

Scenario#01: Text to Speech Conversion

POST S02-Generate • POST S06-Transcrip Groq POST S03-Control O POST S02-Generate • POST S10-TextTosp • + ▾ Groq ▾

GenAI-June / S10-TextTospeech Save ▾ Share ▾

POST ▾ {{baseURL}} /openai/v1/audio/speech Send ▾

Docs Params Authorization Headers (13) Body Scripts Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON ▾ Schema Beautify

```
1 {
2   "model": "canopylabs/orpheus-v1-english",
3   "input": "Welcome to Orpheus text-to-speech. [cheerful] This is an example of high-quality English audio generation with vocal directions support.",
4   "voice": "austin",
5   "response_format": "wav"
6 }
```

Body Cookies (1) Headers (22) Test Results 200 OK • 1.53 s • 398.33 KB Save Response

Hex Preview Visualize ▾

0:00 / 0:08

App Store


Postbot Runner Start Proxy Cookies Vault Trash

Postman Response

```
"id": "chatcmpl-8dfcd154-447c-4c0b-a737-1214d66c2fb8",
"object": "chat.completion",
"created": 1781851621,
"model": "meta-llama/llama-4-scout-17b-16e-instruct",
"choices": [
  {
    "index": 0,
    "message": {
      "role": "assistant",
      "content": "Here is the translation:\n\n```\n{\n  \"tamil\": \"இன்று எப்படி இருக்கிறீர்கள்?\", \n  \"hindi\": \"आज आप कैसे हैं?\" \n}\n```\n",
      "logprobs": null,
      "finish_reason": "stop"
    }
  }
],
"usage": {
  "queue_time": 0.598633264,
  "prompt_tokens": 65,
  "prompt_time": 0.002967785,
  "completion_tokens": 44,
  "completion_time": 0.099679495,
```

```
{
  "total_tokens": 109,
  "total_time": 0.10264728
},
"usage_breakdown": null,
"system_fingerprint": "fp_2f97044c6d",
"x_groq": {
  "id": "req_01kvfa41d4ex98ebm6fwf8j5fv",
  "seed": 1667257179
},
"service_tier": "on_demand"
}
```

Scenario#02: Translate it from one language to another language.

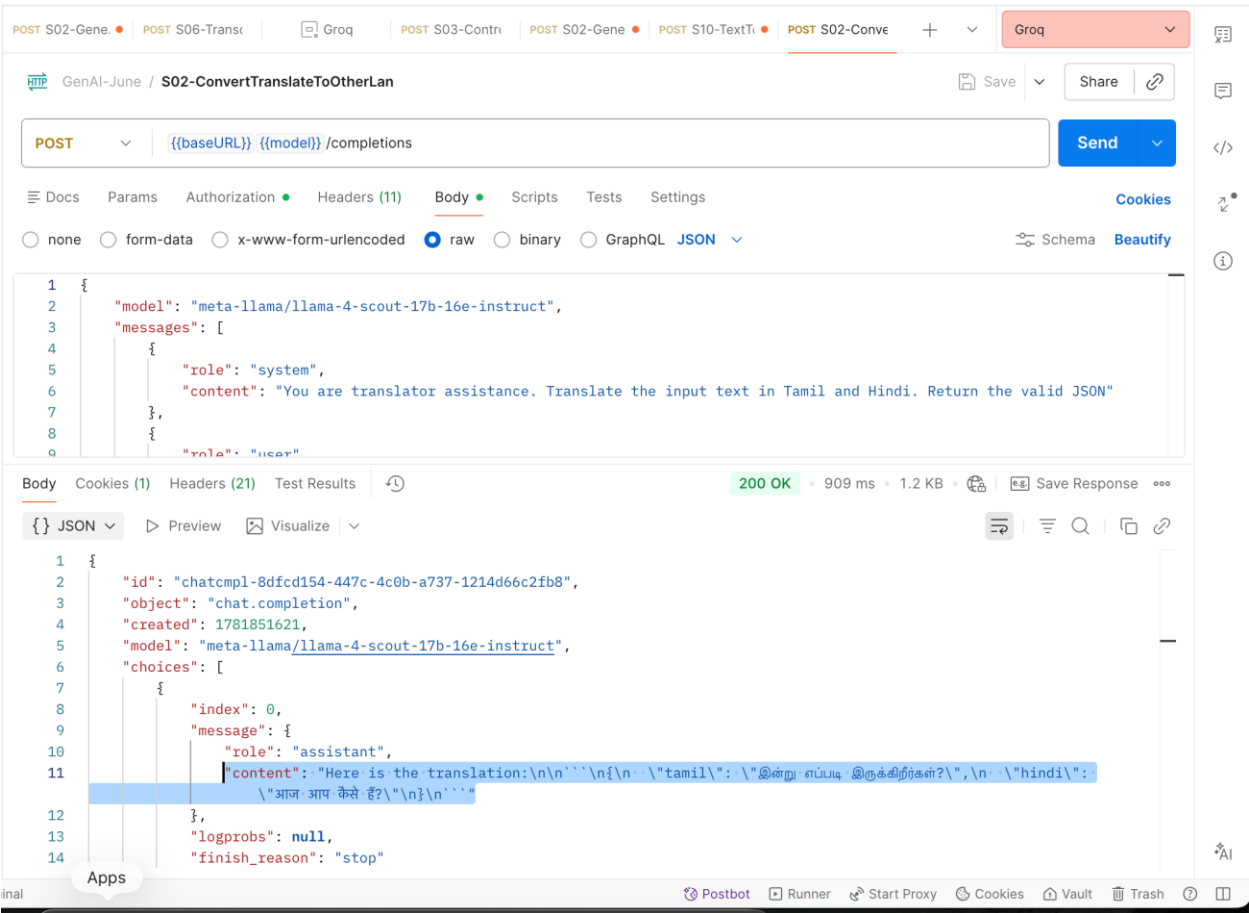

Sc#03: Giving a Swagger converts to Rest Assured Testcases --For this beautify teh request and check the user prompt

Postman

POST S02-Ge POST S06-Trai Groq POST S03-Cor POST S02-Ge POST S10-Tex POST S02-Cor POST S02-Co + Groq

GenAI_W2D2 / S02-ConvertTranslateToOtherLan Copy Save Share

POST {{baseUrl}} {{model}} /completions Send

Docs Params Authorization Headers (11) Body Scripts Tests Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
8 {
9   "role": "user",
10  "content": "Analyze the following LLM API messages and generate Java 21 RestAssured 6.x TestNG test cases.
              \n\nMessages:\n\nSystem:\nYou are a translation assistant. Translate user-provided text into Tamil and Hindi. Return
              only valid JSON with keys tamil and hindi.\n\nUser:\nTranslate the following text:\nHow are you today?\n\nGenerate:\n-
              Positive test cases\n- Negative test cases\n- Response validations\n- Status code validations"
11 }
12 ]
13 }
```

Body Cookies (1) Headers (22) Test Results 200 OK 2.14 s 2.07 KB Save Response

{ } JSON Preview Visualize

```
1 {
2   "id": "chatcmpl-b0574b3c-8e18-4bf6-86b3-bf0e51c2c1fe",
3   "object": "chat.completion",
4   "created": 1781854155,
5   "model": "meta-llama/llama-4-scout-17b-16e-instruct",
6   "choices": [
7     {
8       "index": 0,
9       "message": {
10        "role": "assistant",
11        "content": "```java\nimport io.restassured.RestAssured;\nimport io.restassured.response.Response;\nimport io.
restassured.specification.RequestSpecification;\nimport org.testng.annotations.BeforeClass;\nimport org.
testng.annotations.Test;\nimport static io.restassured.RestAssured.given;\nimport static org.hamcrest.
MatcherAssert.assertThat;\nimport static org.hamcrest.Matchers.is;\nimport static org.hamcrest.Matchers.
notNullValue;\n\n/**\n * Test class for Translation API.\n */\npublic class TranslationAPITest {\n\n
```

Prompt | Text Format

Request JSON to text

JSON [Request]	Text [Request]
<pre>{ "model": "meta-llama/llama-4-scout-17b-16e-instruct", "messages": [{ "role": "system", "content": "You are an Automation Architect specializing in API automation. Generate Java 21 RestAssured 6.x and TestNG test cases. Validate HTTP status code and response body. Include positive and negative scenarios. Add Javadoc. Use meaningful method names. Return only executable Java code." }, { "role": "user", "content": "Analyze the following LLM API messages and generate Java 21 RestAssured 6.x TestNG test cases.\n\nMessages:\n\nSystem:\nYou are a translation assistant. Translate user-provided text into Tamil and Hindi. Return only valid JSON with keys tamil and hindi.\n\nUser:\nTranslate the following text:\nHow are you today?\n\nGenerate:\n- Positive</pre>	<pre>model: meta-llama/llama-4-scout-17b-16e-instruct messages: role: system content: You are an Automation Architect specializing in API automation. Generate Java 21 RestAssured 6.x and TestNG test cases. Validate HTTP status code and response body. Include positive and negative scenarios. Add Javadoc. Use meaningful method names. Return only executable Java code. role: user content: Analyze the following LLM API messages and generate Java 21 RestAssured 6.x TestNG test cases. Messages: System:</pre>

test cases\n- Negative test cases\n- Response validations\n- Status code validations" }] }	You are a translation assistant. Translate user-provided text into Tamil and Hindi. Return only valid JSON with keys tamil and hindi. User: Translate the following text: How are you today? Generate: - Positive test cases - Negative test cases - Response validations - Status code validations
---	---

Output Json

JSON [Output]	Text [Output]
<pre>{ "id": "chatcmpl-b0574b3c-8e18-4bf6-86b3-bf0e51c2c1fe", "object": "chat.completion", "created": 1781854155, "model": "meta-llama/llama-4-scout-17b-16e-instruct", "choices": [{ "index": 0, "message": { "role": "assistant", "content": "java\nimport io.restassured.RestAssured;\nimport io.restassured.response.Response;\nimport io.restassured.specification.RequestSpecification;\nimport org.testng.annotations.BeforeClass;\nimport org.testng.annotations.Test;\nimport static io.restassured.RestAssured.given;\nimport static org.hamcrest.MatcherAssert.assertThat;\nimport static org.hamcrest.Matchers.is;\nimport static org.hamcrest.Matchers.notNullValue;\n\n/**\n * Test class for Translation API.\n */\npublic class TranslationAPITest {\n\n private RequestSpecification requestSpecification;\n\n @BeforeClass\n public void setup() {\n RestAssured.baseURI = "https://example.com"; // Replace with actual base URI\n requestSpecification = given().contentType("application/json");\n } }\n\n /**\n * Positive test case for translation API with valid text.\n */\n @Test\n public void testTranslationAPIValidText() {\n String requestBody = "{\\"text\\": \\"How are you today?\\"}";\n Response response = requestSpecification.body(requestBody)\n .when()\n .post("/tr anslate"); // Replace with actual endpoint\n\n response.then()\n .statusCode(200)\n .body("tamil", notNullValue())\n .body("hindi", notNullValue());\n\n assertThat(response.asJson().getJSONObject().has("tamil"), is(true));\n assertThat(response.asJson().getJSONObject().has("hindi"), is(true));\n } }\n\n /**\n * Negative test case for translation API with invalid text.\n */\n @Test\n public void testTranslationAPIInvalidText() {\n String requestBody = "{\\"text\\": null}";\n Response response = requestSpecification.body(requestBody)\n .when()\n .post("/tr anslate"); // Replace with actual endpoint\n\n response.then()\n .statusCode(400);\n\n assertThat(response.asJson().getJSONObject().has("error"), is(true));\n } }\n\n /**\n * Negative test case for translation API with empty text.\n */\n @Test\n public void testTranslationAPIEmptyText() {\n String requestBody = "{\\"text\\": \\"\\\"\\\"\\\"}";\n Response response = requestSpecification.body(requestBody)\n .when()\n .post("/tr anslate"); // Replace with actual endpoint\n\n response.then()\n .statusCode(400);\n\n assertThat(response.asJson().getJSONObject().has("error"), is(true));\n } }\n\n /**\n * Negative test case for translation API with missing text.\n */\n @Test\n public void testTranslationAPIMissingText() {\n String requestBody =</pre>	<pre>id: chatcmpl-b0574b3c-8e18-4bf6-86b3- bf0e51c2c1fe object: chat.completion created: 1781854155 model: meta-llama/llama-4-scout-17b- 16e-instruct choices: index: 0 message: role: assistant content: ``java import io.restassured.RestAssured; import io.restassured.response.Response; import io.restassured.specification.RequestSp ecification; import org.testng.annotations.BeforeClass; import org.testng.annotations.Test; import static io.restassured.RestAssured.given; import static org.hamcrest.MatcherAssert.assertThat; import static org.hamcrest.Matchers.is; import static org.hamcrest.Matchers.notNullValue; /** * Test class for Translation API. */ public class TranslationAPITest { private RequestSpecification requestSpecification; @BeforeClass public void setup() { RestAssured.baseURI = "https://example.com"; // Replace with actual base URI requestSpecification = given().contentType("application/json"); } /** * Positive test case for</pre>

```

\{"{}";\n Response response =
requestSpecification.body(requestBody)\n .when()\n .post("/tr
anslate"); // Replace with actual endpoint\n\n
response.then()\n .statusCode(400);\n\n
assertThat(response.asJson().getJSONObject().has("error"),
is(true));\n }\n\n /**\n * Negative test case for translation
API with non-JSON request body.\n */\n @Test\n public void
testTranslationAPINonJsonRequestBody() {\n String requestBody
= "Invalid JSON";\n Response response =
given().contentType("application/json").body(requestBody)\n
.when()\n .post("/translate"); // Replace with actual
endpoint\n\n response.then()\n .statusCode(400);\n }\n\n },
"logprobs": null, "finish_reason": "stop" } ], "usage":
{ "queue_time": 0.325117153, "prompt_tokens": 155,
"prompt_time": 0.008009186, "completion_tokens": 671,
"completion_time": 1.515841201, "total_tokens": 826,
"total_time": 1.523850387 }, "usage_breakdown": null,
"system_fingerprint": "fp_79da0e0073", "x_groq": { "id":
"req_01kvfchavne93t1vsrxa54pqt3", "seed": 373973171 },
"service_tier": "on_demand" }

```

```

translation API with valid text.
*/
@Test
public void
testTranslationAPIValidText() {
    String requestBody =
    "{\"text\": \"How are you today?\"}";
    Response response =
    requestSpecification.body(requestBody)
        .when()
        .post("/translate");
    // Replace with actual endpoint

    response.then()
        .statusCode(200)
        .body("tamil",
notNullValue())
        .body("hindi",
notNullValue());

    assertThat(response.asJson().getJSONOb
ject().has("tamil"), is(true));

    assertThat(response.asJson().getJSONOb
ject().has("hindi"), is(true));
}

/**
 * Negative test case for
translation API with invalid text.
*/
@Test
public void
testTranslationAPINullText() {
    String requestBody =
    "{\"text\": null}";
    Response response =
    requestSpecification.body(requestBody)
        .when()
        .post("/translate");
    // Replace with actual endpoint

    response.then()
        .statusCode(400);

    assertThat(response.asJson().getJSONOb
ject().has("error"), is(true));
}

/**
 * Negative test case for
translation API with empty text.
*/
@Test
public void
testTranslationAPEmptyText() {
    String requestBody =
    "{\"text\": \"\"}";
    Response response =
    requestSpecification.body(requestBody)
        .when()
        .post("/translate");
    // Replace with actual endpoint

```

	<pre> response.then() .statusCode(400); assertThat(response.asJson().getJSONOb ject().has("error"), is(true)); } /** * Negative test case for translation API with missing text. */ @Test public void testTranslationAPIMissingText() { String requestBody = "{}"; Response response = requestSpecification.body(requestBody) .when() .post("/translate"); // Replace with actual endpoint response.then() .statusCode(400); assertThat(response.asJson().getJSONOb ject().has("error"), is(true)); } /** * Negative test case for translation API with non-JSON request body. */ @Test public void testTranslationAPINonJsonRequestBody() { String requestBody = "Invalid JSON"; Response response = given().contentType("application/json") .body(requestBody) .when() .post("/translate"); // Replace with actual endpoint response.then() .statusCode(400); } ... logprobs: finish_reason: stop usage: queue_time: 0.325117153 prompt_tokens: 155 prompt_time: 0.008009186 completion_tokens: 671 completion_time: 1.515841201 total_tokens: 826 total_time: 1.523850387 usage_breakdown: </pre>
--	--

	<code>system_fingerprint: fp_79da0e0073</code> <code>x_groq: id:</code> <code>req_01kvfchavne93t1vsrxa54pqt3</code> <code>seed: 373973171</code> <code>service_tier: on_demand</code>
--	---