AI ANALYTICS WORKSHOP DOC

Intel oneAPI Hands-on workshop using Intel oneAPI AI
Analytics toolkit

17th June 2021

Jupyter Notebook Basics(to read)

a) This command at the top of a particular cell will create a bash script containing all the commands of that cell in the "filename.sh" file.

%%writefile filename.sh

b) The Job(bash script file) is submitted to run on a CPU node using the following command

```
qsub filename.sh -l nodes=1:ppn=2 -d.
```

- c) To check the status of all the jobs qstat is used. It shows the running jobs.
- d) After the job is finished running, it creates one output and one error file with name filename.sh.o. & filename.sh.e. with some number as suffix.

Clone github repository using following command:

git clone https://github.com/asirvaiy/AI-Workshop.git

Move all the files from AI-Workshop to home:

mv ~/AI-Workshop/* ~/

Exercise 0

Environment set up for Intel-Tensorflow and Stock-Tensorflow

- a) Open the "condaenvsetup.ipynb" and activate Python 3.7(oneAPI) kernel.
- b) Run through the cells one by one, "qsub cell" submits the job to do all the setup. Now running "qstat" will show 2 jobs running.
- c) Once qstat shows only one job(for Jupiter) setupenv.sh job has finished running and Setup should be completed.
- d) Following are the steps involved in setup.

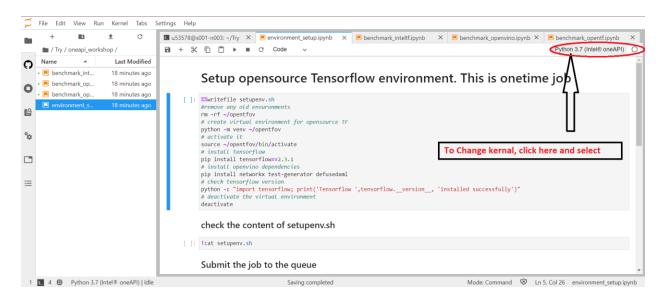


Figure: How To change the kernal

Exercise 1

Running the Census one DAL notebooks

- a. Open the "census_without_onedal.ipynb" and activate Python 3.7(oneAPI) kernel. Run through all the cells. This notebook is without using scickit-learn from oneDAL.
- b. Open the "census_with_onedal.ipynb" and activate Python 3.7(oneAPI) kernel. Run through all the cells. This notebook is with using scickit-learn from oneDAL.
- c. In "census_with_onedal.ipynb" notebook, there is time comparison to show the speedup.

Exercise 2

Intel-TF improvements over Stock-TF

- a. Open the terminal and Clone Intel Model Zoo: git clone https://github.com/IntelAI/models.git
- b. Browse to the perf_analysis folder:cd models/docs/notebooks/perf_analysis
- c. Open the notebook benchmark_perf_comparison.ipynb
- d. First, select the stock-tensorflow kernel and run through every cell of the notebook one by one till section 3
- e. Then change kernel to intel-tensorflow and run all the cells from the beginning.
- f. Now Run the section 3 cells.
- g. Open the 2nd notebook benchmark_perf_timeline_analysis.ipynb.

- h. Run through every cell of the notebook one by one to get the analysis result.
- i. NOTE: There is no requirement for the Jupyter kernel when users run the 2nd notebook to analysis performance in detail.

Documentation Links:

Intel DevCloud for oneAPI – Documentation https://devcloud.intel.com/oneapi/get_started

Intel oneAPI AI Analytics toolkit – Documentation and Samples

https://software.intel.com/content/www/us/en/develop/tools/oneapi/ai-analytics-toolkit.html

https://github.com/oneapi-src/oneAPI-samples/tree/master/AI-and-Analytics

Tensorflow Performance Analysis

https://github.com/oneapi-src/oneAPI-samples/tree/master/AI-and-Analytics/Features-and-Functionality/IntelTensorFlow PerformanceAnalysis

If you have any feedback on this document or ideas to improve it, please write an email to any of us at:

lakshminarasimhan.ranganathan@intel.com

Kavita.aroor@intel.com

jing.xu@intel.com

aditya.sirvaiya@intel.com