

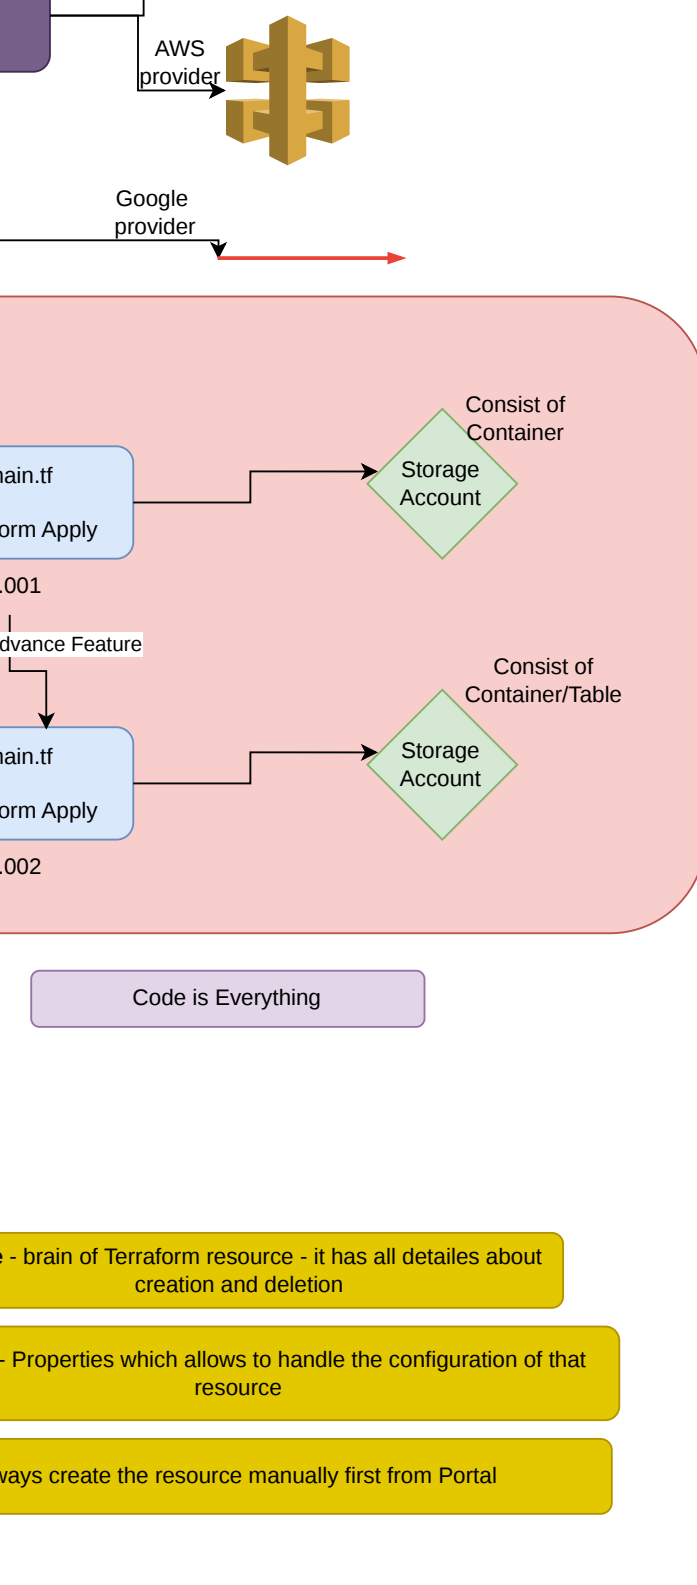
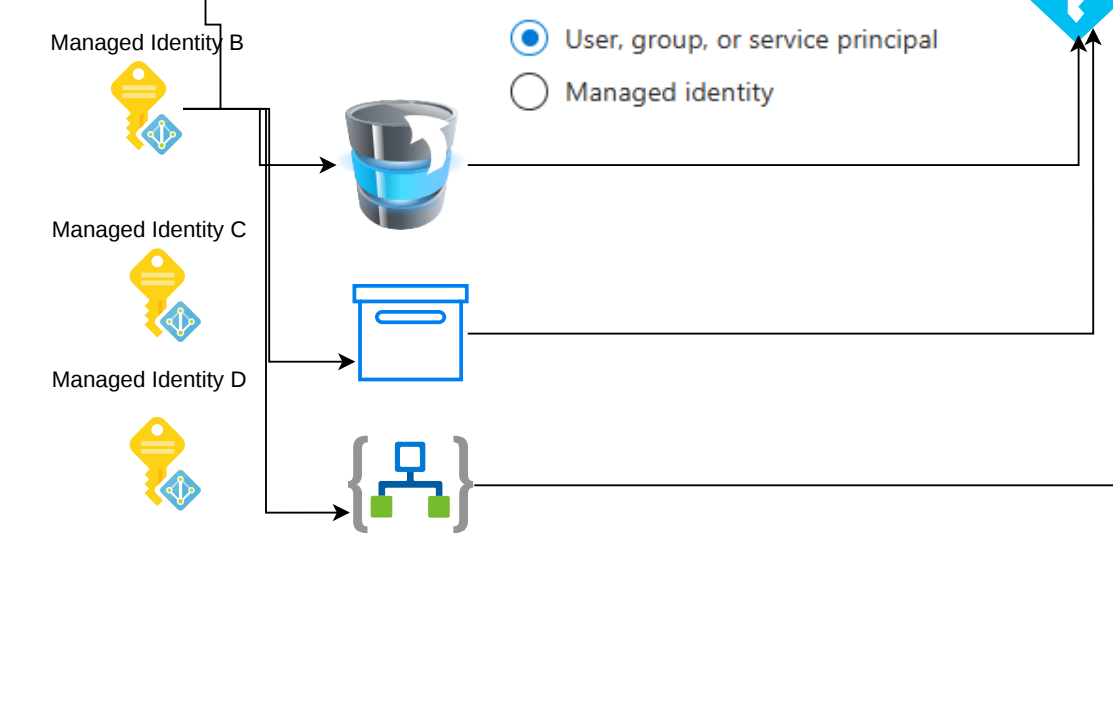


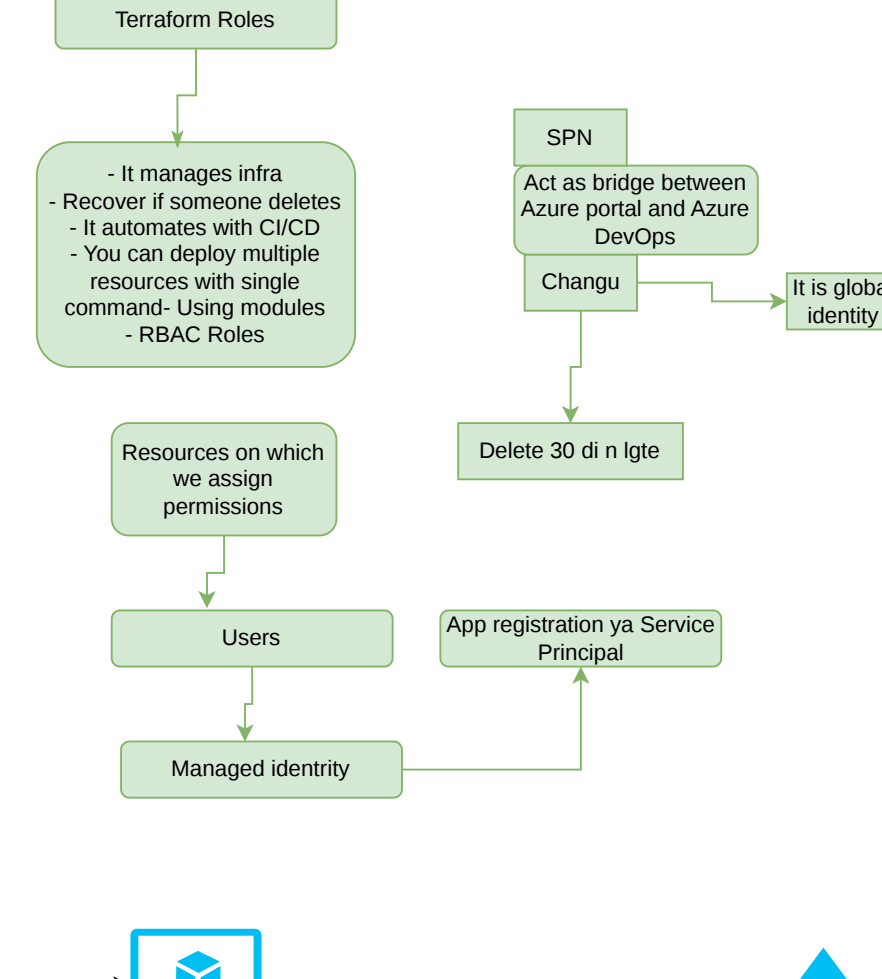

Principle - Train of Terraform resources - Effect of breaking about common dependencies





















Argument - Properties which allow to handle the configuration of the resource

Always create the resource implicitly from the Plan

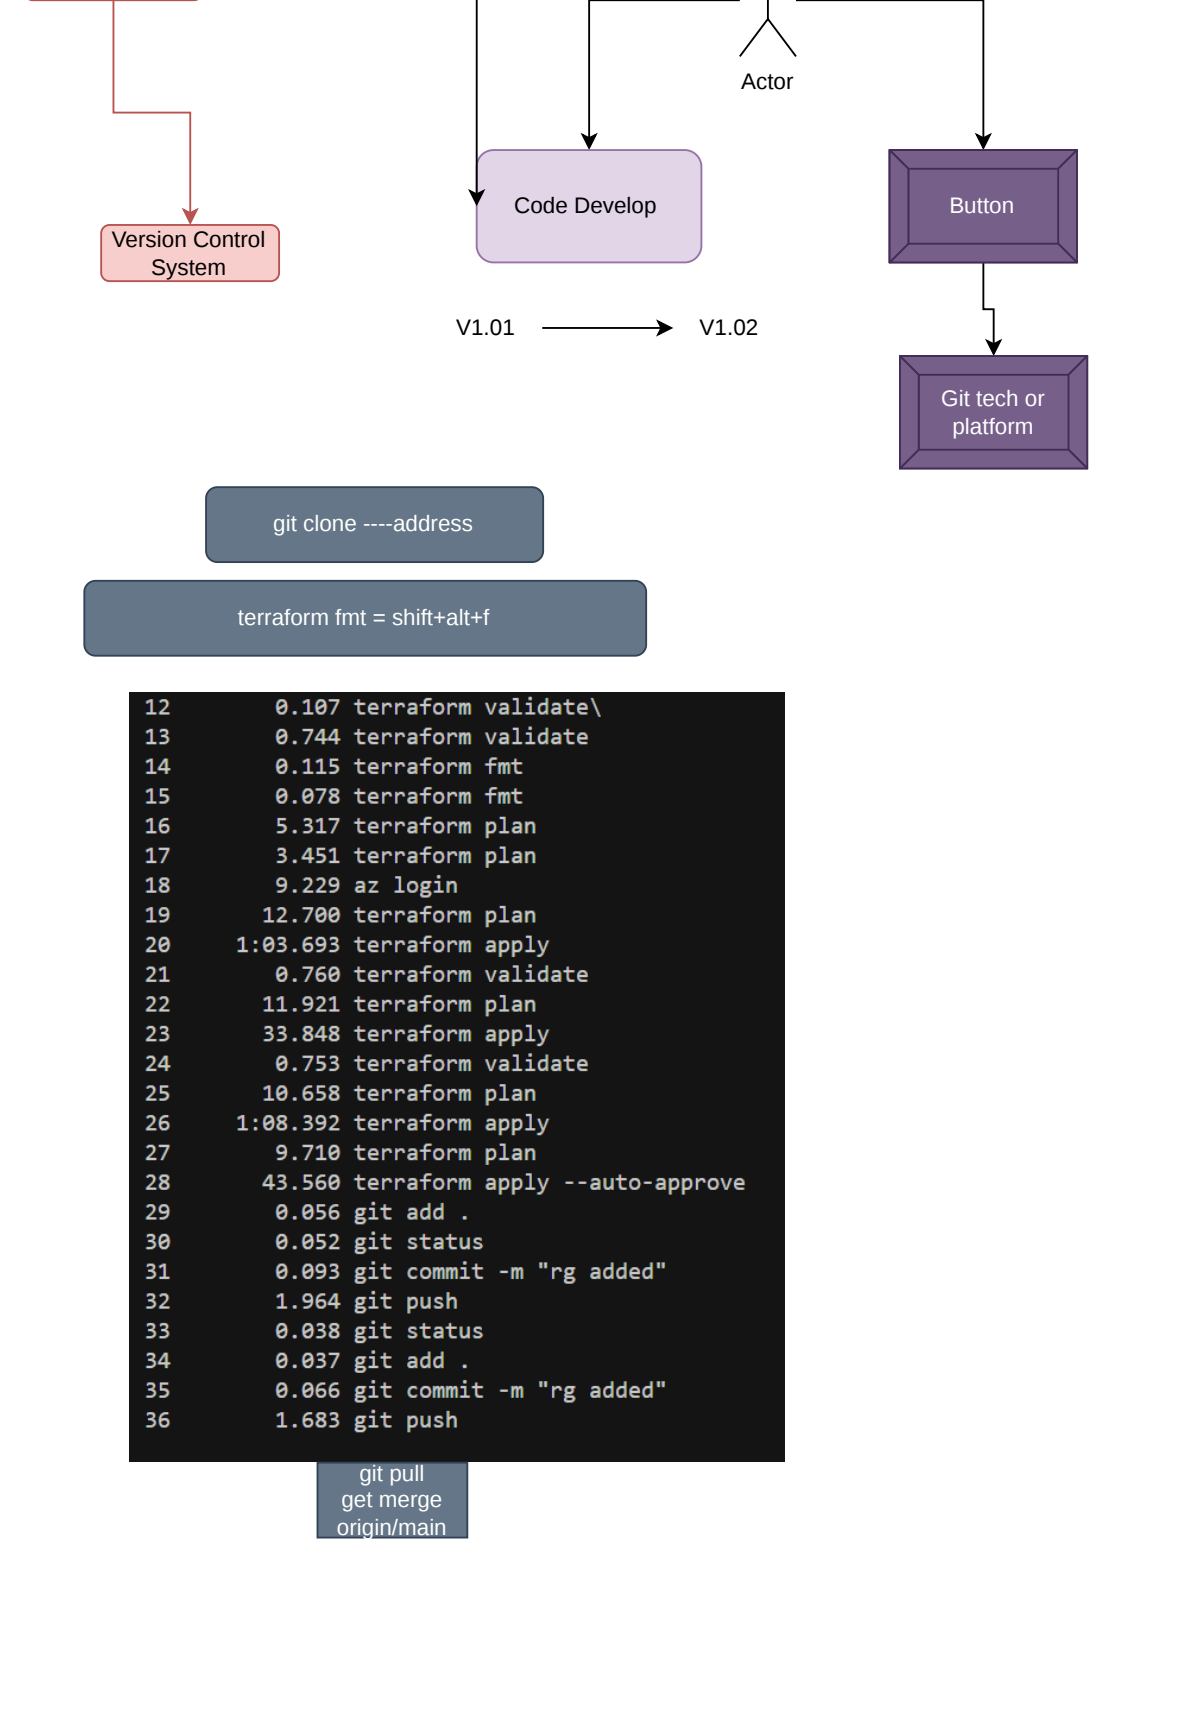

git clone --depth=1 https://github.com/terraform-providers/terraform-provider-aws.git

```
12 9,107 terraform validate
13 9,107 terraform validate
14 9,107 terraform plan
15 9,107 terraform plan
16 9,107 terraform plan
17 9,107 terraform plan
18 9,107 terraform plan
19 9,107 terraform plan
20 9,107 terraform plan
21 9,107 terraform plan
22 9,107 terraform plan
23 9,107 terraform plan
24 9,107 terraform plan
25 9,107 terraform plan
26 9,107 terraform plan
27 9,107 terraform plan
28 9,107 terraform plan
29 9,107 terraform plan
30 9,107 terraform plan
31 9,107 terraform plan
32 9,107 terraform plan
33 9,107 terraform plan
34 9,107 terraform plan
35 9,107 terraform plan
36 9,107 terraform plan
37 9,107 terraform plan
38 9,107 terraform plan
39 9,107 terraform plan
40 9,107 terraform plan
41 9,107 terraform plan
42 9,107 terraform plan
43 9,107 terraform plan
44 9,107 terraform plan
45 9,107 terraform plan
46 9,107 terraform plan
47 9,107 terraform plan
48 9,107 terraform plan
49 9,107 terraform plan
50 9,107 terraform plan
51 9,107 terraform plan
52 9,107 terraform plan
53 9,107 terraform plan
54 9,107 terraform plan
55 9,107 terraform plan
56 9,107 terraform plan
57 9,107 terraform plan
58 9,107 terraform plan
59 9,107 terraform plan
60 9,107 terraform plan
61 9,107 terraform plan
62 9,107 terraform plan
63 9,107 terraform plan
64 9,107 terraform plan
65 9,107 terraform plan
66 9,107 terraform plan
67 9,107 terraform plan
68 9,107 terraform plan
69 9,107 terraform plan
70 9,107 terraform plan
71 9,107 terraform plan
72 9,107 terraform plan
73 9,107 terraform plan
74 9,107 terraform plan
75 9,107 terraform plan
76 9,107 terraform plan
77 9,107 terraform plan
78 9,107 terraform plan
79 9,107 terraform plan
80 9,107 terraform plan
81 9,107 terraform plan
82 9,107 terraform plan
83 9,107 terraform plan
84 9,107 terraform plan
85 9,107 terraform plan
86 9,107 terraform plan
87 9,107 terraform plan
88 9,107 terraform plan
89 9,107 terraform plan
90 9,107 terraform plan
91 9,107 terraform plan
92 9,107 terraform plan
93 9,107 terraform plan
94 9,107 terraform plan
95 9,107 terraform plan
96 9,107 terraform plan
97 9,107 terraform plan
98 9,107 terraform plan
99 9,107 terraform plan
100 9,107 terraform plan
```

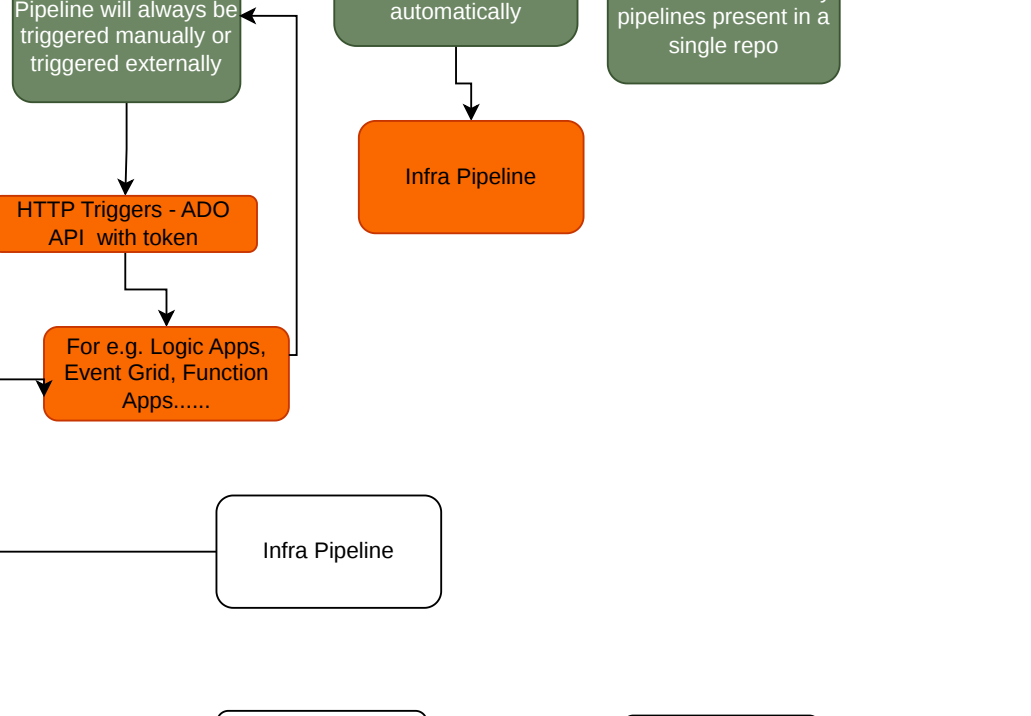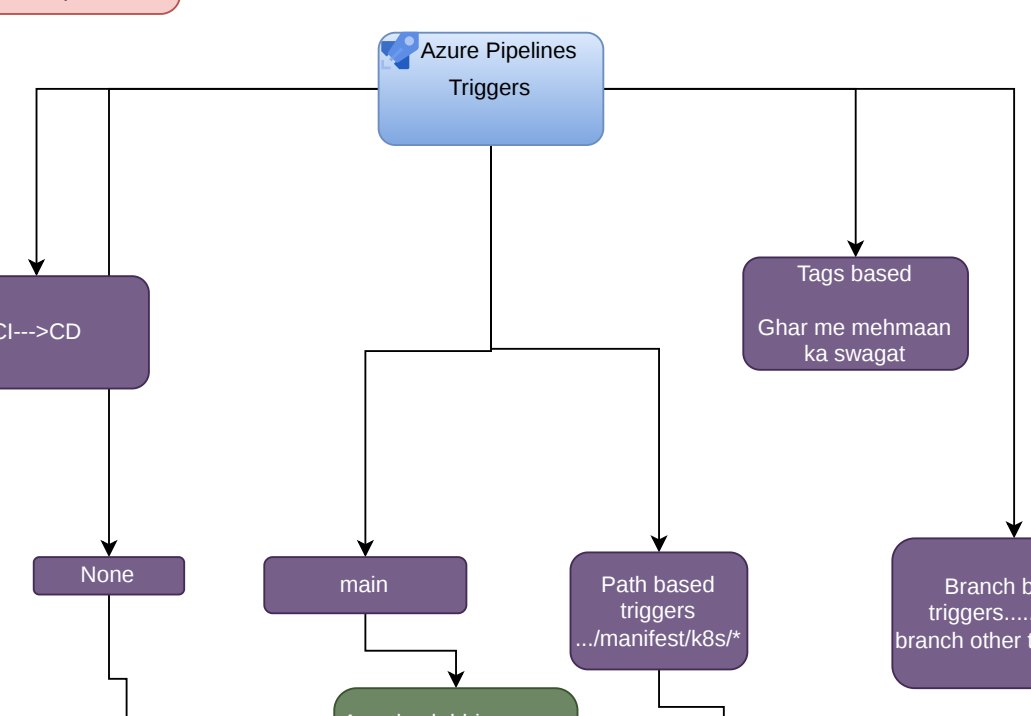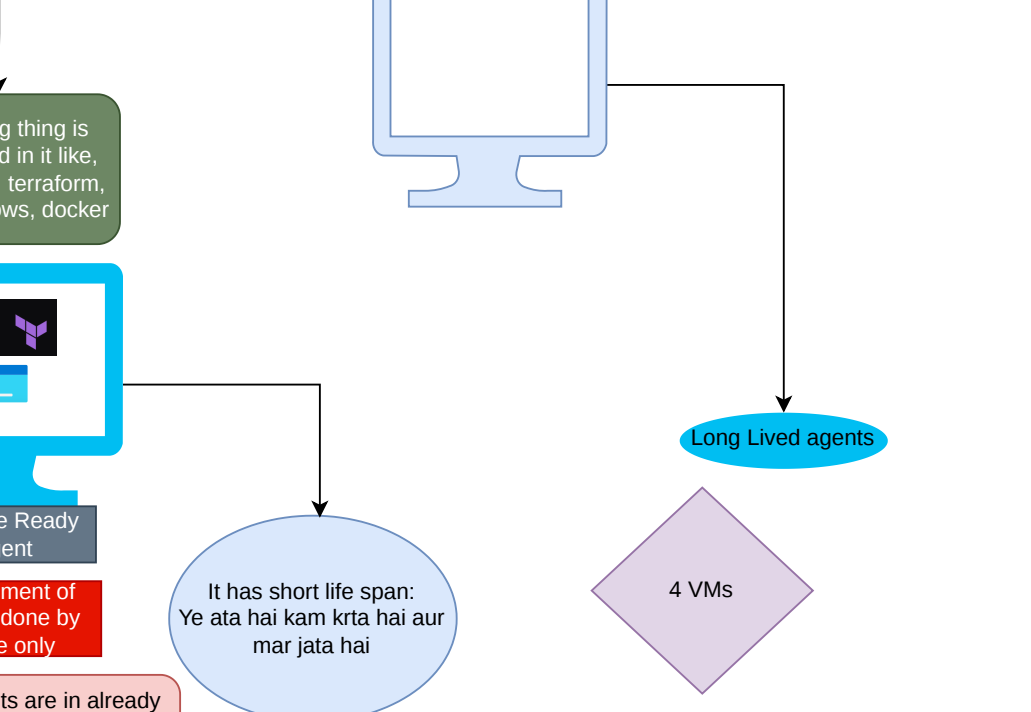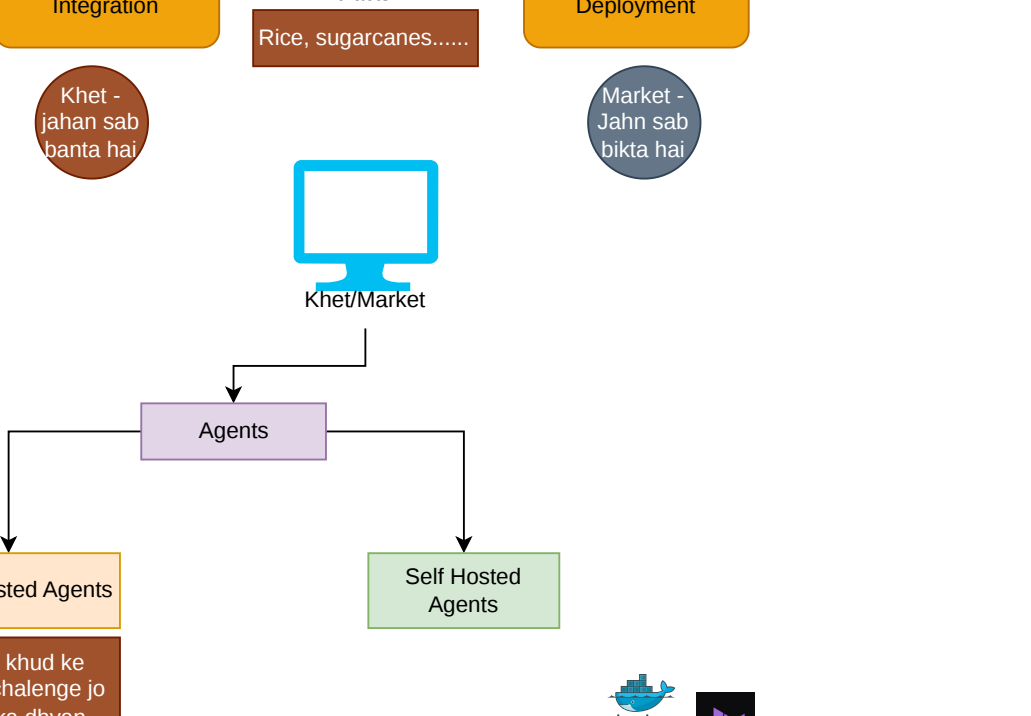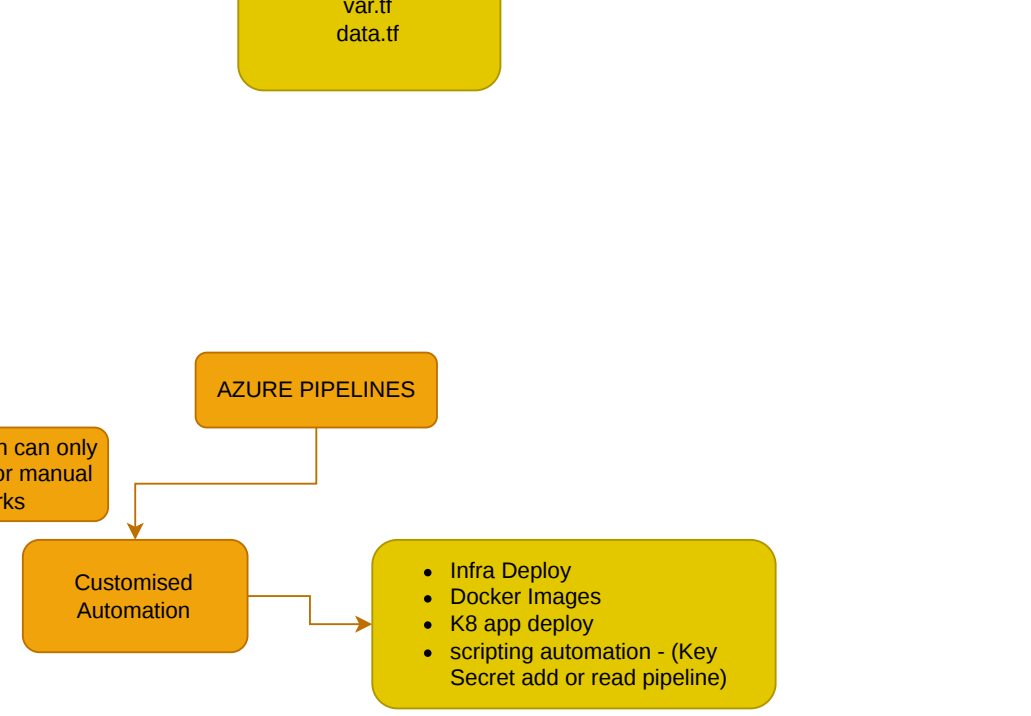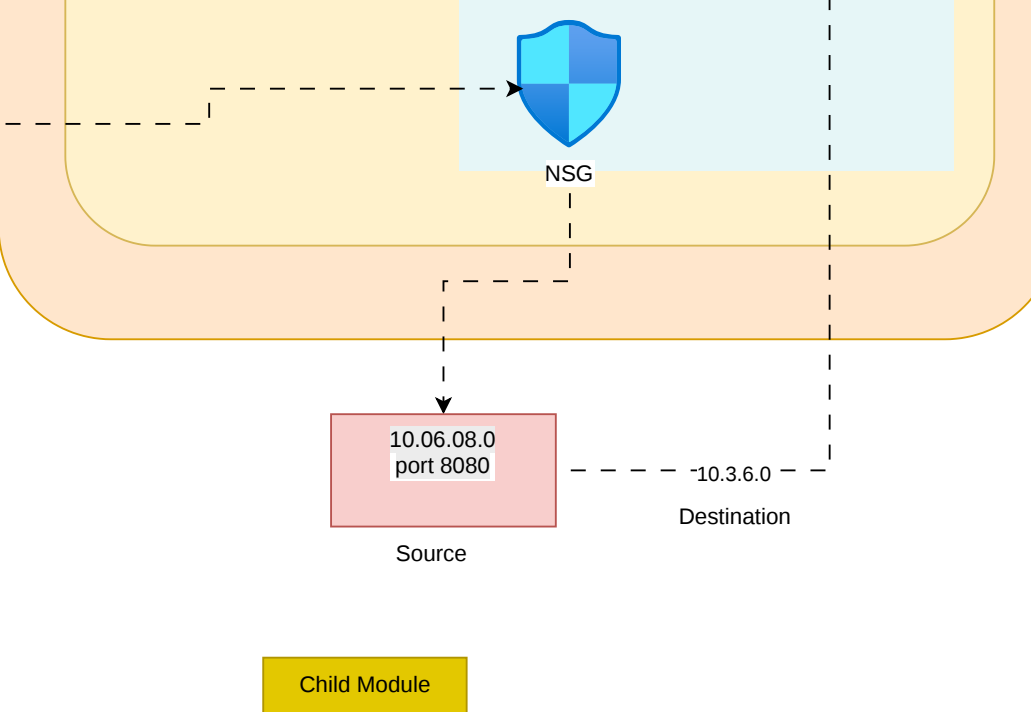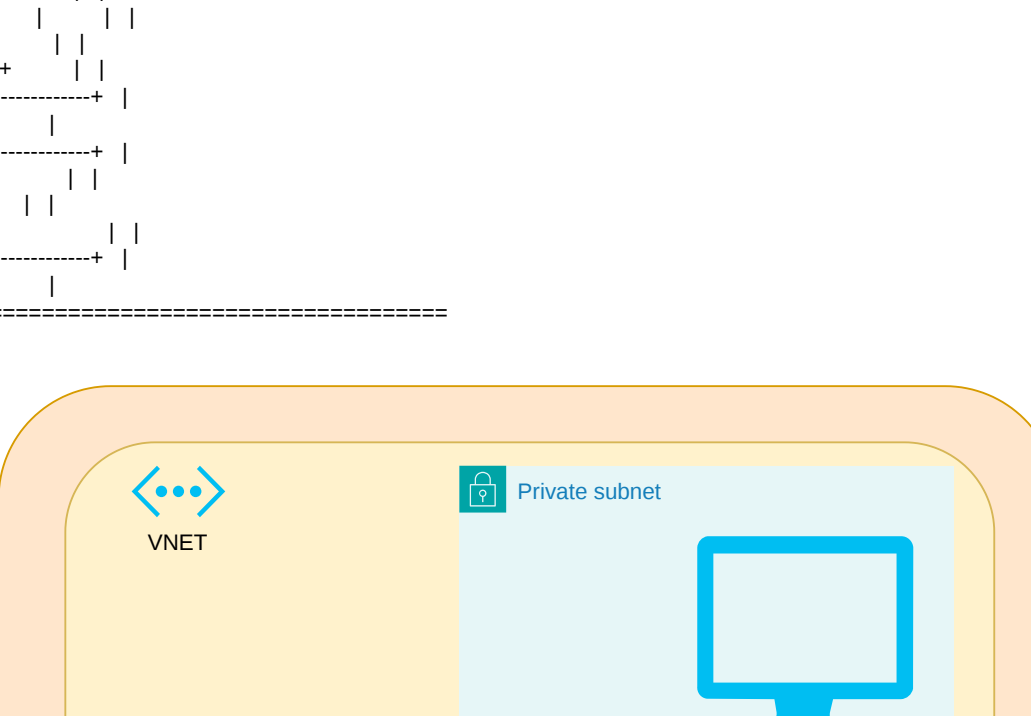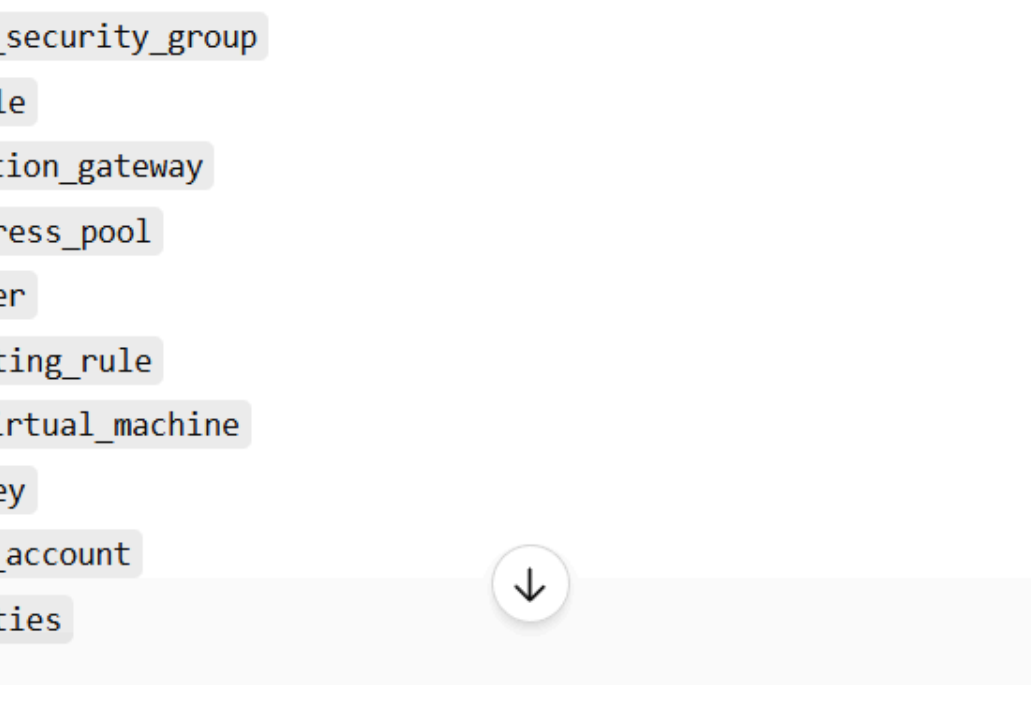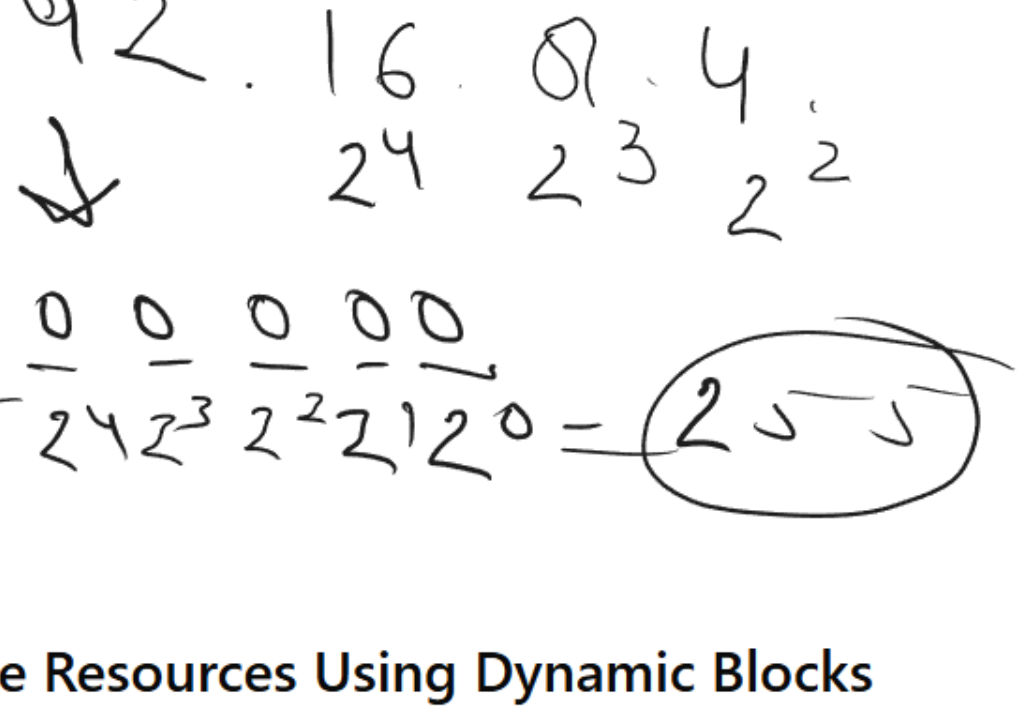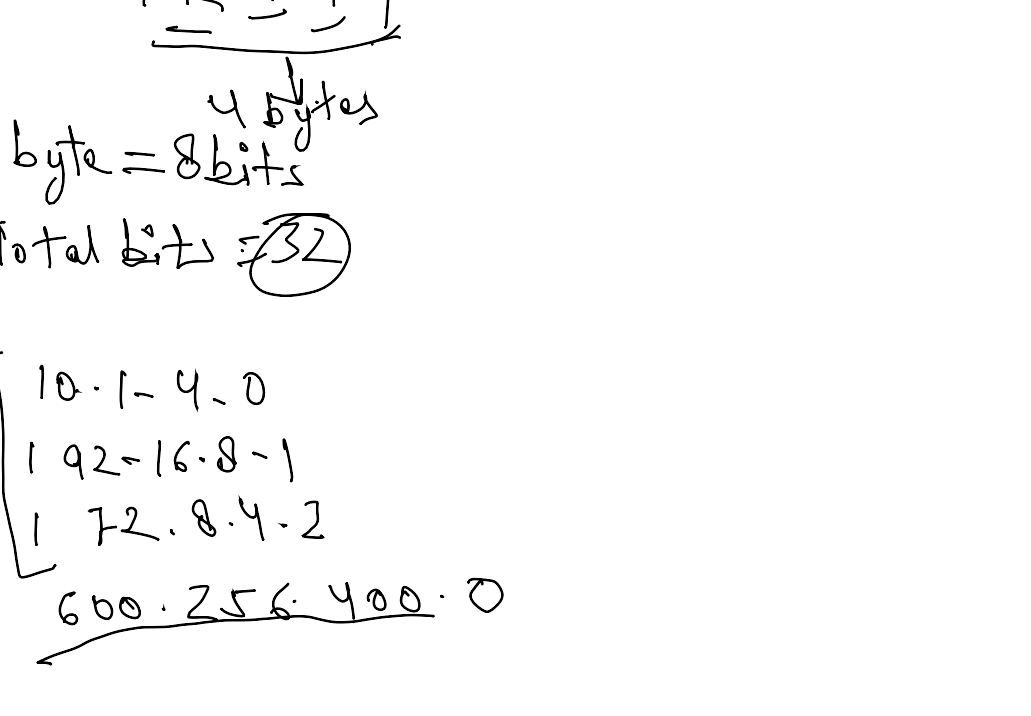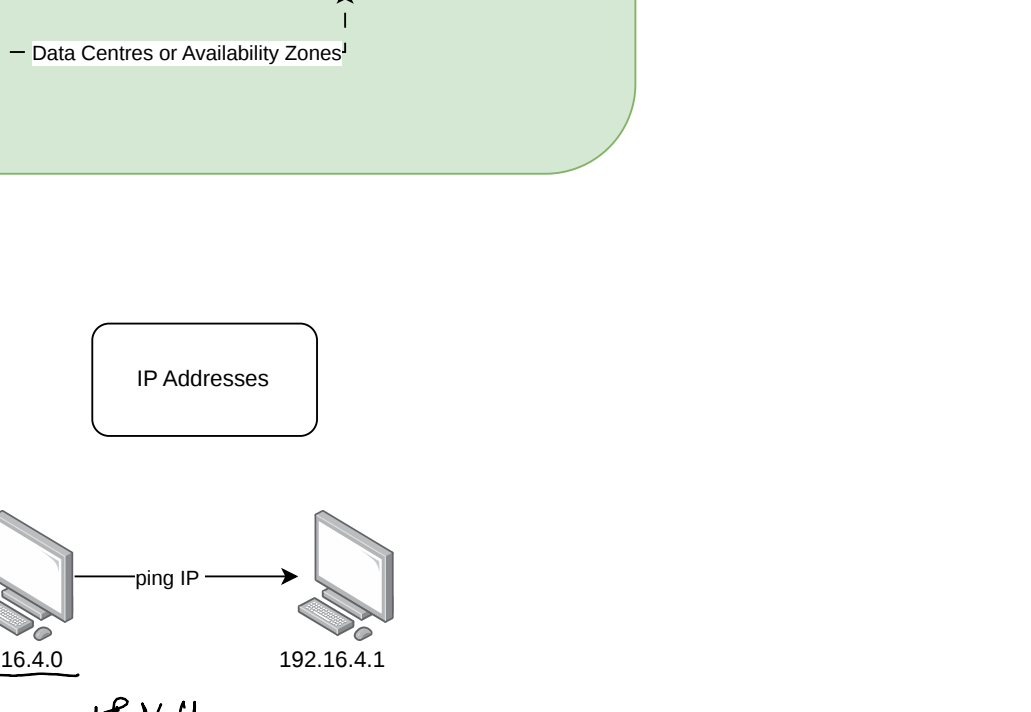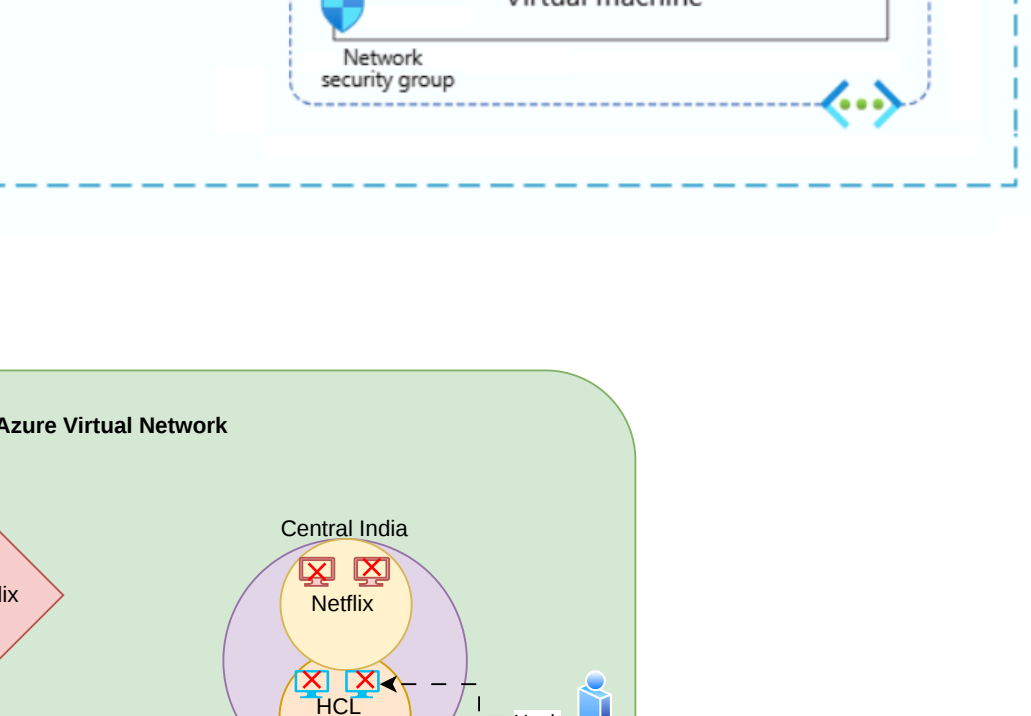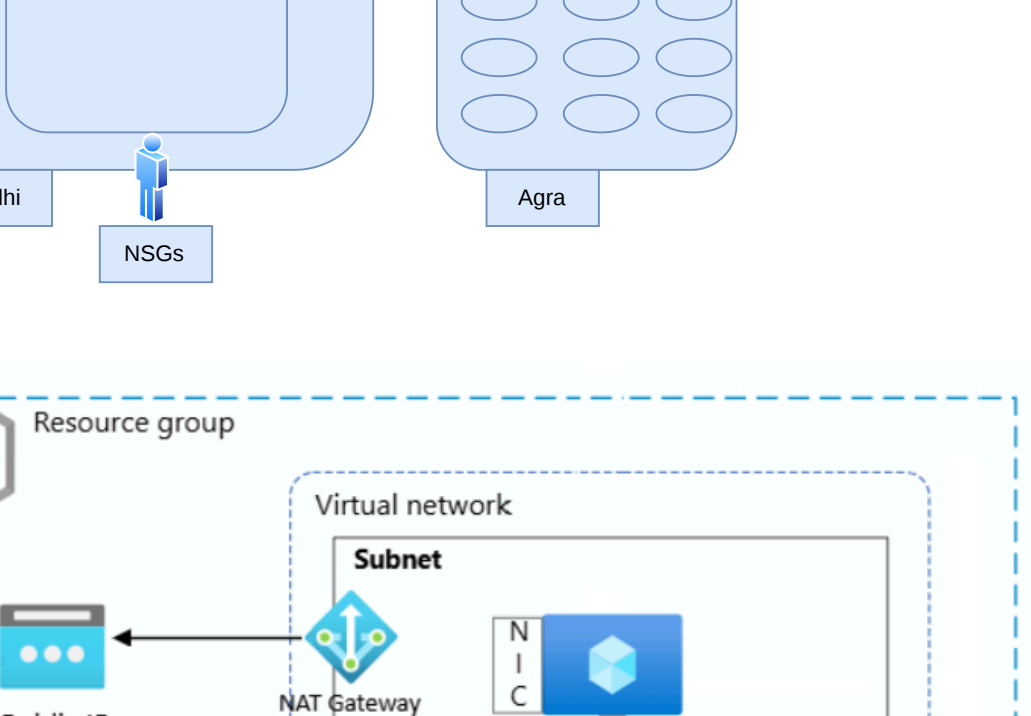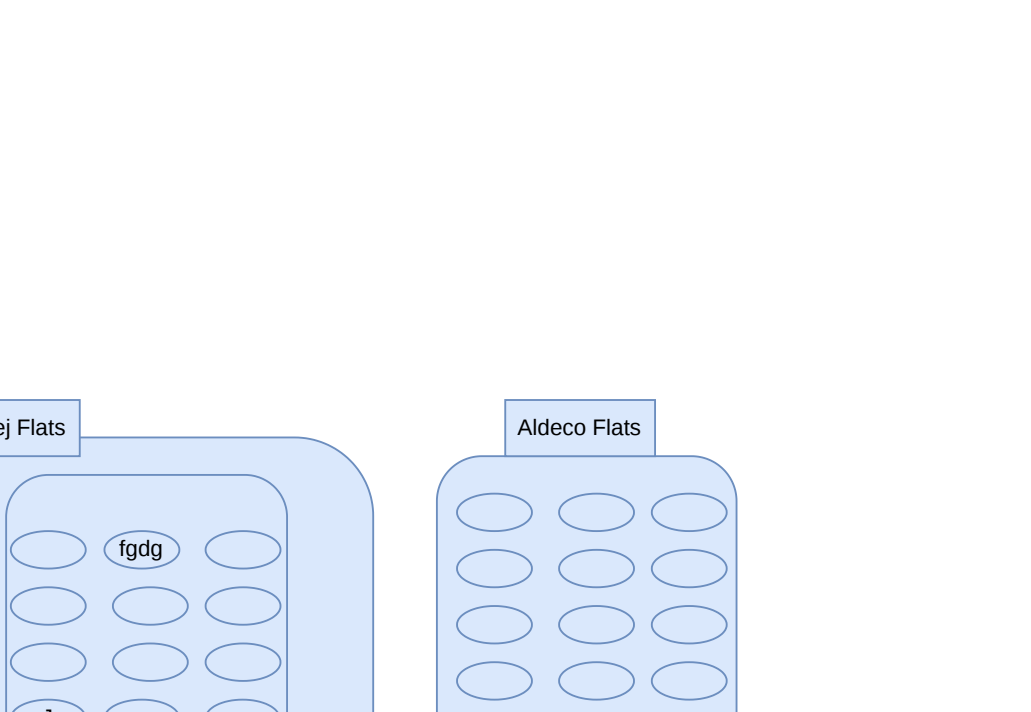
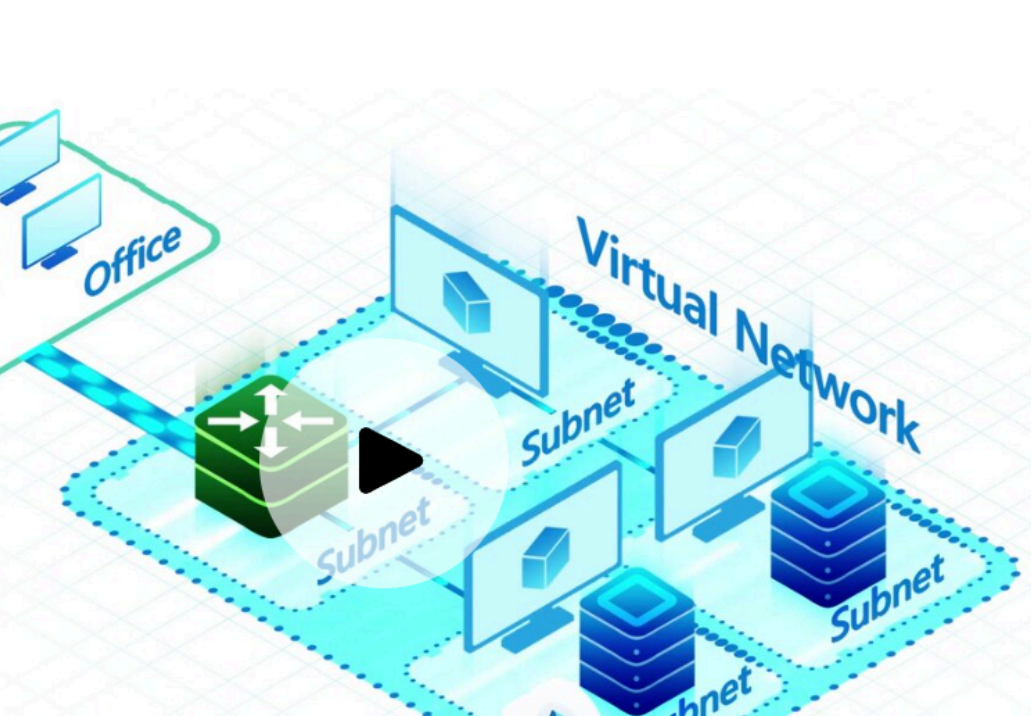
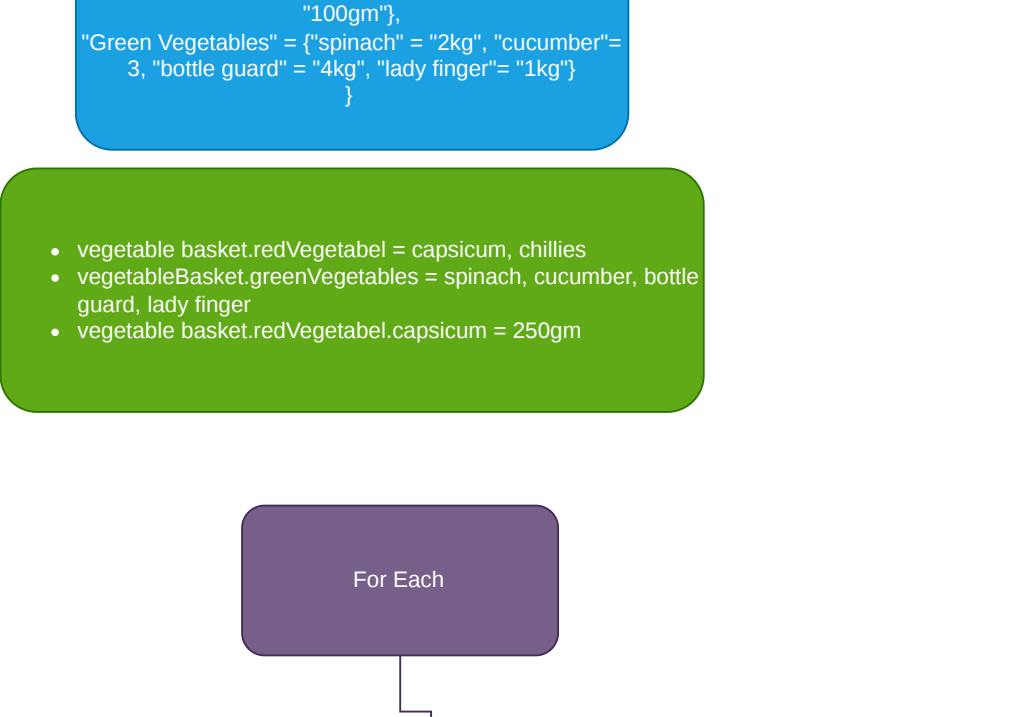
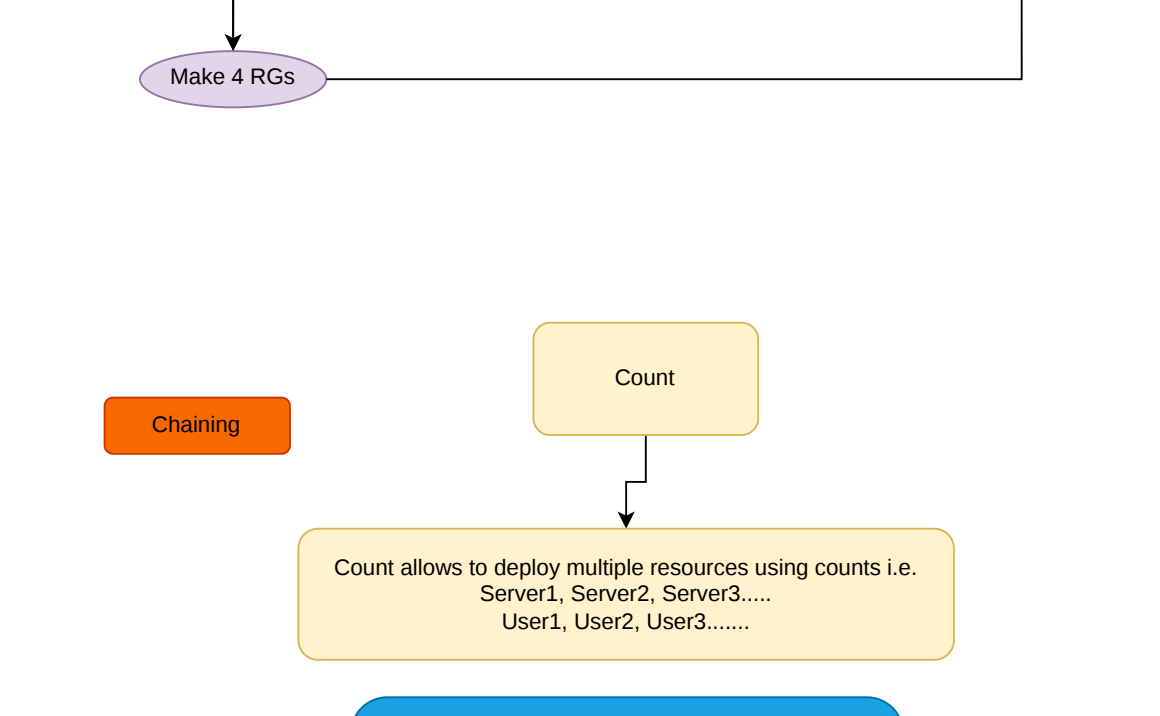
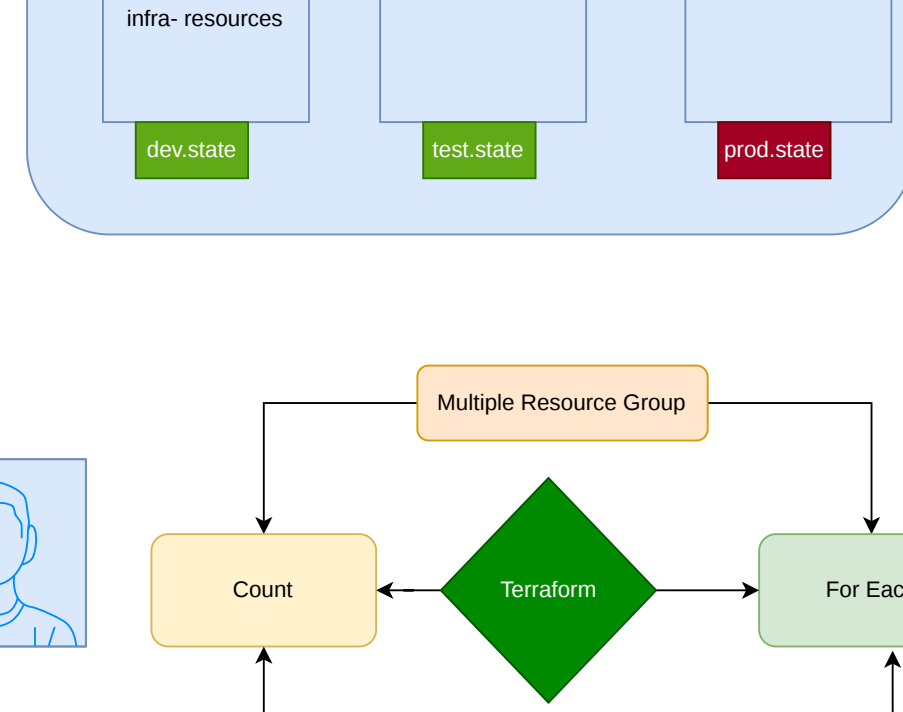
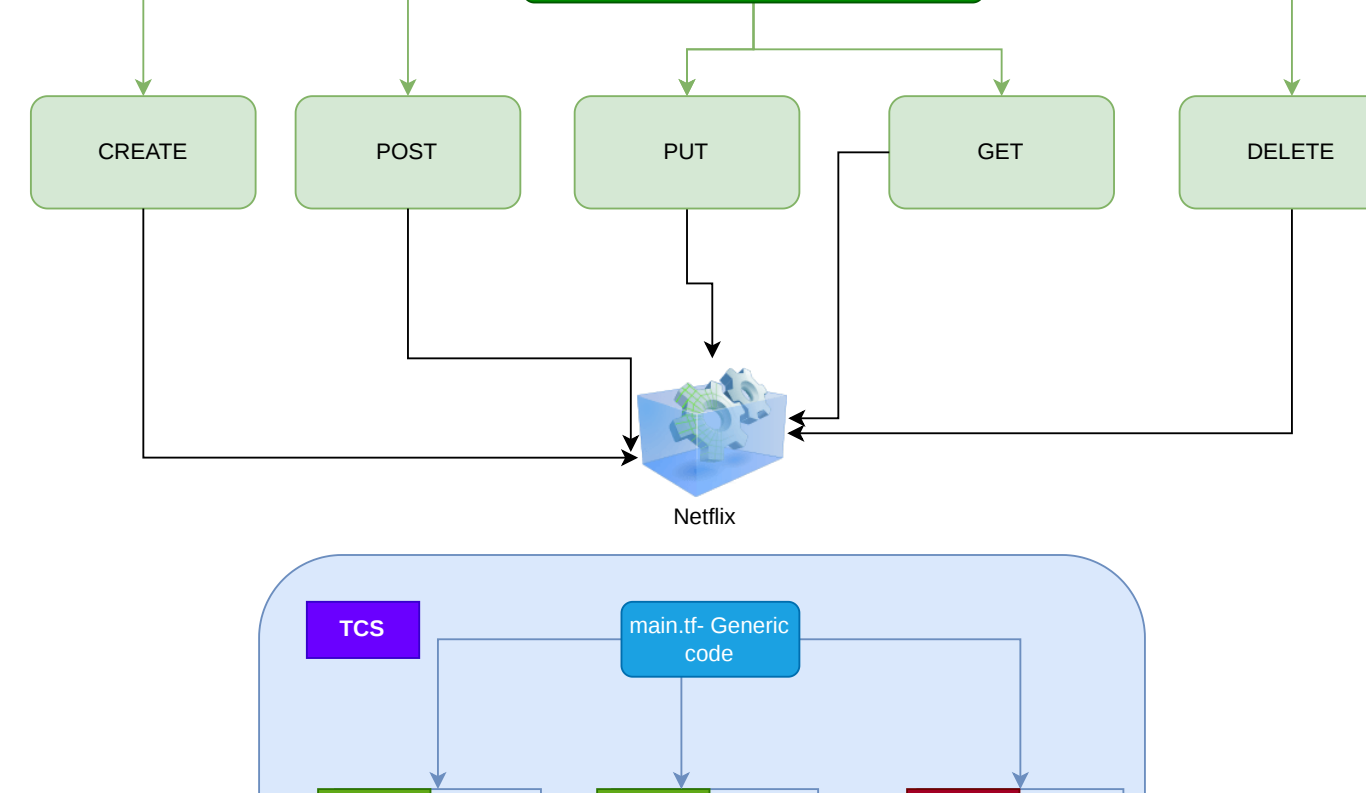
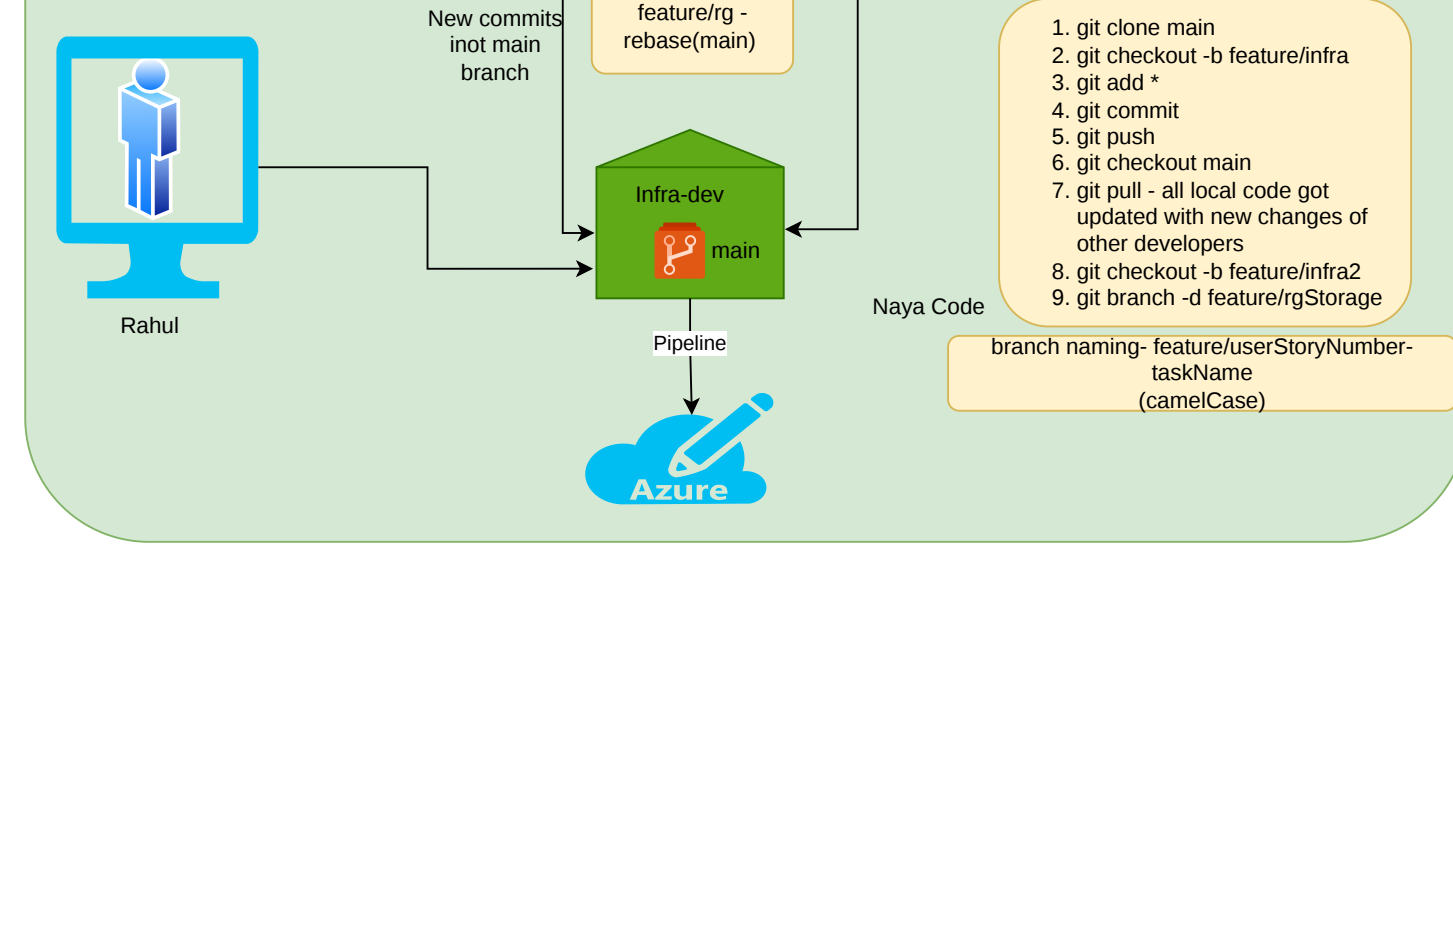


Common Azure Resources Using Dynamic Blocks

Some Azure resources where `dynamic` is commonly used:

- `azure_network_security_group`
 - `security_rule`
- `azure_application_gateway`
 - `backend_address_pool`
 - `http_listener`
 - `request_routing_rule`
- `azure_linux_virtual_machine`
 - `admin_ssh_key`
- `azure_storage_account`

↓

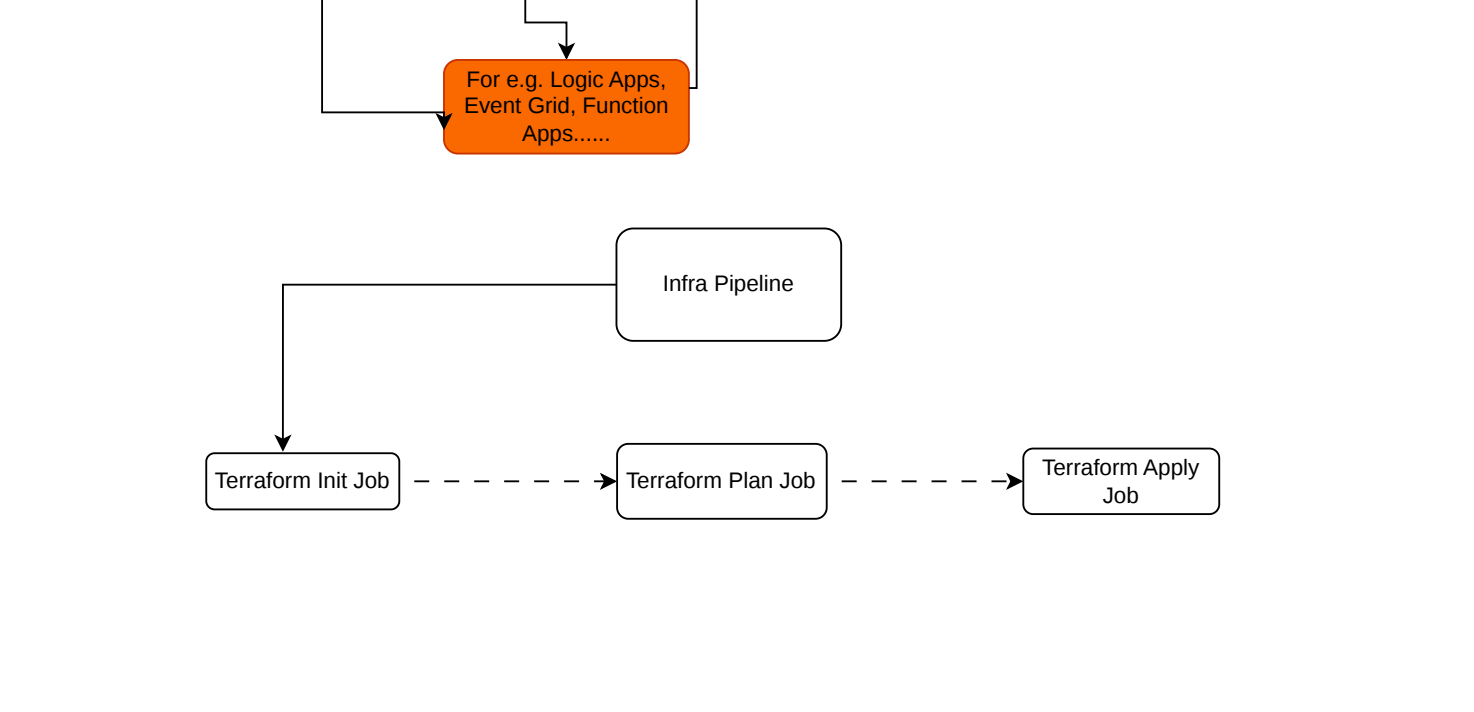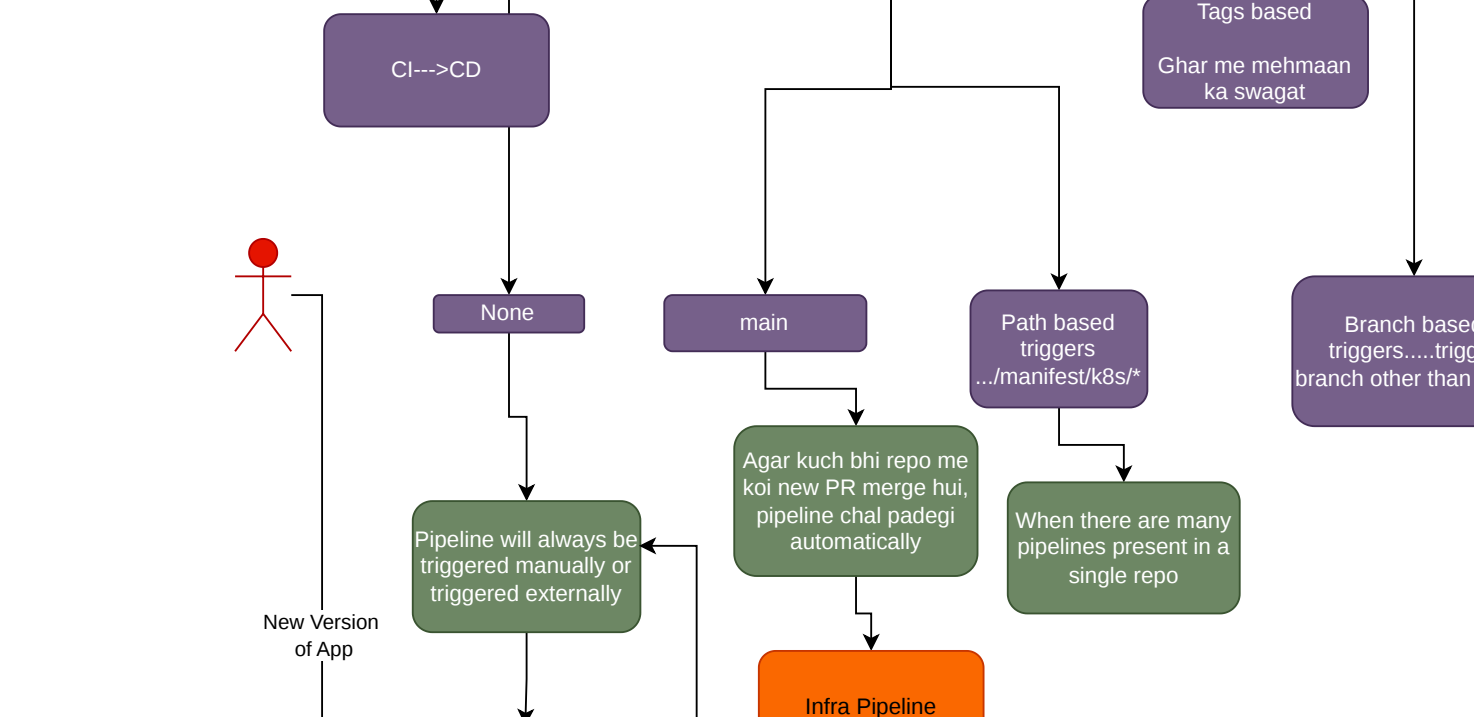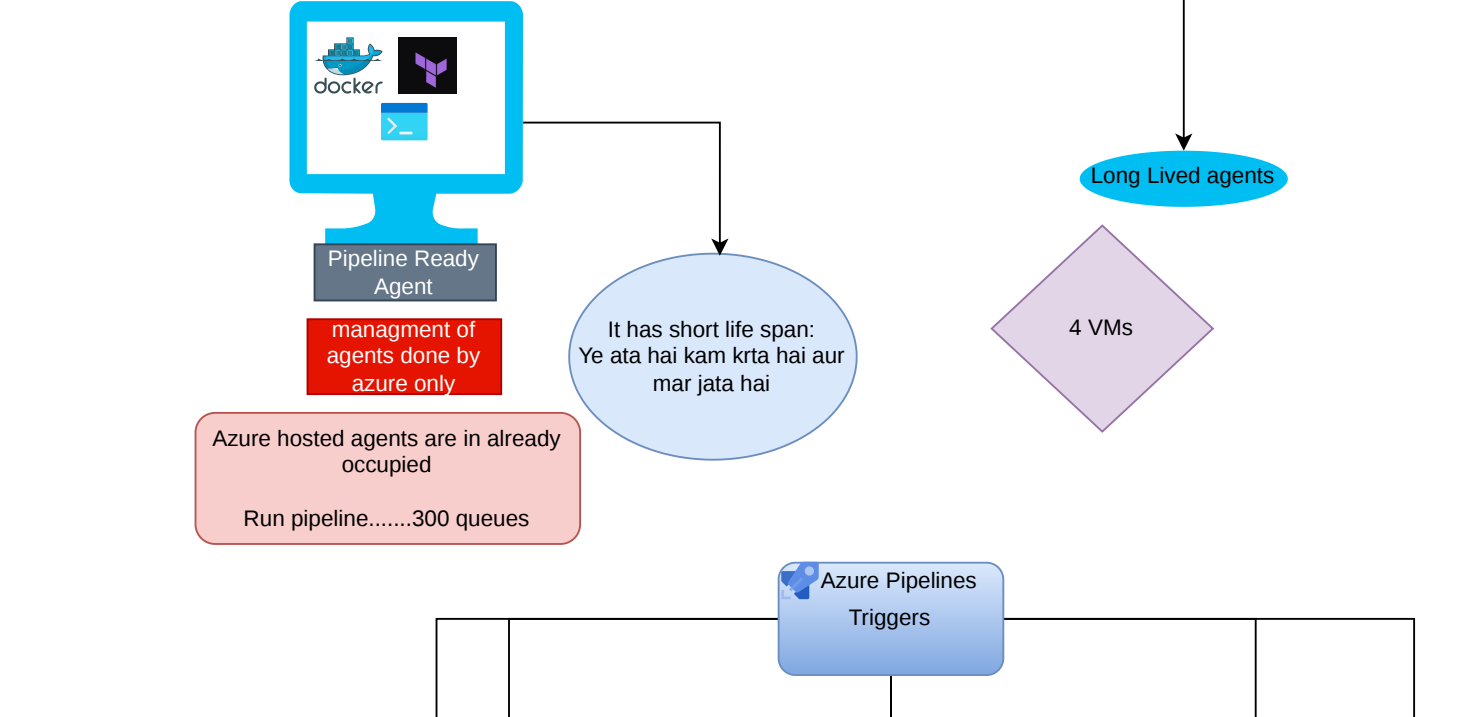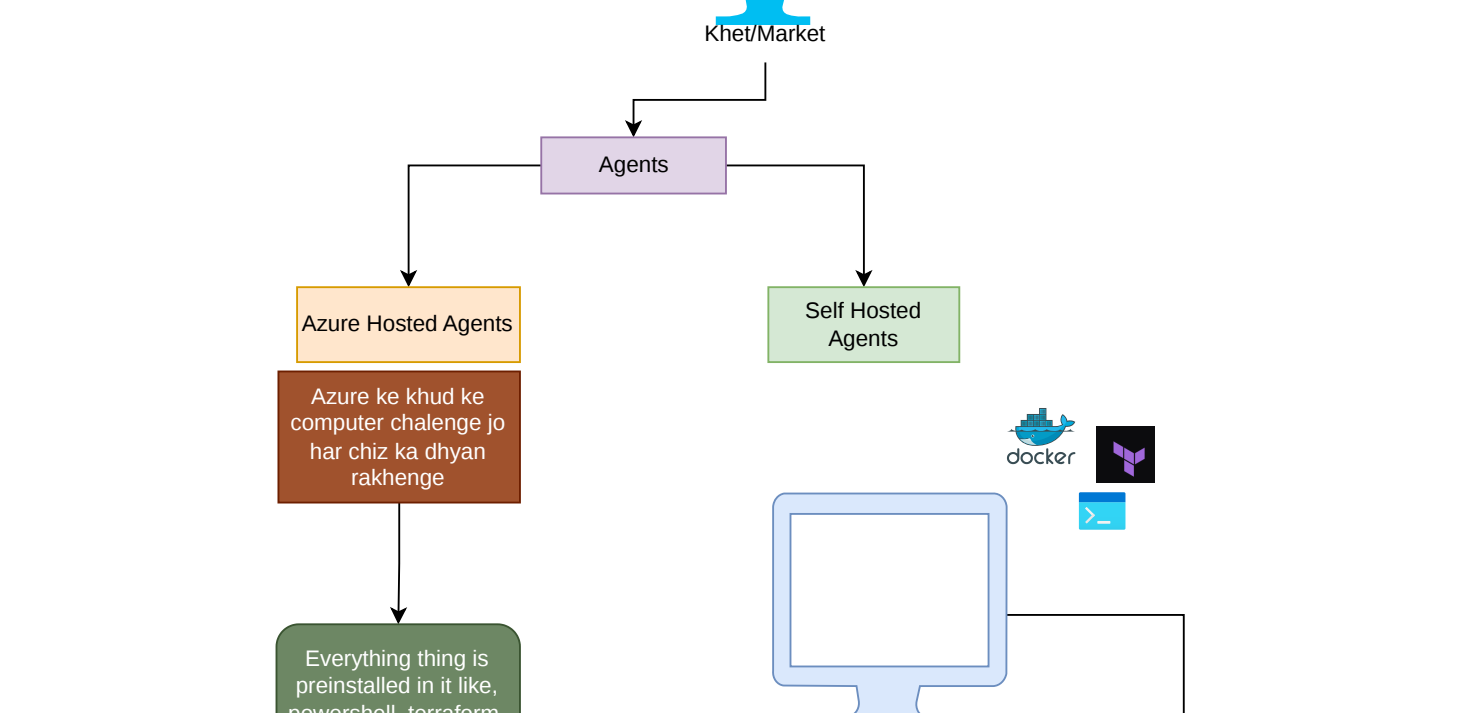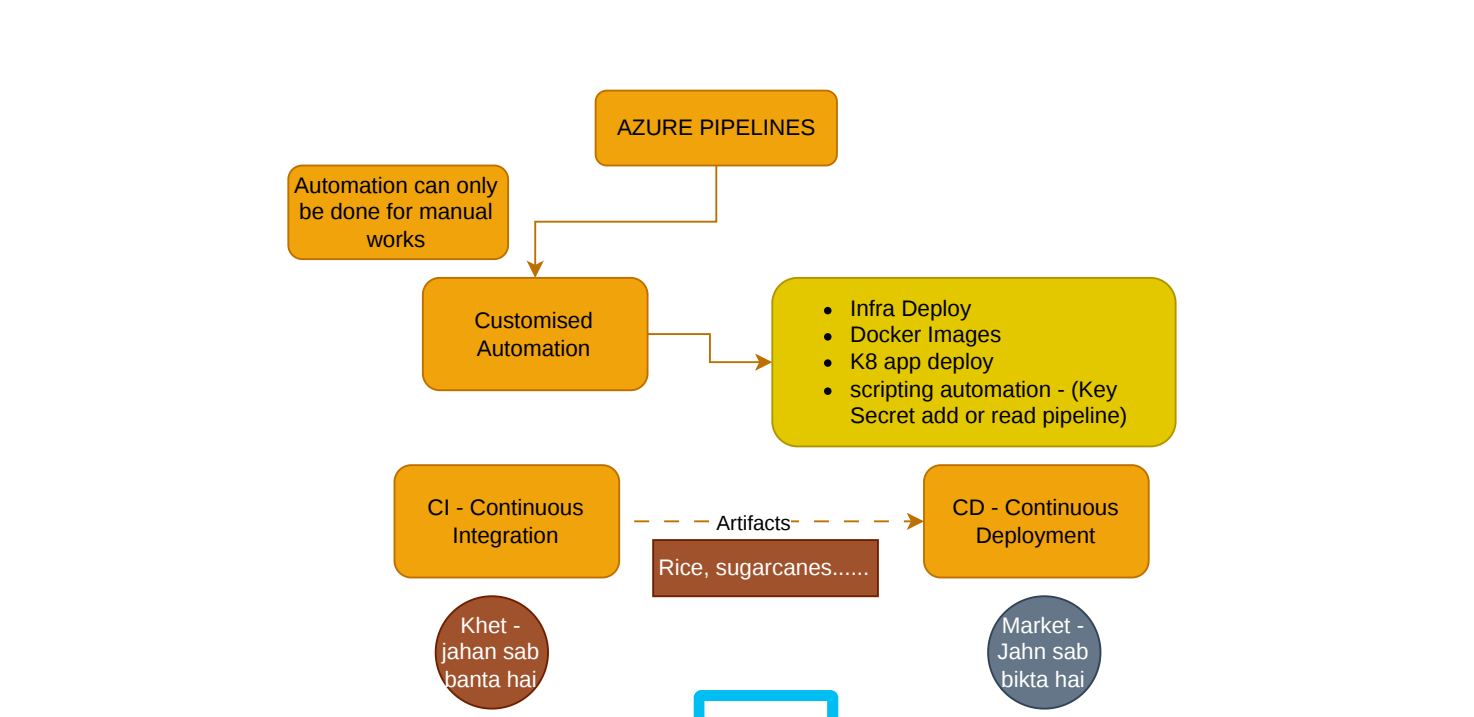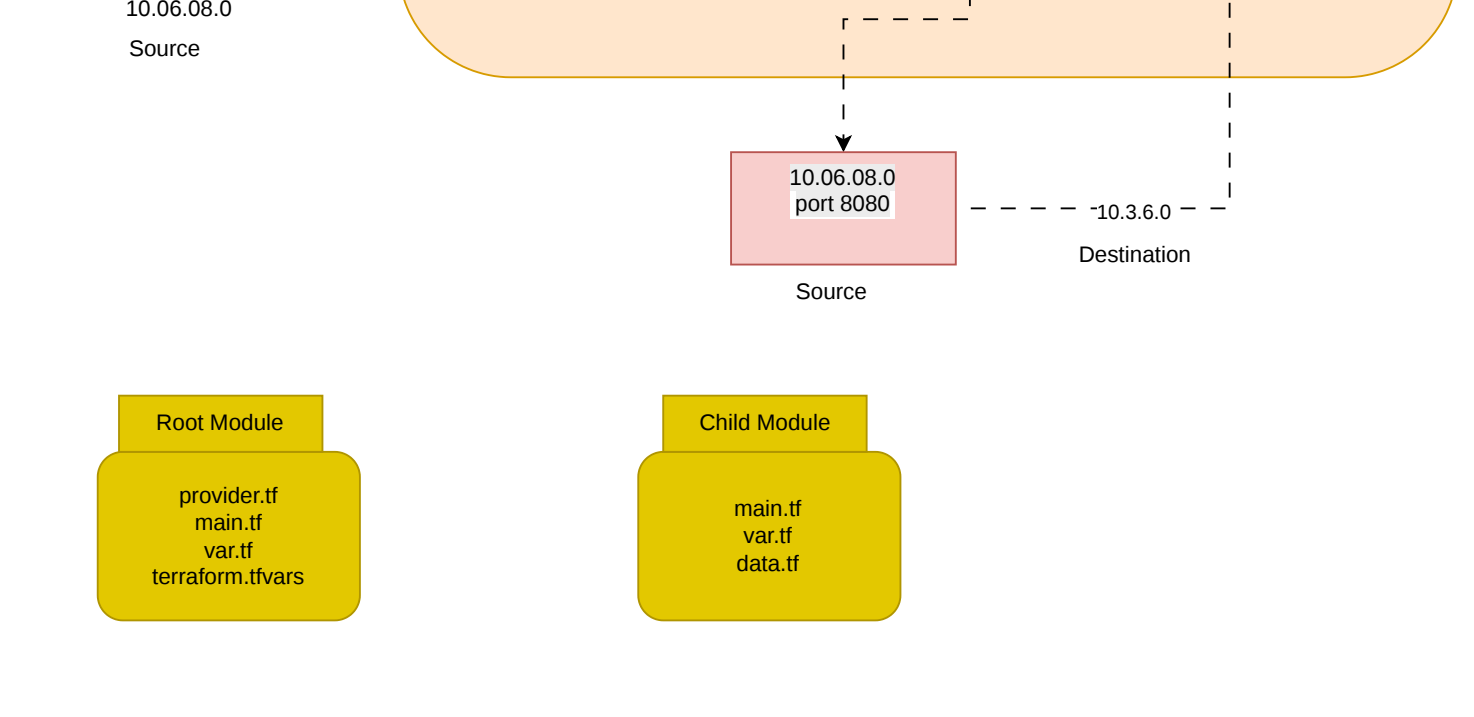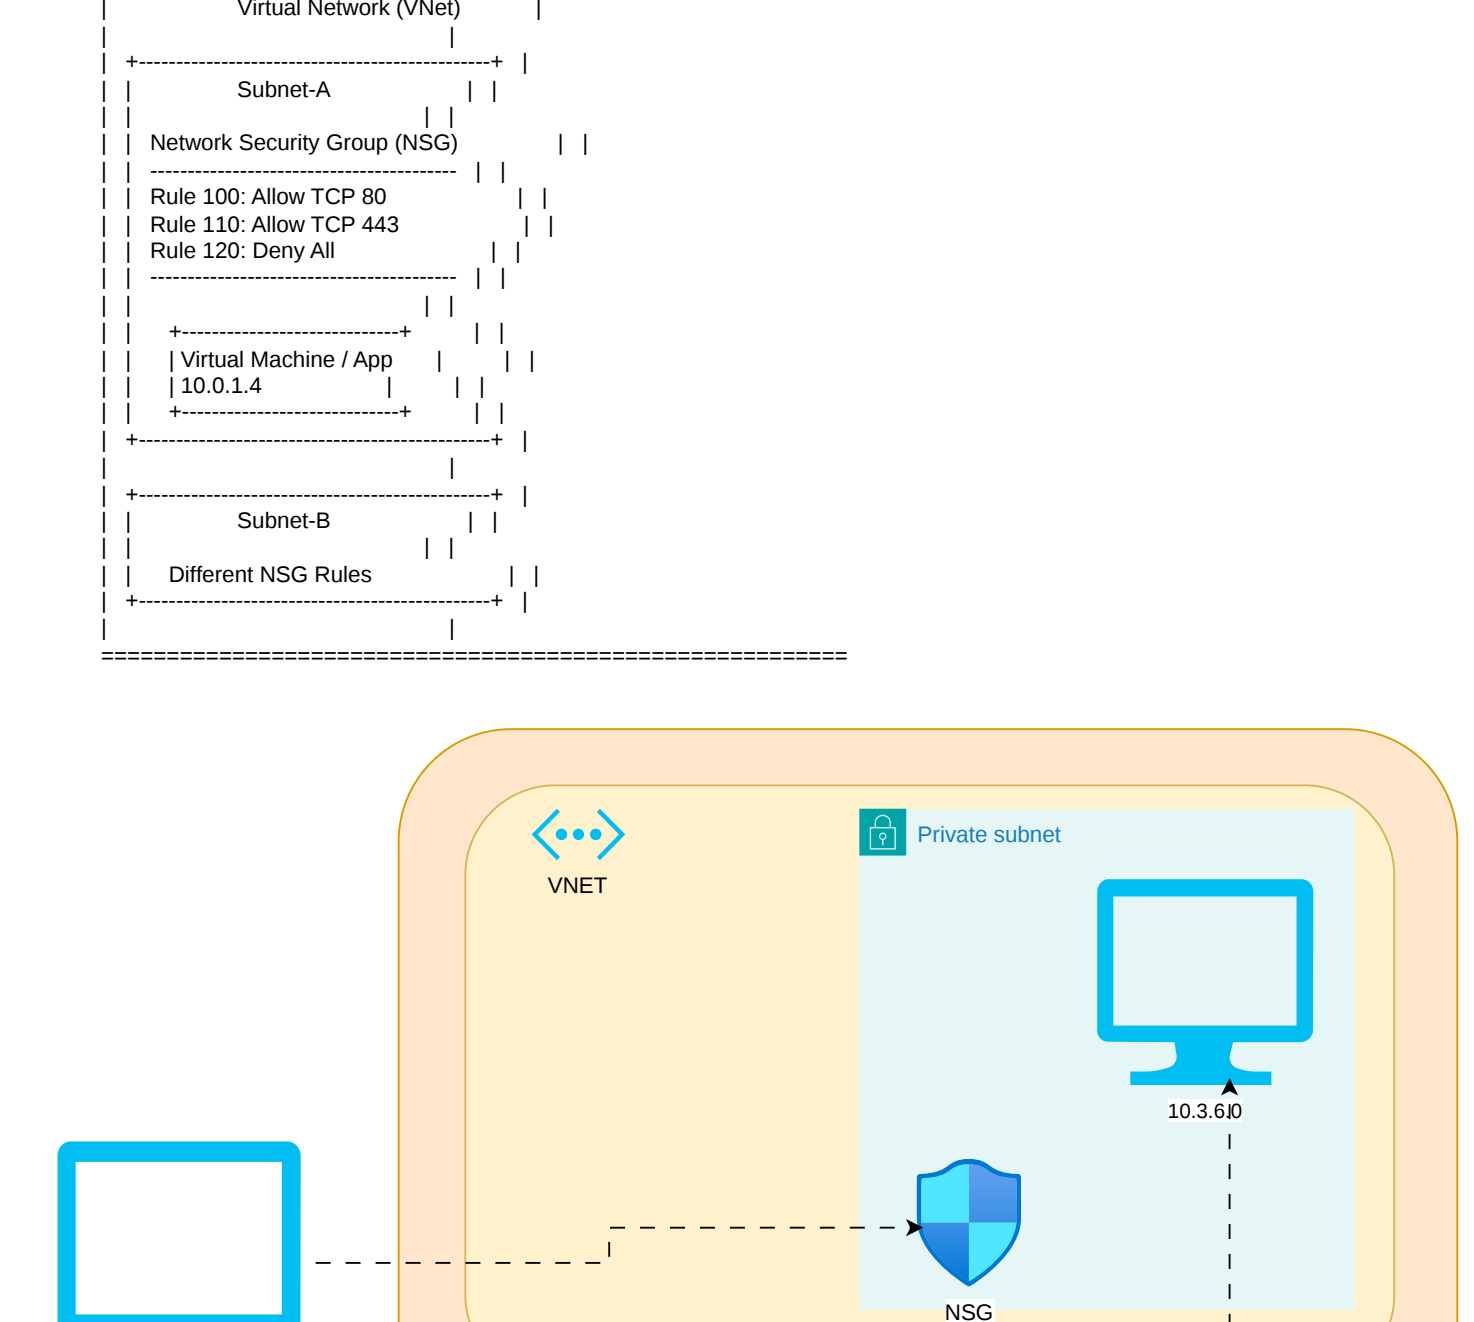

Property	Explanation
Name	A unique name within the network security group. The name can be up to 80 characters long. It must begin with a word character, and it must end with a word character or with <code>_</code> . The name can contain word characters (<code>[a-z]</code> , <code>[0-9]</code> , or <code>[-]</code>).
Priority	A number between 100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers because lower numbers have higher priority. Once traffic matches a rule, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities aren't processed.
Source or destination	You can specify any, an individual IP address, a CIDR block (for example, <code>10.0.0.0/24</code>), a service tag, or an application security group. To specify a particular Azure resource, use the private IP address assigned to the resource. For inbound traffic, network security groups process traffic after Azure translates public IP addresses to private IP addresses. For outbound traffic, network security groups process traffic before translating private IP addresses to public IP addresses. Enter a single, service tag, or application security group to reduce the number of security rules needed. Augmented security rules allow specifying multiple individual IP addresses and ranges in a single rule. However, you can't specify multiple service tags or application groups in a single rule. Augmented security rules are only available in network security groups created through the Resource Manager deployment model. In the classic deployment model, multiple IP addresses and ranges can be specified in a single rule. For example, if the source is subnet <code>10.0.1.0/24</code> (where VM1 is located) and the destination is subnet <code>10.0.2.0/24</code> (where VM2 is located), the network security group filters traffic for VM2. This behavior occurs because the NSG is associated with VM2's network interface.
Protocol	TCP, UDP, ICMPv4, ESP, AH, or Any. The ESP and AH protocols aren't currently available via the Azure portal but can be used via ARM templates.
Direction	Whether the rule applies to inbound or outbound traffic.
Port range	You can specify an individual port or ranges of ports. For example, you could specify <code>80</code> or <code>10000-10005</code> , or for a mix of individual ports and ranges, you can separate them with commas, such as <code>80, 10000-10005</code> . Specifying ranges and comma separation empowers you to create lower security rules. Augmented security rules can only be created in network security groups created through the Resource Manager deployment model. You can't specify multiple ports or port ranges in the same security rule in network security groups created through the classic deployment model.
Action	Allow or deny your specified traffic.

