

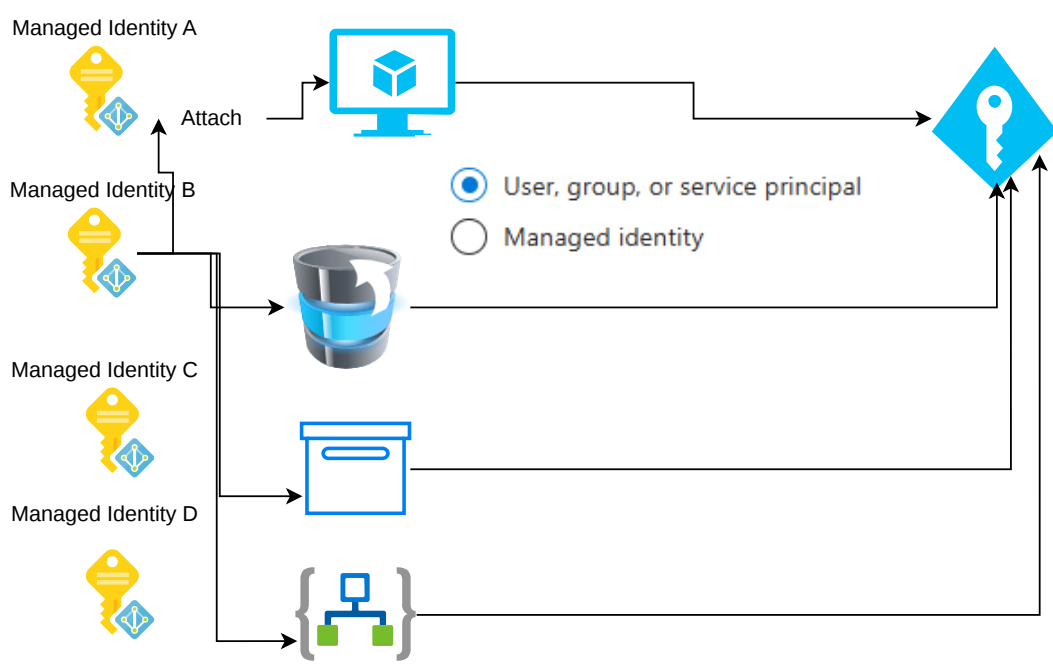


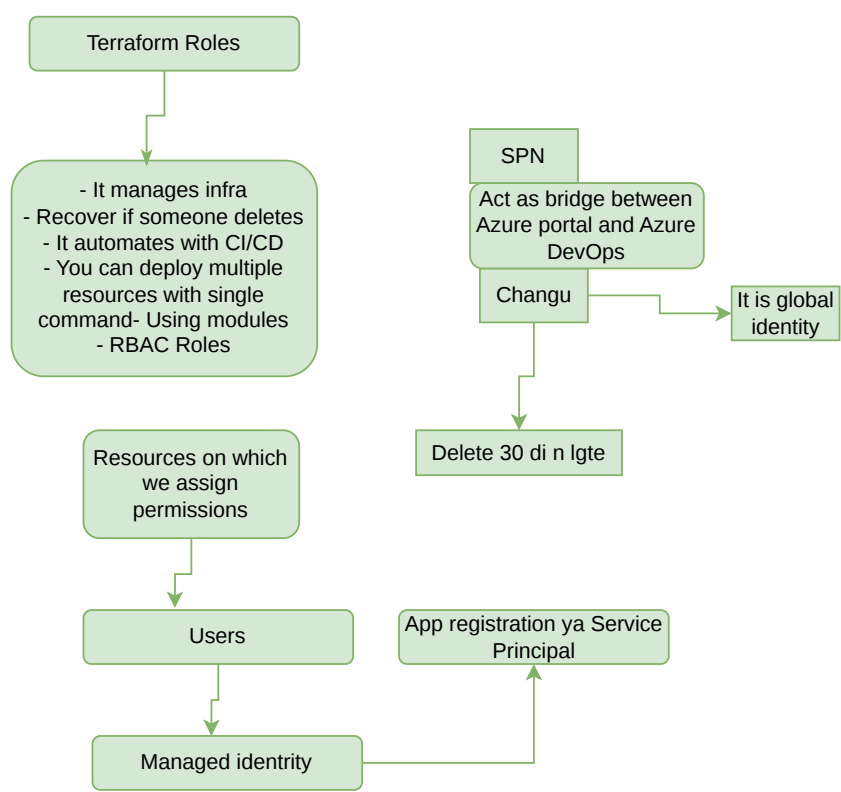


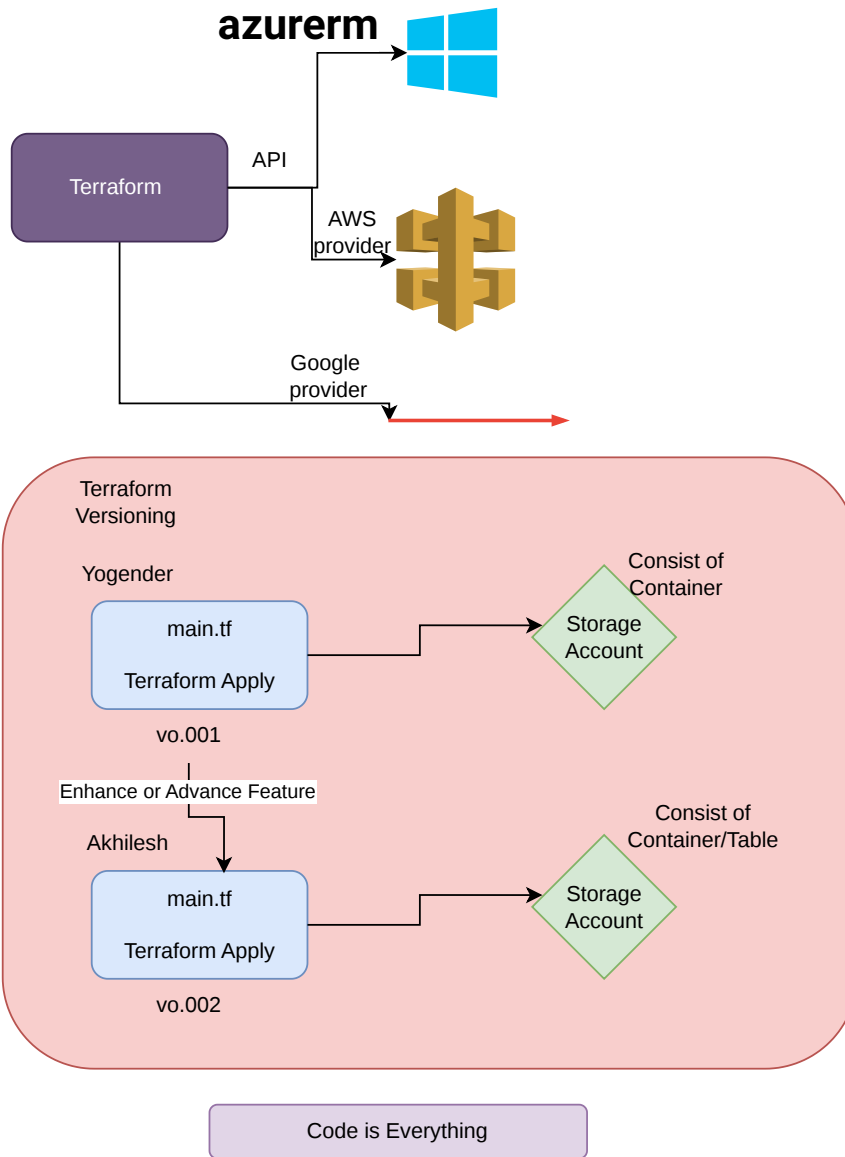


tfstate - brain of Terraform resource - it has all details about creation and deletion

Arguments- Properties which allows to handle the configuration of that resource

Always create the resource manually first from Portal

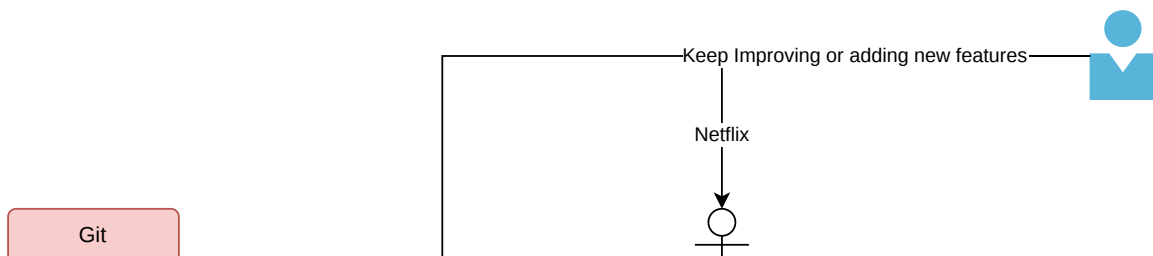

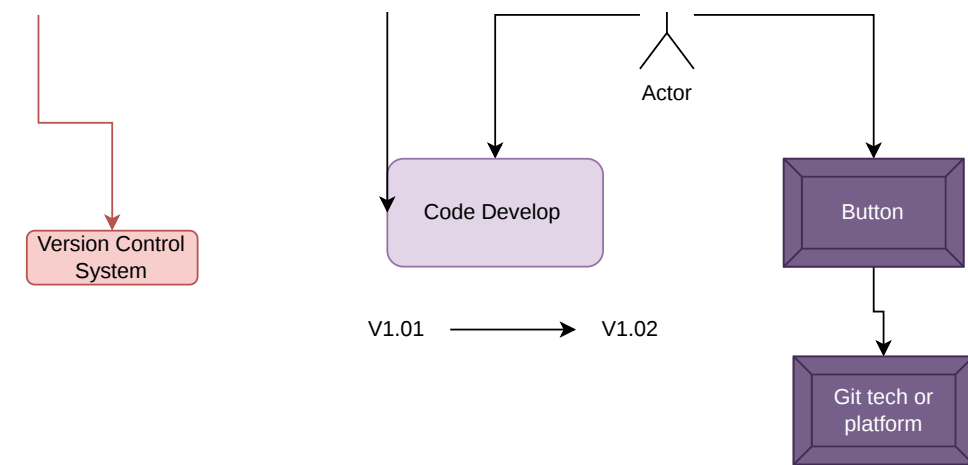


git clone ----address




terraform fmt = shift+alt+f


```

12      0.107 terraform validate\
13      0.744 terraform validate
14      0.115 terraform fmt
15      0.078 terraform fmt
16      5.317 terraform plan
17      3.451 terraform plan
18      9.229 az login
19      12.700 terraform plan
20      1:03.693 terraform apply
21      0.760 terraform validate
22      11.921 terraform plan
23      33.848 terraform apply
24      0.753 terraform validate
25      10.658 terraform plan
26      1:08.392 terraform apply
27      9.710 terraform plan
28      43.560 terraform apply --auto-approve
29      0.056 git add .
30      0.052 git status
31      0.093 git commit -m "rg added"
32      1.964 git push
33      0.038 git status
34      0.037 git add .
35      0.066 git commit -m "rg added"
36      1.683 git push
  
```

git pull
get merge
origin/main

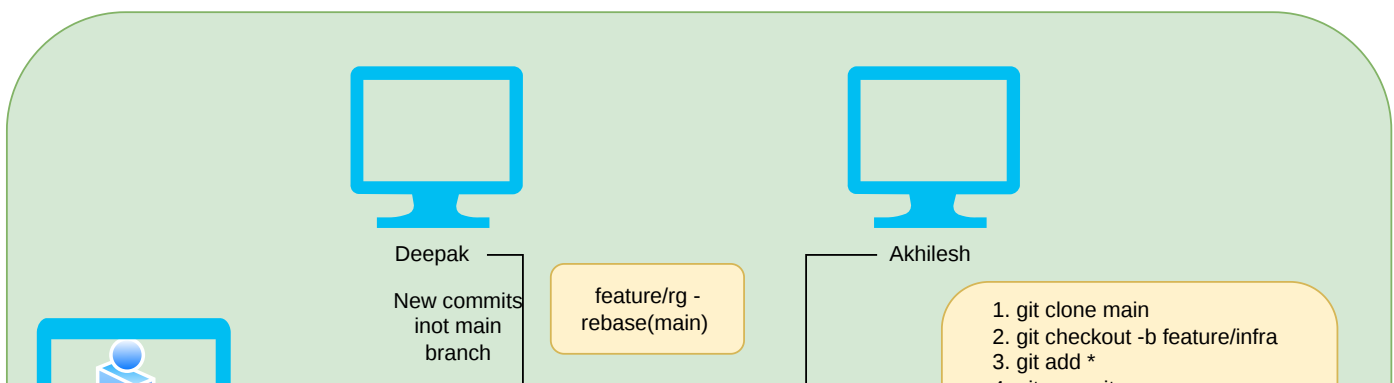

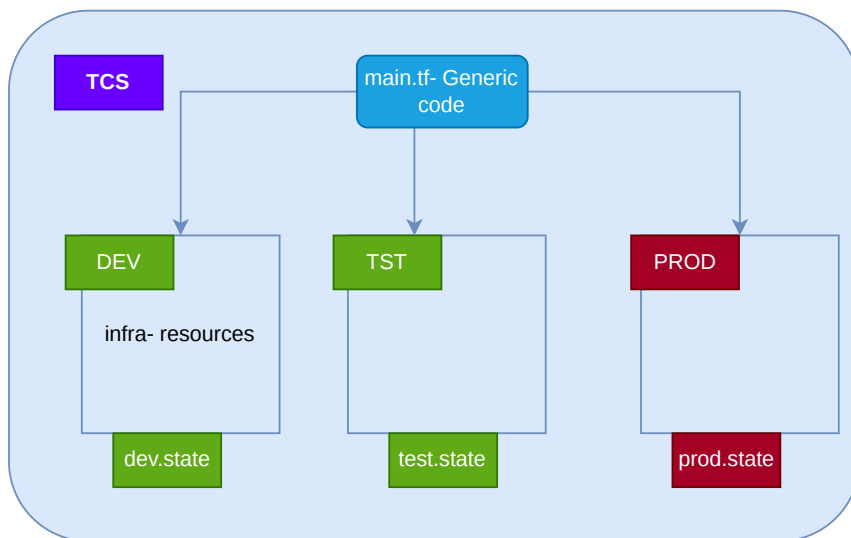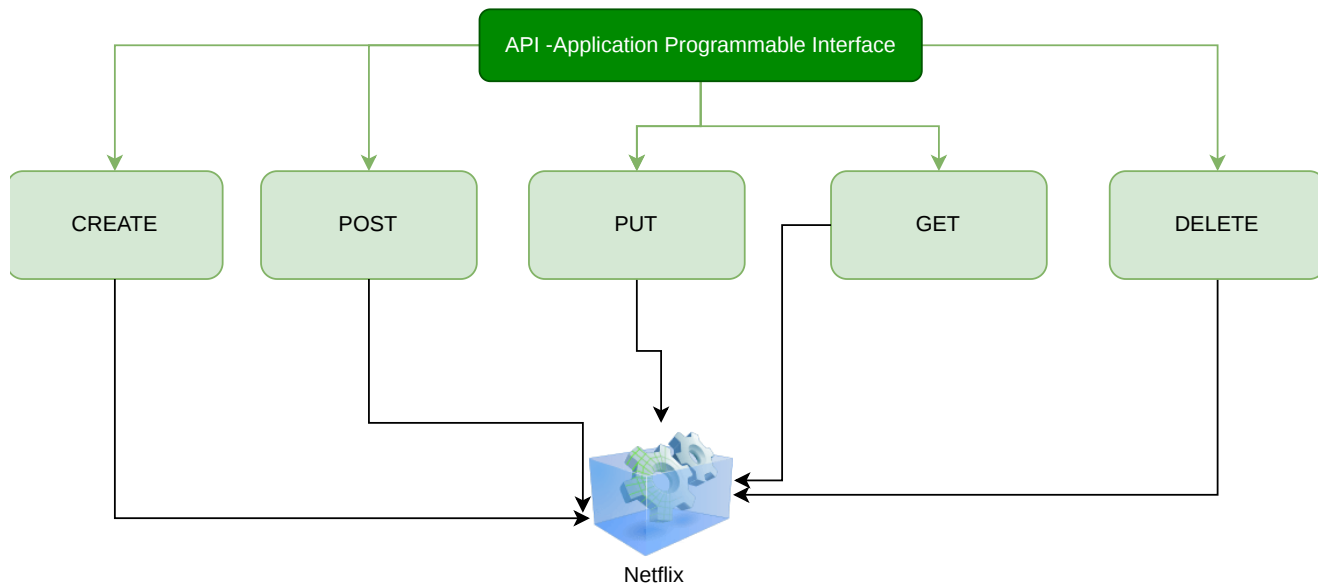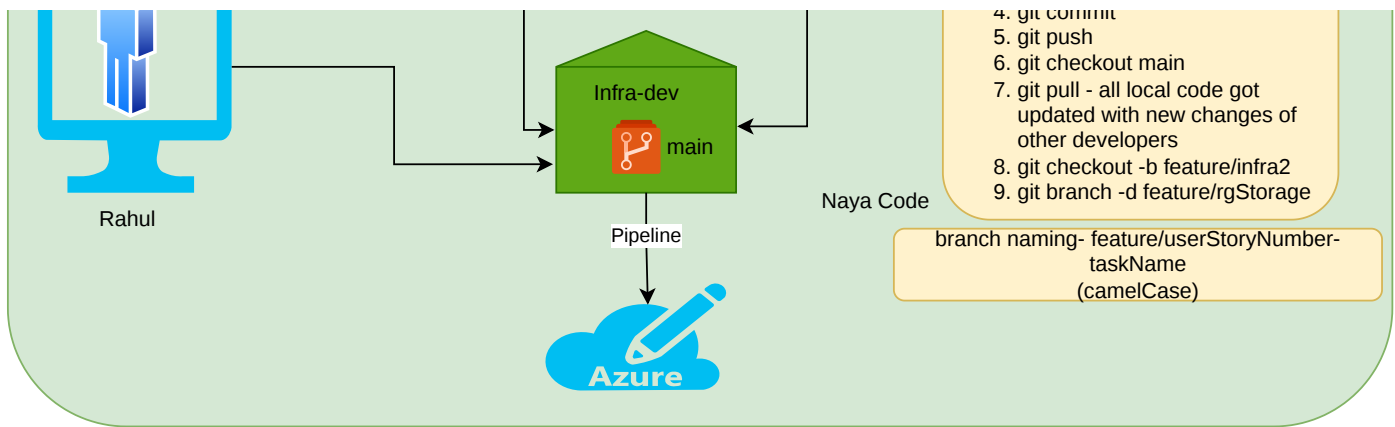

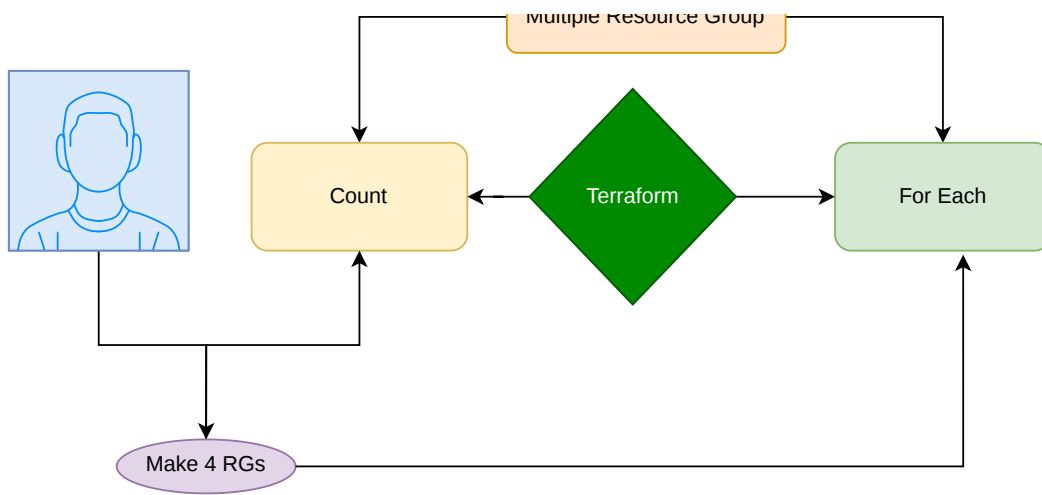

Chaining

Count

Count allows to deploy multiple resources using counts i.e.
 Server1, Server2, Server3.....
 User1, User2, User3.....

```


"Vegetable basket" = {
  "Red Vegetable" = { "capsicum" = "250gm", "chillies" = "100gm"},
  "Green Vegetables" = { "spinach" = "2kg", "cucumber" = 3, "bottle guard" = "4kg", "lady finger" = "1kg" }
}
  
```

- vegetable basket.redVegetabel = capsicum, chillies
- vegetableBasket.greenVegetables = spinach, cucumber, bottle guard, lady finger
- vegetable basket.redVegetabel.capsicum = 250gm

For Each

Loop that reads variables defined values as 'Key' or 'Values' form.

Key = Value

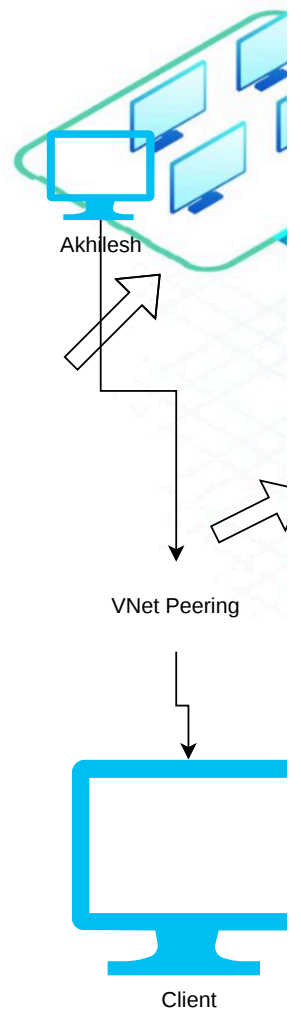


...

LHS

...



RHS



Virtual Networking



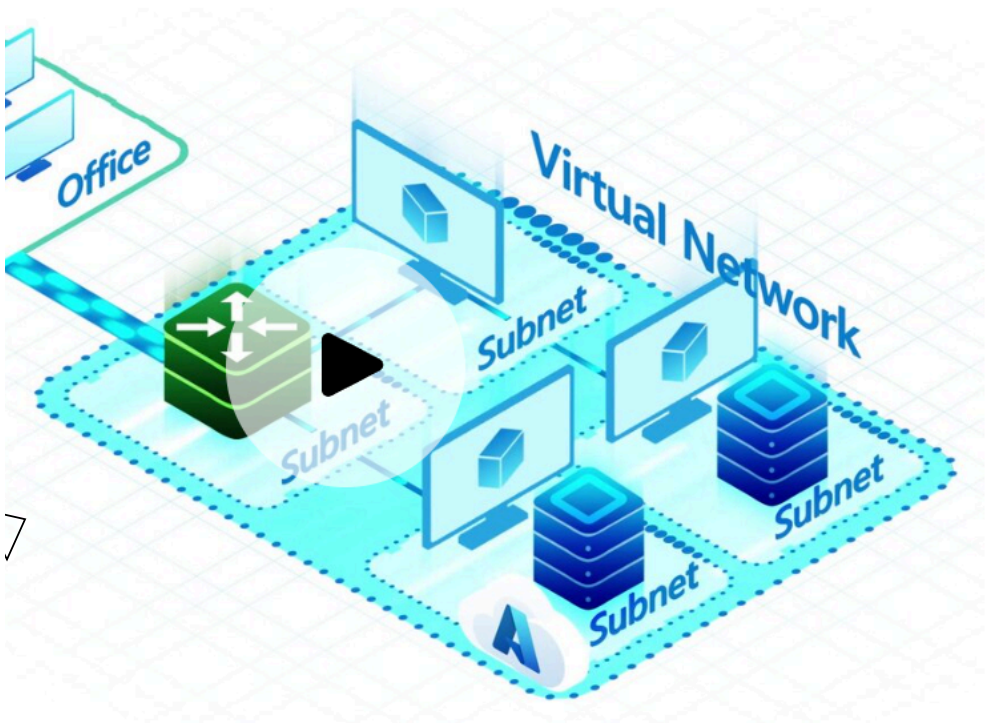


Godrej Flats

Aldeco Flats

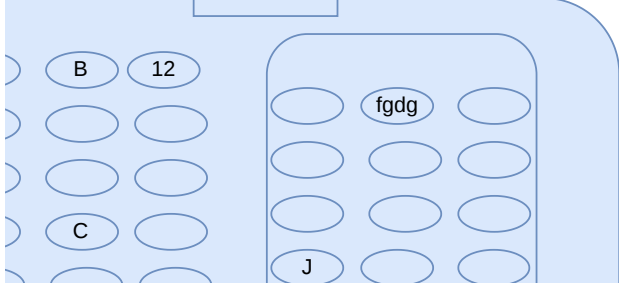

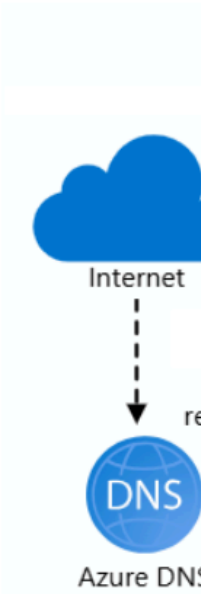

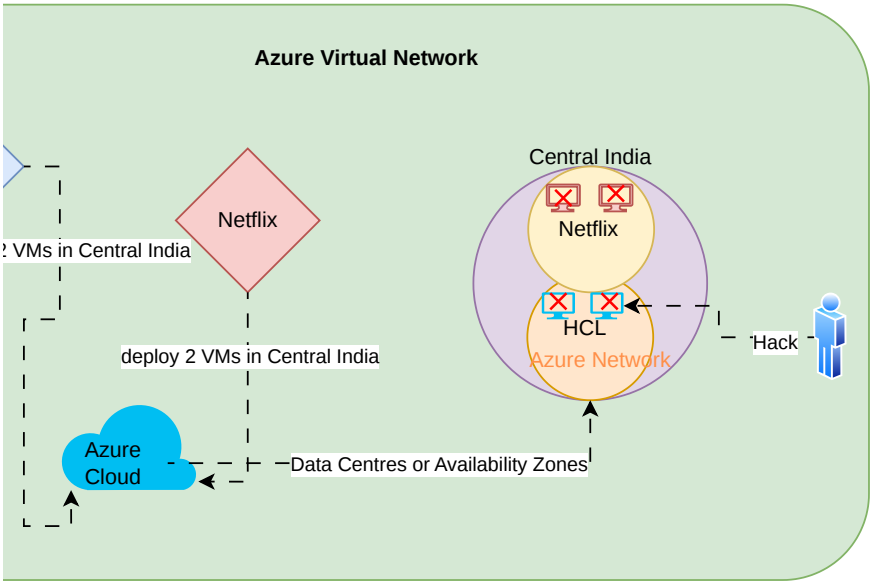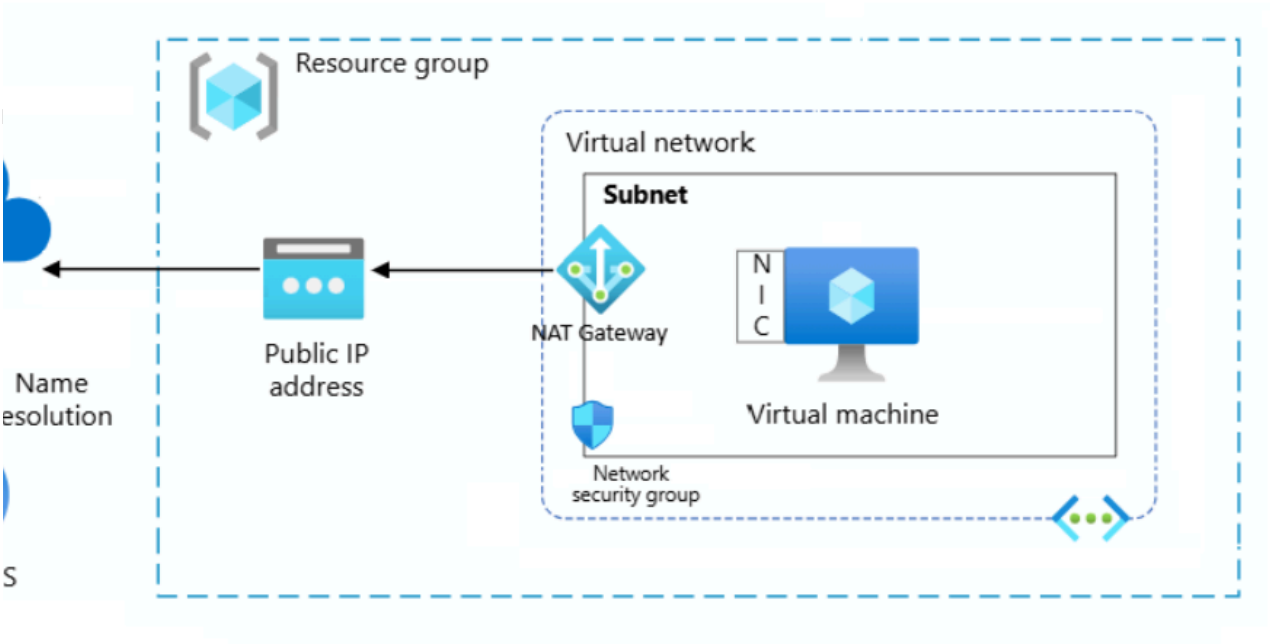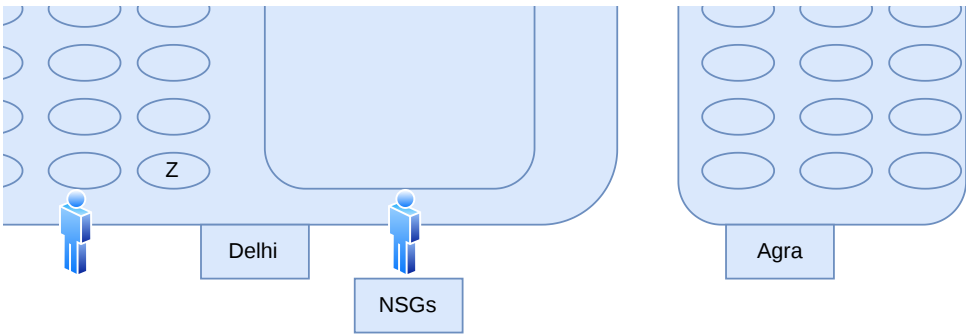


IP Addresses

1 0
27 21

Comm

Some Azu

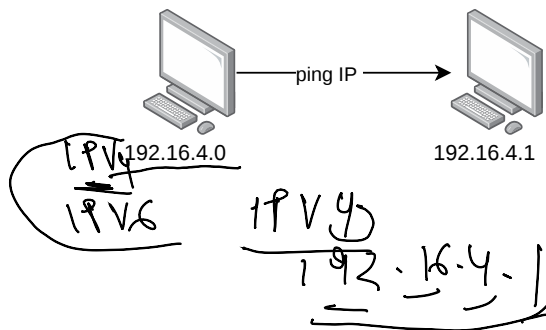

4 bytes
 1 byte = 8 bits
 Total bits = 32

10.1.4.0
 192.16.8.1
 172.8.4.2
 600.256.400.0

192.16.8.4
 24 23 22

1 0 0 0 0 0
 25 24 23 22 21 20 = 255

ion Azure Resources Using Dynamic Blocks

ire resources where **dynamic** is commonly used.

SUITE AZU

- azure
- azure
- azure
- azure
- azure
- azure

INT

[illegible]

the resources where `dynamic` is commonly used.

`erm_network_security_group`

`security_rule`

`erm_application_gateway`

`backend_address_pool`

`http_listener`



`request_routing_rule`

`erm_linux_virtual_machine`

`admin_ssh_key`

`erm_storage_account`

`blob_properties`

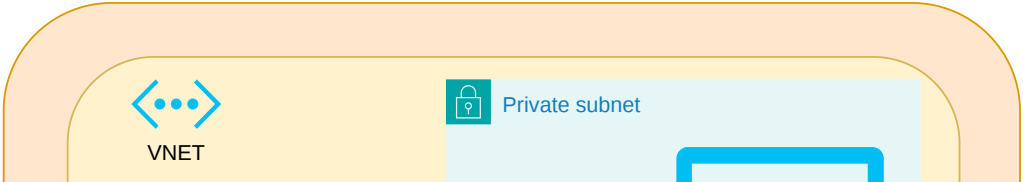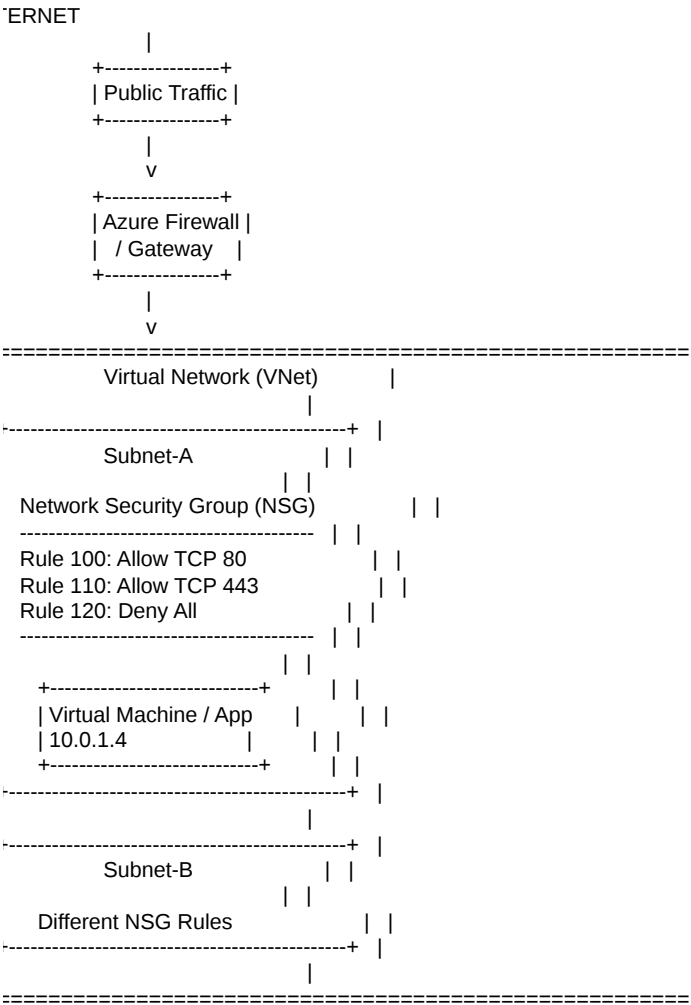




10.06.08.0

Source

Property	Explanation
Name	A unique name with with  . The name c
Priority	A number between : Once traffic matches aren't processed. Azure default secu
Source or destination	You can specify Any use the private IP ad addresses. For outb Enter a range, servi addresses and rang network security gro single rule. For example, if the s traffic for VM2. This
Protocol	TCP, UDP, ICMP, ES
Direction	Whether the rule ap
Port range	You can specify an i with commas, such in network security g security groups crea
Action	Allow or deny your s

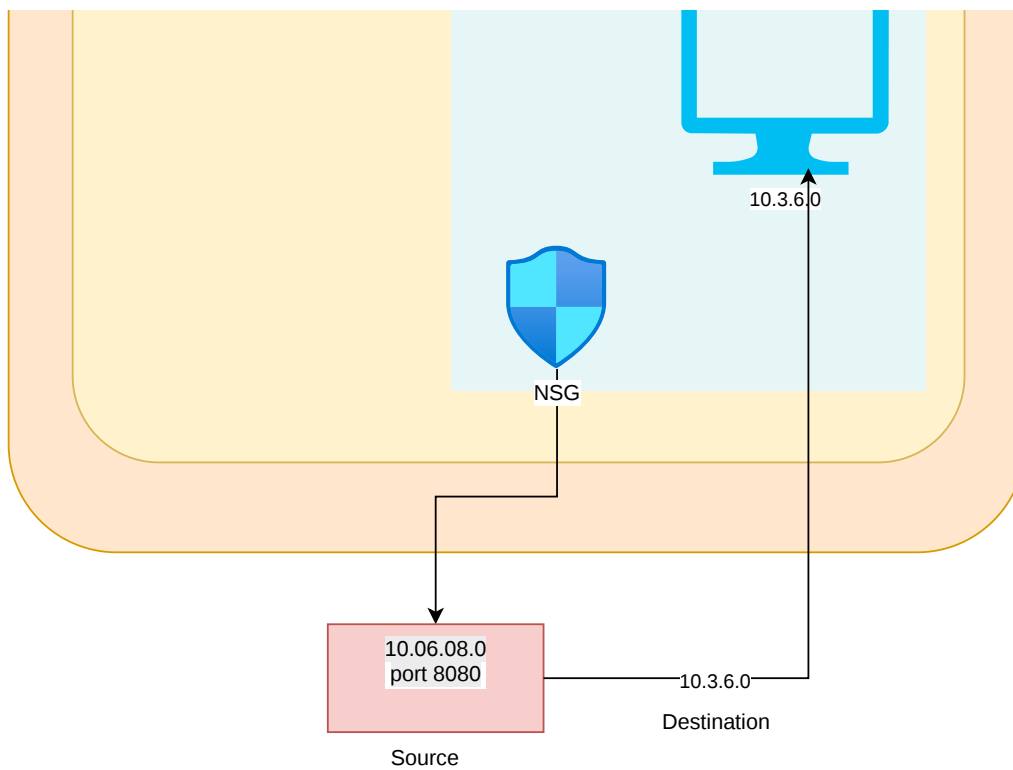

in the network security group. The name can be up to 80 characters long. It must begin with a word character, and it must end with a word character, `.`, `-`, or `_`.

100 and 4096. Rules are processed in priority order, with lower numbers processed before higher numbers because lower numbers have higher priority. If a rule is processed, processing stops. As a result, any rules that exist with lower priorities (higher numbers) that have the same attributes as rules with higher priorities are not processed.

Custom rules are given the lowest priority (highest number) to ensure your custom rules are always processed first.

For example, you can specify `10.0.0.0/24`, a [service tag](#), or an [application security group](#). To specify a particular IP address assigned to the resource. For inbound traffic, network security groups process traffic after Azure translates public IP addresses to private IP addresses. For outbound traffic, network security groups process traffic before translating private IP addresses to public IP addresses.

You can specify a service tag, or application security group to reduce the number of security rules needed. Augmented security rules allow specifying multiple IP addresses in a single rule. However, you can't specify multiple service tags or application groups in a single rule. Augmented security rules are only available for network security groups created through the Resource Manager deployment model. In the classic deployment model, multiple IP addresses and ranges can't be specified in a single rule.

If the source is subnet `10.0.1.0/24` (where VM1 is located) and the destination is subnet `10.0.2.0/24` (where VM2 is located), the network security group behavior occurs because the NSG is associated with VM2's network interface.

SP, AH, or Any. The ESP and AH protocols aren't currently available via the Azure portal but can be used via ARM templates.

Applies to inbound or outbound traffic.

Individual port or ranges of ports. For example, you could specify `80` or `10000-10005`; or for a mix of individual ports and ranges, you can specify `80, 10000-10005`. Specifying ranges and comma separation empowers you to create fewer security rules. Augmented security rules can be specified for network security groups created through the Resource Manager deployment model. You can't specify multiple ports or port ranges in the same security rule created through the classic deployment model.

specified traffic.

l character or
higher priority. n higher priorities
Azure resource, private IP Individual IP ily available in be specified in a y group filters
separate them n only be created e in network