

a.vardhan.vankayala

Test Taken on: October 23, 2020 03:15:38 PM +05:30

a.vardhan.vankayala@accenture.com

Finish State: Normal

Registration Details

Email

a.vardhan.vankayala@accenture.com

First Name:

a.vardhan.vankayala

Address:

Overall Summary


MARKS SCORED

		 Score	 Percentile	 Percentage
Section #1		10 / 20	38	50
Total		10 / 20	38	50

Percentile is among 430 candidate(s) who've taken this test.

SUMMARY OF ATTEMPTS

TIME TAKEN

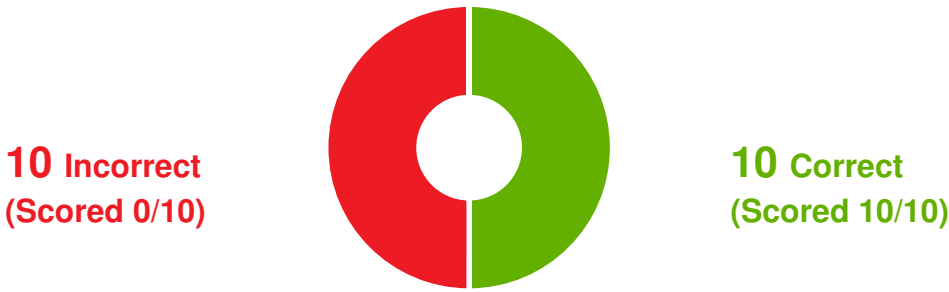

0

hr

30

min

Available time: 0 hr 33 min

TOTAL QUESTIONS

20

Question-wise Details

Section #1

Question 1:

Time: 58 Sec

Marks: 1/ 1

Refer to the JPA code given below.What would be written at Line-X to get the result.

```
1 Query query=em.createQuery("SELECT count(*) FROM CustomerEntity c");
2 Object obj= _____ // Line-X
3 System.out.println(obj);
4
```

Choose the most appropriate option.

Options	Response	Answer
query.getResultList().get(0);	✓	✓
query.getSingleResult().get(0)		
query.getResult().get(0)		
query.getResultObject().get(0);		

Question 2:

Time: 1 Min 1 Sec

Marks: 0/ 1

Refer the incorrect Code Given Below showing the 404 error message:

```
1 package com.lkm.application;
2 @SpringBootApplication
3 public class App {
4     public static void main(String[] args) {
5         SpringApplication.run(App.class, args);
6     }
7 }
8
9 //-----
10
11 package com.lkm.web.controller;
12 @RestController
13 public class Controller {
14     @RequestMapping(value = "/{message}",
15     produces = { "application/json"}, method = RequestMethod.GET)
16     public ResponseEntity<String> getMessage(@PathVariable("message") String pVar) {
17         return new ResponseEntity<String>("Welcome: "+pVar,HttpStatus.OK);
18     }
19 }
20
```

Assume application has been deployed on port 8090 and following request is sent to the application "using a web BROWSER".

http://localhost:8090/Hello world

Choose from below a valid option to correct the above code.

Options	Response	Answer
Move the Primary configuration to the root package:"com.lkm"		✓
Change the port of the application to default port 8080		
Change @SpringBootApplication to @SpringBootApplication(BasePackages ="com.lkm")	✓	
Change the local variable name pVar to message		

Refer the below Requirement:

- 1) LoadCarUpdateByCarName should be accessible to CST_MANAGER,CST_NEW_OP
- 2) LoadCarReport should be accessible to CST_MANAGER only

Choose from below "INVALID" option/options to complete the above requirement.[Choose 2]

Options	Response	Answer
1<http use-expressions="false 2<intercept-url pattern=' 3<intercept-url pattern=' 4access="(5<!-- Rest Code Goes here 6</http> 7	✓	✓
1<http use-expressions="true 2<intercept-url pattern=' 3<intercept-url pattern=' 4access="F 5<!-- Rest Code Goes here 6</http> 7		✓
1<http use-expressions="false 2<intercept-url pattern= 3<intercept-url pattern=' 4access="F 5<!-- Rest Code Goes here 6</http> 7	✓	
1<http use-expressions="true 2<intercept-url pattern="/ 3<intercept-url pattern="/ 4access="hasF 5<!-- Rest Code Goes here 6</http> 7		

Candidate responses were captured before updation of the question with restrictions on maximum responses.

Refer the code given below.

```
1 @RestController
2 public class DPController {
3     @RequestMapping(value = "dp/getDpDetailsById/{id}",
4         method = RequestMethod.GET, produces = MediaType.APPLICATION_JSON_VALUE)
5     public ResponseEntity<DPBean> getDPDetailsById(@PathVariable("id") int myId) {
6         DPBean dpBean = null;
7         //Code goes here to intialize the DPBean
8         return new ResponseEntity<DPBean>(dpBean, HttpStatus.OK);
9     }
10 }
11
```

Assume Application is deployed on port number 8089 and is accessible using the URL **http://localhost:8089/DpApp** and **restTemplate** is holding the instance to the org.springframework.web.client.RestTemplate.

Choose from below a valid RestTemplate call to invoke the above method

Options	Response	Answer
DPBean dpBean = restTemplate.getForObject("http://localh ost:8089/DpApp/dp/getDpDetailsById/1 002", DPBean.class)		✓
DPBean dpBean = restTemplate.getForObject("http://localh ost:8089/DpApp/dp/getDpDetailsById? id=1002", DPBean.class)	✓	
ResponseEntity<DPBean> dpBeanBody = restTemplate.getForObject("http://localh ost:8089/DpApp/dp/getDpDetailsById/1 002", DPBean.class) DPBean dp= dpBean.getBody();		
<u>ResponseEntity</u> <DPBean> dpBeanBody = restTemplate.getForObject("http://localh ost:8089/DpApp/dp/getDpDetailsById? id=1002", DPBean.class) <u>DPBean</u> dp= dpBean.getBody();		

Question 5:

Time: 1 Min 46 Sec

Marks: 0/ 1

Refer below incomplete code:

Service class(Physical Transaction)

```
1 @Transactional(value="txManager")
2 public Integer addEmployeeAndDepartment(EmployeeBean employeeBean,
3     DepartmentBean departmentBean) throws Exception {
4     int result = 0;
5     int deptId=employeeDepartmentDAO.addDepartment(departmentBean);
6     employeeBean.setDepartmentCode(deptId);
7     result = deptId+employeeDepartmentDAO.addEmployee(employeeBean);
8     return result;
9 }
10
```

DAO Class(Logical Transactions)

```
1 @Transactional(value="txManager")
2 public void addEmployee(EmployeeBean employeeBean) throws Exception{
3     //code for creating Employee
4     throw new InvalidDummyException("There is an error");
5 }
6
7 //LineX
8 public void addDepartment(DepartmentBean departmentBean) throws Exception {
9     //code for creating Department
10 }
11
```

Assume **InvalidDummyException** is unchecked exception. Choose from below the valid option to be placed at **LineX** so that Rollback of Physical transaction should not rollback the logical transaction of Department Creation.

Options	Response	Answer
@Transactional(value="txManager",propagation=Propagation.REQUIRES_NEW)		✓
@Transactional(value="txManager",REQUIRES_NEW)		
@Transactional(value="txManager")		
@Transactional(value="txManager",propagation=Propagation.REQUIRED)	✓	

Question 6:

Time: 2 Min 41 Sec

Marks: 1/ 1

Refer to the servlet code given below. (request and response are reference variable of type HttpServletRequest and HttpServletResponse respectively)

1

2

3

4

5

```
String value="Sharable";
RequestDispatcher rd=request.getRequestDispatcher("Test.jsp");
request.setAttribute("share",value);
rd.forward(request, response);
```

Developer John is told to convert the above servlet code to JSP. Which of the following JSP code would help him to meet the requirement. Choose the most appropriate option

Options	Response	Answer
<pre><%String value="Sharable";%> <jsp:forward page="Test.jsp"> <jsp:param value="<%value%>" name="share"/> </jsp:forward></pre>		
<pre><%String value="Sharable";%> <jsp:forward page="Test.jsp"> <jsp:param value="<%=value %>" name="share"/> </jsp:forward></pre>	✓	✓
<pre><%String value="Sharable";%> <jsp:forward page="Test.jsp"> <init:param value="<%=value %>" name="share"/> </jsp:forward></pre>		
<pre><%String value="Sharable";%> <jsp:forward page="Test.jsp" value=" <%=value %>" name="share"/></pre>		

Refer to the code given below.

```
1 interface Demo{
2     void print(String name, int age);
3 }
4
5 public class Test{
6     public static void main(String[] args) {
7
8         // Line-X : Your code goes here
9     }
10 }
11
```

Identify the appropriate code to be placed at Line-X so that it prints the output "Helen 20". [Choose 2]

Options	Response	Answer
Demo demo1=(name,age)- >System.out.println(name+" "+age); demo1.print("Helen", 20);	✓	✓
Demo demo2=(String name,int age)- > System.out.println(name + " "+ age); demo2.print("Helen", 20);	✓	✓
Demo demo3=(String name, age)- > System.out.println(name + " "+ age); demo3.print("Helen", 20);		
Demo demo4=(int age, String name)- > System.out.println(name + " "+ age); demo4.print(20, "Helen");		

Candidate responses were captured before updation of the question with restrictions on maximum responses.

Question 8:

Time: 2 Min 29 Sec

Marks: 0/ 1

Assume that entity classes Department and Employee given below are mapped to tables in the database .There is a department record with deptId 10, and employee record with employeeId 100 in department and employee tables respectively. Employee with id 100 is not associated with any department record.

```
1 @Entity
2 public class Department {
3     @Id
4     private int deptId;
5     private String deptName;
6
7     // getter and setter method
8 }
9
10
11 @Entity
12 public class Employee {
13     @Id
14     private int employeeId;
15     @ManyToOne(cascade=CascadeType.ALL)
16     @JoinColumn(name="deptId")
17     private Department department;
18
19     // getter and setter method
20 }
21
```

Which of the following code will associate department record whose deptid 10 with employee record whose employeeid is 100. ['em' and 'et' are reference of type EntityManager and EntityTransaction respectively]

Options	Response	Answer
Department dept=em.find(Department.class,10); Employee emp=em.find(Employee.class,100); emp.setDepartment(dept); et.begin();		✓

et.commit();		
Department dept= new Department(); Dept.setDeptId(10); Employee emp=em.find(Employee.class,100); emp.setDepartment(dept); et.begin(); et.commit();		
Department dept=em.find(Department.class,10); Employee emp=new Employeeee(); emp.setEmployeeId(100); emp.setDepartment(dept); et.begin(); et.commit();	✓	
Department dept= new Department(); Dept.setDeptId(10);		

```
Employee emp=new Employeee();
```

```
emp.setEmployeeId(100);
```

```
emp.setDepartment(dept);
```

```
et.begin();
```

```
et.commit();
```

Question 9:

Time: 55 Sec

Marks: 0/ 1

What would be the output of the code given below?

```
1 import java.util.Collections;
2 import java.util.LinkedList;
3 public class Test{
4     public static void main(String[] args) {
5         LinkedList<Integer> list=new LinkedList<Integer>();
6         list.add(2);
7         list.add(5);
8         list.add(-100);
9         Collections.sort(list);
10        list.addFirst(10);
11        list.addLast(50);
12        list.forEach( item -> System.out.print(item+", "))
13
14    }
15 }
16
```

Choose the most appropriate option.

Options	Response	Answer
10 -100 2 5 50		✓
-100 2 5 10 50		
10 -100 2 5 50 10	✓	
Compilation Error: sort() is not applicable to a type which is not a comparable class		

Question 10:

Time: 42 Sec

Marks: 1/ 1

Assume that the below code is written in a Controller class.

```
1 @ModelAttribute("countryList")
2 public List<String> populateCountry() {
3     List<String> myList=new ArrayList<String>();
4     myList.add("India");
5     myList.add("US");
6     return myList;
7 }
8
```

A bean class “Employee” with property "country" is created. Identify the appropriate code to bind the model attribute to radio button UI component. Assume “form” is the prefix used while adding the spring form tag library.

Choose the most appropriate option.

Options	Response	Answer
<form:radiobuttons path="country" items="\${countryList }" >	✓	✓
<form:radiobuttons bind="country" items="\${countryList }" >		
<form:radiobuttons path="country" value="\${countryList }" />		
<form:radiobuttons path=" country " items="#{countryList }" />		

Question 11:

Time: 1 Min 42 Sec

Marks: 1/ 1

Refer the classes and spring configuration given below.

```
1 public class Account {
2     private int accountId;
3     private double balance;
4     // getter and setter methods
5 }
6 public class Customer {
7     private int customerId;
8     private Account account;
9     // getter and setter methods
10 }
11
```

```
1 <beans>
2   <bean id="customer" class="com.Customer" autowire="byType">
3     <property name="customerId" value="100" />
4   </bean>
5
6   <bean id="account1" class="com.Account" >
7     <property name="accountId" value="2525" />
8     <property name="balance" value="235.75" />
9   </bean>
10
11  <bean id="account" class="com.Account" >
12    <property name="accountId" value="3535" />
13    <property name="balance" value="335.75" />
14  </bean>
15 </beans>
16
```

Which Account bean would be wired by container while creating the object of the Customer class? Choose the most appropriate option.

Options	Response	Answer
Runtime Error: expected single matching bean, but found 2	✓	✓
account		
Compilation Error : cannot have two bean definition of same type		
account1		

Question 12:

Time: 1 Min 11 Sec

Marks: 0/ 1

What would happen if the code given below executes?

Assume that table Project(pid,pname) is created in the database.

```
1 public class Test {
2     public static void main(String[] args) {
3         try{
4             // Assume code for creating connection to database written here
5             // and connection established successfully
6             PreparedStatement pstmt=connection.prepareStatement("INSERT INTO Project VALUES(?,?)");
7             pstmt.setInt(1,106);
8             pstmt.executeUpdate();
9             System.out.println("Saved");
10        }catch(Exception e){
11            System.out.println("Exception");
12        }
13    }
14 }
15 }
```

Choose the most appropriate option.

Options	Response	Answer
prints “Exception”		✓
inserts a record in to Project table with pid=106 and pname=null and prints “Saved” on console	✓	
inserts a record in to Project table with pid=106 and pname=null and prints “Exception” on console		
inserts a record in to Project table with pid=106 and pname=null and nothing will be printed on the console		

Question 13:

Time: 1 Min 4 Sec

Marks: 1/ 1

Which of the following is/are CORRECT with respect to multithreading?

- (i) A Thread which is already started can be started again
- (ii) A method or a Constructor can be synchronized
- (iii) Once start() method is invoked (which calls the run method), then the thread will be in runnable state

Choose the most appropriate option.

Options	Response	Answer
only (iii)	✓	✓
only (ii)		
both (i) and (iii)		
both (ii) and (iii)		

Question 14:

Time: 3 Min 27 Sec

Marks: 1/ 1

Assume that the below code is written in deployment descriptor(web.xml).

```
1 <servlet>
2   <servlet-name>TestServlet</servlet-name>
3   <servlet-class>com.servlet.TestServlet</servlet-class>
4 </servlet>
5 <context-param>
6   <param-name>myParam</param-name>
7   <param-value>Accenture</param-value>
8 </context-param>
9 <servlet-mapping>
10  <servlet-name>TestServlet</servlet-name>
11  <url-pattern>/TestServlet</url-pattern>
12 </servlet-mapping>
13
```

Identify the appropriate code to be used in servlet to retrieve the value set in the parameter ‘myParam’. Choose the most appropriate option

Options	Response	Answer
ServletContext ctx=getServletContext(); String param=ctx.getInitParameter("myParam");	✓	✓
ServletConfig ctx=getServletConfig(); String param=ctx.getInitParameter("myParam");		
ServletContext ctx=getServletContext(); String param=ctx.getParameter("myParam");		
ServletConfig ctx=getServletConfig(); String param=ctx.getParameter("myParam");		

Question 15:

Time: 1 Min 29 Sec

Marks: 1/ 1

Consider the spring configuration class given below. Assume that classes Customer and Account are created successfully.

```
1 @Configuration
2 public class AppConfig {
3
4     @Bean(name="custObj")
5     public Customer createCustomer() {
6         return new Customer();
7     }
8
9     @Bean(name="accObj")
10    @Lazy
11    public Account createAccount() {
12        return new Account();
13    }
14 }
15
```

How many Customer and Account objects would be created after executing Line-X while executing the below code

```
1 public class Demo1 {
2     public static void main(String[] args) {
3         ApplicationContext ctx = new AnnotationConfigApplicationContext(AppConfig.class);
4         Account account=ctx.getBean("accObj"); // Line-X
5         System.out.println("done");
6     }
7 }
8
```

Choose the most appropriate option.

Options	Response	Answer
1 Customer Object, 1 Account Object	✓	✓
2 Customer Objects only		
2 Account Objects only		
1 Customer Object, 2 Account Object		

Question 16:

Time: 1 Min 43 Sec

Marks: 0/ 1

What would be the ouput of the code given below. [Assume all required interfaces and classes are imported.]

```
1 public class Test{
2     public static void main(String[] args) {
3         try{
4             Map<Integer,String> myMap=new TreeMap<Integer,String>();
5             myMap.put(1,"Mark");
6             myMap.put(2,"John");
7             myMap.put(1,"Tom");
8             Set<Integer> keySet=myMap.keySet();
9             for(Integer key : keySet){
10                 System.out.print(myMap.get(key) +" ");
11             }
12             myMap.put(null,"James");
13             System.out.println(myMap.get(null));
14         }catch(Exception exception){
15             System.out.print("Exception");
16         }
17     }
18 }
19 }
```

Choose the most appropriate option.

Options	Response	Answer
Tom John Exception		✓
Mark John Exception		
Mark John James		
Tom John James		
Exception	✓	

Question 17:

Time: 48 Sec

Marks: 1/ 1

Refer the JPA code given below. Assume that all required interfaces and classes are imported and “em” refers to “EntityManager” and Customer is an entity bean class. Customer table has a record with customer Id 100.

```
1 EntityManager em=emf.createEntityManager();
2 EntityTransaction et=em.getTransaction();
3 Customer c=em.find(Customer.class,100);
4 em.remove(c); // -- Line-X
5 em.persist(c); // -- Line-Y
6 et.commit();
7 System.out.println("end");
8
```

What would be the state of the object after executing Lin-X and Line-Y respectively.

Options	Response	Answer
removed, managed	✓	✓
removed, detached		
managed, detached		
deleted, managed		

Question 18:

Time: 42 Sec

Marks: 0/ 1

John was trying to develop a code to store the state of a customer object to a flat file. He has made some mistakes while developing the code, which has caused some compilation error. Help him to solve the problems in the code which is given below.

```
1 class Customer{ // Line-X
2     int cid;
3     String cname;
4
5     Customer(int cid, String cname){
6         this.cid=cid;
7         this.cname=cname;
8     }
9 }
10
11 public class Test{
12     public static void main(String[] args){ // Line-Y
13         Customer customer=new Customer(100,"Mark");
14         FileOutputStream fos=new FileOutputStream("data.txt");
15         ObjectOutputStream obj=new ObjectOutputStream(fos);
16         obj.write(customer); // Line-Z
17     }
18 }
19
```

What changes John would make so that the program executes successfully. Choose the most appropriate option

Options	Response	Answer
Line X - customer class should implement Serializable interface, Line Y – main method should throws IOException, Line Z – change method name to writeObject		✓
Line X - customer class should implement Synchronized interface, Line Y – main method should throws IOException, Line Z – change method name to writeObject	✓	
Line X - customer class should implement Serializable interface, Line Y – main method should throws IOException, Line Z – change method name to writeObjectState		
Line X - customer class should implement Synchronized interface, Line Y – main method should throws IOException, Line Z – change method name to writeObjectState		

Question 19:

Time: 1 Min 2 Sec

Marks: 1/ 1

Refer the incomplete code given below:

View

====

```
1 <form:form _____="empBean" action="authenticate.html" method="get">
2 Name:<form:input path="empId" type="text" /></td>
3 Password:<form:input path="password" type="password"/></td>
4 <input type="submit" value="Submit"/>
5 </form:form>
6
```

RequestHandler

=====

```
1 _____(value = "/authenticate.html", method = _____)
2 public ModelAndView validateLogin(_____("empBean")EmployeeBean paramBean) {
3 ModelAndView modelAndView = new ModelAndView();
4 //Business logic goes here....
5 return modelAndView;
6 }
7
```

Choose valid option from below in the same order which they appear from top to bottom to complete above code:

Options	Response	Answer
modelAttribute,@RequestMapping,RequestMethod.GET ,@ModelAttribute	✓	✓
modelAttribute,RequestMapping,@RequestMethod.GET ,ModelAttribute		
modelAttribute,@RequestMapping,@RequestMethod.GET, @Model		
model,@RequestMapping,RequestMethod.GET, @ModelAttribute		

What would be the output of the code given below?

```
1 public class Test {
2     public static void main(String[] args) {
3         try{
4             perform();
5         }catch(Exception exception){
6             System.out.println("Exception-Main");
7         }
8     }
9     public static void perform(){
10        try{
11            throw new RuntimeException();
12        }catch(RuntimeException exception){
13            System.out.print("Exception-Perform ");
14            return;
15        }finally{
16            System.out.print("Finally ");
17        }
18    }
19 }
20
```

Choose the most appropriate option.

Options	Response	Answer
Exception-Perform Finally		✓
Exception-Perform Finally Exception-Main	✓	
Exception-Perform Exception-Main		
Exception-perform		

