F14 — Missing-data (n=344, folds=5, repeats=5, model=lightgbm__median, mode=full)

QWK by imputer (incl. iterative)

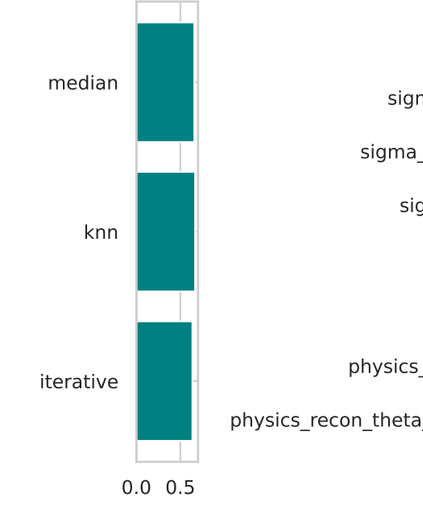

M7 path (physics recon)

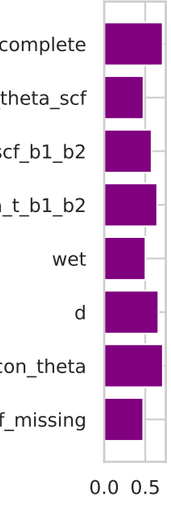

Train vs inference missing-D


```
{
  "inference_time_missing_d": "Fit on complete training fold; evaluate with D set to NaN at test (imputer fills from train marginals).",
  "train_and_inference_missing_d": "Fit with D column entirely NaN on train fold; evaluate with D NaN at test \u2014 matches production rows 315\u2013344 missing-D regime.",
  "fields": [
    "inference_time_missing_d_acc",
    "train_and_inference_missing_d_acc",
    "n_test",
    "imputer",
    "fold",
    "repeat"
  ]
}
```