

RUNTIME ENVIRONMENT

cooperate with OS and system software
to support abstractions of
source language on target machine


→ runtime environment



set of data structures
maintained at runtime to
implement high level structures
(functions, objects, exceptions, datatypes etc.)



Deals with:

- Allocation of storage locations
- Mechanisms used by target
pgm
to access vars
- Linkage
- Mech for passing params
- Interface to OS, I/O, other pgms



Each node represents activation of a procedure

Eg:

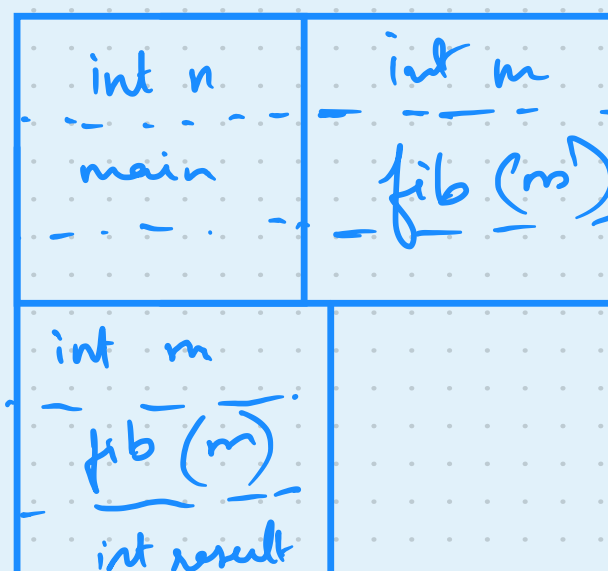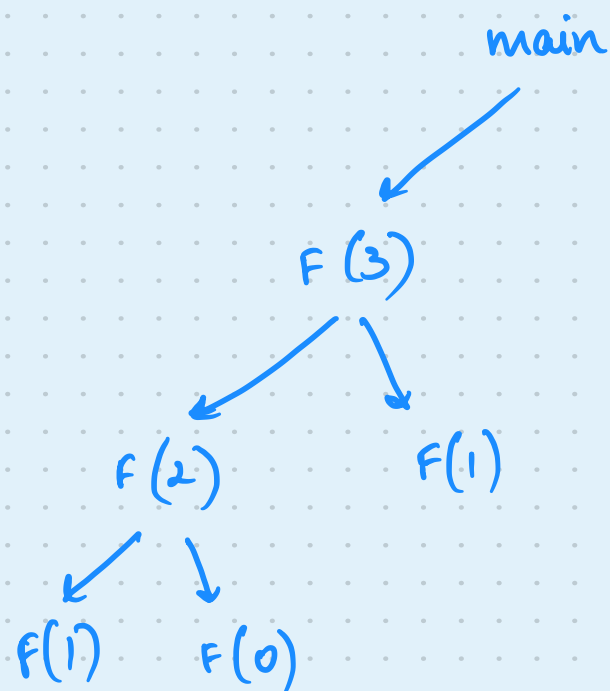

Activation Records

temporary values

local data

Nesting depth: procedures NOT nested within others → nesting depth = 1