



Chapter 4 : Intermediate SQL

Database System Concepts, 7th Ed.

©Silberschatz, Korth and Sudarshan
See www.db-book.com for conditions on re-use



Outline

- Join Expressions
- Views
- Transactions
- Integrity Constraints
- SQL Data Types and Schemas
- Index Definition in SQL
- Authorization



Joined Relations

- **Join operations** take two relations and return as a result another relation.
 - A join operation is a Cartesian product which requires that tuples in the two relations match (under some condition). It also specifies the attributes that are present in the result of the join
 - The join operations are typically used as **subquery expressions** in the **from clause**
 - Three types of joins:
 - Natural join
 - Inner join
 - Outer join
- (Handwritten notes: A inner join B on R1key, B on R2key. Result: R1 & R2 on R1key & R2key)*
- Inner join*
- Diagram: Two overlapping circles labeled A and B. The intersection area is shaded with diagonal lines.*
- Result: R1 & R2 on R1key & R2key*
- Outer join*
- Diagram: Two overlapping circles labeled A and B. The intersection area is shaded with diagonal lines. Below it, handwritten text says: Left outer join, taking table R1 as T1 and table R2 as T2.*



Natural Join in SQL

- Natural join matches tuples with the same **values** for all common attributes and retains only one copy of each common column.
- List the names of instructors along with the course ID of the courses that they taught
 - *select name, course_id
from students, takes
where student.ID = takes.ID;*
- Same query in SQL with “natural join” construct
 - *select name, course_id
from student natural join takes;*

*Two tables have to have the same attributes
if there is no attribute then it's an error*

Attribute count mismatch



Natural Join in SQL (Cont.)

- The **from** clause can have multiple relations combined using natural join:

```
select A1, A2, ... An
  from r1 natural join r2 natural join .. natural join rn
    where P;
```

(ex)

attribute 屬性



Student Relation

ID	name	dept_name	tot_cred
00128	Zhang	Comp. Sci.	102
12345	Shankar	Comp. Sci.	32
19991	Brandt	History	80
23121	Chavez	Finance	110
44553	Peltier	Physics	56
45678	Levy	Physics	46
54321	Williams	Comp. Sci.	54
55739	Sanchez	Music	38
70557	Snow	Physics	0
76543	Brown	Comp. Sci.	58
76653	Aoi	Elec. Eng.	60
98765	Bourikas	Elec. Eng.	98
98988	Tanaka	Biology	120



Takes Relation

ID	course_id	sec_id	semester	year	grade
00128	CS-101	1	Fall	2017	A
00128	CS-347	1	Fall	2017	A-
12345	CS-101	1	Fall	2017	C
12345	CS-190	2	Spring	2017	A
12345	CS-315	1	Spring	2018	A
12345	CS-347	1	Fall	2017	A
19991	HIS-351	1	Spring	2018	B
23121	FIN-201	1	Spring	2018	C+
44553	PHY-101	1	Fall	2017	B-
45678	CS-101	1	Fall	2017	F
45678	CS-101	1	Spring	2018	B+
45678	CS-319	1	Spring	2018	B
54321	CS-101	1	Fall	2017	A-
54321	CS-190	2	Spring	2017	B+
55739	MU-199	1	Spring	2018	A-
76543	CS-101	1	Fall	2017	A
76543	CS-319	2	Spring	2018	A
76653	EE-181	1	Spring	2017	C
98765	CS-101	1	Fall	2017	C-
98765	CS-315	1	Spring	2018	B
98988	BIO-101	1	Summer	2017	A
98988	BIO-301	1	Summer	2018	null



student natural join takes

ID	name	dept_name	tot_cred	course_id	sec_id	semester	year	grade
00128	Zhang	Comp. Sci.	102	CS-101	1	Fall	2017	A
00128	Zhang	Comp. Sci.	102	CS-347	1	Fall	2017	A-
12345	Shankar	Comp. Sci.	32	CS-101	1	Fall	2017	C
12345	Shankar	Comp. Sci.	32	CS-190	2	Spring	2017	A
12345	Shankar	Comp. Sci.	32	CS-315	1	Spring	2018	A
12345	Shankar	Comp. Sci.	32	CS-347	1	Fall	2017	A
19991	Brandt	History	80	HIS-351	1	Spring	2018	B
23121	Chavez	Finance	110	FIN-201	1	Spring	2018	C+
44553	Peltier	Physics	56	PHY-101	1	Fall	2017	B-
45678	Levy	Physics	46	CS-101	1	Fall	2017	F
45678	Levy	Physics	46	CS-101	1	Spring	2018	B+
45678	Levy	Physics	46	CS-319	1	Spring	2018	B
54321	Williams	Comp. Sci.	54	CS-101	1	Fall	2017	A-
54321	Williams	Comp. Sci.	54	CS-190	2	Spring	2017	B+
55739	Sanchez	Music	38	MU-199	1	Spring	2018	A-
76543	Brown	Comp. Sci.	58	CS-101	1	Fall	2017	A
76543	Brown	Comp. Sci.	58	CS-319	2	Spring	2018	A
76653	Aoi	Elec. Eng.	60	EE-181	1	Spring	2017	C
98765	Bourikas	Elec. Eng.	98	CS-101	1	Fall	2017	C-
98765	Bourikas	Elec. Eng.	98	CS-315	1	Spring	2018	B
98988	Tanaka	Biology	120	BIO-101	1	Summer	2017	A
98988	Tanaka	Biology	120	BIO-301	1	Summer	2018	null

course_id	title	dept_name	credits
BIO-101	Intro. to Biology	Biology	4
BIO-301	Genetics	Biology	4
BIO-399	Computational Biology	Biology	3
CS-101	Intro. to Computer Science	Comp. Sci.	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3
CS-319	Image Processing	Comp. Sci.	3
CS-347	Database System Concepts	Comp. Sci.	3
EE-181	Intro. to Digital Systems	Elec. Eng.	3
FIN-201	Investment Banking	Finance	3
HIS-351	World History	History	3
MU-199	Music Video Production	Music	3
PHY-101	Physical Principles	Physics	4

Figure 2.2 The course relation.

ID	name	dept_name	tot_cred
00128	Zhang	Comp. Sci.	102
12345	Shankar	Comp. Sci.	32
19991	Brandt	History	80
23121	Chavez	Finance	110
44553	Peltier	Physics	56
45678	Levy	Physics	46
54321	Williams	Comp. Sci.	54
55739	Sanchez	Music	38
70557	Snow	Physics	0
76543	Brown	Comp. Sci.	58
76653	Aoi	Elec. Eng.	60
98765	Bourikas	Elec. Eng.	98
98988	Tanaka	Biology	120

ID	course_id	sec_id	semester	year	grade
00128	CS-101	1	Fall	2017	A
00128	CS-347	1	Fall	2017	A-
12345	CS-101	1	Fall	2017	C
12345	CS-190	2	Spring	2017	A
12345	CS-315	1	Spring	2018	A
12345	CS-347	1	Fall	2017	A
19991	HIS-351	1	Spring	2018	B
23121	FIN-201	1	Spring	2018	C+
44553	PHY-101	1	Fall	2017	B-
45678	CS-101	1	Fall	2017	F
45678	CS-101	1	Spring	2018	B+
45678	CS-319	1	Spring	2018	B
54321	CS-101	1	Fall	2017	A-
54321	CS-190	2	Spring	2017	B+
55739	MU-199	1	Spring	2018	A-
76543	CS-101	1	Fall	2017	A
76543	CS-319	2	Spring	2018	A
76653	EE-181	1	Spring	2017	C
76653	CS-101	1	Fall	2017	C-
98765	CS-315	1	Spring	2018	B
98765	BIO-101	1	Summer	2017	A
98988	BIO-301	1	Summer	2018	null

table of 8 rows



Dangerous in Natural Join

- Beware of unrelated attributes with same name which get equated incorrectly
→ 양쪽 테이블 속성이 동일하게 있을 때 문제
- Example -- List the names of students along with the titles of courses that they have taken
 - Correct version

```
select name, title
  from student natural join takes, course
    where takes.course_id = course.course_id;
```

- Incorrect version

```
select name, title
  from student natural join takes natural join course;
```

- This query omits all (student name, course title) pairs where the student takes a course in a department other than the student's own department.
- The correct version (above), correctly outputs such pairs.

※ 예상되는 결과와 차이가 있는 경우
※ 예상되는 결과와 차이가 있는 경우



Natural Join with Using Clause

- To avoid the danger of equating attributes erroneously, we can use the "using" construct that allows us to specify exactly which columns should be equated.
- Query example

```
select name, title
  from (student natural join takes) join course using (course_id)
```

ID	name	dept_name	tot_cred
00128	Zhang	Comp. Sci.	102
12345	Shankar	Comp. Sci.	32
19991	Brandt	History	80
23121	Chavez	Finance	110
44553	Peltier	Physics	56
45678	Levy	Physics	46
54321	Williams	Comp. Sci.	54
55739	Sanchez	Music	38
70557	Snow	Physics	0
76543	Brown	Comp. Sci.	58
76653	Aoi	Elec. Eng.	60
98765	Bourikas	Elec. Eng.	98
98988	Tanaka	Biology	120

ID	course_id	sec_id	semester	year	grade
00128	CS-101	1	Fall	2017	A
00128	CS-347	1	Fall	2017	A-
12345	CS-101	1	Fall	2017	C
12345	CS-190	2	Spring	2017	A
12345	CS-315	1	Spring	2018	A
12345	CS-347	1	Fall	2017	A
19991	HIS-351	1	Spring	2018	B
23121	FIN-201	1	Spring	2018	C+
44553	PHY-101	1	Fall	2017	B-
45678	CS-101	1	Fall	2017	F
45678	CS-101	1	Spring	2018	B+
45678	CS-319	1	Spring	2018	B
54321	CS-101	1	Fall	2017	A-
54321	CS-190	2	Spring	2017	B+
55739	MU-199	1	Spring	2018	A-
76543	CS-101	1	Fall	2017	A
76543	CS-319	2	Spring	2018	A
76653	EE-181	1	Spring	2017	C
98765	CS-101	1	Fall	2017	C-
98765	CS-315	1	Spring	2018	B
98988	BIO-101	1	Summer	2017	A
98988	BIO-301	1	Summer	2018	null

course_id	title	dept_name	credits
BIO-101	Intro. to Biology	Biology	4
BIO-301	Genetics	Biology	4
BIO-399	Computational Biology	Biology	3
CS-101	Intro. to Computer Science	Comp. Sci.	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3
CS-319	Image Processing	Comp. Sci.	3
CS-347	Database System Concepts	Comp. Sci.	3
EE-181	Intro. to Digital Systems	Elec. Eng.	3
FIN-201	Investment Banking	Finance	3
HIS-351	World History	History	3
MU-199	Music Video Production	Music	3
PHY-101	Physical Principles	Physics	4

Figure 2.2 The course relation.



Join Condition

- The **on** condition allows a general predicate over the relations being joined.
- This predicate is written like a **where** clause predicate except for the use of the keyword **on**.
- Query example

```
select *  
from student join takes on student_ID = takes_ID
```

 - The **on** condition above specifies that a tuple from *student* matches a tuple from *takes* if their *ID* values are equal.
- Equivalent to:

```
select *  
from student , takes  
where student_ID = takes_ID
```



Outer Join

- An extension of the join operation that avoids loss of information.
- Computes the join and then adds tuples from one relation that does not match tuples in the other relation to the result of the join.
- Uses *null* values.
- Three forms of outer join:
 - left outer join
 - right outer join
 - full outer join



Outer Join Examples

- Relation *course*

course_id	title	dept_name	credits
BIO-301	Genetics	Biology	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3

- Relation *prereq*

course_id	prereq_id
BIO-301	BIO-101
CS-190	CS-101
CS-347	CS-101

- Observe that

course information is missing CS-347

prereq information is missing CS-315



Left Outer Join

- *course natural left outer join prereq*

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-315	Robotics	Comp. Sci.	3	null

- In relational algebra: $course \bowtie prereq$

course_id	title	dept_name	credits
BIO-301	Genetics	Biology	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3

course_id	prereq_id
BIO-301	BIO-101
CS-190	CS-101
CS-347	CS-101



Right Outer Join

- *course natural right outer join prereq*

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-347	null	null	null	CS-101

- In relational algebra: $course \bowtie prereq$

course_id	title	dept_name	credits
BIO-301	Genetics	Biology	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3

course_id	prereq_id
BIO-301	BIO-101
CS-190	CS-101
CS-347	CS-101



Full Outer Join

- *course natural full outer join prereq*

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-315	Robotics	Comp. Sci.	3	null
CS-347	null	null	null	CS-101

- In relational algebra: $course \bowtie prereq$

course_id	title	dept_name	credits
BIO-301	Genetics	Biology	4
CS-190	Game Design	Comp. Sci.	4
CS-315	Robotics	Comp. Sci.	3

course_id	prereq_id
BIO-301	BIO-101
CS-190	CS-101
CS-347	CS-101



Joined Types and Conditions

- **Join operations** take two relations and return as a result another relation.
- These additional operations are typically used as subquery expressions in the **from** clause
- **Join condition** – defines which tuples in the two relations match.
- **Join type** – defines how tuples in each relation that do not match any tuple in the other relation (based on the join condition) are treated.

Join types
inner join
left outer join
right outer join
full outer join

Join conditions
natural
on < predicate >
using (A ₁ , A ₂ , ..., A _n)



Joined Relations – Examples

- *course natural right outer join prereq*

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-347	<i>null</i>	<i>null</i>	<i>null</i>	CS-101

- *course full outer join prereq using (course_id)*

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-315	Robotics	Comp. Sci.	3	<i>null</i>
CS-347	<i>null</i>	<i>null</i>	<i>null</i>	CS-101



Joined Relations – Examples

- **course inner join prereq on**
 $course.course_id = prereq.course_id$

course_id	title	dept_name	credits	prereq_id	course_id
BIO-301	Genetics	Biology	4	BIO-101	BIO-301
CS-190	Game Design	Comp. Sci.	4	CS-101	CS-190

- What is the difference between the above, and a natural join?
- **course left outer join prereq on**
 $course.course_id = prereq.course_id$

course_id	title	dept_name	credits	prereq_id	course_id
BIO-301	Genetics	Biology	4	BIO-101	BIO-301
CS-190	Game Design	Comp. Sci.	4	CS-101	CS-190
CS-315	Robotics	Comp. Sci.	3	null	null



Joined Relations – Examples

- **course natural right outer join prereq**

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-347	null	null	null	CS-101

- **course full outer join prereq using (course_id)**

course_id	title	dept_name	credits	prereq_id
BIO-301	Genetics	Biology	4	BIO-101
CS-190	Game Design	Comp. Sci.	4	CS-101
CS-315	Robotics	Comp. Sci.	3	null
CS-347	null	null	null	CS-101



Views

1. user가 허락하지 않은 데이터를 볼 때는 관계를 제한하는 방법.
2. 관계를 확장하는 경우에 사용되는 유용한 기능이다.
- 예제: `SELECT * FROM instructor;`
선택: `SELECT * FROM instructor WHERE salary > 10000;`

- In some cases, it is not desirable for all users to see the entire logical model (that is, all the actual relations stored in the database.)
- Consider a person who needs to know an instructor's name and department, but not the salary. This person should see a relation described, in SQL, by

```
select ID, name, dept_name  
from instructor
```

- A **view** provides a mechanism to hide certain data from the view of certain users.
- Any relation that is not of the conceptual model but is made visible to a user as a “virtual relation” is called a **view**.



View Definition

- t¹-B.
- A view is defined using the **create view** statement which has the form
create view *v* as <query expression>
 - where <query expression> is any legal SQL expression. The view name is represented by *v*.
 - Once a view is defined, the view name can be used to refer to the virtual relation that the view generates.
 - View definition is not the same as creating a new relation by evaluating the query expression
 - Rather, a view definition causes the saving of an expression; the expression is substituted into queries using the view.



View Definition and Use

- A view of instructors without their salary
 - ```
create view faculty as
 select ID, name, dept_name
 from instructor
```
- Find all instructors in the Biology department
  - ```
select name
from faculty
where dept_name = 'Biology'
```

- Create a view of department salary totals

```
create view departments_total_salary(dept_name, total_salary) as
    select dept_name, sum (salary)
    from instructor
    group by dept_name;
```



Views Defined Using Other Views

- One view may be used in the expression defining another view
- A view relation v_1 is said to **depend directly** on a view relation v_2 if v_2 is used in the expression defining v_1
- A view relation v_1 is said to **depend on** view relation v_2 if either v_1 depends directly to v_2 or there is a path of dependencies from v_1 to v_2
- A view relation v is said to be **recursive** if it depends on itself.



Views Defined Using Other Views

- ```
create view physics_fall_2017 as
 select course.course_id, sec_id, building, room_number
 from course, section
 where course.course_id = section.course_id ← (join?) }
 and course.dept_name = 'Physics'
 and section.semester = 'Fall'
 and section.year = '2017';
```
- ```
create view physics_fall_2017_watson as
    select course_id, room_number
    from physics_fall_2017 ←
    where building= 'Watson';
```



View Expansion

- Expand the view :

```
create view physics_fall_2017_watson as
    select course_id, room_number
    from physics_fall_2017
    where building= 'Watson'
```
- To:

```
create view physics_fall_2017_watson as
    select course_id, room_number
    from (select course.course_id, building, room_number
          from course, section
          where course.course_id = section.course_id
            and course.dept_name = 'Physics'
            and section.semester = 'Fall'
            and section.year = '2017')
    where building= 'Watson';
```



View Expansion (Cont.)

- A way to define the meaning of views defined in terms of other views.
- Let view v_1 be defined by an expression e_1 that may itself contain uses of view relations.
- View expansion of an expression repeats the following replacement step:
repeat
 Find any view relation v_i in e_1
 Replace the view relation v_i by the expression defining v_i
until no more view relations are present in e_1
- As long as the view definitions are not recursive, this loop will terminate



Materialized Views

- Certain database systems allow view relations to be physically stored.
 - Physical copy created when the view is defined.
 - Such views are called **Materialized view**:
- If relations used in the query are updated, the materialized view result becomes out of date
 - Need to **Maintain** the view, by updating the view whenever the underlying relations are updated.



Update of a View

- Add a new tuple to *faculty* view which we defined earlier

insert into faculty

values ('30765', 'Green', 'Music');

- This insertion must be represented by the insertion into the *instructor* relation

- Must have a value for salary.

- Two approaches

- Reject the insert

- Inset the tuple

('30765', 'Green', 'Music', null)

into the *instructor* relation



Some Updates Cannot be Translated Uniquely

- create view instructor_info as**
select ID, name, building
from instructor, department
where instructor.dept_name= department.dept_name;
- insert into instructor_info**
values ('69987', 'White', 'Taylor');
- Issues
 - Which department, if multiple departments in Taylor?
 - What if no department is in Taylor?
 - View *instructor_info* still does not include the tuple ('69987', 'White', 'Taylor') as a result of the insertion

ID	name	dept_name	salary
10101	Srinivasan	Comp. Sci.	65000
12121	Wu	Finance	90000
15151	Mozart	Music	40000
22222	Einstein	Physics	95000
32343	El Said	History	60000
33456	Gold	Physics	87000
45565	Katz	Comp. Sci.	75000
58583	Califieri	History	62000
76543	Singh	Finance	80000
76766	Crick	Biology	72000
83821	Brandt	Comp. Sci.	92000
98345	Kim	Elec. Eng.	80000
69987	White	null	null

dept_name	building	budget
Biology	Watson	90000
Comp. Sci.	Taylor	100000
Electrical Eng.	Taylor	85000
Finance	Painter	120000
History	Painter	50000
Music	Packard	80000
Physics	Watson	70000
null	Taylor	null

department



View Updates in SQL

- Most SQL implementations allow updates only on simple views
 - The **from** clause has only one database relation.
 - The **select** clause contains only attribute names of the relation, and does not have any expressions, aggregates, or **distinct** specification.
 - Any attribute not listed in the **select** clause can be set to null
 - The query does not have a **group by** or **having** clause.



And Some Not at All

- ```
create view history_instructors as
 select *
 from instructor
 where dept_name= 'History';
```
- What happens if we insert

```
('25566', 'Brown', 'Biology', 100000)
```

into *history\_instructors*?
  - Views can be defined with a **with check option** clause at the end of the view definition
    - if a tuple inserted into the view does not satisfy the view's clause condition, the insertion **is rejected**
    - Updates are similarly rejected



# Transactions

- A **transaction** consists of a sequence of query and/or update statements and is a “unit” of work
- The SQL standard specifies that a transaction begins implicitly when an SQL statement is executed.
- The transaction must end with one of the following statements:
  - **Commit work.** The updates performed by the transaction become permanent in the database.
  - **Rollback work.** All the updates performed by the SQL statements in the transaction are undone.
- Atomic transaction
  - either fully executed or rolled back as if it never occurred *要么全部完成，要么全部失败。*
- Isolation from concurrent transactions



# Integrity Constraints

*Integrity constraints ensure data consistency and integrity.*

- Integrity constraints guard against **accidental damage** to the database, by ensuring that authorized changes to the database do not result in a loss of data consistency.
  - A checking account must have a balance greater than \$10,000.00
  - A salary of a bank employee must be at least \$4.00 an hour
  - A customer must have a (non-null) phone number
- An integrity constraint can be an arbitrary predicate pertaining to DB
  - Arbitrary predicates may be costly to test
  - Most DBMS allow one to specify only those integrity constraints that can be tested with minimal overhead



## Constraints on a Single Relation

- $\left\{ \begin{array}{l} \text{not null} \\ \text{primary key} \\ \text{unique} \end{array} \right.$
- **check (P)**, where P is a predicate



## Not Null Constraints

- **not null**
  - Declare *name* and *budget* to be not null  
*name varchar(20) not null*  
*budget numeric(12,2) not null*



# Unique Constraints

- **unique** ( $A_1, A_2, \dots, A_m$ )
  - The unique specification states that the attributes  $A_1, A_2, \dots, A_m$  form a candidate key.
  - Candidate keys are permitted to be null (in contrast to primary keys).



# The check clause

- The **check** (P) clause specifies a predicate P that must be satisfied by every tuple in a relation.
- Example: ensure that semester is one of fall, winter, spring or summer

```
create table section
 (course_id varchar (8),
 sec_id varchar (8),
 semester varchar (6),
 year numeric (4,0),
 building varchar (15),
 room_number varchar (7),
 time_slot_id varchar (4),
 primary key (course_id, sec_id, semester, year),
 check (semester in ('Fall', 'Winter', 'Spring', 'Summer')))
```



## Referential Integrity

- ~~Ensures that a value that appears in one relation for a given set of attributes also appears for a certain set of attributes in another relation.~~
  - Example: If “Biology” is a department name appearing in one of the tuples in the *instructor* relation, then there exists a tuple in the *department* relation for “Biology”.
- Let A be a set of attributes. Let R and S be two relations that contain attributes A and where A is the primary key of S. A is said to be a **foreign key** of R if for any values of A appearing in R these values also appear in S.



## Referential Integrity (Cont.)

- Foreign keys can be specified as part of the SQL **create table** statement
  - foreign key (dept\_name) references department**
- By default, a foreign key references the primary-key attributes of the referenced table.
- SQL allows a list of attributes of the referenced relation to be specified explicitly.
  - foreign key (dept\_name) references department (dept\_name)**



## Cascading Actions in Referential Integrity

- When a referential-integrity constraint is violated, the normal procedure is to reject the action that caused the violation.
- An alternative, in case of delete or update is to cascade
  - ```
create table course (
    ...
    dept_name varchar(20),
    foreign key (dept_name) references department
        on delete cascade
        on update cascade,
    . . .)
```
- Instead of cascade we can use :
 - **set null**,
 - **set default**



4/2

Integrity Constraint Violation During Transactions

- Consider:

```
create table person (
    ID char(10),
    name char(40),
    mother char(10),
    father char(10),
    primary key ID,
    foreign key father references person,
    foreign key mother references person)
```
- How to insert a tuple without causing constraint violation?
 - Insert father and mother of a person before inserting person
 - OR, set father and mother to null initially, update after inserting all persons (not possible if father and mother attributes declared to be **not null**)
 - OR defer constraint checking



Complex Check Conditions

- The predicate in the check clause can be an arbitrary predicate that can include a subquery.

```
check (time_slot_id in (select time_slot_id from time_slot))
```

The check condition states that the *time_slot_id* in each tuple in the *section* relation is actually the identifier of a time slot in the *time_slot* relation.

- The condition has to be checked not only when a tuple is inserted or modified in *section*, but also when the relation *time_slot* changes

```
classroom(building, room_number, capacity)
department(dept_name, building, budget)
course(course_id, title, dept_name, credits)
instructor(ID, name, dept_name, salary)
section(course_id, sec_id, semester, year, building, room_number, time_slot_id)
teaches(ID, course_id, sec_id, semester, year)
student(ID, name, dept_name, tot_cred)
takes(ID, course_id, sec_id, semester, year, grade)
advisor(s_ID, i_ID)
time_slot(time_slot_id, day, start_time, end_time)
prereq(course_id, prereq_id)
```

Figure 7.1 Database schema for the university example.



Assertions

- An **assertion** is a predicate expressing a condition that we wish the database always to satisfy.
- The following constraints, can be expressed using assertions:
- For each tuple in the *student* relation, the value of the attribute *tot_cred* must equal the sum of credits of courses that the student has completed successfully.
- An instructor cannot teach in two different classrooms in a semester in the same time slot
- An assertion in SQL takes the form:

```
create assertion <assertion-name> check (<predicate>);
```

```
create assertion credits_earned_constraint check
(not exists (select ID
            from student
            where tot_cred <> (select coalesce(sum(credits), 0)
                                  from takes natural join course
                                  where student.ID= takes.ID
                                        and grade is not null and grade<> 'F' )))
```

Figure 4.10 An assertion example.



Built-in Data Types in SQL

- **date:** Dates, containing a (4 digit) year, month and date
 - Example: **date** '2005-7-27'
- **time:** Time of day, in hours, minutes and seconds.
 - Example: **time** '09:00:30' **time** '09:00:30.75'
- **timestamp:** date plus time of day
 - Example: **timestamp** '2005-7-27 09:00:30.75'
- **interval:** period of time
 - Example: **interval** '1' day
 - Subtracting a date/time/timestamp value from another gives an interval value
 - Interval values can be added to date/time/timestamp values



Large-Object Types

- Large objects (photos, videos, CAD files, etc.) are stored as a *large object*:
 - **blob:** binary large object -- object is a large collection of uninterpreted binary data (whose interpretation is left to an application outside of the database system)
 - **clob:** character large object -- object is a large collection of character data
- When a query returns a large object, a pointer is returned rather than the large object itself.



User-Defined Types

- **create type** construct in SQL creates user-defined type

```
create type Dollars as numeric (12,2) final
```

*~~~~~
. MySQL types*

- Example:

```
create table department
(dept_name varchar (20),
building varchar (15),
budget Dollars);
```



Domains

- **create domain** construct in SQL-92 creates user-defined domain types

```
create domain person_name char(20) not null
```

- Types and domains are similar. Domains can have constraints, such as **not null**, specified on them.
- Example:

```
create domain degree_level varchar(10)
constraint degree_level_test
check (value in ('Bachelors', 'Masters', 'Doctorate'));
```



차, | 막에 차내(차) 찾기 (Index Creation)

- Many queries reference only a small proportion of the records in a table.
- It is inefficient for the system to read every record to find a record with particular value
- An **index** on an attribute of a relation is a data structure that allows the database system to find those tuples in the relation that have a specified value for that attribute efficiently, without scanning through all the tuples of the relation. 전체 풀면 훨씬 더 걸리겠지.
- We create an index with the **create index** command
 - create index <name> on <relation-name> (attribute);**



Index Creation Example

- **create table student**
(ID varchar (5),
name varchar (20) not null,
dept_name varchar (20),
tot_cred numeric (3,0) default 0,
primary key (ID))
- **create index studentID_index on student(ID)**
- The query:

```
select *  
from student  
where ID = '12345'
```

can be executed by using the index to find the required record, without looking at all records of *student*



Authorization

- We may assign a user several forms of authorizations on parts of the database.
 - **Read** - allows reading, but not modification of data.
 - **Insert** - allows insertion of new data, but not modification of existing data.
 - **Update** - allows modification, but not deletion of data.
 - **Delete** - allows deletion of data.
- Each of these types of authorizations is called a **privilege**. We may authorize the user all, none, or a combination of these types of privileges on specified parts of a database, such as a relation or a view.

권한



Schema 권한

Authorization (Cont.)

- Forms of authorization to modify the database schema
 - **Index** - allows creation and deletion of indices.
 - **Resources** - allows creation of new relations.
 - **Alteration** - allows addition or deletion of attributes in a relation.
 - **Drop** - allows deletion of relations.



Authorization Specification in SQL

- The **grant** statement is used to confer authorization
 - **grant <privilege list> on <relation or view > to <user list>**
- <user list> is:
 - a user-id
 - **public** which allows all valid users the privilege granted
 - A role (more on this later)
- Example:
 - **grant select on department to Amit, Satoshi**
- Granting a privilege on a view does not imply granting any privileges on the underlying relations.
- The grantor of the privilege must already hold the privilege on the specified item (or be the database administrator).




Privileges in SQL

- **select**: allows read access to relation, or the ability to query using the view
 - Example: grant users U_1 , U_2 , and U_3 **select** authorization on the *instructor* relation:
grant select on instructor to U_1, U_2, U_3
- **insert**: the ability to insert tuples
- **update**: the ability to update using the SQL update statement
- **delete**: the ability to delete tuples.
- **all privileges**: used as a short form for all the allowable privileges



Revoking Authorization in SQL

- The **revoke** statement is used to revoke authorization.
revoke <privilege list> on <relation or view> from <user list>
- Example:
revoke select on student from U₁, U₂, U₃
- <privilege-list> may be **all** to revoke all privileges the revoker may hold.
- If <revoker-list> includes **public**, all users lose the privilege except those granted it explicitly.
- If the same privilege was granted twice to the same user by different grantees, the user may retain the privilege after the revocation.
- All privileges that depend on the privilege being revoked are also revoked.

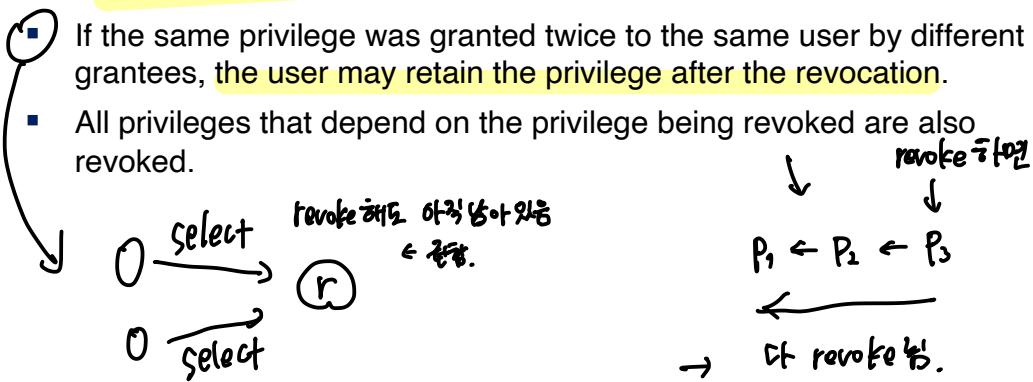

Roles

- A **role** is a way to distinguish among various users (as far as what these users can access/update in the database)
- To create a role we use:
create a role <name>
- Example:
 - create role instructor**
- Once a role is created we can assign “users” to the role using:
 - grant <role> to <users>**



Roles Example

- **create role** instructor;
- **grant instructor to Amit;** *→ Amit이 가진 권한*
- Privileges can be granted to roles:
 - **grant(select on takes) to instructor;** *→ Amit은 takes에 대한 SELECT 권한을 가짐.*
- Roles can be granted to users, as well as to other roles
 - **create role teaching_assistant**
 - **grant teaching_assistant to instructor;**
 - Instructor inherits all privileges of teaching_assistant *→ 교직원은 교직원에 대한 모든 권한을 상속함.*
- Chain of roles
 - **create role dean;**
 - **grant instructor to dean;**
 - **grant dean to Satoshi;** *Satoshi는 dean에게 권한을 부여함.*



Authorization on Views

- **create view geo_instructor as**
*{ select * from instructor where dept_name = 'Geology'; }* *role (group)*
- **grant select on geo_instructor to geo_staff;** *→ geo_staff는 geo_instructor에서 SELECT 권한을 가짐?*
- Suppose that a geo_staff member issues
 - **select *** from geo_instructor;
- What if
 - **geo_staff does not have permissions on instructor?**
 - Creator of view did not have some permissions on instructor?



Other Authorization Features

instructor & department ~ REHTEG 2. 927

- **references** privilege to create foreign key
 - **grant reference** (*dept_name*) on *department* to Mariano;
 - Why is this required? ↗ **foreign key** ~~delet~~ & 禁止. ↗
 - transfer of privileges
 - **grant select** on *department* to Amit with grant option;
 - **revoke select** on *department* from Amit, Satoshi **cascade**;
 - **revoke select** on *department* from Amit, Satoshi **restrict**;
 - And more!

다른 사람한테도 들수 있는 전한도 있다.



End of Chapter 4