

KeepDelta: A Python Library for Human-Readable Data Differencing

Aslan Noorghasemi¹ and Christopher McComb¹

¹ Department of Mechanical Engineering, Carnegie Mellon University, USA  Corresponding author

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: [Open Journals](#) 

Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

Summary

Efficiently managing evolving data is crucial in applications like computational simulations and sensing, where dynamic data tracking and processing are essential. In simulations, the traditional method known as full-state encoding stores the entire system state, including all nested data structures and variable values, at every timestep. While simple to implement, this approach is highly storage-intensive. On the other hand, recalculating states from scratch to avoid storage demands is computationally expensive. Similarly, in sensing, continuously transmitting full data snapshots is inefficient, leading to increased bandwidth consumption and latency. *KeepDelta* addresses this challenge by providing a lightweight Python library that captures and applies only the changes (deltas) between successive states of complex, nested Python data structures. Designed for clarity and ease of use, *KeepDelta* produces human-readable outputs, facilitating debugging and analysis in research applications.




Figure 1: KeepDelta logo

Statement of need

High-frequency data sampling is fundamental in both scientific simulations and real-world sensing applications, where large volumes of evolving data must be efficiently managed. Both domains, whether generating synthetic data through computational models or collecting real-time measurements from physical sensors, face a common challenge: storing, transmitting, and processing dynamic data without excessive redundancy.

First and foremost, *KeepDelta* applies to simulation. Simulation is a widely used methodology across all applied science disciplines, offering a flexible, powerful, and intuitive tool for designing processes or systems and maximizing their efficiency (Kleijnen, 2018). Specifically, computational simulations are invaluable tools for studying complex systems and their behaviors (Aumann, 2007). These studies often take the form of computer experiments, where data is generated through pseudo-random sampling from known probability distributions. This approach serves as an invaluable resource for research, particularly in evaluating new methods and comparing alternative approaches (Morris et al., 2019).

Secondly, *KeepDelta* also applies to sensing. Sensing technologies are employed across diverse

scientific and engineering domains, enabling continuous monitoring and analysis of dynamic environments. It is common for these systems to utilize a set of sensors to capture real-time data, which is essential for studying systems behaviors, informed decision-making, and system optimization (Al-Qurabat et al., 2021; Felton et al., 2018).

Both simulations and sensing require mechanisms to track and store evolving states of data structures over time. In simulations, the naive approach of saving full snapshots at every timestep leads to excessive storage demands, while recalculating states from scratch is computationally expensive. Similarly, in sensing applications, continuously storing or transmitting full data snapshots is impractical, particularly in bandwidth-limited and remote environments. Instead of relying on these easy-to-implement but inefficient methods, KeepDelta introduces an optimized middle ground by saving only the *deltas* (changes) between states, significantly reducing storage and computation overhead. This Delta Encoding technique has been successfully applied in other domains where managing evolving data efficiently is critical, such as web development (Hoff et al., 2002) and software version management (Percival, 2003).

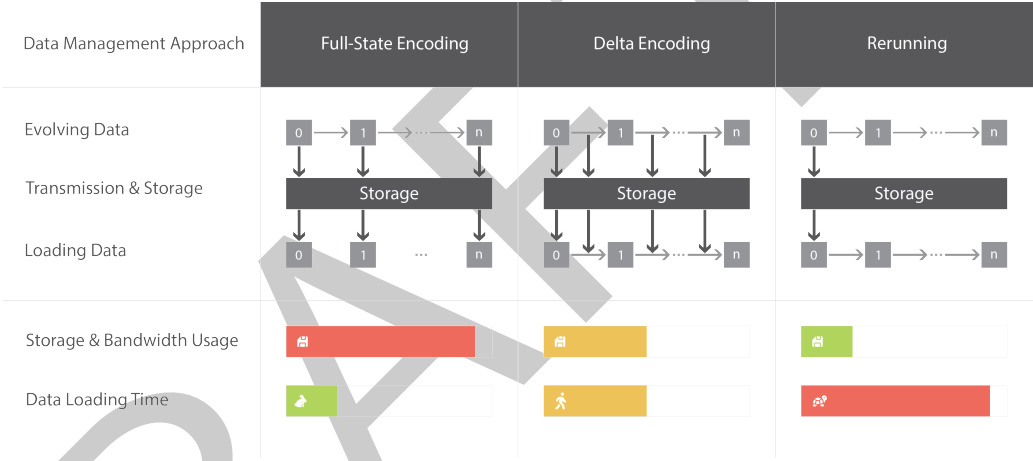


Figure 2: Comparison of data management approaches in evolving systems. Full-state encoding incurs high storage and bandwidth costs, while delta encoding saves only changes for efficiency. Rerunning reduces storage but increases computation and is often impractical for sensing real-world data. The bottom gradients illustrate trade-offs: storage/bandwidth decrease left to right, while data loading time increases.

Human-readability is crucial for debugging and development in both simulation and sensing projects, and KeepDelta is tailored specifically for this purpose. It is lightweight and has no dependencies, supports native Python data structures, and generates results that are easy to interpret. This makes it an ideal tool for Python developers and researchers seeking a simple yet powerful solution for change management. By providing clear, human-readable output, KeepDelta enhances both the development process and debugging efficiency, making it easier to track and manage changes in complex projects involving both computational models and real-world sensing systems.



Figure 3: An example of human-readable change tracking with KeepDelta. (a) Previous smart-home state. (b) State after updates to temperature, lights, door lock, schedule, and alerts. (c) Delta produced by KeepDelta, which records only the changes including numeric adjustments, boolean toggles, a tuple insertion, and a new set element, offering a concise, easily interpretable summary.

Comparison to Existing Tools

In the landscape of Python libraries designed for delta encoding, several notable tools have emerged, each with distinct features and applications.

xdelta3 (Colvin, 2017) and its predecessor, xdelta (MacDonald, 2016), are tools that perform delta encoding at the binary level. These utilities are particularly effective for binary file differencing and are widely used in version control systems and data synchronization tasks. However, both are considered outdated and are no longer actively maintained. Their operation at the binary level results in outputs that are not human-readable, and they are not tailored for Python data structures, limiting their applicability in Python-centric workflows.

detools (Moqvist, 2023) is a Python package that focuses on applying and generating binary patches using a custom delta algorithm optimized for embedded systems. While it is efficient and actively maintained, detools operates strictly at the binary level, producing outputs that are not human-readable and lacking support for native Python data structures. As such, it is more suitable for firmware and embedded development than for Python-centric simulation or data analysis workflows.

diffliib is part of the Python Standard Library and requires no external dependencies. It provides unified- and context-style text diffs for strings and lists, making it readily available but limited to sequence comparison rather than structured data differencing. It does not expose a programmatic delta object, so you cannot save its diff output as a delta for later state reconstruction.

DataDiff (Brondsema & R. Coombs, 2023) offers human-readable, unified-diff style comparisons of Python objects, including nested dictionaries, sequences, sets, and multi-line strings, and integrates with testing frameworks via nose-assert. Similar to diffliib, it produces text-based diffs, but unlike diffliib, it handles arbitrary Python objects rather than only strings or lists. However, like diffliib, DataDiff only generates one-off diffs and does not expose a programmatic delta object for incremental change tracking or later state reconstruction.

DeepDiff (Dehpour, 2025) is a contemporary library that facilitates the identification of

81 differences between complex Python data structures, including dictionaries, lists, and sets. It
 82 extends support to external libraries like NumPy (Harris et al., 2020), enhancing its versatility.
 83 DeepDiff also offers a range of configuration options, such as ignoring iterable order, controlling
 84 significant-digit precision in numeric comparisons, and custom comparator functions which
 85 make it highly flexible but add complexity and dependencies. Moreover, this extensibility
 86 can lead to outputs that are less human-readable compared to KeepDelta, and the added
 87 dependencies may not be necessary for all projects.

88 In contrast to these alternatives, KeepDelta is a lightweight Python library tailored for simula-
 89 tions and sensing, focusing on efficient delta management for built-in Python data structures.
 90 It produces human-readable outputs that facilitate debugging and research workflows. Written
 91 entirely in Python and free of external dependencies, KeepDelta integrates seamlessly into
 92 Python-centric workflows, including simulation, sensing, and data analysis pipelines.

93 References

- 94 Al-Qurabat, A. K. M., Mohammed, Z. A., & Hussein, Z. J. (2021). Data traffic management
 95 based on compression and MDL techniques for smart agriculture in IoT. *Wirel. Pers.*
 96 *Commun.*, 120(3), 2227–2258. <https://doi.org/10.1007/s11277-021-08563-4>
- 97 Aumann, C. A. (2007). A methodology for developing simulation models of complex systems.
 98 *Ecological Modelling*, 202(3), 385–396. <https://doi.org/10.1016/j.ecolmodel.2006.11.005>
- 99 Brondsema, D., & R. Coombs, J. (2023). *DataDiff* (Version 2.2.0). [https://pypi.org/project/](https://pypi.org/project/datadiff/)
 100 [datadiff/](https://pypi.org/project/datadiff/)
- 101 Colvin, S. (2017). *xdelta3*. In *GitHub repository* (Version 0.0.5). GitHub. [https://github.](https://github.com/samuelcolvin/xdelta3-python)
 102 [com/samuelcolvin/xdelta3-python](https://github.com/samuelcolvin/xdelta3-python)
- 103 Dehpour, S. (2025). *DeepDiff*. In *GitHub repository* (Version 8.4.2). GitHub. [https:](https://github.com/seperman/deepdiff)
 104 [//github.com/seperman/deepdiff](https://github.com/seperman/deepdiff)
- 105 Felton, C. L., Gilbert, B. K., & Haider, C. R. (2018). Data compression via low complexity delta
 106 transition lossless encoding for remote physiological and environmental monitoring. *2018*
 107 *40th Annual International Conference of the IEEE Engineering in Medicine and Biology*
 108 *Society (EMBC)*, 4379–4384. <https://doi.org/10.1109/EMBC.2018.8513277>
- 109 Harris, C. R., Millman, K. J., Walt, S. J. van der, Gommers, R., Virtanen, P., Cournapeau, D.,
 110 Wieser, E., Taylor, J., Berg, S., Smith, N. J., Kern, R., Picus, M., Hoyer, S., Kerkwijk,
 111 M. H. van, Brett, M., Haldane, A., Río, J. F. del, Wiebe, M., Peterson, P., ... Oliphant,
 112 T. E. (2020). Array programming with NumPy. *Nature*, 585(7825), 357–362. [https:](https://doi.org/10.1038/s41586-020-2649-2)
 113 [//doi.org/10.1038/s41586-020-2649-2](https://doi.org/10.1038/s41586-020-2649-2)
- 114 Hoff, A. van, Douglass, F., Krishnamurthy, B., Golland, Y. Y., Hellerstein, D. M., Feldmann,
 115 A., & Mogul, J. (2002). *Delta encoding in HTTP* (No. 3229). RFC 3229; RFC Editor.
 116 <https://doi.org/10.17487/RFC3229>
- 117 Kleijnen, J. P. C. (2018). Design and analysis of simulation experiments. In J. Pilz, D. Rasch, V.
 118 B. Melas, & K. Moder (Eds.), *Statistics and simulation* (pp. 3–22). Springer International
 119 Publishing. ISBN: 978-3-319-76035-3
- 120 MacDonald, J. (2016). *xdelta*. In *GitHub repository* (Version 3.1.0). GitHub. [https:](https://github.com/jmacd/xdelta)
 121 [//github.com/jmacd/xdelta](https://github.com/jmacd/xdelta)
- 122 Moqvist, E. (2023). *detools*. In *GitHub repository* (Version 0.53.0). GitHub. [https://github.](https://github.com/erimoq/detools)
 123 [com/erimoq/detools](https://github.com/erimoq/detools)
- 124 Morris, T. P., White, I. R., & Crowther, M. J. (2019). Using simulation studies to evaluate
 125 statistical methods. *Statistics in Medicine*, 38(11), 2074–2102. [https://doi.org/10.1002/](https://doi.org/10.1002/sim.8086)
 126 [sim.8086](https://doi.org/10.1002/sim.8086)

¹²⁷ Percival, C. (2003). Naive differences of executable code. *[https://www.daemonology.net/Bs-](https://www.daemonology.net/Bs-diff/)*
¹²⁸ *[diff/](https://www.daemonology.net/Bs-diff/)*.

DRAFT