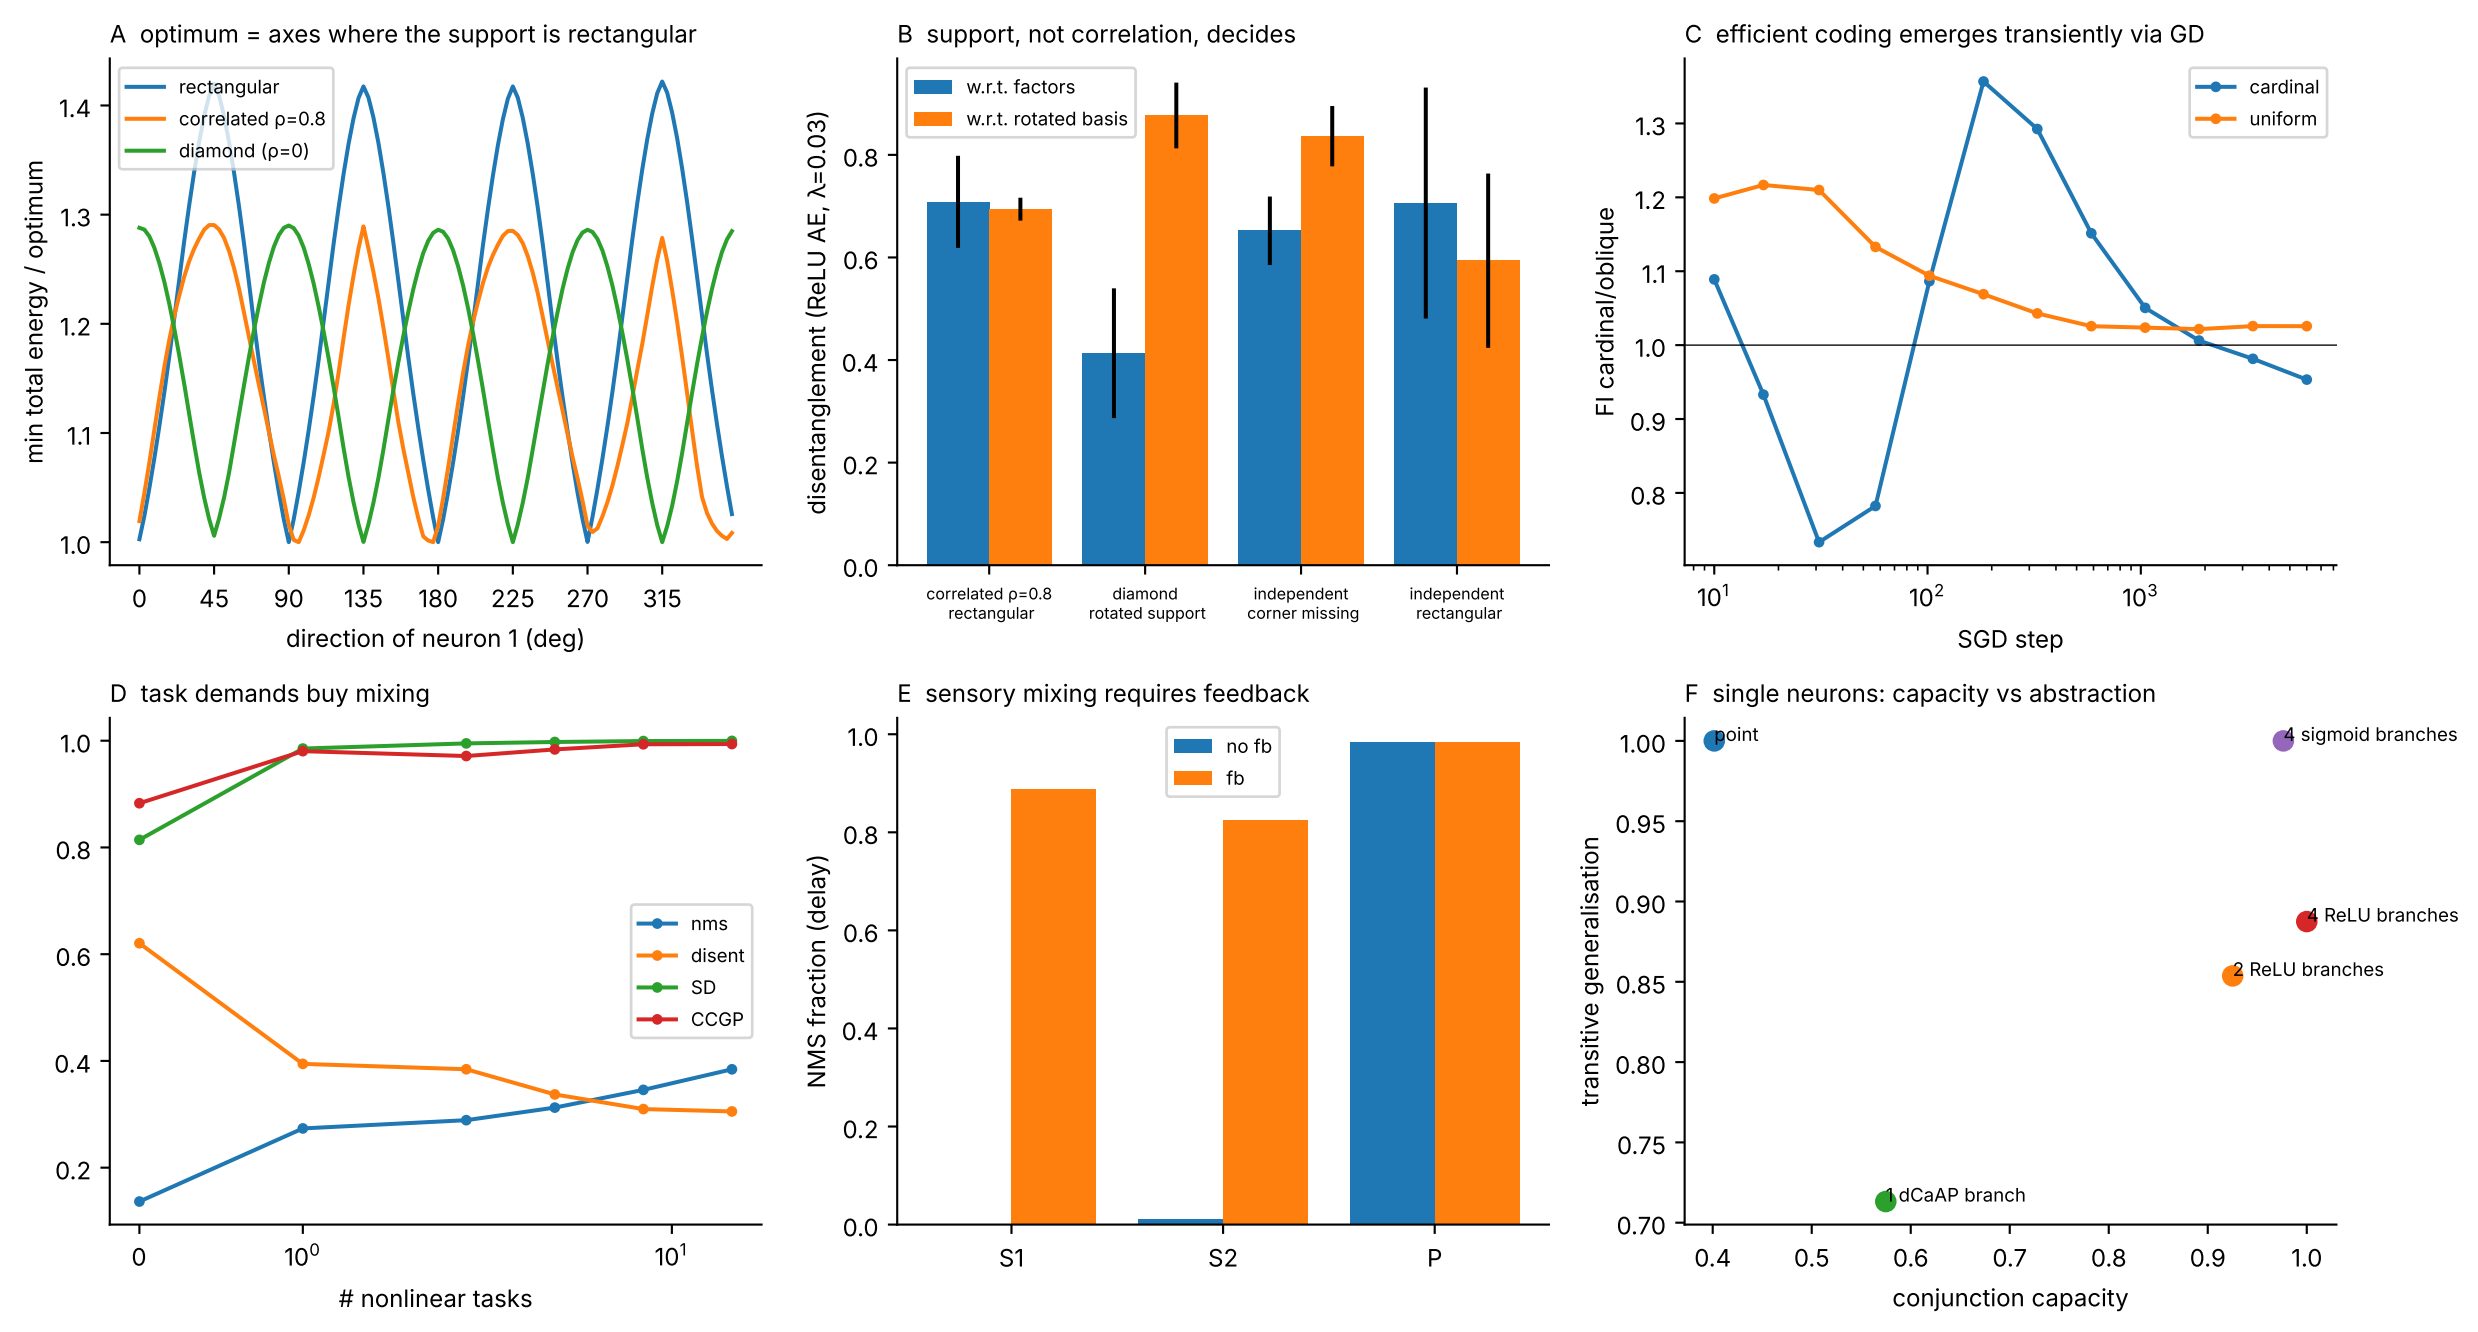
A optimum = axes where the support is rectangular
rectangular
correlated ρ=0.8
diamond (ρ=0)
min total energy / optimum
direction of neuron 1 (deg)
B support, not correlation, decides
w.r.t. factors
w.r.t. rotated basis
disentanglement (ReLU AE, λ=0.03)
correlated ρ=0.8 rectangular
diamond rotated support
independent corner missing
independent rectangular
C efficient coding emerges transiently via GD
cardinal
uniform
FI cardinal/oblique
SGD step
D task demands buy mixing
nms
disent
SD
CCGP
nonlinear tasks
E sensory mixing requires feedback
no fb
fb
NMS fraction (delay)
S1
S2
P
F single neurons: capacity vs abstraction
point
4 sigmoid branches
4 ReLU branches
2 ReLU branches
1 dCaAP branch
transitive generalisation
conjunction capacity