


# Integrated Hsp60/10 client evidence defines candidate classes for mechanistic follow-up

Collapse, inverse Braak/tau coupling, cognition support, and centrality are continuous axes; AGORA support and MitoCarta–derived functional classes annotate rule–based candidate layers.


## A. Candidate classification framework

Rule–based prioritization keeps quantitative axes separate and adds support/context layers for follow–up.




## B. Collapse–Braak target landscape

Candidate–layer genes are colored by MitoCarta class; unlabeled background clients are grey. Pareto rings use collapse, inverse Braak, cognition, and centrality axes.

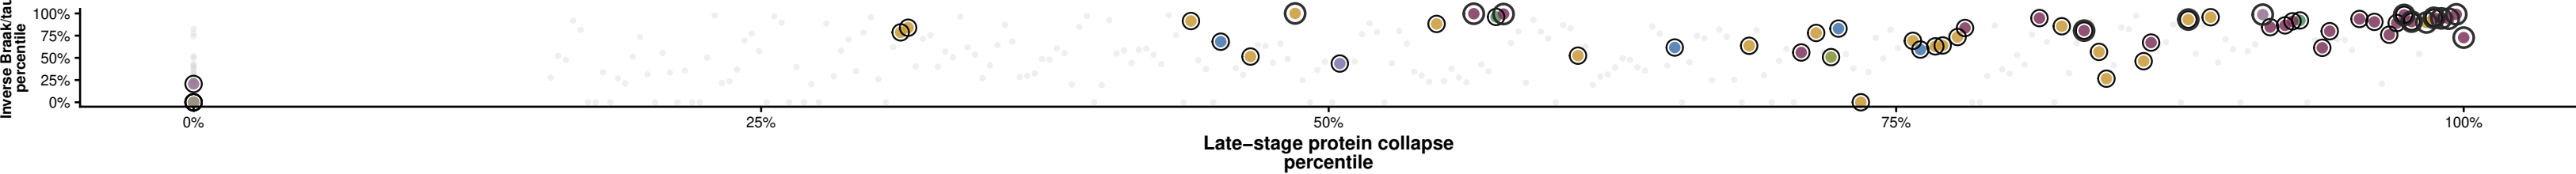


## C. Ranked MitoCarta functional–class evidence summary

Rows are ordered by frontier fraction, then cognition, inverse Braak, collapse, and centrality.

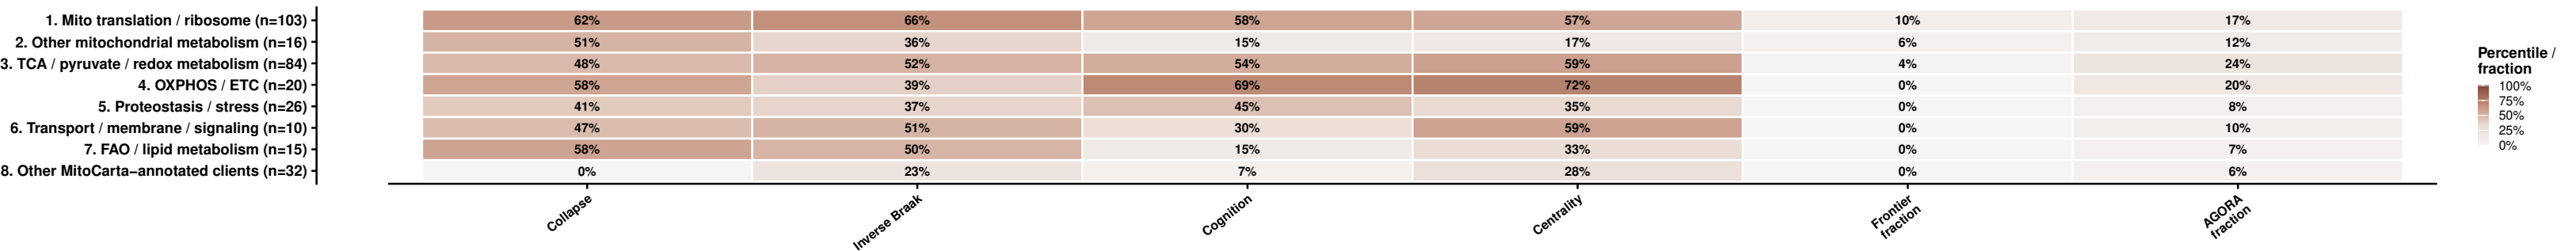

## D. Rule–based candidate–layer evidence table

Rows show up to 6 genes per candidate layer when available. Class dots use the same MitoCarta colors as Panel C/B. Ordering uses the unweighted mean of collapse, inverse Braak, cognition, and centrality percentiles for display only; full ranked table is saved.

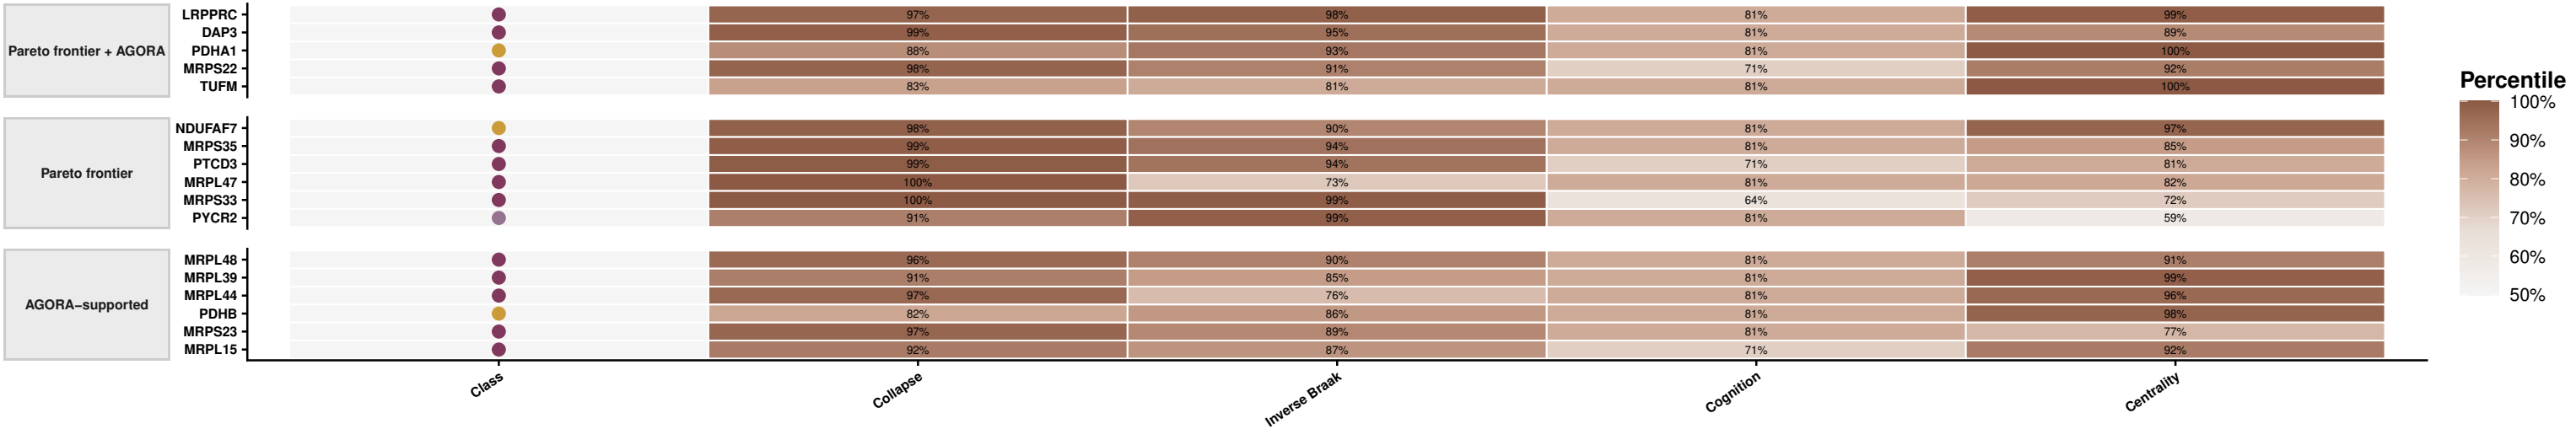

## E. Candidate–layer composition

Counts show which MitoCarta classes contribute to each candidate layer.

