


Integrated Hsp60/10 client evidence defines candidate classes for mechanistic follow-up

Collapse, inverse Braak/tau coupling, cognition support, and centrality are continuous axes; AGORA support and MitoCarta-derived functional classes annotate rule-based candidate layers.

A. Candidate classification framework


Rule-based prioritization keeps quantitative axes separate and adds support/context layers for follow-up.



B. Collapse-Braak target landscape


Candidate-layer genes are colored by MitoCarta class; unlabeled background clients are grey.

Pareto rings use collapse, inverse Braak, cognition, and centrality axes.

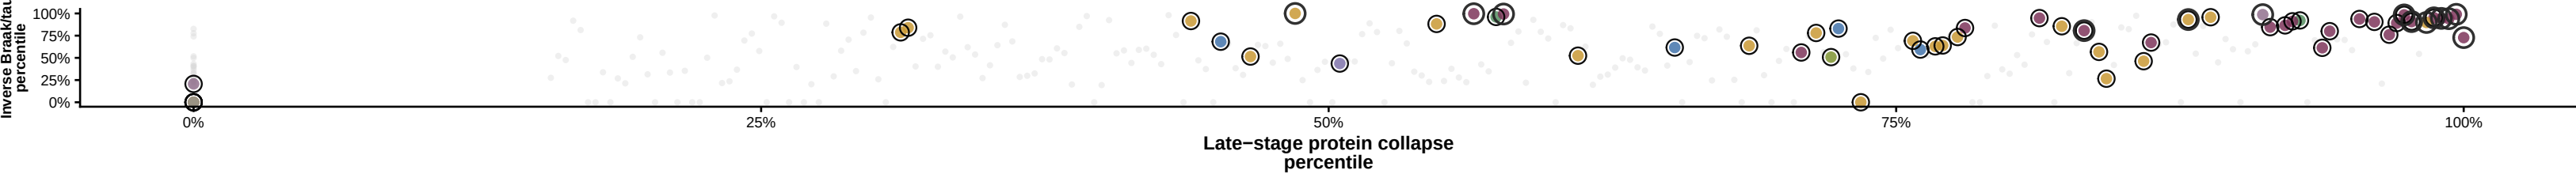

C. Ranked MitoCarta functional-class evidence summary

Rows are ordered by frontier fraction, then cognition, inverse Braak, collapse, and centrality.

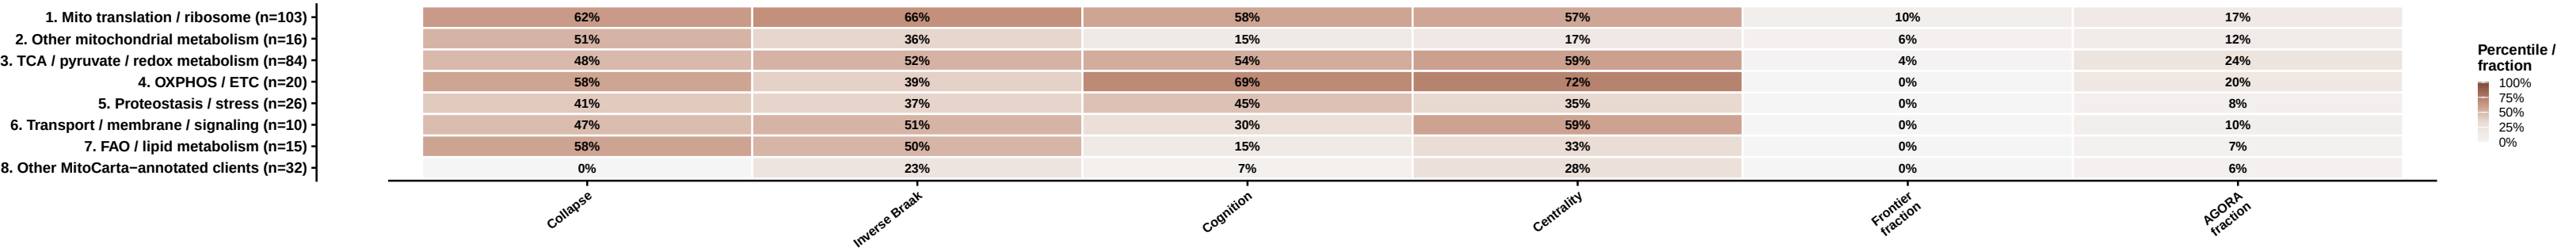


D. Rule-based candidate-layer evidence table

Rows show up to 6 genes per candidate layer when available. Class dots use the same MitoCarta colors as Panel C/B.

Ordering uses the unweighted mean of collapse, inverse Braak, cognition, and centrality percentiles for display only;

full ranked table is saved.

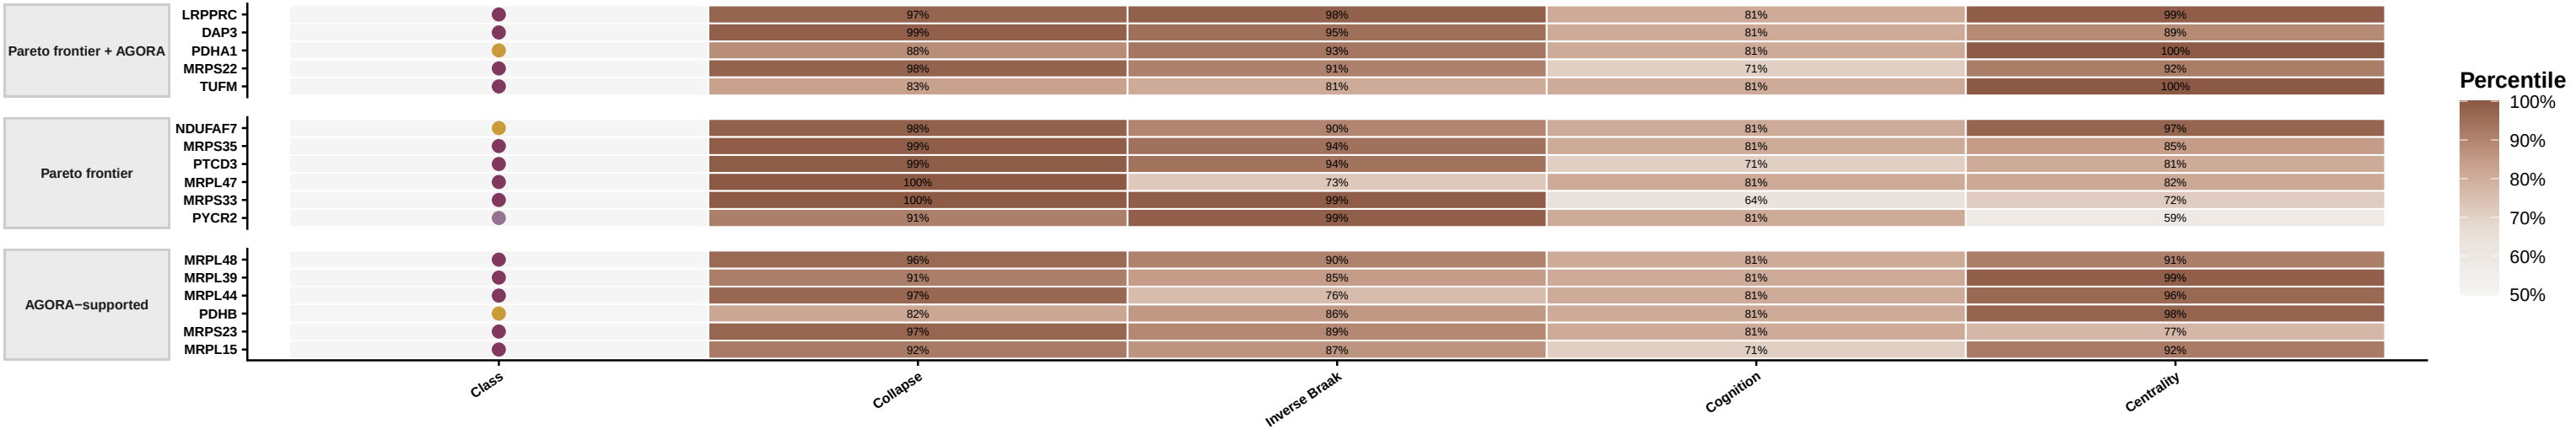

E. Candidate-layer composition

Counts show which MitoCarta classes contribute to each candidate layer.

