


Integrated Hsp60/10 client evidence defines candidate classes for mechanistic follow-up

Late-stage decline, joint Braak/CERAD pathology, cognition support, and centrality are continuous axes; AGORA support and MitoCarta-derived functional classes annotate rule-based candidate layers.


A. Candidate classification framework

Rule-based prioritization keeps quantitative axes separate and adds support/context layers for follow-up.




B. Late-decline / joint-pathology target landscape

Candidate-layer genes are colored by MitoCarta class; unlabeled background clients are grey. Pareto rings use late-stage decline, joint pathology, cognition, and centrality axes.

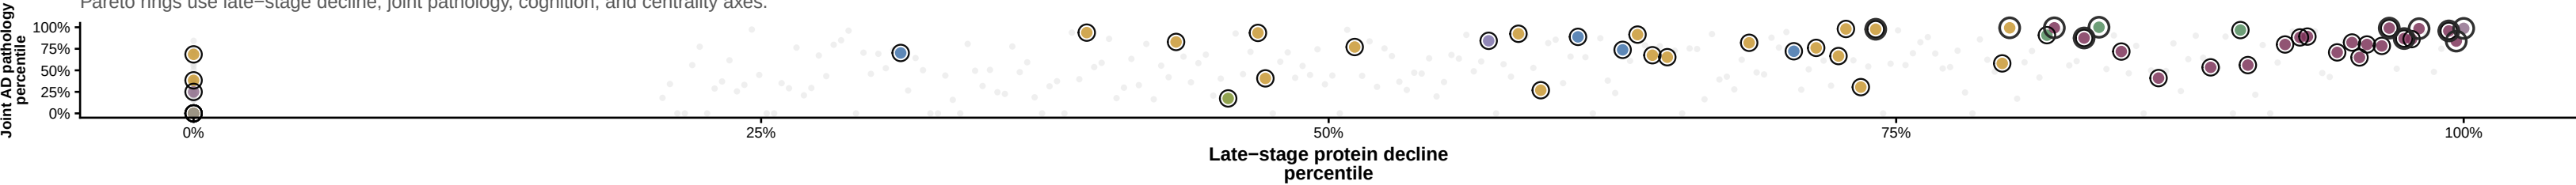


C. Ranked MitoCarta functional-class evidence summary

Rows are ordered by frontier fraction, then cognition, joint pathology, late-stage decline, and centrality.

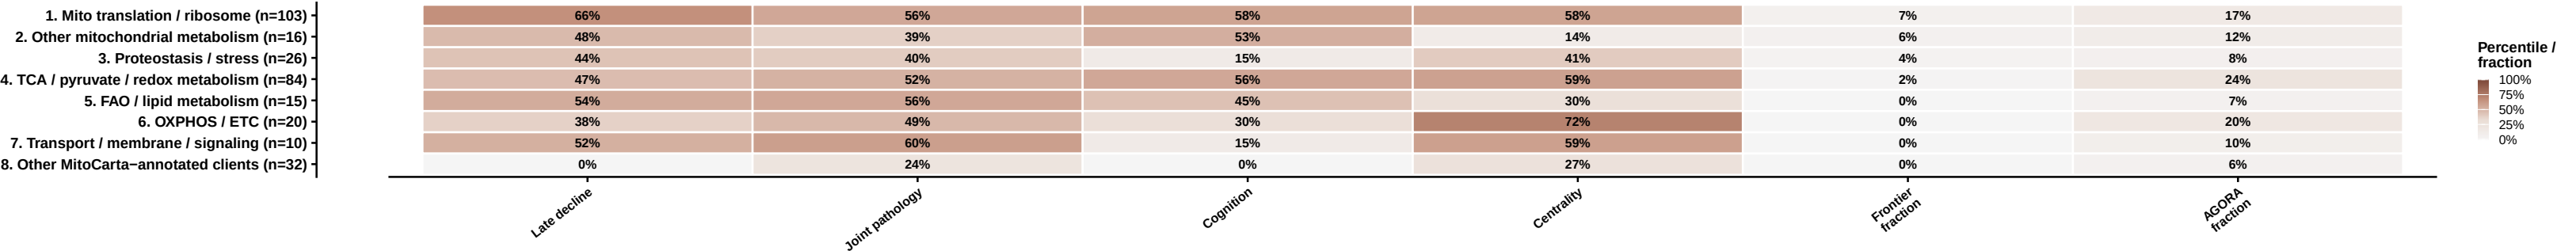

D. Rule-based candidate-layer evidence table

Rows show up to 6 genes per candidate layer when available. Class dots use the same MitoCarta colors as Panel C/B. Ordering uses the unweighted mean of late-stage decline, joint pathology, cognition, and centrality percentiles for display only; full ranked table is saved.

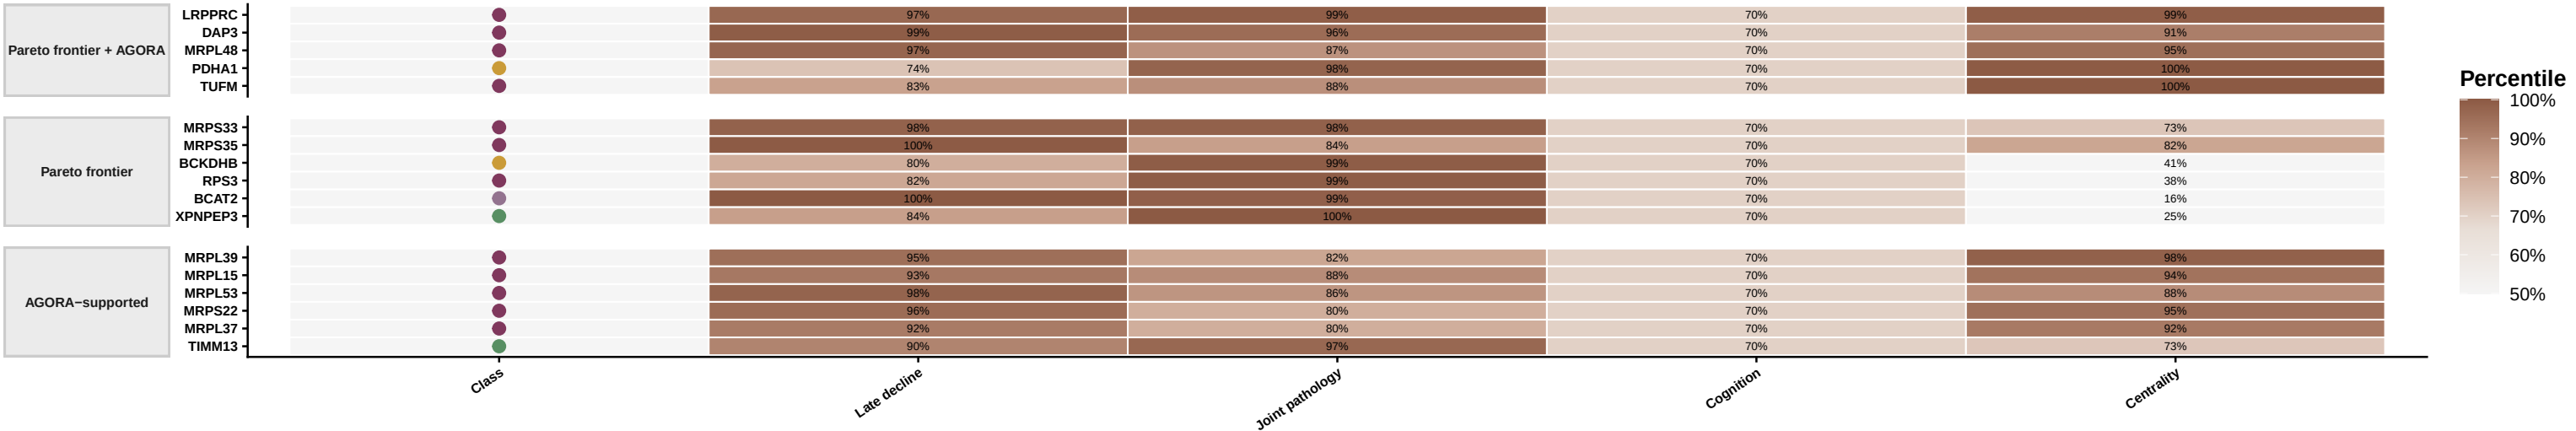

E. Candidate-layer composition

Counts show which MitoCarta classes contribute to each candidate layer.

