Integrated Hsp60/10 client evidence defines candidate classes for mechanistic follow−up

AD−versus−MCI lower abundance, joint Braak/CERAD pathology, cognition support, and centrality are continuous axes; AGORA support and MitoCarta−derived functional classes annotate rule−based candidate layers.

A. Candidate classification framework

Rule−based prioritization keeps quantitative axes separate and adds support/context layers for follow−up.



B. Lower−abundance / joint−pathology target landscape

Candidate−layer genes are colored by MitoCarta class; unlabeled background clients are grey.
Pareto rings use AD−versus−MCI lower abundance, joint pathology, cognition, and centrality axes.

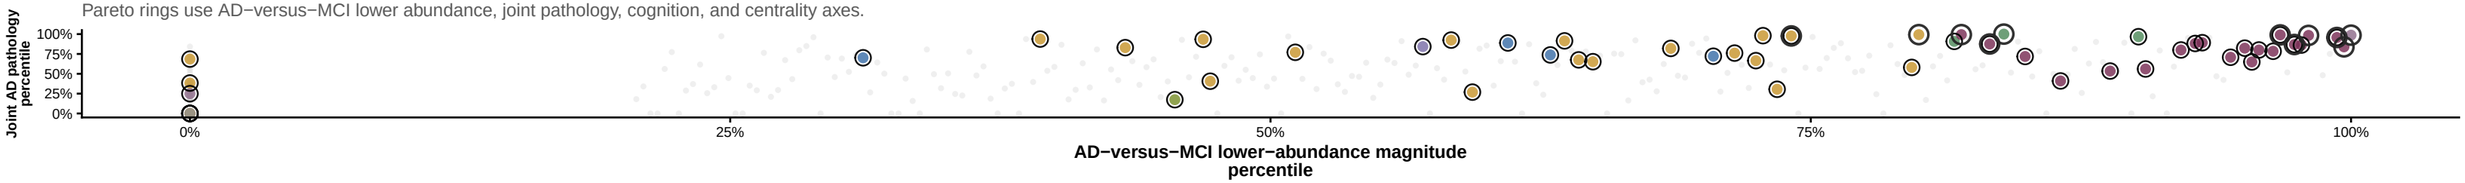

C. Ranked MitoCarta functional−class evidence summary

Rows are ordered by frontier fraction, then cognition, joint pathology, AD−versus−MCI lower abundance, and centrality.

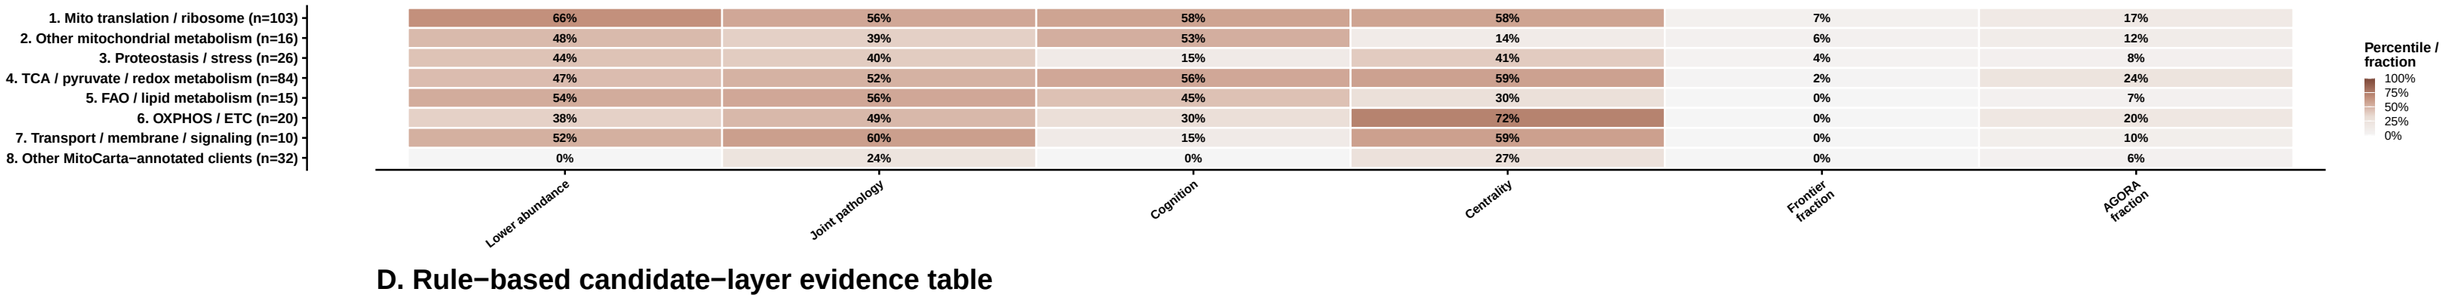

D. Rule−based candidate−layer evidence table

Rows show up to 6 genes per candidate layer when available. Class dots use the same MitoCarta colors as Panel C/B.
Ordering uses the unweighted mean of AD−versus−MCI lower abundance, joint pathology, cognition, and centrality percentiles for display only; full ranked table is saved.

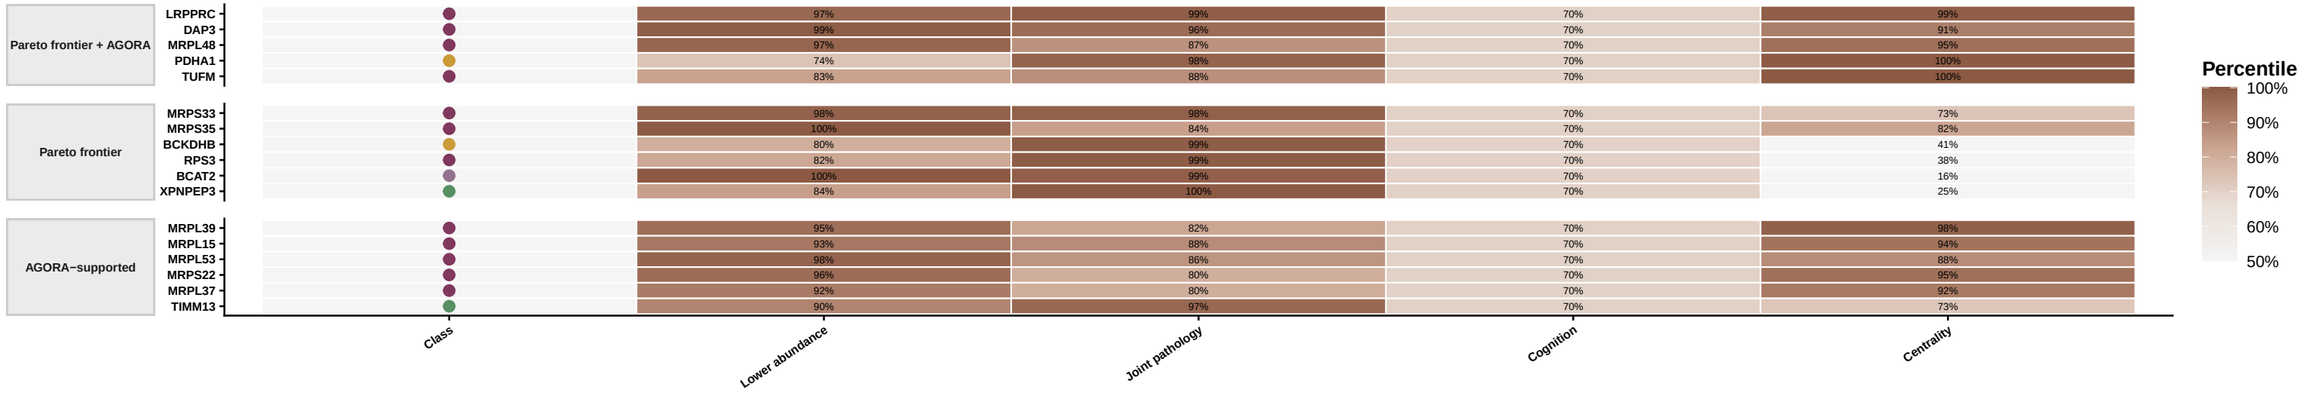

E. Candidate−layer composition
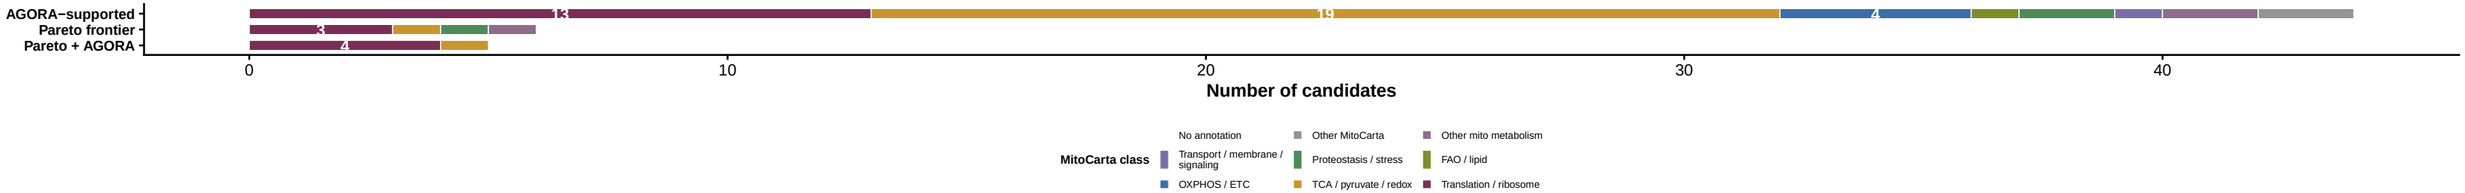
Counts show which MitoCarta classes contribute to each candidate layer.