# **High Level Assembler Plugin**Project specification

Michal Bali, Marcel Hruška, Peter Polák, Adam Šmelko, Lucia Tódová

Supervisor: Miroslav Kratochvíl

## **Contents**

1	Background and goals 1.1 Related Work	<b>2</b> 2			
2	HLASM overview  2.1 Syntax 2.1.1 Statement 2.1.2 Continuation  2.2 Assembling 2.2.1 Conditional assembly 2.2.2 Ordinary assembly	3 3 3 4 5			
3	Requirements 3.1 Language features	<b>8</b> 8			
4	Architecture 4.1 Parser library	9 9 9 9 9			
5	Technologies 1				
6	Project execution 6.1 Collaboration	<b>11</b> 11 11			

## 1. Background and goals

#### 1.1 Related Work

misto 'related work' je tady vhodny mit spis 'related HLASM users'

#### 2. HLASM overview

In general, high-level assemblers provide for their assembly languages features that are commonly found in high-level programming languages. Hence, in addition to ordinary machine instructions they also contain control statements similar to *if, while, for* as well as custom callable macros.

IBM High Level Assembler (HLASM) comforts this definition and adds other features which will be described in this chapter.

#### 2.1 Syntax

Because of historical reasons HLASM syntax is fairly complicated. Its line length is limited to 80 characters as it was in times when punch cards were used.

Besides this HLASM uses syntax common to regular assemblers.

#### 2.1.1 Statement

HLASM program is sequence of statements. Statement consists of four fields. Those are:

- **Name field** Serves as a place for named constants that are to be used in code. The field is optional but when present it must start in the begin column of a line.
- **Operation field** Instruction that is executed. The only field that is mandatory. Must not begin in the first column as it would be interpreted as a name field.
- **Operands field** Field for instruction operands separated by comma located immediately after operation field. According to instruction used it can be any sequence of characters, apostrophe separated string or blank.
- **Remark field** Serves as inline commentary. Optionally located after operands field or operation field when operands are blank.

This is an example of basic statement using all field.

```
label instruction operands remarks
.NOMOV AGO (&WH).L1,.L2,.L3 SEQUENTIAL BRANCH
```

#### 2.1.2 Continuation

One line in HLASM source code can contain only up to 80 characters. However, sometimes statement is too long to be written in one line. Therefore, special handling is introduced called **continuation**.

Prosim nepouzivejte bold uprostred odstavce nebo v textu, na emphasis a definice je \(\begin{array}{c} emph. \) Pokud je neco potreba zvyraznit, je to potreba udelat systematictejc, idealne obrazkem.




Figure 2.1: Description of line columns (source HLASM Language Reference https://www-01.ibm.com/servers/resourcelink/svc00100.nsf/pages/zOSV2R3sc264940/-\$file/asmr1023.pdf).

Firstly, let us elaborate more on the topic of line column. There are four special columns:

- Begin column (default 1)
- End column (default 71)
- Continuation column (default 72)
- Continue column (default 16)

They all serve different purpose. *Begin column* states start of the statement or where name field should be written. Anything after *end column* does not count as the content of a statement, rather it is used as a place for the line sequence number (see 2.1).

Continuation column is used for indication that statement continues on the next line (to correctly indicate we write there arbitrary character other than space). Then the remainder of the statement must start on continue column to finally create a well formed statement

Here is an example of an instruction where its last operand exceeded 72. column of the line.

```
OP1 REG12, REG07, REG04, REG00, REG01, REG11, Rx EG02
```

However, there are some instructions that allow so called *extended format* of operands allowing continuation even when the contents of a line have not reached the continuation column.

reference the figure, do not use [h].

```
AIF ('&VAR' FIND '~').A, REMARK1 x
('&VAR' EQ 'L').B, REMARK2 x
(T'&VAR EQ 'U').C REMARK3
```

#### 2.2 Assembling

Having briefly described syntax, this section prepares reader to better understand assembly process hidden behind HLASM.

We can divide assembling into two interlinked steps, **conditional assembly** and **ordinary assembly**.

#### 2.2.1 Conditional assembly

This part of assembly process can be compared to C++ text prepocessor. In HLASM it is more complicated process so it has obtained the term *code generation*. It consists of **variable symbols**, **conditional assembly (CA) instructions** and **macros**.

#### 2.2.1.1 Variable symbols

These symbols serve as points of substitution or information holders.

When they occur in a statement, they are substituted by their value to create a new statement. For example, in this manner user can write variable symbol in operation field of statement and generate any instruction that can be a result of substitution.

Variable symbols have also notion of types. Symbol can be integer, boolean or string. CA instructions gather this information for different sorts of conditional branching.

#### 2.2.1.2 **CA instructions**

The major difference to other instructions is that they are not assembled into object code, they rather select which instructions will be processed by assembler next.

One subset of CA instructions operates on variable symbols. With them user can define variable symbols locally or globally, assign or update their value.

Other subset is capable of conditional and unconditional branching. HLASM provides big variety of built in binary or unary operations on variable symbols which can create complex conditional expressions. This is important in HLASM as you can alter flow of instructions that will be assembled into executable program.

#### 2.2.1.3 **Macros**

Macro is structure consisting of name, input parameters and sequence of statements called body. When they are called in HLASM program, each statement in the body is performed. Nested or recursive call of macros is allowed. Macro body can even contain such sequence of instructions that it can generate another macro definition ready for later use. With help of variable symbols, HLASM macros have power to create custom task specific macros.

#### 2.2.2 Ordinary assembly

Ordinary assembly is a term for assembly other that conditional.

Assembly of *machine instructions* belong here. They and their operands are translated to sequence of bytes and written to executable program. HLASM differs from basic assemblers as it allows expressions as operands of those instructions. This expressions can contain constanst as well as are capable of address arithmetics.

Assembly of *assembler instructions* also belong here. However, they are neither assembled nor completely ignored. They alter behavior of assembler.

#### 2.2.2.1 Assembler instructions

The behavior of assembler is altered by this instructions in different ways. Let us enumerate some of them.

- ICTL Changes previously described line columns (i.e. *begin column* at column 2 etc. ).
- **DC** Reserves space in object code for data described in operands field and assembles them in place (i.e. assembles float, double, character array, address etc. ).
- **EQU** Defines named constant with integer value or relative address value. This constants can be accessed by *conditional assembly*, hence alter it in custom manner.
- **COPY** Copies whole file found in *copy member library*<sup>1</sup> and pastes it in place of the instruction.
- **CSECT** Creates an executable control section. Serves as the beginning of a machine instruction sequence and start of relative addressing.

Here is example of simple HLASM program with the description of its statements.

	name	operation	operands
[01]		MACRO	
[02]	&NAME	GEN_LABEL	
[03]	&NAME	EQU	*
[04]		MEND	
[05]			
[06]		COPY	REGS
[07]			
[80]	TEST	CSECT	
[09]	&VAR	SETA	L'DOUBLE
[10]		AIF	(&VAR EQ 4).END
[11]	LBL1	GEN_LABEL	
[12]		LR	3,2
[13]		L	8
[14]	LBL2	GEN_LABEL	
[15]	LEN	EQU	LBL2-LBL1
[16]		DC	(LEN)C'HELLO'
[17]	DOUBLE	DC	D'-3.729'
[18]	.END	ANOP	
[19]		END	

In lines 01-04 the reader can see *macro definition*. It is defined with a name GEN\_LABEL, variable NAME and has one instruction in body that assigns to label in NAME current address. In line 06 there is use of *copy instruction* where it includes contents of REGS file.

Line 08 establishes start of executable section called TEST.

In line 09 integer value is assigned to variable symbol VAR. The value is the length attribute of non previously defined constant DOUBLE. The assembler looks for definition of the constant to properly evaluate conditional assembly expression. In the next line there is CA branching instruction AIF. If value of VAR equals 4, next lines are skipped and assembling continues on line 18 where branching symbol END is located.

Lines 12-13 shows example of machine instructions which are directly assembled into object code. Lines 11,14 are examples of macro call.

<sup>&</sup>lt;sup>1</sup>Path to library is passed to assembler before the start of assembly.

In line 15 to constant LEN is equated difference of two addresses. This value is next used to generate character data.

Instruction DC in line 17 creates value of type double and assigns its address to constant DOUBLE. This constant also holds information about length, type and other attributes of the data.

ANOP is empty assembler action and line 19 ends the program assembling.

As the reader may see, HLASM is heavily extended assembler with complex assembling phases. However, the result of that is programming language with large expressive power.

## 3. Requirements

-co ten nas produkt ma byt vseobecne zhrnutie

...je to extension ... doda support pre ... -cela tato sekcia uz je popisana niekde na CA wiki, mozno dobry zaklad

Tohle by mozna nebylo spatny rovnou pojmenovat nejak jako 'Features', 'API' nebo mozna 'Interfaces'.

#### **Language features**

-zoznam veci jazyka co podporujeme

#### 3.2 LSP features

-working plugin for vs code

- Go to definition for all symbols, macro definitions and copy members.
- Find all references
- Completion for instructions, defined symbols and macros
- Highlighting
- Hover

-non functional requirement - api kniznice??

### 4. Architecture

- -JNI? asi by som nespominal mirko: a je fajn rozepsat vsechny API a takovy veci co sou po ceste –velky graf vsetkych komponent –ku kazdemu odstavcek
- **4.1 Parser library**
- **4.1.1 Workspace manager**
- 4.1.2 Analyzer
- 4.1.2.1 **Lexer**
- 4.1.2.2 **Parser**
- 4.1.2.3 **Processing**
- 4.1.2.4 Checking
- 4.1.3 **Debugger**
- 4.2 Language server
- **4.3** VS code client

## 5. Technologies

mirko: soupis konkretnich technologii a verzi antlr cmake jenkins json lib boost asio? docker

tohle patri do Architecture, pripadne to prejmenujte na 'Implementation details' nebo tak cosi.

vscode theia che produkcne zdrojaky poskytnute broadcom google test –jenkins sa opytat ako s tym ze to nie je nase jazyky typescript c++ cmake

## 6. Project execution

In the following chapter is represented execution of the High Level Assembler Plugin software project. We analyze the problem difficulty, break it into tasks and estimate time requirements of particular tasks. We further describe the team and work organization.

#### 6.1 Collaboration

The team consists of five members. Collaboration within the team is essential for successful completion of the project. We use a variety of means to achieve this.

Our team works with agile software development. To aid this we use visual process management system Kanban. The team meets every week together with our supervisor at stand ups. The team discusses the current status of particular tasks with their owners, review progress and plan work for next week.

For communication between team members is used online tool Slack.

#### 6.2 Milestones and work packages

We analyzed the problem and split it into several milestones and work packages. At the time of writing this document milestone Preview. By now there is a working prototype. Therefore, some of the presented work packages are specified.

Tasks were assigned to individual team members during stand ups. The tasks and their assignment (team member name initials in the parentheses following task name) is presented in the Gantt diagram(s) (6.1, 6.2, 6.3). Project implementation is planned to be done within nine months.

#### (M1) Research and analysis (month 2)

(WP1) HLASM language analysis (Adam, Marcel)

(WP2) Parser libraries research (Peter)

(WP3) IDEs research (Michal)

#### (M2) Parser prototype (month 3)

(WP4) Lexer (Lucia, Peter)

(WP5) Parser (Adam, Marcel)

(M3) IDE integration prototype (month 3)

(WP6) LSP POC (Michal)

(WP7) VSCode client POC (Michal)

(WP8) Debugger POC (Michal)

#### (M4) Preview (month 4)

(WP9) Client semantic highlighting (Marcel)

(WP10) Assembler checker (Lucia)

**(WP11)** Conditional assembly instructions (Adam)

(WP12) Conditional assembly expressions (Peter)

(WP13) Macro expansion (Adam)

(WP14) Conditional assembly LSP features (Marcel)

(WP15) Machine expressions (Michal)

#### (M5) Detailed specification (month 6)

(WP16) Detailed specification (all)

#### (M6) Final version skeleton (month 7)

(WP17) Machine instruction checker (Lucia)

(WP18) DC instruction (Michal, Peter)

(WP19) Copy instruction (Adam)

(WP20) Client-server continuation handling (Marcel)

(WP21) Diagnostics (Lucia)

(WP22) Ordinary LSP features (Marcel)

(WP23) Ordinary symbols (Adam, Peter)

#### (M7) Feature integration (month 7)

(WP24) Feature integration (all)

#### (M8) Feature testing (month 9)

(WP25) Testing (all)

(WP26) Multiplatform deployment (Michal)

(WP27) Code coverage (Lucia)

#### (M9) Documentation (month 9)

(WP28) Documnetation (all)

#### (M10) Final presenation (month 9)

(WP29) Final presenation (all)

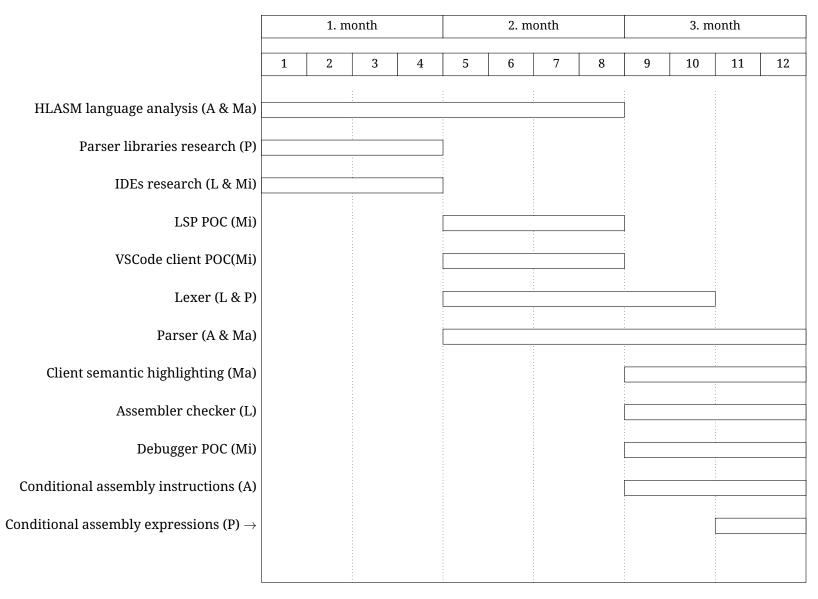


Figure 6.1: Tasks for months 1 – 3

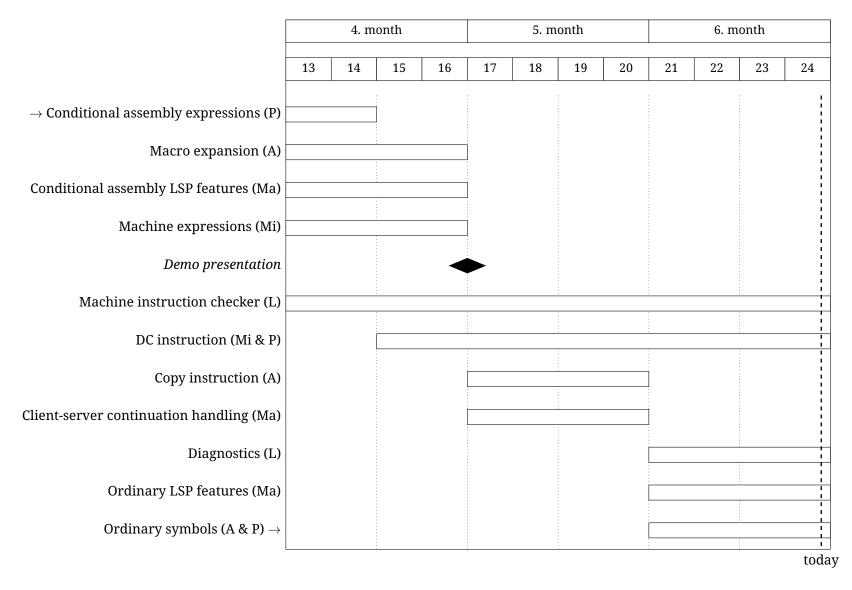


Figure 6.2: Tasks for months 4 – 6

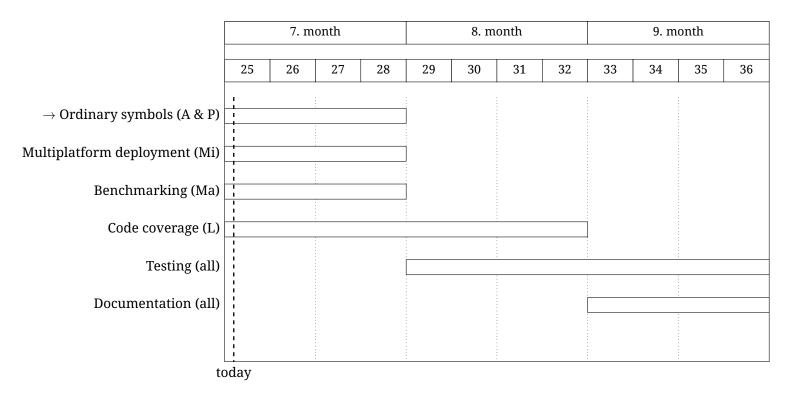


Figure 6.3: Tasks for months 7 – 9

```
mirko:
milestony
gantt
prirazeni lidi k projektum
udelejte si cas na psani dokumentace
je fajn mit contingency plan, co delat kdyz se to dojebe nebo ltery ficury jsou jak prioritni
```

je fajn vsechno
tohle podeprit tim
ze mate prototyp,
a jak se na nej
bude navazovat.
Rozhodne do specifikace uz nemuzete
psat ze budete volit
parser a ide, protoze to tady ma
bejt specifikovany.