

Tables in HTML

<thead> to wrap table header

<tbody> to wrap table body

<tfoot> to wrap table footer



Colspan & Rowspan Attributes

used to create cells which spans over multiple rows or columns

Food Menu		
Item	Price	
	INR	USD
Frooti	10	0.14
Samosa	12	0.17
Chips	20	0.28

`rowspan = " "`

`colspan = " "`



Practice Qs 7

Re-create the following table using HTML

A test table with merged cells

	Average		Red eyes
	Height	Weight	
Males	1.9	0.003	40%
Females	1.7	0.002	43%



Forms in HTML

Forms are used to collect data from the user




Instagram

Phone number, username or email address

Password

Log in

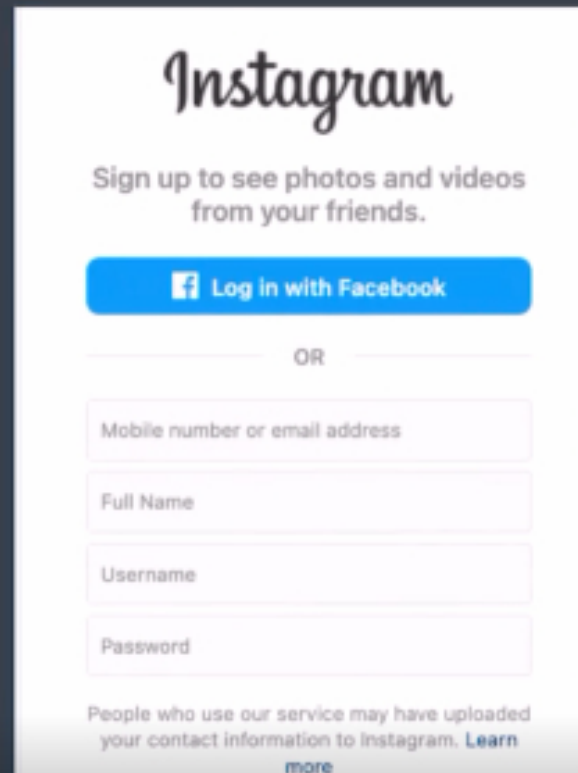

Instagram

Sign up to see photos and videos from your friends.

Log in with Facebook

OR

Mobile number or email address

Full Name

Username

Password

People who use our service may have uploaded your contact information to Instagram. [Learn more](#)

By signing up, you agree to our [Terms](#), [Privacy Policy](#) and [Cookies Policy](#).

Sign Up

0:50 / 5:13

MI




Action Attribute

Action attribute is used to define what action needs to be performed when a form is submitted or where the form data should be sent

```
<form action="/action.php" >
```

```
<form action="/action" >
```

Play (Spacebar)

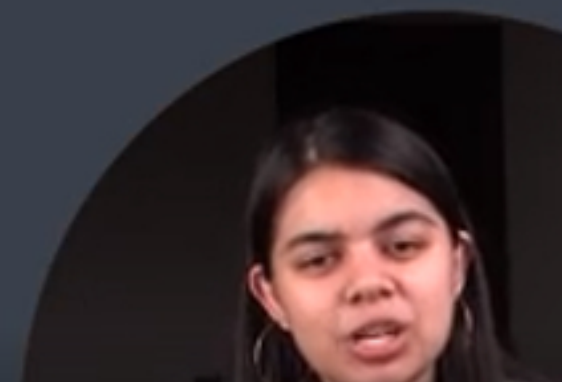

Form Elements

Input

- used to create multiple form controls
- there are multiple types of inputs that can be created using type attribute



Form Elements

type attribute

`<input>`

`<input type="text">`

`<input type="password">`

`<input type="number">`

`<input type="time">`

`<input type="color">`

asmit.kumarsingh.cse26@heritageit.edu.in



Form Elements

placeholder attribute

```
<input type="text" placeholder="Enter Name">
```

type here / username



Form Elements

Label


- Label element represents a caption for an item in a user interface

<label >

Enter your username :

 <input type="text" placeholder="username">

</label>

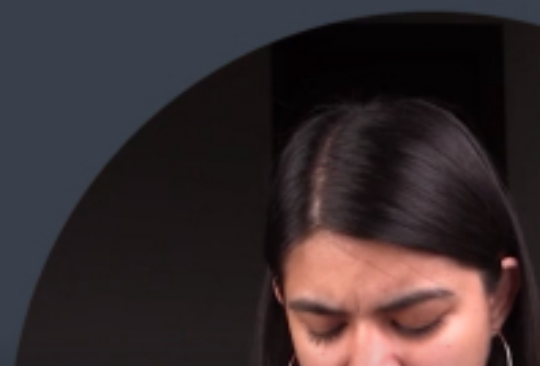


Form Elements

Label Classical Approach

```
<label for="username"> Enter your username : </label>
```

```
<input type="text" id="username" placeholder="username">
```

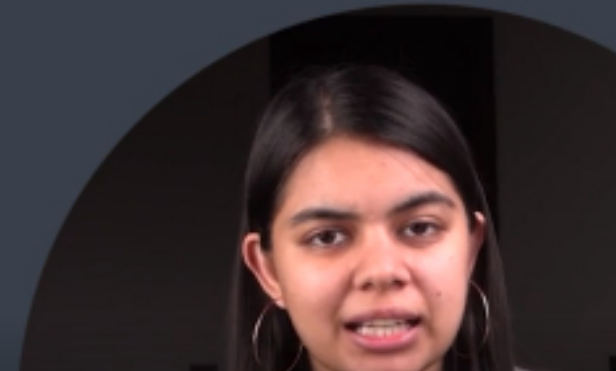

Button Element

```
<button> submit </button>
```

Backward (←)






Button Element

type attribute

```
<button type="submit"> submit </button>
```

```
<button type="button"> do something </button>
```

```
<button type="reset"> do something </button>
```

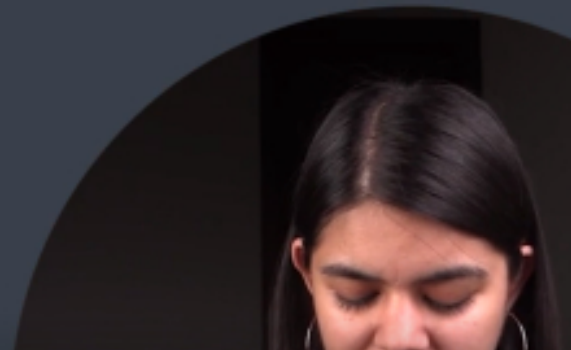

Input Element

Button using input

```
<input type="submit" >
```

```
<input type="submit" value="click me">
```



Name Attribute

Name of the form control. Submitted with the form as part of a name/value pair

```
<input type="text" placeholder="enter name" id="username" name="username"/>
```



Input Element

Checkbox

```
<input type="checkbox" name="age" id="age" checked />  
<label for="age"> I am 18+ </label>
```

Input Element

Radio Button

```
<input type="radio" name="fruit" id="apple" value="apple" />
```

```
<label for="apple"> Apple </label>
```


Select Element

Dropdown

```
<select name="profession" id="profession">
```

```
  <option value="student">Student</option>
```

```
  <option value="dev">Developer</option>
```

```
</select>
```

Input

Range

```
<label for="volume">Volume</label>
```

```
<input type="range" min="0" max="100" name="vol" />
```

Play (Spacebar)



Text Area

```
<label for="feedback">Please provide your valuable feedback :</label>
```

```
<textarea id="feedback" > </textarea>
```

