

Use Case Specification Document

PhishGuard Website Development project

Team Members

#	Name
1	Manahil Imran
2	Jeanine Gomez
3	Anthony D'Alauro
4	Arrianna Dawkins
5	Angelee Sullivan-Quintana

Contents

1. Overall Description	3
2. Users	3
3. Use Case Specifications	3
3.1. Log in / UC1 [Author Name: Manahil Imran]	4
3.2. Take quiz / UC2 [Author Name: Manahil Imran]	4
3.3. Scan email or URL / UC3 [Author Name: Manahil Imran]	5
3.4. Filter Articles / UC4 [Author Name: Manahil Imran]	6
3.5. Evaluate Password Strength/ UC5 [Author Name: Manahil Imran]	7
3.6. Report Phishing Incident/UC6 [Author Name: Manahil Imran]	8
3.7. Create Account/UC7 [Author Name: Arrianna Dawkins]	10
3.8. Purchase Premium Access /UC8 [Author Name: Arrianna Dawkins]	12
3.9. Install Browser Extension/UC9 [Author Name: Arrianna Dawkins]	13
3.10. Display completed quiz attempts/UC10 [Author Name: Arrianna Dawkins]	14
3.11. Assess email for phishing using extension/UC11 [Author Name: Arrianna Dawkins]	14
3.12. Generate certificate of completion/UC11 [Author Name: Arrianna Dawkins]	15
3.13. Expand a Shortened URL/UC12 [Author Name: Angelee Sullivan-Quintana]	16
3.14. Changing Pricing for Subscription Plan/UC13 [Author Name: Angelee Sullivan-Quintana]	17
3.15. Ask Chatbot for Quiz Explanations/UC14 [Author Name: Angelee Sullivan-Quintana]	18
3.16. Check Credentials for Any Data Breaches/UC15 [Author Name: Angelee Sullivan-Quintana]	19
3.17. Modify User Details on Account Profile/UC15 [Author Name: Angelee Sullivan-Quintana]	20
3.18. Add Course/UC15 [Author Name: Anthony DAlauro]	21
3.19. Remove Course/UC16 [Author Name: Anthony DAlauro]	21
3.20. Unpublish Course/UC17 [Author Name: Anthony DAlauro]	22
3.21. Disable Users / UC21 [Author Name: Jeanine Gomez]	23
3.22. Publish Course Content / UC22 [Author Name: Jeanine Gomez]	24
3.23. Add Groups / UC23 [Author Name: Jeanine Gomez]	25
3.24. Remove Groups / UC24 [Author Name: Jeanine Gomez]	27
3.25. Generate License Keys / UC25 [Author Name: Jeanine Gomez]	28
3.26. Add User / UC26 [Author Name: Anthony DAlauro]	30
3.27. Remove User / UC27 [Author Name: Anthony DAlauro]	30
4. Use Case Diagram	31
5. Constraints and Limitations	33
6. UI Specifications (Prototype)	33
7. Definitions and Acronyms	33

1. Overall Description

[Instructions: In the section, provide a brief description of the services that the PhishGuard website would provide once online]

Something's Phishy is a comprehensive web platform that aims at equipping users with adequate knowledge about phishing attacks while supplying the resources necessary to identify and deal with various cyber risks. The system provides structured training modules, assessments, performance evaluations, and even artificial intelligence technology that can be used for scanning emails and URLs. Additionally, SomethingPhishy has included a number of advanced elements, including gamification, simulated phishing attacks, and premium features like the security toolkit, AI chatbot, and the email scanner extension.

2. Users

[Instructions: In table given below, identify the users/actors and provide a brief description about each identified user and their intended use of website (i.e., what does this user do on a day-to-day basis in his/her job or home and what goals will the PhishGuard website help each user achieve?)]

User	Description
System Admin	Registered user who has authorized access to manage and maintain the system. The System Administrator oversees user accounts, monitors system activity, manages course content and assessments, reviews reported phishing incidents, and configures system settings such as pricing, threat databases, and simulated phishing campaigns.
Learner	Registered user who uses the system to learn about phishing awareness and cybersecurity. The learner can complete training modules, take assessments, use basic detection tools, and track their learning progress. This user has access to all the core features available in the free tier.
Pro Defender	Registered user with extended access to premium features via paid subscription. In addition to all Learner capabilities, the Pro Defender can access enhanced security tools such as the email scanner extension.

3. Use Case Specifications

Each use case description should be provided under its own sub-section. Also, note that each use case should have a name (a verb phrase) and unique identifier (e.g., UC1, UC2, and so on).

3.1. Log in / UC1 [Author Name: Manahil Imran]

Use Case Name:	Log in
Description:	Allows the actor to enter valid credentials in order to securely access their account.
Primary Actor(s):	Learner, Pro Defender, System Admin
Trigger:	The actor wants to access their account by using the login feature.
Precondition(s):	• The actor must have a registered account • The actor must have valid credentials
Postcondition(s):	• The actor gets redirected to the dashboard
Success Scenario (or Normal Flow):	1. The actor enters the email. 2. The actor enters the password 3. The System checks that: a. The email field is not empty. b. The email is valid. c. The password field is not empty. d. The password is valid. 4. The system authenticates the actor. 5. The actor successfully logs in and gets redirected to the dashboard.
Alternative Courses:	3A1) The actor leaves the email field blank 1. The system returns an error message : “ Email and password are mandatory, please try again.” 2. The use case returns to step 1 of the success scenario.

3.2. Take quiz / UC2 [Author Name: Manahil Imran]

Use Case Name:	Take quiz
Description:	Allows the actor to complete a quiz associated with a training module to evaluate their understanding.
Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor completes a module and wants to assess their understanding of the subject material in order to move forward to the next module.
Precondition(s):	• The actor is logged in • The actor completes the required module
Postcondition(s):	• The actor is allowed to move onto the next module.
Success Scenario (or Normal Flow):	1. The actor navigates to the module quiz. 2. The system displays the quiz questions. (multiple

	choice) - The actor selects the answers. - The actor submits the quiz by clicking the submit button. - The system checks that: - No question is left unanswered. - The actor passes the quiz (70% is passing grade). - The system displays the percentage that the actor got and feedback for each question. - The system displays how many questions the actor got wrong. - The system displays the message: “You've passed! The next module is now unlocked” and allows the actor to move onto the next module.
Alternative Courses:	5A1) The actor did not select an answer for a question - The system returns an error message: “Please answer all questions before submitting.” - The use case returns to step 3 of the success scenario. 5A2) The actor did not pass the quiz - The system displays the percentage that the actor got. - The system displays how many questions the actor got wrong. - The system displays a message: “You need 70% to pass. Review the material and try again.” - The actor clicks the try again button. - The use case returns to step 2 of the success scenario.

3.3. Scan email or URL / UC3 [Author Name: Manahil Imran]

Use Case Name:	Scan email or URL
Description:	Allows the actor to submit email content or URLs to determine the level of phishing risk and provide a detailed explanation.
Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor is doubtful of an email or URL and wants to make sure it does not pose any phishing risk.
Precondition(s):	- The actor is logged in. - The actor navigates to the AI scanner tool
Postcondition(s):	Scan results are stored in the actor's history.
Success Scenario (or Normal Flow):	The actor chooses which type of input they want to scan (email text or URL).

	2. The actor inputs the email text or URL into the analysis field. 3. The actor submits the input for scanning by pressing the scan button. 4. The system checks that: a. The input field is not empty. b. The URL structure is valid (if applicable) c. The input does not exceed the character limit of 5000. 5. The system preprocesses the input by extracting links, keywords, metadata or normalizing text for analysis. 6. The system performs blacklist checks by comparing URL/email elements against known phishing databases. 7. The system performs keyword pattern analysis by detecting suspicious phrases (urgency, too good to be true, threats, account/financial verification, etc.) 8. The system invokes the AI classification model and classifies the input as either Safe, Suspicious, or High Risk. 9. The system generates and displays an explanation report.
Alternative Courses:	3A1) The actor submitted an invalid URL 1. The system returns an error message saying, “Invalid URL format, please try again.” 2. The use case returns to step 1 of the success scenario. 3A2) The actor submits input that exceeds the character limit 1. The system returns an error message saying, “The field cannot exceed 5000 characters, please try again.” 2. The use case returns to step 1 of the success scenario.

3.4. Filter Articles / UC4 [Author Name: Manahil Imran]

Use Case Name:	Filter Articles
Description:	Allows the actor to search for cybersecurity articles based on categories or keywords.
Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor wants to search for a cybersecurity article on a specific topic that they want to learn more about.
Precondition(s):	● The actor is logged in ● The actor navigates to the resource library
Postcondition(s):	● The relevant articles are displayed

Success Scenario (or Normal Flow):	1. The actor enters a keyword and/or selects the category filters. 2. The actor submits the search request by clicking the search button. 3. The system checks that: a. Either the input field is not empty or at least one category is selected. b. The input length is within the allowed range. (50 characters) c. The keywords match with the article content/titles available. 4. The system retrieves the matching articles and displays the filtered results to the actor.
Alternative Courses:	3A1) The actor inputs text which exceeds the character limit. 1. The system returns an error message saying, “The field cannot exceed 50 characters, please try again.” 2. The use case returns to step 1 of the success scenario. 3A2) The actor inputs keywords which do not match any articles available. 1. The system displays the message, “No resources found, please try entering different criteria”. 2. The use case returns to step 1 of the success scenario.

3.5. Evaluate Password Strength/ UC5 [Author Name: Manahil Imran]

Use Case Name:	Evaluate Password Strength
Description:	Allows the actor to test the strength of a password. The system evaluates the password against a defined security criteria and provides a strength rating along with recommendations for improvement.
Primary Actor(s):	Pro Defender
Trigger:	The actor wants to see if their password is strong enough in order to avoid getting hacked in the future.
Precondition(s):	• The actor is logged in. • The actor navigates to the security toolkit.
Postcondition(s):	• The system displays the password strength rating. • The system provides the security recommendations.
Success Scenario (or Normal Flow):	1. The actor navigates to the password strength tester. 2. The actor enters a password into the input field. 3. The actor submits the password for testing by clicking the “test” button. 4. The system checks that: a. The input field is not empty.

	b. The input length is within the allowed range. (8 - 65 characters). c. The input does not contain unsupported or invalid characters like spaces, commas, colons, slashes, double quotes, ampersand, brackets, less than or greater than signs, etc. 5. The system evaluates password strength against security criteria: a. Checks for uppercase letters b. Checks for lowercase letters c. Checks for numbers d. Checks for special characters (! , @ , #) e. Checks for common or weak patterns like “1234” or “password”, etc. 6. The system assigns the strength rating: a. Weak, Moderate, Strong 7. The system generates feedback where it identifies the missing criteria and also suggests improvements like “Add special characters”. 8. The system generates the result to the actor.
Alternative Courses:	4A1) The actor inputs a password which violates the allowed range. 1. The system returns an error message saying, “The password needs to be within the allowed range (8-65 characters), please try again.” 2. The use case returns to step 2 of the success scenario. 4A2) The actor inputs a password which contains invalid characters. 1. The system returns an error message saying, “The password cannot contain invalid characters which may cause system errors or are unsupported, please revise and try again.” 2. The use case returns to step 2 of the success scenario.

3.6. Report Phishing Incident/UC6 [Author Name: Manahil Imran]

Use Case Name:	Report Phishing Incident
Description:	Allows the actor to submit suspicious emails or URLs by submitting relevant details and optional supporting evidence. The system validates the submission and stores it for

	administrative review.
Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor wants to report an email which they know is a phishing scam or are highly suspicious of, so that deep analysis takes place and others can be warned.
Precondition(s):	• The actor is logged in. • The actor navigates to the incident reporting section.
Postcondition(s):	• The report is stored in the system. • The Admin can review the submission.
Success Scenario (or Normal Flow):	1. The actor chooses the incident type. a. Options: Email / URL / SMS b. This field is mandatory 2. The actor pastes the suspicious URL or text into the suspicious content section. a. This field is mandatory 3. The actor gives a short description of the incident, describing exactly what happened. a. This field is mandatory 4. The actor enters the date of the incident in the date section. a. This field is mandatory 5. The actor enters sender's information a. Email address or phone number b. This field is optional 6. The actor enters the subject line (for emails) a. This field is optional 7. The actor uploads screenshots or files for further analysis. a. This field is optional 8. The actor chooses the confidence level from the drop down menu. a. "I think this is phishing" b. "Not sure" c. "Just reporting" d. This field is optional 9. The actor submits the report by clicking the submit button. 10. The system checks that: a. All the mandatory fields are not empty b. All input fields do not exceed 5000 characters c. If URL provided than format should be valid d. If email or SMS provided, then no corrupted input present e. The date must be a valid format f. Submission is not duplicated by comparing

	from previous submissions. g. If a file is uploaded then the file type must be supported (jpg, png, pdf). h. The file is not corrupted. i. Input does not contain harmful scripts or malicious code. 11. The system processes and stores the report. 12. The system displays a confirmation message: “Thank you for reporting this incident with us, please allow 48 hours for a complete analysis of this report”.
Alternative Courses:	9A1) The actor has left the date field empty. 1. The system returns an error message saying, “Please select a date, this field is required.” 2. The use case returns to step 4 of the success scenario. 9A2) The actor submits a duplicate submission. 1. The system returns a message saying, "A similar incident has already been reported. Case [Number] was created on [Date]. Would you like to view/update the existing case or proceed with a new submission?" 2. The actor opts to proceed with a new submission. 3. The use case returns to step 11 of the success scenario.

3.7. Create Account/UC7 [Author Name: Arrianna Dawkins]

Use Case Name:	Create Account
Description:	Allows the actor to create a new account to access the phishing simulation platform after email verification.
Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor wants to register a new account to access the platform.
Precondition(s):	● The actor is on the registration page. ● The actor’s email is not already registered.
Postcondition(s):	● The new account is created and verified successfully. ● The actor receives confirmation of successful registration. ● The actor can log in and access the platform.
Success Scenario (or Normal Flow):	1. The actor navigates to the registration page. 2. The actor enters the required registration details. i.e: full name, email, password, confirm password 3. The actor submits the form. 4. The system checks that:

	a. All mandatory fields are completed. b. The email is valid and unique. c. The password meets the security requirements and matches the confirmed password. 5. The system sends the verification email with a token. 6. The system displays a message to verify email. 7. The actor clicks the verification link. 8. The system checks that: a. The token is not expired and matches the email. 9. The system activates the account 10. The system sends confirmation of successful registration to email with a login link. 11. The actor is redirected to login.
Alternative Courses:	4A1) Missing required fields 1. The system returns an error message saying “Required field must be completed.” 2. The actor returns to step 2 of the success scenario where the actor enters the required fields. 4A2) Email already exists 1. The system returns an error message saying “An account with this email already exists. Please navigate to login.” 2. The use case returns to step 11 of the success scenario. 4A3) Invalid or weak password 1. The system returns an error message saying “Password does not meet security requirements. 2. The use case returns to step 2 of the success scenario. 7A1) The actor does not click the verification link 1. The system returns a message saying, “Please verify your email to activate your account. A new link has been sent.” 2. The use case returns to step 5 of the success scenario. 8A1) The verification link has expired 1. The system returns a message saying, “Verification link has expired. A new email has been sent.” 2. The use case returns to step 5 of the success scenario.

3.8. Purchase Premium Access /UC8 [Author Name: Arrianna Dawkins]

Use Case Name:	Purchase Premium Access
Description:	Allows the actor to purchase premium access to gain access to phishing prevention browser extension and is upgraded to pro defender status.
Primary Actor(s):	Learner
Trigger:	The actor wants to upgrade to premium features.
Precondition(s):	• The actor is logged in. • The actor does not already have premium access.
Postcondition(s):	• Payment is processed successfully. • The actor gains access to premium features and browser extension to help prevent phishing.
Success Scenario (or Normal Flow):	1. The actor navigates to the premium upgrade page. 2. The system displays premium features and pricing. 3. The actor enters payment details. i.e. card number, expiration date, CVV, billing info 4. The actor submits payment. 5. The system checks that: a. All payment fields are complete. b. Payment details are valid. c. The actor is eligible for upgrade. 6. The system sends the payment for processing. 7. The payment is approved. 8. The system displays a confirmation message. 9. The system activates premium access: a. Enables pro defender status b. Instructions to install phishing prevention extension sent to email 10. The actor is directed to the dashboard.
Alternative Courses:	2A1) The actor already has premium access 1. The system returns a message saying, "You already have premium access." 2. The use case returns to step 10 of the success scenario. 5A2) The actor enters invalid payment details 1. The system returns an error message saying, "Invalid payment information. Please try again." 2. The use case returns to step 3 of the success scenario. 7A1) The payment is declined

	1. The system returns a message saying, “Payment was declined Please use a different method.” 2. The use case returns to step 3 of the success scenario.
--	---

3.9. Install Browser Extension/UC9 [Author Name: Arrianna Dawkins]

Use Case Name:	Install Browser Extension
Description:	Allows the actor to install the phishing prevention extension after access is granted.
Primary Actor(s):	Learner (special access) , Pro Defender
Trigger:	The actor wants to install the phishing prevention extension to detect phishing threats.
Precondition(s):	• The actor is logged in. • The actor has premium access or completed all quizzes correctly on the first try.
Postcondition(s):	• The extension is installed. • The extension is linked to the actor’s account. • The actor will have real time phishing protection while using email.
Success Scenario (or Normal Flow):	1. The actor navigates to the browser extension installation page. 2. The system displays installation options and supported browsers. 3. The actor selects the correct link for installation based on device. 4. The system checks that: a. The actor has paid for premium access or has been given special access. b. The browser is supported. 5. The system redirects to the browser extension installation prompt. 6. The actor confirms installation. 7. The extension is installed in the browser for phishing protection. 8. The system links the extension to the actor’s account. 9. The system displays a confirmation message.
Alternative Courses:	4A1) The actor does not have premium access 1. The system returns a message saying, “Premium access required to install this extension.” 2. The use case returns to step 3 of the success scenario. 4A2) The actor is using an unsupported browser 1. The system returns a message saying, “This browser is not supported. Please switch to a supported browser

	listed below.” - The use case returns to step 2 of the success scenario. 7A1) The installation fails - The system returns a message saying, “Installation failed. Please try again.” - The use case returns to step 3 of the success scenario.
--	---

3.10. Display completed quiz attempts/UC10 [Author Name: Arrianna Dawkins]

Use Case Name:	Display completed quiz attempts
Description:	Allows the actor to view past quiz attempts from completed tests including scores and attempt history.
Primary Actor(s):	Learner, Pro Defender
Trigger:	Learner, Pro defender
Precondition(s):	- The actor is logged in - The actor has completed at least one test
Postcondition(s):	- Quiz attempts are displayed - The actor can review scores and attempt details
Success Scenario (or Normal Flow):	- The actor navigates to the completed tests section. - The actor selects a completed test. - The system retrieves the attempt history. - The system checks that: - The actor is authorized to view it. - Attempt data is available. - The system displays quiz attempts, details and grades. - The actor reviews the results.
Alternative Courses:	4A1) No attempts are available for the selected test - The system returns a message saying, “No quiz attempts available. 4A2)The actor is not authorized to view the test. - The system returns an error message saying, “You are not authorized to view this test.”

3.11. Assess email for phishing using the extension/UC11 [Author Name: Arrianna Dawkins]

Use Case Name:	Assess email for phishing using the extension
Description:	Allows the actor to analyze emails in real time using the extension to detect phishing risks and receive explanations.
Primary Actor(s):	Learner (with special access), Pro Defender
Trigger:	The actor wants to analyze an email for potential phishing risk using the premium browser extension.
Precondition(s):	• The actor is logged in • The extension is installed • The actor is granted special access by achieving 100% on first try for all quizzes in course or has purchased premium access
Postcondition(s):	• The email is classified as Safe, Suspicious, or High Risk • The actor receives an explanation • The result is logged in history
Success Scenario (or Normal Flow):	1. The actor opens an email in their browser. 2. The actor activates the browser extension. 3. The extension captures the email content. 4. The actor submits the email for analysis. 5. The system performs checks: a. Sender review for suspicious activity b. Link and email address analysis c. Suspicious keyword detection 6. The system classifies the email as Safe, Suspicious, or High Risk. 7. The system generates a result with an explanation through the extension. 8. The system stores the result in history.
Alternative Courses:	5A2) The email content cannot be processed 1. The system returns an error message saying, “Unable to analyze this email. Please try again.” 2. The use case returns to step 4 of the success scenario.

3.12. Generate certificate of completion/UC11 [Author Name: Arrianna Dawkins]

Use Case Name:	Generate certificate of completion
Description:	Allows the actor to generate and download a certificate after successfully completing all required phishing training modules and quizzes.

Primary Actor(s):	Learner, Pro Defender
Trigger:	The actor completes all required modules and achieves passing scores on all quizzes.
Precondition(s):	• The actor is logged in • All required modules are completed • All quizzes are passed according requirements (70
Postcondition(s):	• A certificate is generated • The actor can download or view the certificate • Completion status is stored in the system
Success Scenario (or Normal Flow):	1. The actor navigates to the course completion section. 2. The actor selects “View Certificate.” 3. The system checks that: a. All modules are completed. b. All quizzes meet passing requirements. 4. The system generates and displays a certificate. 5. The actor downloads or saves the certificate. 6. The system logs completion status.
Alternative Courses:	3A1) The actor has not completed all modules 1. The system returns a message saying, “All modules must be completed before generating a certificate.” 3A2) The actor has not achieved required quiz scores 1. The system returns a message saying, “All quizzes must be passed before generating a certificate.”

3.13. Expand a Shortened URL/UC12 [Author Name: Angelee Sullivan-Quintana]

Use Case Name:	Expand a Shortened URL
Description:	Allows the Pro Defender to input a shortened URL to reveal the full destination before visiting it.
Primary Actor(s):	Pro Defender
Trigger:	The actor encounters a shortened URL and wants to verify it.
Precondition(s):	• The actor is logged in as Pro Defender • The actor access to the URL Expander tool
Postcondition(s):	• The full expanded URL is displayed

Success Scenario (or Normal Flow):	1. The actor navigates to the URL Expander tool 2. The actor enters the shortened URL 3. The actor clicks the “Expand” button 4. The system checks that: a. The input field is not empty b. The input is valid URL format 5. The system processes the shortened URL and retrieves the full destination URL 6. The system displays the full expanded URL to the actor
Alternative Courses:	4A1) The actor submits an empty input field 1. The system returns an error message: “Please enter a URL to expand.” 2. The use case returns to step 2 of the success scenario. 4B1) The actor enters an invalid or unrecognized URL 1. The system returns an error message. “The URL entered is not valid, please try again.” 2. The use case returns to step 2 of the success scenario.

3.14. Changing Pricing for Subscription Plan/UC13 [Author Name: Angelee Sullivan-Quintana]

Use Case Name:	Change Pricing for Subscription Plan
Description:	Allows the System Admin to update subscription pricing
Primary Actor(s):	System Admin
Trigger:	The System Admin wants to modify a subscription price
Precondition(s):	• The actor is logged in as a System Admin • The actor is on subscription management page
Postcondition(s):	• The subscription plan price is successfully updated • The pricing is updated across the platform
Success Scenario (or Normal Flow):	1. The actor opens subscription management 2. The actor selects a plan 3. The actor enters new price

	4. The system checks that: - The price field is not empty - The entered value is a valid positive number 5. The actor confirms the pricing change 6 The system saves and applies the updated pricing to the subscription plan.
Alternative Courses:	4A1) The actor enters a non-numeric or negative value - The system returns an error: “Please enter a valid positive price.” - The use case returns to step 3 of the success scenario 4B1) The actor leaves the pricing field empty - The system returns an error: “Price field cannot be empty, please try again.” - The use case returns to step 3 of the success scenario.

3.15. Ask Chatbot for Quiz Explanations/UC14 [Author Name: Angelee Sullivan-Quintana]

Use Case Name:	Ask Chatbot for Quiz Explanations
Description:	Allows the Pro Defender to get explanations for quiz explanations.
Primary Actor(s):	Pro Defender
Trigger:	The Actor wants clarification on a quiz question/answer
Precondition(s):	- The actor is logged in as a Pro Defender - The actor has chatbot access
Postcondition(s):	The chatbot provides explanation
Success Scenario (or Normal Flow):	- The actor opens the chatbot – The Pro Defender clicks on the AI Chatbot from the sidebar menu in the platform. - The actor enters a question – They type their question into the text box, for example: “<i>Why is this quiz answer correct?</i>” - The actor submits a question – They hit the send button to submit it. - The system checks that: - Is the text box empty? If yes → error. If no → continue. - Is the message too long? If yes → error. If no → continue. - The chatbot processes the question and generates a relevant explanation – Once the check passes, the AI reads the question and creates a relevant explanation based on

	phishing/cybersecurity knowledge. 6. The system displays the chatbot response to the actor – The chatbot answer appears on screen for the Pro Defender
Alternative Courses:	4A1) The actor submits an empty message 1. The system returns an error: “Please enter a question before submitting.” 2. The use case returns to step 2 of the success scenario 4B1) The chatbot cannot generate a relevant message. 1. The system displays: “I’m sorry, I could not find an explanation for that. Please try rephrasing your question.” 2. The use case returns to step 2 of the success scenario

3.16. Check Credentials for Any Data Breaches/UC15 [Author Name: Angelee Sullivan-Quintana]

Use Case Name:	Check Credentials for Any Data Breaches
Description:	Allows the Pro Defender to check if their credentials were exposed in breaches
Primary Actor(s):	Pro Defender
Trigger:	The Actor wants to verify if credentials are compromised
Precondition(s):	• The actor is logged in as a Pro Defender • The actor has access to Breach Checker tool
Postcondition(s):	• The system results of Breach are displayed
Success Scenario (or Normal Flow):	1. The actor opens Breach Checker 2. The actor enters email or credentials 3. The actor clicks “Check” button 4. The system checks that: a. The input is not empty b. The input is a valid email or credential format 5. The system searches the breach database for matching records 6. The system displays the results to the actor, indicating whether a breach was found

Alternative Courses:	4A1) The actor enters an invalid email format. 1. The system returns an error: "Please enter a valid email address." 2. The use case returns to step 2 of the success scenario 4B1) The actor submits an empty field 1. The system returns an error: "This field cannot be empty. Please try again." 2. The use case returns to step 2 of the success scenario.

3.17. Modify User Details on Account Profile/UC16 [Author Name: Angelee Sullivan-Quintana]

Use Case Name:	Modify User Details on Account Profile
Description:	Allows the Learner or Pro Defender to update account details
Primary Actor(s):	Learner, Pro Defender
Trigger:	The Actor wants to update profile information
Precondition(s):	• The actor is logged in • The actor is on profile page
Postcondition(s):	• The actors profile details are successfully updated • The actors profile is saved and displayed
Success Scenario (or Normal Flow):	1. The actor opens profile page 2. The actor selects fields to update 3.. The actor enters new information 4. The system checks that: a. The required fields are not empty b. The email entered is in a valid format c. The new password meets the minimum security requirements (if changed) 5. The actor clicks "Save Changes" button 6. The system confirms update
Alternative Courses:	4A1) The actor leaves a required field empty 1. The system returns an error: "Required fields cannot be empty, please try again/" 2. The use case returns to step 3 of the success scenario 4B1) The actor enters an invalid email format

	1. The system has an error: “Please enter a valid email address.” 2. The use case returns to step 3 of the success scenario. 4C1) The actor’s new password does not meet security requirements. 1. The system returns an error: “Password must be at least 8 characters and include a number and special character.” 2. The use case returns to step 3 of the success scenario.
--	--

3.18. Add Course/UC15 [Author Name: Anthony DAlauro]

Use Case Name:	Add Course
Description:	The actor should be able to manage available courses by adding courses
Primary Actor(s):	System Admin
Trigger:	Actor needs to add a course
Precondition(s):	• Actor is logged in • Actor has an administrator role
Postcondition(s):	• The course is added. • The course is unpublished, so it is not yet viewable. • The actor can change course settings and add content to the course
Success Scenario (or Normal Flow):	1. Actor clicks on “Courses” navigation button 2. System displays courses page 3. Actor clicks on the +Course button 4. System brings up course add dialogue box 5. Actor chooses the name for the course, and enters the name in the text box 6. System checks if the course name already exists 7. Actor clicks on Add Course 8. System adds the course

Alternative Courses:	6. The system disables the add course button.
-----------------------------	---

3.19. Remove Course/UC16 [Author Name: Anthony DAlauro]

Use Case Name:	Remove Course
Description:	The actor should be able to manage available courses by removing courses
Primary Actor(s):	System Admin
Trigger:	Actor needs to remove a course
Precondition(s):	• Actor has administrator role • Actor is logged in
Postcondition(s):	• The course is removed and no longer exists
Success Scenario (or Normal Flow):	1. Actor clicks on “Courses” navigation button 2. System shows all courses in the system 3. Actor clicks on the delete course button 4. System checks if the course to delete exists 5. System deletes the course
Alternative Courses:	4A1) The actor attempts to delete a course that does not exist 1. The system displays a ‘course not found’ message and does not complete any delete action

3.20. Unpublish Course/UC17 [Author Name: Anthony DAlauro]

Use Case Name:	Unpublish course
Description:	The actor is unpublishing a course, to edit content, remove broken content, or in preparation to remove the course.
Primary Actor(s):	System Admin
Trigger:	Actor needs to unpublish a course
Precondition(s):	• Actor is logged in • Actor has ‘Administrator’ role • Actor has decided on a course to unpublish

Postcondition(s):	The course is no longer viewable to all actors
Success Scenario (or Normal Flow):	- Actor clicks on the courses navigation page - System shows all courses in the system - Actor clicks unpublish course - System checks if the course is already unpublished - System unpublishes the course
Alternative Courses:	4A1) The actor clicks on the unpublish button on an unpublished course The button does not do anything

3.21. Disable Users / UC21 [Author Name: Jeanine Gomez]

Use Case Name:	Disable Users
Description:	This use case describes the process by which a system administrator disables user accounts that have been inactive for more than six months and have not completed any courses, ensuring system security and data integrity.
Primary Actor(s):	System Administrator
Trigger:	The system detects that a Learner/Pro-Defender has not logged in for more than six months nor completed any of the courses.
Precondition(s):	- User account exists in the system - System tracks user login activity - System stores course completion data - Actor is authenticated - Actor is authorized to manage user accounts
Postcondition(s):	- System sets user account status to Disabled - System prevent the user from logging in - System records the action in audit logs - System may send notification to the actor
Success Scenario (or Normal Flow):	- Actor navigates to the User Management module - System displays list of users and their activity status - flags users inactive for 6+ months with no course completion - Actor selects one or more users to disable - System verifies that the selected users meet the disable criteria - System prompts the actor for confirmation of the

	disable action (Mandatory) 6. Actor confirms the action (Mandatory) 7. System updates user status to “Disabled” (Mandatory) a. logs the action for auditing b. Displays a confirmation message indicating the account(s) were successfully disabled.
Alternative Courses:	2A1) No eligible users found 1. System determines that no users meet the inactivity and course completion criteria for disabling 2. System displays a message indicating that no eligible users were found 4A1) Selected user does not meet criteria 1. System determines that one or more selected users do not meet the criteria (ex. Recent login or course completion) 2. System displays an error message identifying invalid selections 3. System prevents the disable action from continuing 5A1) Actor cancels action 1. System prompts the actor for confirmation 2. Actor selects Cancel 3. System aborts the disable process 4. System returns the actor to the User Management screen 5. No changes are made 7A1) System error during update 1. System encounters an error while processing the update 2. System does not change the user account status 3. System logs the error 4. System displays an error notification to actor

3.22. Publish Course Content / UC22 [Author Name: Jeanine Gomez]

Use Case Name:	Publish Course Content
Description:	This use case describes how an admin publishes course content, making it accessible and available to users on the platform.
Primary Actor(s):	System Administrator
Trigger:	Actor determines that course content is complete, accurate, and ready for release to users, and initiates the publishing

	process to make the content accessible on the platform.
Precondition(s):	• Course content has been created or updated • Required fields (e.g., title, modules, materials) are completed • Actor is authenticated and authorized • Content has passed any required validation or review
Postcondition(s):	• Course content is marked as “Published” • Course becomes visible and accessible to users • System updates course status in database • Notification may be sent to users about new content
Success Scenario (or Normal Flow):	1. Actor navigates to the Course Managements module. 2. System displays existing course details and content 3. Actor selects a course to publish. 4. System retrieves and displays course content 5. Actor reviews and updates content 6. System saves updated course content 7. Actor reviews content for accuracy and completeness 8. Actor selects the “Publish” option. (Mandatory) 9. System validates that all required fields are complete a. Required fields: i. Course Title: (1-100 characters) ii. Course Description: (50-500 characters) iii. Category (Preselected List) 10. System verifies that content has passed required review/approval (if applicable) 11. System updates course status to “Published” (Mandatory) 12. System makes the course visible and accessible to users. 13. System updates course status in the database. 14. System may send notifications to users about the newly published content.
Alternative Courses:	6A1) Actor chooses to save instead of publish 1. Actor selects “Save as Draft”. 2. System saves the course content as “Draft”. 3. System confirms the save action. 4. Course remains unpublished. 9A1) Required fields do not meet constraints 1. System detects missing or invalid required fields (ex: title exceeds 100 characters, no modules, missing quiz) 2. System prevents publishing. 3. System displays specific error message identifying missing fields. 4. Actor may update the course content.

	10A1) Course content not approved 1. System determines course content has not passed required review/approval 2. System prevents publishing 3. System notifies actor that approval is required before publishing 11A1) System fails to update course status 1. System encounters an error while updating course status 2. System does not publish the course status. 3. System logs the error. 4. System displays an error message to the actor that publishing failed. 14A1) Actor schedules publication instead of immediate publishing 1. Actor selects “Schedule for later” 2. System prompts actor to select a future date and time. 3. Actor provides scheduling details. 4. System validates the scheduled date and time in the future. 5. System schedules the course for future publication.
--	---

3.23. Add Groups / UC23 [Author Name: Jeanine Gomez]

Use Case Name:	Add Groups
Description:	The use case describes how an admin creates user groups to organize participants for targeted phishing education, progress tracking, and feature access (e.g., eligibility for email security extension).
Primary Actor(s):	System Administrator
Trigger:	Actor need to organize users into groups to support targeted fishing education, track user progress, and manage feature access (ex: Eligibility for email security extension).
Precondition(s):	• Actor is authenticated and authorized • Users exist in the system • Group criteria (e.g., skill level, risk level, or demographic) is defined

Postcondition(s):	• New group is created in the system • Selected users are assigned to the group • Group is available for course assignment and tracking
Success Scenario (or Normal Flow):	1. Actor navigates to the Group Management module. 2. System displays group management options. 3. Actor selects “Create Group” 4. System displays group creation form 5. Actor enters group details (ex:name and criteria) 6. System validates that all required fields are completed. (Mandatory)(ex, group name 1-50 characters, criteria selected) 7. Actor selects users to assign to the group 8. System displays available users 9. Actor selects users one or more users 10. Actor confirms group creation (Mandatory) 11. System creates the group and assigns selected users (Mandatory) 12. System stores the group in the database 13. System displays confirmation and makes the group available for management and reporting
Alternative Courses:	5A1) Actor selects automatic grouping option 1. Actor selects automatic grouping based on predefined criteria 2. System evaluates users based on defined criteria (ex: skill level, risk level) 3. System automatically assigns users to the group 6A1) Required fields do not meet constraints 1. System detects missing or invalid input fields (ex: group name is empty or exceeds character limit, criteria not selected) 2. System prevents progression 3. System displays descriptive error messages specifying invalid or missing fields 4. Actor updates the group information 9A1) No users selected 1. System detect that no users have been selected 2. System prompts actor to either: ○ Select at least one user, or ○ Proceed without assigning users 3. If actor selects users resume on step 9 4. If actor proceeds without users continue to step 10 10A1) Actor cancels group creation 1. Actor cancel the action before confirmation 2. System aborts group creation process. 3. System discards entered data. 4. No group is created.

	11A1) System fails to create a group 1. System encounters an error while creating the group or assigning users 2. System does not create the group 3. System logs the error 4. System displayed an error message to the actor
--	--

3.24. Remove Groups / UC24 [Author Name: Jeanine Gomez]

Use Case Name:	Remove Groups
Description:	The use case describes how an admin removes existing user groups that are no longer needed, ensuring the system remains organized and up to date.
Primary Actor(s):	System Administrator
Trigger:	Actor determines that a group is no longer needed or relevant
Precondition(s):	• Actor is authenticated and authorized • Group exists in the system
Postcondition(s):	• System deletes the group is deleted from the system • System unassigns or reassigns users previously associated with the group • System updates records • System logs the action
Success Scenario (or Normal Flow):	1. Actor navigates to Group Management module 2. System displays list of groups 3. Actor selects a group to remove 4. System displays group details and assigned users 5. System checks whether the group contains assigned users 6. System prompts actor for confirmation of deletion (Mandatory) 7. Actor confirms deletion (Mandatory) 8. System removes the group (Mandatory) 9. System updates user assignments (unassigns or reassigns users) 10. System update related records 11. System logs the action in the audit system 12. System displays confirmation of successful deletion.
Alternative Courses:	5A1) Group contains assigned users 1. System determines that users are still assigned to the

	group. 2. System prompts actor to reassign or unassign users before deletion. 3. System prevents deletion from continuing until users are reassigned or removed. 6A1) Actor cancels deletion 1. Actor selects Cancel 2. System aborts the deletion process 3. System returns actor to the Group Management module 4. No changes are made to the group 8A1) System error during deletion 1. System encounters an error 2. System fails to delete the group 3. System logs the error 4. System notifies actor of the failure
--	--

3.25. Generate License Keys / UC25 [Author Name: Jeanine Gomez]

Use Case Name:	Generate License Keys
Description:	This use case describes how a system administrator generates unique license keys that allow individual users to securely access specific courses or content. Each license key is assigned to a single user to ensure controlled and private access.
Primary Actor(s):	System Administrator
Trigger:	Actor need to create license keys for users to grant access to courses or restricted content.
Precondition(s):	• Actor is authenticated and authorized • Course or content associated with the license key exists • System is capable of generating unique license keys • Number of keys or users is specified
Postcondition(s):	• System generates unique license key(s) • System stores license key(s) database • System links license key(s) to a course or access level • System enables licence key(s) to users
Success Scenario (or Normal Flow):	1. Actor navigates to License Key Management module 2. System displays license key management options

	3. Actor selects course or content to associate with license keys 4. System retrieves and displays selected course/content details 5. Actor specifies number of license keys to generate 6. System validates the requested number of keys (Mandatory) 7. Actor initiates license key generation (Mandatory) 8. System generates unique license keys (Mandatory) 9. System stores generated license keys in database 10. System links license keys to the selected course or access level 11. System displays generated keys to actor 12. Actor distributes license keys to users
Alternative Courses:	3A1) Invalid or unavailable content 1. System determines the selected content is invalid or unavailable. 2. System displays an error message. 3. System prevents the process from continuing. 6A1) Invalid number of keys 1. System determines the number is invalid (ex: zero, negative, or exceeds limit). 2. System prevents the generation process. 3. System displays an error message. 4. Actor enters a valid number. 7A) Actor cancels the generation 1. Actor cancels the generation process. 2. System aborts the operation. 3. No license keys are generated. 8A1) System error during key generation 1. System encounters an error or duplication issue. 2. System fails to generate keys. 3. System logs the error. 4. System displays an error notification to actor. 8B1) Bulk or individual key generation 1. System allow selection between bulk or individual key generation. 2. System processes generation based on selected method. 8C1) Keys with expiration or usage limits 1. System applies expiration dates or usage limits based on configuration. 2. System stores keys with associated constraints.

3.26. Add User / UC26 [Author Name: Anthony D'Alauro]

Use Case Name:	Add user
Description:	The actor may need to manually manage accounts, such as adding a user account to the system environment.
Primary Actor(s):	System Admin
Trigger:	The actor needs to add a user account to the system.
Precondition(s):	• Actor is logged in • Actor has 'Administrator' role
Postcondition(s):	• The user account is created
Success Scenario (or Normal Flow):	1. Actor clicks on the users navigation button 2. System presents all users in the system 3. Actor clicks on +User 4. Actor fills in the following fields: a. Display name b. Email Address c. Role 5. Actor clicks on submit 6. System checks if the email exists already 7. The system creates the account
Alternative Courses:	6A1) The actor requests to create an account with an existing email 1. The system presents an error with text: 'user with that email already exists' 2. The system does not create the user account

3.27. Remove User / UC27 [Author Name: Anthony D'Alauro]

Use Case Name:	Remove user
Description:	The actor may need to manually manage accounts, such as removing a user account to the system environment.
Primary Actor(s):	System Admin


Trigger:	The actor needs to delete a user account to the system.
Precondition(s):	• Actor is logged in • User account has 'Administrator' role
Postcondition(s):	• The user account is deleted and no longer exists
Success Scenario (or Normal Flow):	1. Actor clicks on the users navigation button 2. System presents all users in the system 3. Actor clicks on the delete user button 4. System checks if the user account exists 5. System deletes the user account
Alternative Courses:	4A1) The actor attempts to delete a user that does not exist 1. The system displays a 'user not found' message and does not complete any delete action

4. Use Case Diagram

[Instructions: In the space given below, provide the **use case diagram** for PhishGuard project.]

Link to view in detail:

https://lucid.app/lucidchart/37863dbe-0b8a-48ca-8a1b-4710af0c539a/edit?viewport_loc=-544%2C-90%2C2226%2C1125%2C0_0&invitationId=inv_a6ebaa49-fd63-48c5-b7ec-99abf29374af

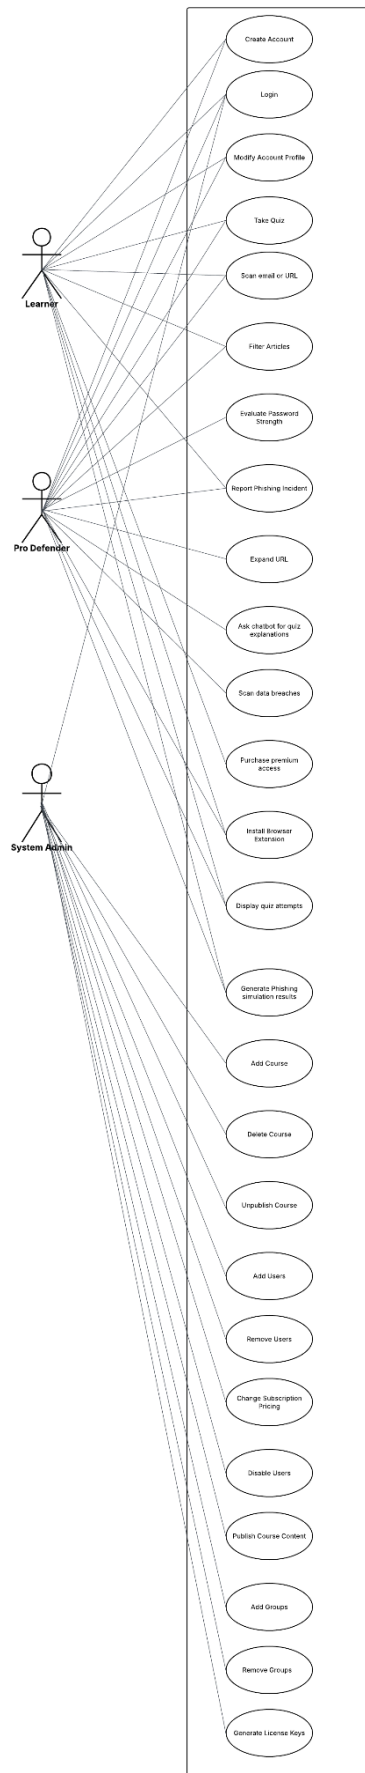

5. Constraints and Limitations

The **Constraint** field lists the constraint or limitation for the project. The **USE CASE ID** field lists the related use cases (if any) that provides additional context for the constraint.

Constraint	USE CASE ID


6. UI Specifications (Prototype)

Based on the use cases described in Section 3, provide the prototype for what the PhishGuard website's interface would look like. UI design is a creative activity and you are allowed to create the website based on your own vision (i.e., team's vision). Additionally, you can use the UI design tool of your choice. Here are helpful resources to find the right UI design tools:

Your prototype should be interactive (i.e., clickable) and simulate the look and feel of the final website.

Prototype link: <https://spectacular-phish-proof-pro.base44.app>

Landing Page:

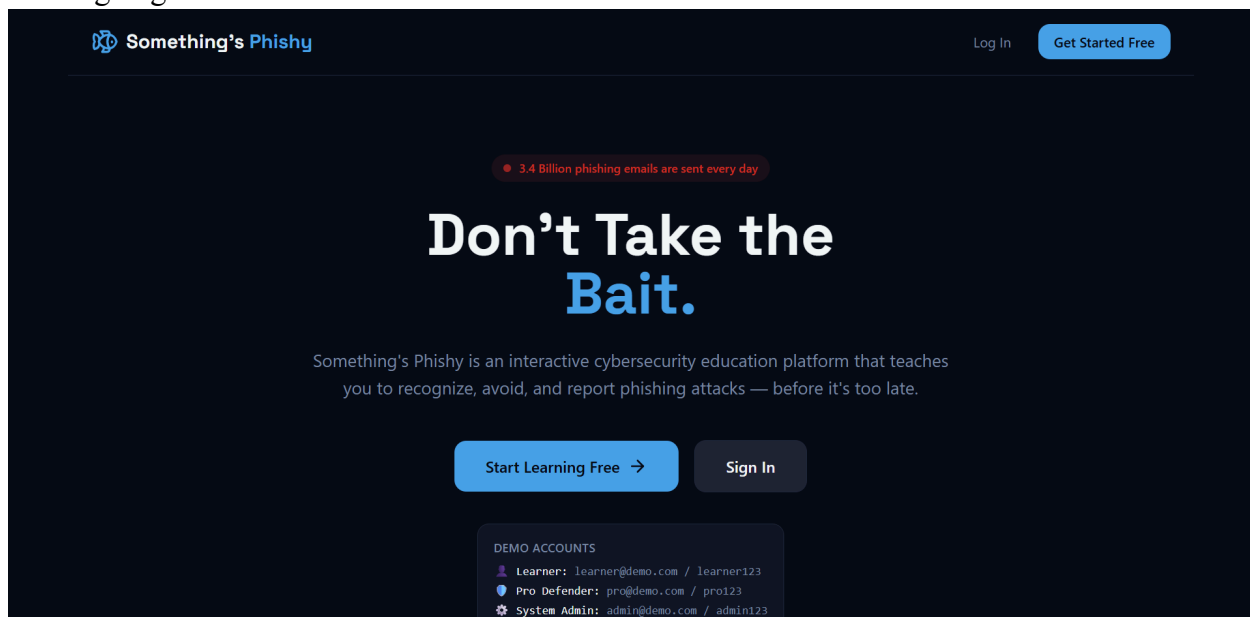

3.4B

Phishing emails sent daily

15%

Of all data breaches

\$4.88M

Average breach cost

97%

Users can't identify sophisticated phishing

Everything You Need to Stay Safe

From beginner lessons to advanced security tools, we've got you covered.

5 Training Modules
Structured lessons from intro to prevention, built for all skill levels.

AI Phishing Scanner
Analyze suspicious emails and URLs instantly with our AI-powered tool.

Security Toolkit
Password tester, URL expander, and breach checker all in one place.

Threat Intelligence
Live threat feed with the latest phishing campaigns and attack vectors.

Choose Your Plan

Learner
Free
All the basics to get started

5 Training Modules

Interactive Quizzes

Resource Library

Incident Reporting

Progress Tracking

Threat Feed

Get Started Free

Pro Defender
\$9.99 /month
Everything in Free, plus:

AI Email Scanner Plugin

Security Toolkit Access

URL Expander & Breach Checker

Password Strength Tester

AI Chatbot

Priority Support


Upgrade to Pro

Something's Phishy

© 2026 Something's Phishy. A cybersecurity education platform.

35

Create account:

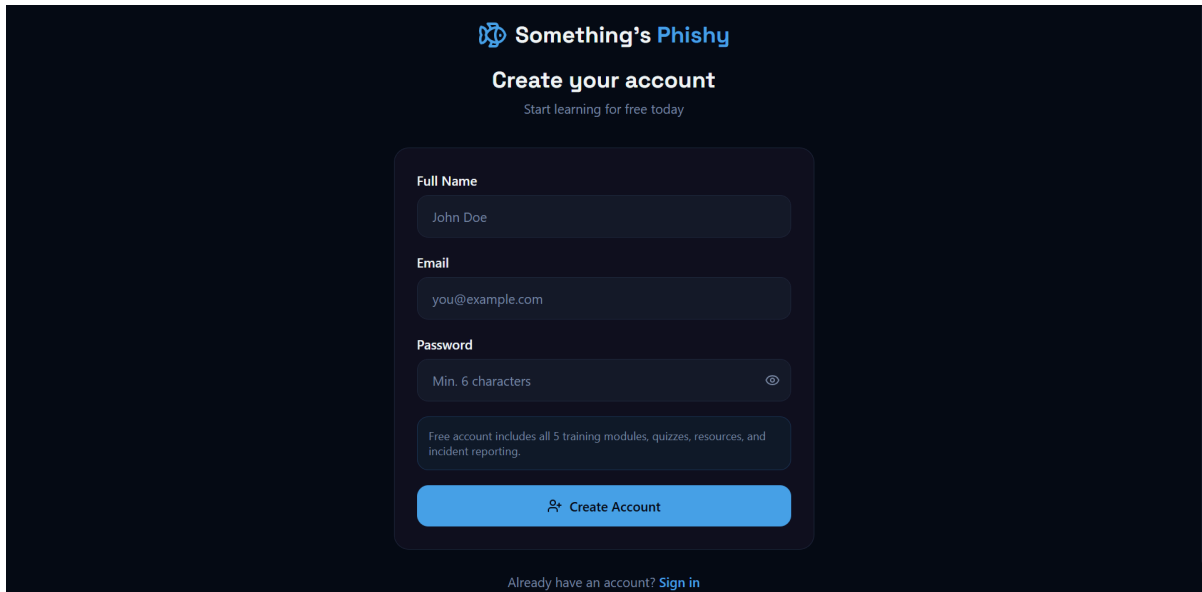

The 'Create your account' page features a dark blue background with the 'Something's Phishy' logo at the top. Below the logo, the heading 'Create your account' is followed by the subtext 'Start learning for free today'. The form contains three input fields: 'Full Name' (with 'John Doe' as a placeholder), 'Email' (with 'you@example.com'), and 'Password' (with 'Min. 6 characters' and a toggle icon). A text box below the password field states: 'Free account includes all 5 training modules, quizzes, resources, and incident reporting.' A blue 'Create Account' button is at the bottom of the form. At the very bottom of the page, a link says 'Already have an account? Sign in'.

Something's Phishy

Create your account

Start learning for free today

Full Name

John Doe

Email

you@example.com

Password


Min. 6 characters

Free account includes all 5 training modules, quizzes, resources, and incident reporting.

Create Account

Already have an account? [Sign in](#)

Login:

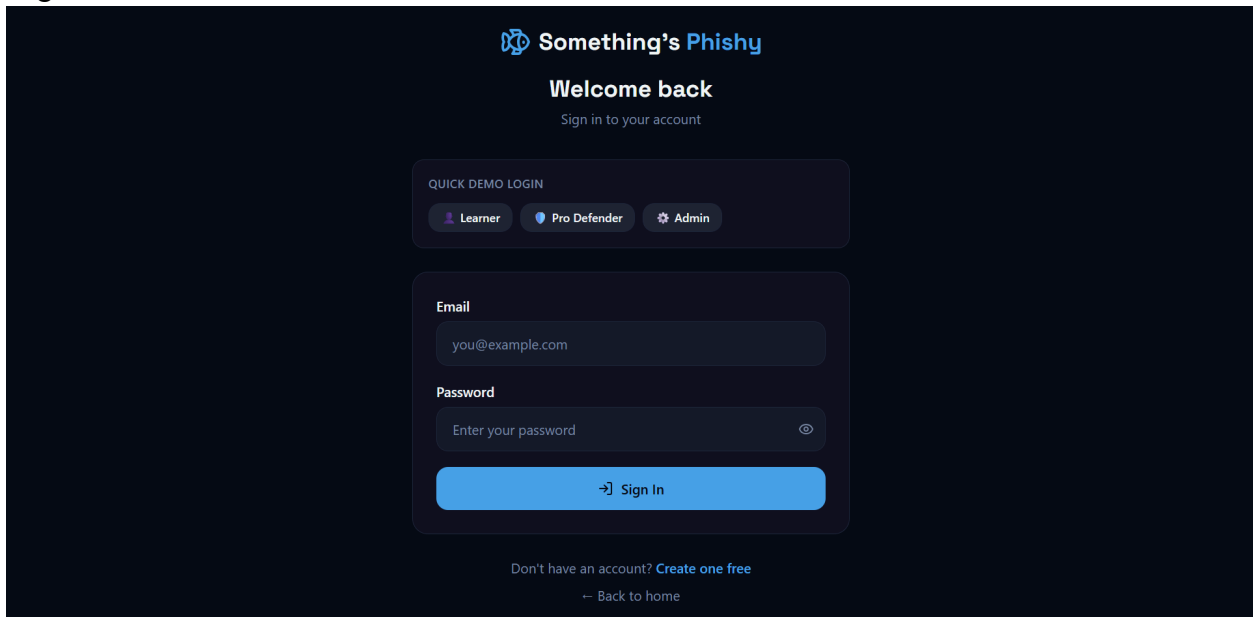

The 'Welcome back' login page has a dark blue background with the 'Something's Phishy' logo. The heading 'Welcome back' is followed by 'Sign in to your account'. A 'QUICK DEMO LOGIN' section offers three buttons: 'Learner' (with a person icon), 'Pro Defender' (with a shield icon), and 'Admin' (with a gear icon). Below this is a form with 'Email' (placeholder 'you@example.com') and 'Password' (placeholder 'Enter your password' and a toggle icon). A blue 'Sign In' button is at the bottom of the form. At the bottom of the page, a link says 'Don't have an account? Create one free' and another link says 'Back to home'.

Something's Phishy

Welcome back

Sign in to your account

QUICK DEMO LOGIN

[Learner](#) [Pro Defender](#) [Admin](#)

Email

you@example.com

Password

Enter your password

Sign In

Don't have an account? [Create one free](#)

[Back to home](#)

Dashboard:

The dashboard for 'Something's Phishy' shows a welcome message to Alex and a list of navigation options on the left. The main area displays four key metrics: 3 courses enrolled, 12 quizzes passed with an 85% average score, 28 threats scanned with 3 flagged, and a security score of 78. At the bottom, there are links for 'Course Progress' and 'Quick Actions'.

Something's Phishy

Welcome back, Alex

Your cybersecurity awareness training platform. Learn to identify and defend against phishing attacks through interactive courses and AI-powered tools.

[Continue Learning](#) [Scan Now](#)

Metric	Value	Details
Courses Enrolled	3	+1 this week
Quizzes Passed	12	85% avg score
Threats Scanned	28	3 flagged
Security Score	78	+5 points

[Course Progress](#) [View All >](#) [Quick Actions](#)

Training Modules:

The Training Modules page shows a progress bar for the overall course (0/5 Complete) and a list of three modules. The first module, 'Introduction to Phishing', is available for study. The other two, 'Types of Phishing Attacks' and 'Impacts of Phishing', are locked and require completing the first module to unlock.

Something's Phishy

Training Modules

Read each module first, then pass the quiz (70%) to unlock the next one.

Overall Progress 0/5 Complete

0% of course completed

Module	Status	Duration	Questions	Action
1 Introduction to Phishing	Available	15 min	10 quiz questions	Study Quiz
Types of Phishing Attacks	LOCKED	20 min	10 quiz questions	Study Quiz
Impacts of Phishing	LOCKED			Study

[Sign Out](#)

Module Content:

 **Something's Phishy**

Dashboard

Courses

AI Scanner

Security Toolkit

AI Chatbot

Email Plugin

Resources

Report Incident

Quiz History

Alex Johnson

Learner

Sign Out

← Back to Courses

Module 1 15 min

Introduction to Phishing

Learn what phishing is, how it works, and why it's one of the most dangerous cyber threats.

▶ Video Lesson

▶

What is Phishing? Learn how this attack works

Watch on YouTube [↗](#)

📖 Lesson Content

Phishing is a type of cyberattack that uses fraudulent emails, text messages, phone calls or websites to trick people into sharing sensitive data, downloading malware or otherwise exposing themselves to cybercrime.

Phishing attacks are a form of social engineering. Unlike other cyberattacks that directly target networks and resources, social engineering attacks use human error, fake stories and pressure tactics to manipulate victims into unintentionally harming themselves or their organizations.

In a typical phishing scam, a hacker pretends to be someone the victim trusts, like a colleague,

Phishing is popular among cybercriminals and highly effective. According to IBM's Cost of a Data Breach report, phishing is the most common data breach vector, accounting for 15% of all breaches. Breaches caused by phishing cost organizations an average of USD 4.88 million.

Phishing is a significant threat because it exploits people rather than technological vulnerabilities. Attackers don't need to breach systems directly or outsmart cybersecurity tools. They can trick people who have authorized access to their target into doing their dirty work.

To combat phishing, organizations must combine advanced threat detection tools with robust employee education to ensure that users can accurately identify and safely respond to scam attempts.

Key Takeaways

- Phishing uses fraudulent messages to trick users into sharing sensitive data
- It's a form of social engineering that exploits human trust
- Phishing accounts for 15% of all data breaches, costing ~\$4.88M per incident
- Combining security tools with user education is the best defense

🔗 Read More: Written Resource

Take the Quiz >

<https://spectacular-phish-proof-pro.base44.app>

Quiz:

The screenshot shows a web application interface for a phishing quiz. On the left is a dark sidebar with a logo 'Something's Phishy' and a menu with items: Dashboard, Courses, AI Scanner, Security Toolkit, AI Chatbot, Email Plugin, Resources, Report Incident, and Quiz History. Below the menu is a user profile for 'Alex Johnson' with the role 'Learner' and a 'Sign Out' button. The main content area has a 'Back to Courses' link and the title 'Introduction to Phishing — Quiz' with a subtitle '10 questions - Answer all before submitting'. The first question is 'What is phishing?' with four options: A (A method of encrypting data), B (A type of cyberattack that tricks users into sharing sensitive information), C (A network security protocol), and D (A software update process). The second question is 'Which of the following is commonly used in phishing attacks?' with option A (Hardware failures) visible.

Something's Phishy

← Back to Courses

Introduction to Phishing — Quiz

10 questions - Answer all before submitting

1 What is phishing?

- A A method of encrypting data
- B A type of cyberattack that tricks users into sharing sensitive information
- C A network security protocol
- D A software update process

2 Which of the following is commonly used in phishing attacks?

- A Hardware failures

Sign Out

<https://spectacular-phish-proof-pro.base44.app>

AI Phishing Scanner:

The screenshot shows the 'AI Phishing Scanner' interface. The sidebar is identical to the previous one. The main content area has the title 'AI Phishing Scanner' and the instruction 'Paste email content or a URL to analyze for phishing indicators'. There are two tabs: 'Email' (selected) and 'URL'. Below the tabs is a large text input field with placeholder text 'Paste suspicious email content here (try: 'urgent', 'paypal', 'verify account')...'. A 'Scan for Phishing' button is below the input field. The 'Recent Scans' section shows two results: an email 'Fake Netflix renewal email' detected as 'Phishing' 2 min ago, and a URL 'https://secure-paypal.verify-now.com' detected as 'Phishing' 1 hour ago.

Something's Phishy

AI Phishing Scanner

Paste email content or a URL to analyze for phishing indicators

Email URL

Paste suspicious email content here (try: 'urgent', 'paypal', 'verify account')...

Scan for Phishing

Recent Scans

Email - Fake Netflix renewal email	Phishing 2 min ago
URL - https://secure-paypal.verify-now.com	Phishing 1 hour ago

Sign Out

Resource Library:

The screenshot shows the 'Resource Library' page. On the left is a dark sidebar with a logo at the top and a list of navigation items: Dashboard, Courses, AI Scanner, Security Toolkit, AI Chatbot, Email Plugin, Resources (highlighted), Report Incident, and Quiz History. Below the list is a user profile for 'Alex Johnson' with the role 'Learner' and a 'Sign Out' button. The main content area has a title 'Resource Library' and a subtitle 'Browse cybersecurity articles, guides, and best practices'. It features a search bar with the placeholder 'Search articles...' and a 'Search' button. Below the search bar are filter tabs: All, Phishing, Email Security, Password Safety, Social Engineering, and Privacy. The page displays four article cards. The first card, '10 Ways to Spot a Phishing Email', is under the 'Phishing' filter and describes key indicators for spotting phishing emails, with a 5-minute read time from March 15, 2026. The second card, 'Understanding Social Engineering Attacks', is under the 'Social Engineering' filter and provides a comprehensive guide to social engineering techniques, with an 8-minute read time from March 10, 2026. The third card, 'Password Best Practices for 2026', is under the 'Password Safety' filter and offers updated guidelines for creating and managing strong passwords, with a 4-minute read time from March 8, 2026. The fourth card, 'How Email Encryption Works', is under the 'Email Security' filter and gives a beginner-friendly explanation of email encryption protocols, with a 6-minute read time from March 5, 2026. Each card includes a bookmark icon in the top right corner.

Incident Report:

The screenshot shows the 'Report Phishing Incident' form. The sidebar is identical to the previous page. The main content area has a title 'Report Phishing Incident' and a subtitle 'Submit suspicious emails or URLs for analysis and review'. The form is contained within a light gray box and has three required sections, each marked with a red asterisk. The 'Incident Type' section has three radio buttons: 'Email' (selected), 'URL', and 'SMS'. The 'Suspicious Content' section has a large text area with the placeholder 'Paste the suspicious URL or email content here...' and a character count '0/5000'. The 'Description' section has a text area with the placeholder 'Describe what happened...'. The 'Date of Incident' section has a date input field with the placeholder 'mm/dd/yyyy' and a calendar icon on the right.

Something's Phishy

Dashboard

Courses

AI Scanner

Security Toolkit

AI Chatbot

Email Plugin

Resources

Report Incident

Quiz History

Alex JohnsonLearner

Sign Out

Describe what happened...

Date of Incident *

mm/dd/yyyy

Sender Info (optional)

Email or phone number

Subject Line (optional)

Email subject

Confidence Level (optional)

Select...

Click to upload screenshots (jpg, png, pdf)

Optional supporting evidence

Submit Report

Quiz History:

Something's Phishy

AI Scanner

Security Toolkit

AI Chatbot

Email Plugin

Resources

Report Incident

Quiz History

Profile

Go Pro

Alex JohnsonLearner

Sign Out

Quiz History

Your completed quiz attempts, scores and grades

5Quizzes Taken

3Modules Passed

9Total Attempts

Phishing Fundamentals

2 attempts · Best score: 80%

PASSED

ATTEMPT HISTORY

#1

6/10 correct

Apr 8, 2026

60%

Fail

#2

8/10 correct

Apr 10, 2026

80%

Pass

Email Security Essentials

3 attempts · Best score: 60%

NOT PASSED

41

Profile:

The 'Profile' page displays user information for Alex Johnson (learner@demo.com), a LEARNER. It shows progress metrics: 2/5 Modules Done, 73% Avg Score, 3/6 Badges, and 14 Days Active. A section titled 'Badges & Achievements' lists: First Quiz (Earned), On Fire (Earned), Defender, Champion, Speed Run (Earned), and Graduate. The left sidebar includes navigation options like AI Scanner, Security Toolkit, AI Chatbot, Email Plugin, Resources, Report Incident, Quiz History, Profile, Go Pro, and Sign Out.

Something's Phishy

Profile

Alex Johnson
learner@demo.com
LEARNER Learner

Member since Jan 2026 · Plan: Free

2/5
Modules Done

73%
Avg Score

3/6
Badges

14
Days Active

Badges & Achievements

- First Quiz (Earned)
- On Fire (Earned)
- Defender
- Champion
- Speed Run (Earned)
- Graduate

Go Pro PRO

Alex Johnson
Learner

Sign Out

Upgrade Plan:

The 'Upgrade Plan' page promotes the 'Pro Defender' plan. It compares the 'Learner Free' plan with the 'Pro Defender \$9.99/month' plan. The Pro Defender plan includes an Email Scanner Plugin, URL Expander Tool, Breach Checker, AI Chatbot Access, Password Strength Tester, and Priority Support. A 'RECOMMENDED' badge is above the Pro Defender plan. The left sidebar is identical to the Profile page.

Something's Phishy

Become a Pro Defender

UPGRADE YOUR PROTECTION

Unlock advanced security tools and the AI-powered email scanner plugin to stay protected.

Learner Free
Access all courses & quizzes

- ✓ All training modules
- ✓ Quizzes & assessments
- ✓ AI email/URL scanner
- ✓ Resource library
- ✓ Incident reporting
- ✓ Progress tracking

Current Plan

Pro Defender \$9.99/month
RECOMMENDED
Everything in Free, plus:

- ✓ Email Scanner Plugin
- ✓ URL Expander Tool
- ✓ Breach Checker
- ✓ AI Chatbot Access
- ✓ Password Strength Tester
- ✓ Priority Support

Upgrade Now


Or earn it free by passing all quizzes at 100% on first try!

Go Pro PRO


Alex Johnson
Learner

Sign Out


Security Toolkit:

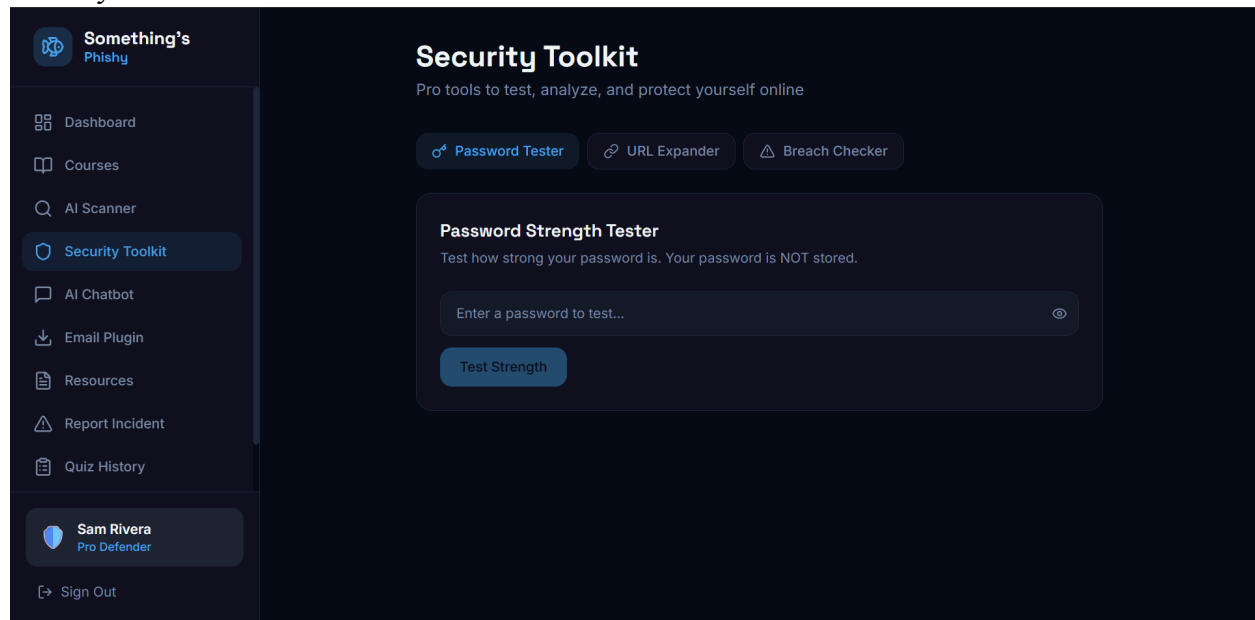


AI Chatbot:

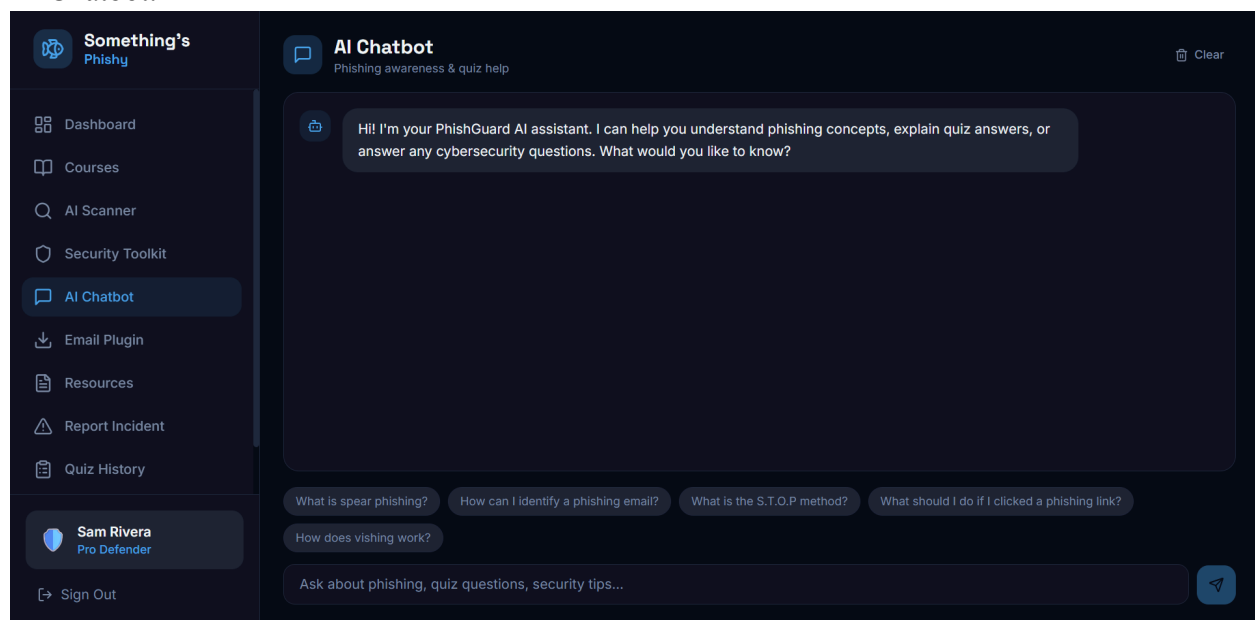

Email Plugin:

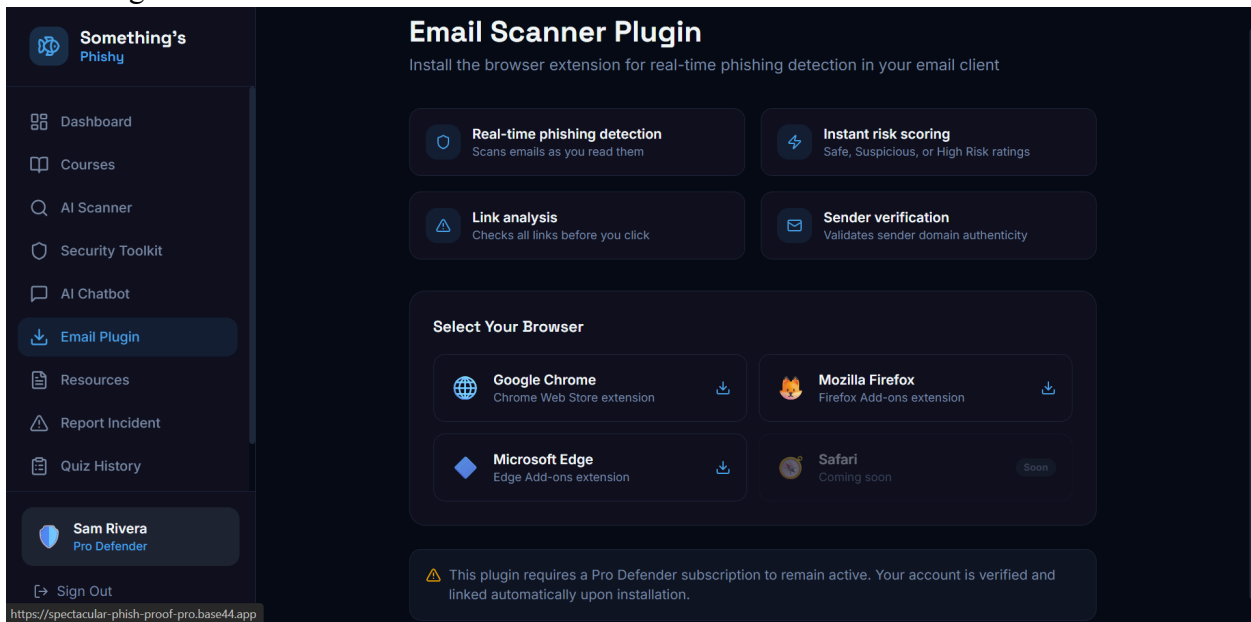

Admin Dashboard:

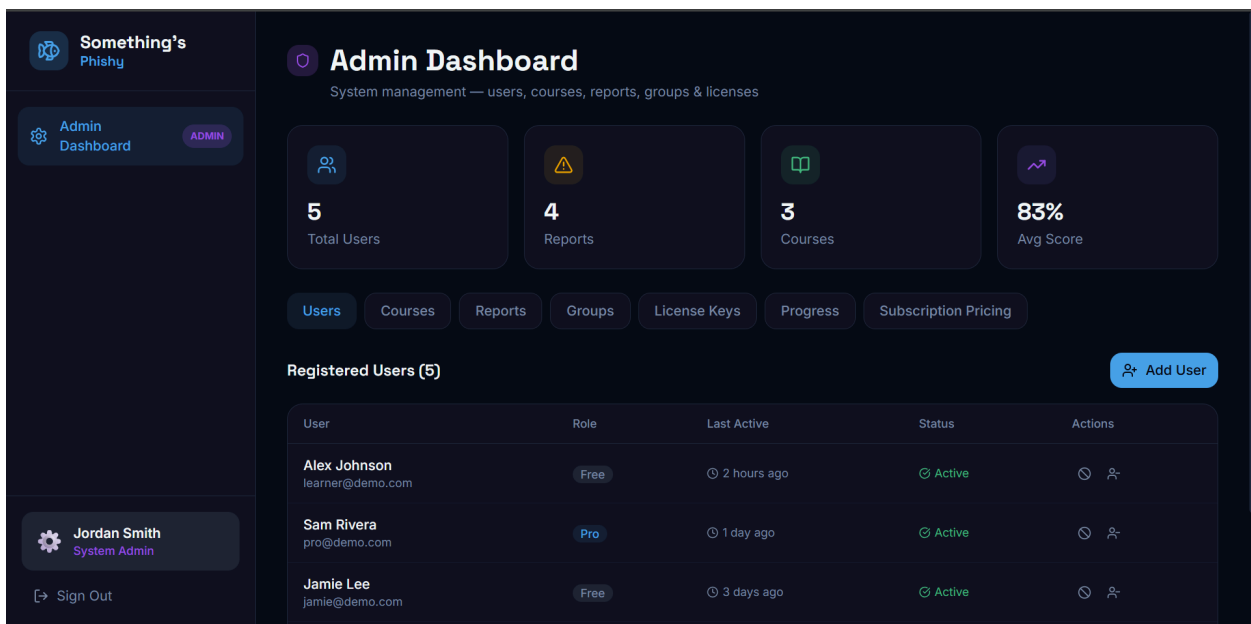

7. Definitions and Acronyms

Term	Definition
Modules	Learning tools such as videos, literature, etc.
AI	Artificial Intelligence
URL	“Uniform Resource Locator” - Link to a web page.
MFA	Multi Factor Authentication
VPN	Virtual Private Network
API	Application Programming Interface
Phishing	A cyber attack where attackers attempt to trick users into revealing sensitive information.
Course	Container for modules