

Category Theory and Functional Programming

Subject Introduction

Andrés Sicard-Ramírez

Universidad EAFIT

Semestre 2022-2

Preliminaries

Textbook

S. Abramsky and N. Tzevelekos (2011). Introduction to Categories and Categorical Logic.

Convention

The numbers and page numbers assigned to chapters, examples, exercises, figures, quotes, sections and theorems on these slides correspond to the numbers assigned in the textbook.

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

“Algebra” of Functions

Definition

Let $f : X \rightarrow Y$ and $g : Y \rightarrow Z$ be two functions. The **composite of g after f** is the function defined by

$$g \circ f : X \rightarrow Z := x \mapsto g(f x).$$


“Algebra” of Functions

Definition

Let $f : X \rightarrow Y$ and $g : Y \rightarrow Z$ be two functions. The **composite of g after f** is the function defined by

$$g \circ f : X \rightarrow Z := x \mapsto g(fx).$$

Diagram.



“Algebra” of Functions

Remark

The textbook writes “ $g \circ f(x)$ ” instead of “ $(g \circ f) x$ ”.

“Algebra” of Functions

Theorem

Let $f : X \rightarrow Y$, $g : Y \rightarrow Z$ and $h : Z \rightarrow W$ be three functions. Then

$$h \circ (g \circ f) = (h \circ g) \circ f.$$

That is, the composition of functions is **associative**.



(continued on next slide)

“Algebra” of Functions

Theorem (continuation)

Diagrams.

(i)



$$h \circ (g \circ f) = (h \circ g) \circ f$$


(continued on next slide)

“Algebra” of Functions

Theorem (continuation)

Diagrams.

(ii) In (Mac Lane 1998, p. 8).

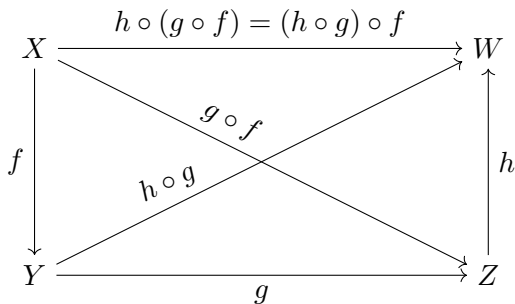


(continued on next slide)

“Algebra” of Functions

Theorem (continuation)

Diagrams.

(iii) In (Awodey 2010, p. 3).

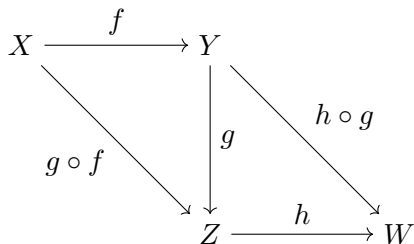

$$h \circ (g \circ f) = (h \circ g) \circ f$$

“Algebra” of Functions

Definition

Let X be a set. The **identity function on X** is defined by

$$\mathrm{id}_X : X \rightarrow X := x \mapsto x.$$

“Algebra” of Functions

Theorem

Let $f : X \rightarrow Y$ be a function. Then

$$f \circ \text{id}_X = f = \text{id}_Y \circ f.$$

That is, the identity functions are the **unit** for composition.



(continued on next slide)

“Algebra” of Functions

Theorem (continuation)

Diagrams.

(i)




(continued on next slide)

“Algebra” of Functions

Theorem (continuation)

Diagrams.

(ii) In (Awodey 2010, p. 4).

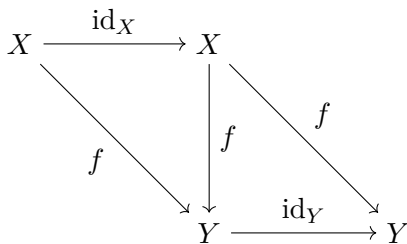

$$f \circ \text{id}_X = f = \text{id}_Y \circ f$$

From Elements to Functions

Elements as functions

Let $\mathbb{1} := \{*\}$ be a one-element set and let X be a set. For each $x \in X$ we define the function

$$\bar{x} : \mathbb{1} \rightarrow X := * \mapsto x.$$

From Elements to Functions

Elements as functions

Let $\mathbb{1} := \{*\}$ be an one-element set and let X be a set. For each $x \in X$ we define the function

$$\bar{x} : \mathbb{1} \rightarrow X := * \mapsto x.$$

Theorem

Let X be a set. The set X and the set of functions $\{\bar{x} : \mathbb{1} \rightarrow X \mid x \in X\}$ are isomorphic.

From Set Theory to Category Theory

Definition

Let $f : X \rightarrow Y$ be a function. The function f is

injective	if	for all $x, x' \in X$, $f x = f x'$ implies $x = x'$
surjective	if	for all $y \in Y$, there exists $x \in X$ such that $f x = y$
monic	if	for all $g, h : Z \rightarrow X$, $f \circ g = f \circ h$ implies $g = h$
epic	if	for all $i, j : Y \rightarrow Z$, $i \circ f = j \circ f$ implies $i = j$

From Set Theory to Category Theory

Definition

Let $f : X \rightarrow Y$ be a function. The function f is

injective	if	for all $x, x' \in X$, $f x = f x'$ implies $x = x'$
surjective	if	for all $y \in Y$, there exists $x \in X$ such that $f x = y$
monic	if	for all $g, h : Z \rightarrow X$, $f \circ g = f \circ h$ implies $g = h$
epic	if	for all $i, j : Y \rightarrow Z$, $i \circ f = j \circ f$ implies $i = j$

Remark

Nouns: Injection, surjection, monomorphism and epimorphism.

From Set Theory to Category Theory

Theorem (Proposition 1)

Let $f : X \rightarrow Y$. Then,

- (i) the function f is injective iff f is monic,
- (ii) the function f is surjective iff f is epic.

From Set Theory to Category Theory

Theorem (Proposition 1)

Let $f : X \rightarrow Y$. Then,

- (i) the function f is injective iff f is monic,
- (ii) the function f is surjective iff f is epic.

Exercise

Let $f : X \rightarrow Y$ be a function. Show that f is injective iff it is monic (Proposition 1.i).

Exercise

Let $f : X \rightarrow Y$ be a function. Show that f is surjective iff it is epic (Exercise 2).

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

From Functional Programming to Category Theory

Types, composition, identities, applicative and functional laws

Whiteboard.

Applicative laws

$$\text{id } x = x,$$

$$(g \circ f) x = g (f x),$$

$$\text{fst } (x, y) = x,$$

$$\langle f, g \rangle x = (f x, g x).$$

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Definition of a Category

Definition

A **category** $\mathcal{C}$ consists of:

- (i) A collection $\text{Obj}(\mathcal{C})$ of **objects**.

Notation. Objects are denoted by $A, B, C, \dots$

- (ii) A collection $\text{Ar}(\mathcal{C})$ of **arrows** or **morphisms**.

Notation. Arrows are denoted by $f, g, h, \dots$

(continued on next slide)

Definition of a Category

Definition (continuation)

(iii) Two mappings

$\text{dom} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C})$ (source),

$\text{cod} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C})$ (target).

Definition of a Category

Definition (continuation)

(iii) Two mappings

$\text{dom} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C})$ (source),

$\text{cod} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C})$ (target).

These mappings assign to each arrow f its **domain** $\text{dom } f$ and its **codomain** $\text{cod } f$.

Definition of a Category

Definition (continuation)

(iii) Two mappings

$$\begin{array}{ll} \text{dom} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C}) & \text{(source),} \\ \text{cod} : \text{Ar}(\mathcal{C}) \rightarrow \text{Obj}(\mathcal{C}) & \text{(target).} \end{array}$$

These mappings assign to each arrow f its **domain** $\text{dom } f$ and its **codomain** $\text{cod } f$.

Notation. An arrow f with $\text{dom } f = A$ and $\text{cod } f = B$ is written $A \xrightarrow{f} B$ or $f : A \rightarrow B$.

(continued on next slide)

Definition of a Category

Definition (continuation)

Notation. The collection $\mathcal{C}(A, B)$ is the collection of arrows from object A to object B , that is,

$$\mathcal{C}(A, B) := \left\{ f \in \text{Ar}(\mathcal{C}) \mid A \xrightarrow{f} B \right\}.$$

Definition of a Category

Definition (continuation)

Notation. The collection $\mathcal{C}(A, B)$ is the collection of arrows from object A to object B , that is,

$$\mathcal{C}(A, B) := \left\{ f \in \text{Ar}(\mathcal{C}) \mid A \xrightarrow{f} B \right\}.$$

Notation. The collection $\mathcal{C}(A, B)$ also will be denoted by $\text{Mor}_{\mathcal{C}}(A, B)$.

Definition of a Category

Definition (continuation)

Notation. The collection $\mathcal{C}(A, B)$ is the collection of arrows from object A to object B , that is,

$$\mathcal{C}(A, B) := \left\{ f \in \text{Ar}(\mathcal{C}) \mid A \xrightarrow{f} B \right\}.$$

Notation. The collection $\mathcal{C}(A, B)$ also will be denoted by $\text{Mor}_{\mathcal{C}}(A, B)$.

Notation. If the collection $\mathcal{C}(A, B)$ is a **set** it is called a **hom-set** and it is denoted $\text{hom}_{\mathcal{C}}(A, B)$.

Definition of a Category

Definition (continuation)

Notation. The collection $\mathcal{C}(A, B)$ is the collection of arrows from object A to object B , that is,

$$\mathcal{C}(A, B) := \left\{ f \in \text{Ar}(\mathcal{C}) \mid A \xrightarrow{f} B \right\}.$$

Notation. The collection $\mathcal{C}(A, B)$ also will be denoted by $\text{Mor}_{\mathcal{C}}(A, B)$.

Notation. If the collection $\mathcal{C}(A, B)$ is a **set** it is called a **hom-set** and it is denoted $\text{hom}_{\mathcal{C}}(A, B)$.

Convention. All the collections $\mathcal{C}(A, B)$ are hom-sets in the textbook.

(continued on next slide)

Definition of a Category

Definition (continuation)

(iv) For all objects A, B, C , a **composition** map

$$\mathcal{C}_{A,B,C} : \mathcal{C}(A, B) \times \mathcal{C}(B, C) \rightarrow \mathcal{C}(A, C).$$

Notation. The map $\mathcal{C}_{A,B,C}(f, g)$ is written $g \circ f$.

Definition of a Category

Definition (continuation)

(iv) For all objects A, B, C , a **composition** map

$$\mathcal{C}_{A,B,C} : \mathcal{C}(A, B) \times \mathcal{C}(B, C) \rightarrow \mathcal{C}(A, C).$$

Notation. The map $\mathcal{C}_{A,B,C}(f, g)$ is written $g \circ f$.

(v) For all object A , an **identity** arrow

$$A \xrightarrow{\text{id}_A} A.$$

(continued on next slide)

Definition of a Category

Definition (continuation)

The above items must satisfy the following axioms, where arrow equality is a **logical primitive**.

Definition of a Category

Definition (continuation)

The above items must satisfy the following axioms, where arrow equality is a **logical primitive**.

(i) Associativity law

For all arrows $A \xrightarrow{f} B$, $B \xrightarrow{g} C$, $C \xrightarrow{h} D$,

$$h \circ (g \circ f) = (h \circ g) \circ f.$$

Definition of a Category

Definition (continuation)

The above items must satisfy the following axioms, where arrow equality is a **logical primitive**.

(i) Associativity law

For all arrows $A \xrightarrow{f} B$, $B \xrightarrow{g} C$, $C \xrightarrow{h} D$,

$$h \circ (g \circ f) = (h \circ g) \circ f.$$

(ii) Unit laws

For all arrow $A \xrightarrow{f} B$,

$$f \circ \text{id}_A = f = \text{id}_B \circ f.$$

Definition of a Category

Remark

Some authors[†] state the unit laws in the following equivalent way:

For all arrows $A \xrightarrow{f} B$ and $B \xrightarrow{g} C$,

$$\text{id}_B \circ f = f,$$

$$g \circ \text{id}_B = g.$$

[†]E.g. (Asperti and Longo 1980; Goldblatt 2006; Mac Lane 1998).

Definition of a Category

Remark

Note that the axioms in the definition of category are generalised monoid axioms.

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Diagrams in Categories


Commutativity of diagrams

A diagram commutes when every possible path from one object to other object is the same.

Diagrams in Categories

Basic cases

(i) Commutativity of a triangle




$$(h = g \circ f)$$

Diagrams in Categories

Basic cases

(v) Commutativity of a square




$$(g \circ f = k \circ h)$$

Diagrams in Categories

Example

Let $A \xrightarrow{f} B$, $B \xrightarrow{g} C$ and $C \xrightarrow{h} D$. The associativity of the composition is equivalent to say that the following diagram commutes.

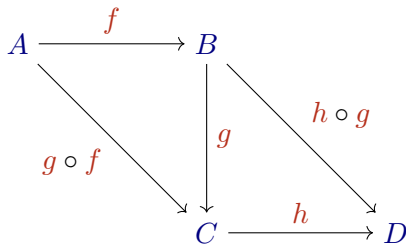


$$(h \circ (g \circ f) = (h \circ g) \circ f)$$

Diagrams in Categories

Example

Let $A \xrightarrow{f} B$. The unit of the identity arrow is equivalent to say that the following diagram commutes.

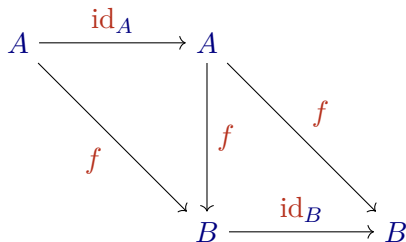

$$(f \circ \text{id}_A = f = \text{id}_B \circ f)$$

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Examples of Categories

Example

The category **Set** of sets and functions.

Examples of Categories

Example

Mathematical structures and structure preserving functions.

- **Pos** (partially ordered sets and monotone functions)
- **Mon** (monoids and monoid homomorphisms)
- **Grp** (groups and group homomorphisms)
- **Top** (topological spaces and continuous functions)

Examples of Categories

Example

Mathematical structures and structure preserving functions.

- **Pos** (partially ordered sets and monotone functions)
- **Mon** (monoids and monoid homomorphisms)
- **Grp** (groups and group homomorphisms)
- **Top** (topological spaces and continuous functions)

Exercise

Show that **Pos**, **Mon**, **Grp** and **Top** are categories (Exercise 6).

Examples of Categories

Remark

The arrows of a category do not have to be functions as shows the following example.

Examples of Categories

Example

The category **Rel**.

- The objects are sets.
- The arrows $X \xrightarrow{R} Y$ are the relations $R \subseteq X \times Y$.
- The arrow composition is the relation composition. Given $X \xrightarrow{R} Y$ and $Y \xrightarrow{S} Z$ then

$$S \circ R := \{ (x, z) \in X \times Z \mid \text{there exists } y \in Y \text{ such as } (x, y) \in R \text{ and } (y, z) \in S \}.$$

- The identity arrow on X is the equality relation on X , that is

$$\text{id}_X := \{ (x, x) \in X \times X \mid x \in X \}.$$

Examples of Categories

Remark

The objects of a category do not have to be sets as show the following examples.

Examples of Categories

Example


The categories **1**, **2**, **3** and **4**. The diagrams do not show the identity arrows.

*


1

* $\longrightarrow$ *

2



3



4

Examples of Categories

Example


The categories **1**, **2**, **3** and **4**. The diagrams do not show the identity arrows.

*


1

* $\longrightarrow$ *

2



3



4

Remark

The category **n** has $n(n+1)/2$ arrows (Zeng [n.d.](#)).

Examples of Categories

Example

The empty category. It has no objects nor arrows.

Examples of Categories

Example


Any monoid is a **one-object** category.

- Arrows: Elements of the monoid
- Composition: Monoid binary operation
- Identity arrow: Monoid unit

Examples of Categories

Example

One-object category from monoid $(\mathbb{N}, +, 0)$.



$$\begin{pmatrix} 0 + n = n \\ 1 + 1 = 2 \\ 1 + 2 = 3 \\ \vdots \end{pmatrix}$$

Examples of Categories

Example

Any pre-ordered set $(P, \preceq)$ is a category.

- Objects: Elements of P
- Arrows: There is an arrow $A \rightarrow B$ iff $A \preceq B$
- Composition: Binary relation $\preceq$
- Identity arrow: The arrow $A \rightarrow A$ because $A \preceq A$

Examples of Categories

Example

Any pre-ordered set $(P, \preceq)$ is a category.

- Objects: Elements of P
- Arrows: There is an arrow $A \rightarrow B$ iff $A \preceq B$
- Composition: Binary relation $\preceq$
- Identity arrow: The arrow $A \rightarrow A$ because $A \preceq A$

Remark

Note that the above category has **at most one** arrow between any two objects.

Examples of Categories

Example

Any category with **at most one** arrow between any two objects is a pre-order.

- Elements of the pre-order: Objects of the category
- Binary relation: $A \preceq B$ iff there is an arrow $A \rightarrow B$

The relation $\preceq$ is transitive because the composition of functions and it is reflexive because the identity arrows.

Examples of Categories

Example

A category for a simple functional programming language given by (adapted from (Pierce 1991)):

- Types: `Nat`, `Bool`, `Unit`, $\cdot \rightarrow \cdot$.
- Built-in functions:

<code>isZero</code>	<code>: Nat → Bool</code>	(test for zero)
<code>not</code>	<code>: Bool → Bool</code>	(negation)
<code>succ</code>	<code>: Nat → Nat</code>	(successor)

- Constants

`zero` : `Nat`; `true`, `false` : `Bool`; `unit` : `Unit`.

(continued on next slide)

Examples of Categories

Example (continuation)


The category is given by:

- Objects: Types
- Arrows:
 - Built-in functions
 - The constants are arrows from `Unit` to the type of the constant
 - Add arrows required by arrow composition
- Identity arrows: Identity functions in each type
- Equating arrows that represent the same functions (according to the semantics of the language)

(continued on next slide)

Examples of Categories

Example (continuation)

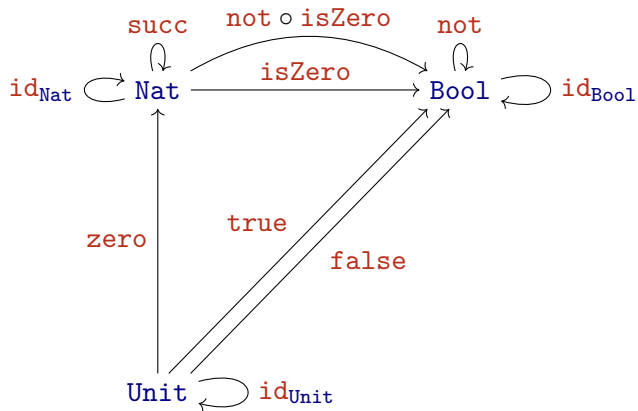

Same functions

$$\left(\begin{array}{l} \text{not} \circ \text{true} = \text{false} \\ \text{not} \circ \text{false} = \text{true} \\ \text{isZero} \circ \text{zero} = \text{true} \\ \text{isZero} \circ \text{succ} = \text{false} \\ \text{unit} = \text{id}_{\text{Unit}} \end{array} \right)$$

Examples of Categories

Exercise

Show an example of a category from logic. See, e.g. (Awodey 2010, § 1.14. Example 10).

Examples of Categories

Example

Hask is the *idealised* category for the **Haskell** programming language.

- Objects: **Haskell**'s (unlifted) types
- Arrows: **Haskell**'s functions
- Composition:

```
(.) :: (b -> c) -> (a -> b) -> a -> c  
g . f = \x -> g (f x)
```

- Identity arrow:

```
id :: a -> a  
id x = x
```

Examples of Categories

Exercise

Given some implementation of categories in [Haskell](#), show two examples of categories in that implementation.

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Monomorphisms

Definition

Let $\mathcal{C}$ be a category and let $A \xrightarrow{f} B$ be an arrow in $\mathcal{C}$. The arrow f is **monic** (or a **monomorphism**) if

for all $C \xrightarrow{g, h} A$, $f \circ g = f \circ h$ implies $g = h$,

that is,

$$C \begin{array}{c} \xrightarrow{g} \\ \xrightarrow{h} \end{array} A \xrightarrow{f} B \quad \text{implies} \quad g = h,$$

where the above diagram commutes.

Epimorphisms

Definition

Let $\mathcal{C}$ be a category and let $A \xrightarrow{f} B$ be an arrow in $\mathcal{C}$. The arrow f is **epic** (or a **epimorphism**) if

for all $B \xrightarrow{i,j} C$, $i \circ f = j \circ f$ implies $i = j$,

that is,

$$A \xrightarrow{f} B \begin{array}{c} \xrightarrow{i} \\ \xrightarrow{j} \end{array} C \quad \text{implies} \quad i = j,$$

where the above diagram commutes.

Isomorphisms

Definition

Let $\mathcal{C}$ be a category. An arrow $A \xrightarrow{i} B$ in $\mathcal{C}$ is an **isomorphism** (or **iso**) if there exists an arrow $B \xrightarrow{j} A$ in $\mathcal{C}$ such that

$$j \circ i = \text{id}_A \quad \text{and} \quad i \circ j = \text{id}_B.$$

Isomorphisms

Definition

Let $\mathcal{C}$ be a category. An arrow $A \xrightarrow{i} B$ in $\mathcal{C}$ is an **isomorphism** (or **iso**) if there exists an arrow $B \xrightarrow{j} A$ in $\mathcal{C}$ such that

$$j \circ i = \text{id}_A \quad \text{and} \quad i \circ j = \text{id}_B.$$


The arrow j is the **inverse** of i and it is denoted by i^{-1} .

(continued on next slide)

Isomorphisms

Definition (continuation)

That is, an arrow $A \xrightarrow{i} B$ is an isomorphism if there exists an arrow $B \xrightarrow{i^{-1}} A$ such that the following diagram commutes

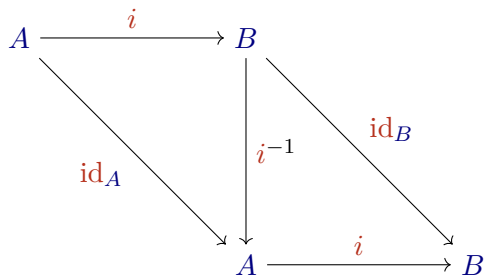

$$\begin{pmatrix} i^{-1} \circ i = \text{id}_A \\ i \circ i^{-1} = \text{id}_B \end{pmatrix}$$

Isomorphisms

Notation

An isomorphism $i : A \rightarrow B$ is denoted by $i : A \xrightarrow{\cong} B$.

Isomorphisms

Notation

An isomorphism $i : A \rightarrow B$ is denoted by $i : A \xrightarrow{\cong} B$.

Definition

Two objects A and B are **isomorphic**, written $A \cong B$, if there exists $i : A \xrightarrow{\cong} B$.

Isomorphisms

Theorem

If an arrow has inverse it is unique.

Exercise

Proof the previous theorem (Exercise 10).

Isomorphisms

Exercise

Show that $\cong$ is an equivalence relation on the objects of a category (Exercise 11).

Isomorphisms

Example

Isomorphisms in **Set** and **Rel** correspond to one-one correspondences (bijections).

Isomorphisms

Example

Isomorphisms in **Grp** correspond to group isomorphisms, in **Pos** to order isomorphisms and in **Top** to homeomorphisms.

Isomorphisms

Example

Recall that any monoid is a one-object category. Any group is a **one-object** category in which every arrow is an **isomorphism**.

Isomorphisms

Example

Recall that any monoid is a one-object category. Any group is a **one-object** category in which every arrow is an **isomorphism**.


Exercise

Verify the previous example.

Isomorphisms

Example

One-object category from monoid $(\mathbb{Z}, +, 0)$.

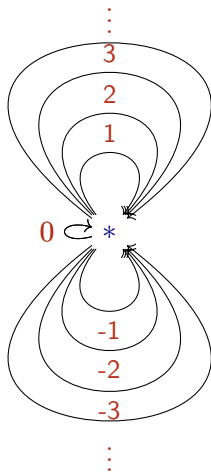

$$\left(\begin{array}{l} 0 + n = n \\ 1 + 1 = 2 \\ 1 + 2 = 3 \\ \vdots \\ 1 + -1 = 0 \\ 2 + -2 = 0 \\ \vdots \end{array} \right)$$

Groupoids

Definition

A **groupoid** is a category in which every arrow is an isomorphism.

Groupoids

Example

A group is one-object grupoid.

Groupoids

Definition

A **setoid** $(X, \sim)$ is a set X equipped with an equivalence relation $\sim$.

Groupoids

Definition

A **setoid** $(X, \sim)$ is a set X equipped with an equivalence relation $\sim$.

Example

Given a setoid $(X, \sim)$ we can define an associated grupoid.

- Objects: Elements of X
- Arrows: There is an arrow $x \rightarrow y$ iff $x \sim y$.
- Composition: From transitivity of $\sim$.
- Identity arrow: From reflexivity of $\sim$.

Monics, Epics and Isos

Theorem (Awodey (2010, Proposition 2.9))

If an arrow is iso then it is monic and epic.

Monics, Epics and Isos

Theorem (Awodey (2010, Proposition 2.9))

If an arrow is iso then it is monic and epic.

Exercise

Proof the previous theorem.

Monics, Epics and Isos

Example (Exercise 1.1.6.e)

In the category **Mon** of monoids and monoid homomorphisms, consider the inclusion map

$$i : (\mathbb{N}, +, 0) \rightarrow (\mathbb{Z}, +, 0)$$

of natural numbers into the integers. Show that this arrow is both monic and epic. Is it an iso?

Monics, Epics and Isos

Example (Exercise 1.1.6.e)

In the category **Mon** of monoids and monoid homomorphisms, consider the inclusion map

$$i : (\mathbb{N}, +, 0) \rightarrow (\mathbb{Z}, +, 0)$$

of natural numbers into the integers. Show that this arrow is both monic and epic. Is it an iso?

Solution

Whiteboard.

Monics, Epics and Isos

Example (Exercise 1.1.6.e)

In the category **Mon** of monoids and monoid homomorphisms, consider the inclusion map

$$i : (\mathbb{N}, +, 0) \rightarrow (\mathbb{Z}, +, 0)$$

of natural numbers into the integers. Show that this arrow is both monic and epic. Is it an iso?

Solution

Whiteboard.

Remark

As showed the previous exercises if an arrow is monic and epic does not imply that it is an iso.

Skeletal Categories

Definition

A category is **skeletal** if isomorphic objects are always equals (Awodey 2010).

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Opposite Categories and Duality

Introduction

We get a category from other category by turning around the arrows and then we get a duality principle between both categories.

Opposite Categories

Definition

Let $\mathcal{C}$ be a category. The **opposite** (or **dual**) category $\mathcal{C}^{\text{op}}$ of $\mathcal{C}$ is **defined** by



$$\begin{aligned}\text{Obj}(\mathcal{C}^{\text{op}}) &:= \text{Obj}(\mathcal{C}), \\ \mathcal{C}^{\text{op}}(A^*, B^*) &:= \mathcal{C}(B, A), \\ \text{id}_{A^*} &:= (\text{id}_A)^*, \\ g^* \circ f^* &:= (f \circ g)^*,\end{aligned}$$

where we use $*$ for distinguishing objects and arrows of the opposite category following (Awodey 2010).

Opposite Categories

Example

The left diagram in a category $\mathcal{C}$ corresponds to the right diagram in the category $\mathcal{C}^{\text{op}}$.



The Duality Principle

Definition

Let S be a sentence. The dual statement S^{op} of S is the sentence obtained by reversing all the arrows of S .

Description

Let $\mathcal{C}$ be a category and S be a sentence. The **duality principle** states that

$$S \text{ holds in } \mathcal{C} \quad \text{iff} \quad S^{\text{op}} \text{ holds in } \mathcal{C}^{\text{op}}.$$

The Duality Principle

Example

Monic and epic are dual notions. That is, an arrow f is monic in $\mathcal{C}$ iff f^* is epic in $\mathcal{C}^{\text{op}}$.

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

Subcategories

Definition

A **subcategory** $\mathcal{D}$ of a category $\mathcal{C}$ is a collection of some of the objects and arrows of $\mathcal{C}$

$$\text{Obj}(\mathcal{D}) \subseteq \text{Obj}(\mathcal{C}),$$

$$\text{Ar}(\mathcal{D}) \subseteq \text{Ar}(\mathcal{C}),$$

which is closed under dom , cod , id , and $\circ$, that is,

$$\begin{array}{lll} f \in \text{Ar}(\mathcal{D}) & \text{implies} & \text{dom } f, \text{cod } f \in \text{Obj}(\mathcal{D}), \\ f \in \mathcal{D}(A, B), g \in \mathcal{D}(B, C) & \text{implies} & g \circ f \in \mathcal{D}(A, C), \\ A \in \text{Obj}(\mathcal{D}) & \text{implies} & \text{id}_A \in \mathcal{D}(A, A). \end{array}$$

(continued on next slide)

Subcategories

Definition (continuation)

Additionally, the category $\mathcal{D}$ is

- a **full subcategory** of $\mathcal{C}$ if

$$\mathcal{D}(A, B) = \mathcal{C}(A, B), \quad \text{for all } A, B \in \text{Obj}(\mathcal{D}),$$

- a **lluf subcategory** of $\mathcal{C}$ if

$$\text{Obj}(\mathcal{D}) = \text{Obj}(\mathcal{C}).$$

Subcategories

Example

Grp is a full subcategory of **Mon**.

Subcategories

Example

Grp is a full subcategory of **Mon**.

Example

Set is a lluf subcategory of **Rel**.

Outline

From Set Theory to Category Theory

From Functional Programming to Category Theory

Definition of a Category

Diagrams in Categories

Examples of Categories

Isomorphisms

Opposite Categories and Duality

Subcategories

References

References

- S. Abramsky and N. Tzevelekos (2011). Introduction to Categories and Categorical Logic. In: New Structures for Physics. Ed. by Bob Coecke. Vol. 813. Lecture Notes in Physics. Springer, pp. 3–94. DOI: [10.1007/978-3-642-12821-9_1](https://doi.org/10.1007/978-3-642-12821-9_1) (cit. on p. 2).
- Andrea Asperti and Giuseppe Longo (1980). Categories, Types, and Structures. MIT Press (cit. on p. 38).
- Steve Awodey 2006 (2010). Category Theory. 2nd ed. Vol. 52. Oxford Logic Guides. Oxford University Press (cit. on pp. 11, 15, 64, 86, 87, 91, 94).
- Robert Goldblatt 1979 (2006). Topoi. The Categorical Analysis of Logic. Revised edition. Dover Publications (cit. on p. 38).
- Saunders Mac Lane 1971 (1998). Categories for the Working Mathematician. 2nd ed. Springer (cit. on pp. 10, 38).
- Benjamin C. Pierce (1991). Basic Category Theory for Computer Scientists. Foundations of Computing Series. MIT Press (cit. on p. 61).
- W. J. Zeng (n.d.). A Subtle Introduction to Category Theory. (Cit. on pp. 53, 54).