

Project Title : SWIFT SHIP TRACKER

College Name : Arasu Engineering College

Team Leader : Asra Farveen T [asrafarveen25@gmail.com]

Team Member 1 : Anu K [anuk041105@gmail.com]

Team Member 2 : Akila P [akilaprabagar35@gmail.com]

Team Member 3 : Mathumitha R [mathumitharajaji@gmail.com]

SWIFT SHIP TRACKER

INTRODUCTION

Swift Ship Tracker is a Salesforce-based parcel management system developed to manage shipment-related activities in a centralized platform. The system maintains important information such as parcel, sender, receiver, and delivery details in a structured manner. The application helps users monitor the parcel lifecycle from booking to delivery. Salesforce Flows are used to automate important operations, while Agentforce AI and Prompt Builder provide conversational support for accessing parcel information. The system also uses Salesforce security features, reports, and dashboards to support efficient and controlled parcel management.

PROJECT OVERVIEW

Swift Ship Tracker is a Salesforce-based parcel management application designed to provide a centralized platform for managing shipment and delivery operations. The system brings together parcel, sender, receiver, and delivery information, allowing authorized users to manage shipment details throughout the delivery lifecycle.

The application uses Salesforce automation features such as Flows and Approval Processes to reduce manual work and improve operational efficiency. Delivery agents can update parcel statuses, while customers can access relevant shipment information through the system. Agentforce AI and Prompt Builder are integrated to provide conversational assistance for parcel tracking and retrieving parcel-related information.

The system also includes role-based security, reports, and dashboards to support controlled access and effective monitoring of parcel operations. Overall, Swift Ship Tracker demonstrates how Salesforce CRM, automation, AI, and security features can be combined to create an organized and efficient parcel management solution.

PURPOSE

The purpose of Swift Ship Tracker is to provide a centralized platform for managing parcel delivery operations using Salesforce technologies. It brings different shipment-related information together and makes it easier for authorized users to access and manage the data.

The system is intended to reduce manual work, improve parcel visibility, and simplify communication during the delivery process. By combining Salesforce automation with Agentforce AI and Prompt Builder, the application provides a more convenient way to retrieve parcel information and support delivery operations.

The project also demonstrates the practical use of Salesforce CRM features such as custom objects, relationships, Flows, AI capabilities, security controls, and dashboards in a real-world parcel management scenario.

Phase 1: Requirement Analysis & Planning

Objective:

“Customers often face delays and confusion while booking, tracking, and managing parcel deliveries because they need to call support or use multiple apps. A conversational AI agent can simplify this by allowing customers to book parcels, get live tracking, and manage deliveries in one place.”

Key Requirements:

- Requirement gathering from end users and delivery agents.
- Defining system scope and user personas (Customer, Agent, Admin).
- Designing the data model with relationships between Parcel, Sender, Receiver, and Delivery.
- Identifying use cases such as parcel booking, tracking, and delivery update automation.
- Selecting tools: Salesforce Flows, Prompt Builder, and AgentForce AI.

Defining Project Scope & Objectives

Project Scope:

1. Build a scalable CRM solution for parcel delivery businesses to manage customer bookings, shipments, and delivery operations efficiently.
2. Support the end-to-end parcel lifecycle — from parcel booking → dispatch → tracking → delivery confirmation.
3. Include comprehensive data model design, automation (Flows, Apex, Email Alerts), AI-powered prompt builder, and reporting dashboards for effective management.
4. Provide role-based access for admins, delivery agents, and customers through Salesforce profiles, permission sets, and Experience Cloud.
5. Ensure real-time parcel visibility for customers and simplified operational tracking for agents through AI-integrated conversational support.

Objectives Summary:

- Streamline parcel operations by automating booking, tracking, and delivery notifications to reduce manual updates.
- Improve customer satisfaction with transparent, real-time shipment status and self-service tracking options.
- Enhance agent efficiency through centralized dashboards and guided Flows for quick status updates.
- Enable business insights with reports and dashboards showing parcel trends, delivery performance, and agent activity.
- Ensure security and reliability by implementing Salesforce role hierarchies, sharing rules, and audit-based data access.

Gathering & Analysing User Needs

Users Involved:

- Customers / Senders – End users who book parcels, track deliveries, and receive real-time updates through the portal or AI agent.
- Delivery Agents – Manage assigned parcels, update delivery status, and ensure timely handover to customers.
- Customer Support Team – Handle delivery-related issues, respond to customer queries, and ensure smooth communication.
- Admin Team – Configure the Salesforce environment, manage user roles, security settings, and monitor operational performance.
- System Integrator / Developer – Responsible for implementing automation, AI agent setup, and backend integrations.

Key Functional Needs:

- Seamless parcel booking and tracking interface for customers through Salesforce Experience Site or agent assistance.
- Ability for agents to update parcel status (Booked → In Transit → Out for Delivery → Delivered) in real time.
- Automated notifications and email alerts to customers on every delivery stage update.
- Support for Sender and Receiver details management with address, contact, and email fields for communication.
- AI Agent integration (via Prompt Builder) for real-time parcel status queries and automated assistance.
- Reports and dashboards to monitor parcel flow, delivery performance, and agent activity for admins.
- Security controls with role-based access, profiles, and permission sets for different user levels.

Tools Used:

- Salesforce Developer Org – For configuration, development, and testing.
- Prompt Builder (AgentForce AI) – To create intelligent parcel tracking prompts and responses.
- Salesforce Flow Builder – To automate booking, tracking, and delivery updates.
- Google Sheets / Docs – For initial data planning, requirement documentation, and system mapping.

Identifying Key Salesforce Features & Tools Required

Salesforce Features Planned:

- Custom Objects:

Parcel__c, Delivery__c, Sender__c, Receiver__c

- **Standard Objects:**

Account, Contact, Case, Task, EmailMessage, User

- **Automations:**

Record-Triggered Flows, Auto-Launched Flows, Approval Processes, Scheduled Flows

- **Apex:** Apex Classes for automated parcel operations (e.g., Lead-to-Parcel mapping, delivery notifications), Batch Apex for periodic updates or notifications

- **UI:** Lightning App Page (SwiftShip Tracker App), Dynamic Forms for Parcel Details, Lightning Record Pages, and Experience Cloud for Customer Access

- **AgentForce AI & Prompt Builder:** Integrated AI agent trained to fetch parcel data based on Parcel ID and respond to tracking or delivery status queries

- **Email Services:** Custom Email Alerts and Templates for booking confirmations, delivery updates, and completion acknowledgments

- **Security:** Profiles, Permission Sets, Role Hierarchies, Field-Level Security, and Sharing Rules to ensure controlled access for Admin, Agent, and Customer roles

Designing Data Model and Security Model

Data Model Includes:

- **Parcel__c (Custom Object)**
 - Stores core parcel details such as Parcel ID, Status, Weight, and Estimated Delivery Date.
 - Linked to Sender__c and Receiver__c objects to fetch sender and receiver details.
 - Connected with Delivery__c object to track real-time parcel location and status.
- **Delivery__c (Custom Object)**
 - Stores delivery-specific information such as current location, estimated delivery date, and linked parcel.
 - Connected with Sender__c and Parcel__c for relationship-based tracking.
 - Used by agents to update and monitor delivery status during the parcel lifecycle.
- **Sender__c (Custom Object)**
 - Captures sender-related information such as address, contact number, and email.
 - Linked to multiple parcels to track sender history and associated deliveries.
 - Used for sending booking confirmations and delivery updates via automated emails.
- **Receiver__c (Custom Object)**
 - Stores receiver details such as address, contact, and email for communication and delivery confirmation.
 - Linked to Sender__c and Parcel__c to associate both ends of the shipment process.
 - Used by agents for delivery reference and automated email notifications upon completion.

Security Model Design:

- Role Hierarchy: Administrator → Delivery Manager → Agent → Customer

- Profiles:

Admin Profile: Full access to all objects and records.

Delivery Agent Profile: Read/Edit access to Parcel, Delivery, Sender, and Receiver objects.

Customer Profile: Read-only access to their own parcel details via Experience Cloud.

Support Staff Profile: Access to Cases and Parcel details for issue resolution.

- Permission Sets: Used to grant additional privileges (e.g., “Update Delivery Status,” “Access Agent Console”).

- Record-Level Security: Sharing Rules applied for Parcel__c and Delivery__c to allow controlled access for agents and managers. Customers can only view records linked to their own Sender or Receiver details.

- Field-Level Security: Sensitive fields like Sender Email, Receiver Contact, and Location Coordinates restricted to Admin and Agent profiles only.

Phase 2: Salesforce Development –Backend & Configurations

This phase focused on developing the core logic of SwiftShip Tracker. Custom objects were created for Parcel, Sender, Receiver, and Delivery with relationships. Automations were built using Flows for parcel status updates and approval processes.

Milestone 1- Salesforce Account

Introduction:

Are you new to Salesforce? Not sure exactly what it is, or how to use it? Don't know where you should start on your learning journey? If you've answered yes to any of these questions, then you're in the right place. This module is for you. Welcome to Salesforce! Salesforce is game-changing technology, with a host of productivity-boosting features, that will help you sell smarter and faster. As you work toward your badge for this module, we'll take you through these features and answer the question, “What is Salesforce, anyway?”.

What Is Salesforce?

Salesforce is your customer success platform, designed to help you sell, service, market, analyse, and connect with your customers.

Creating Developer Account

Creating a developer org in salesforce.


1. Go to <https://developer.salesforce.com/signup>
2. On the sign-up form, enter the following details:
 - 1) First name & Last name
 - 2) Email
 - 3) Job Title: Developer

4) Company: College Name

5) Country: India

Click on sign me up after filling these.

1. Go to the inbox of the email that you used while signing up. Click on the verify account to activate your account. The email may take 10-30mins and sometimes 2 hours.
2. Click on Verify Account
3. Give a password and answer a security question and click on change password.
4. Then you will redirect to your salesforce setup page.

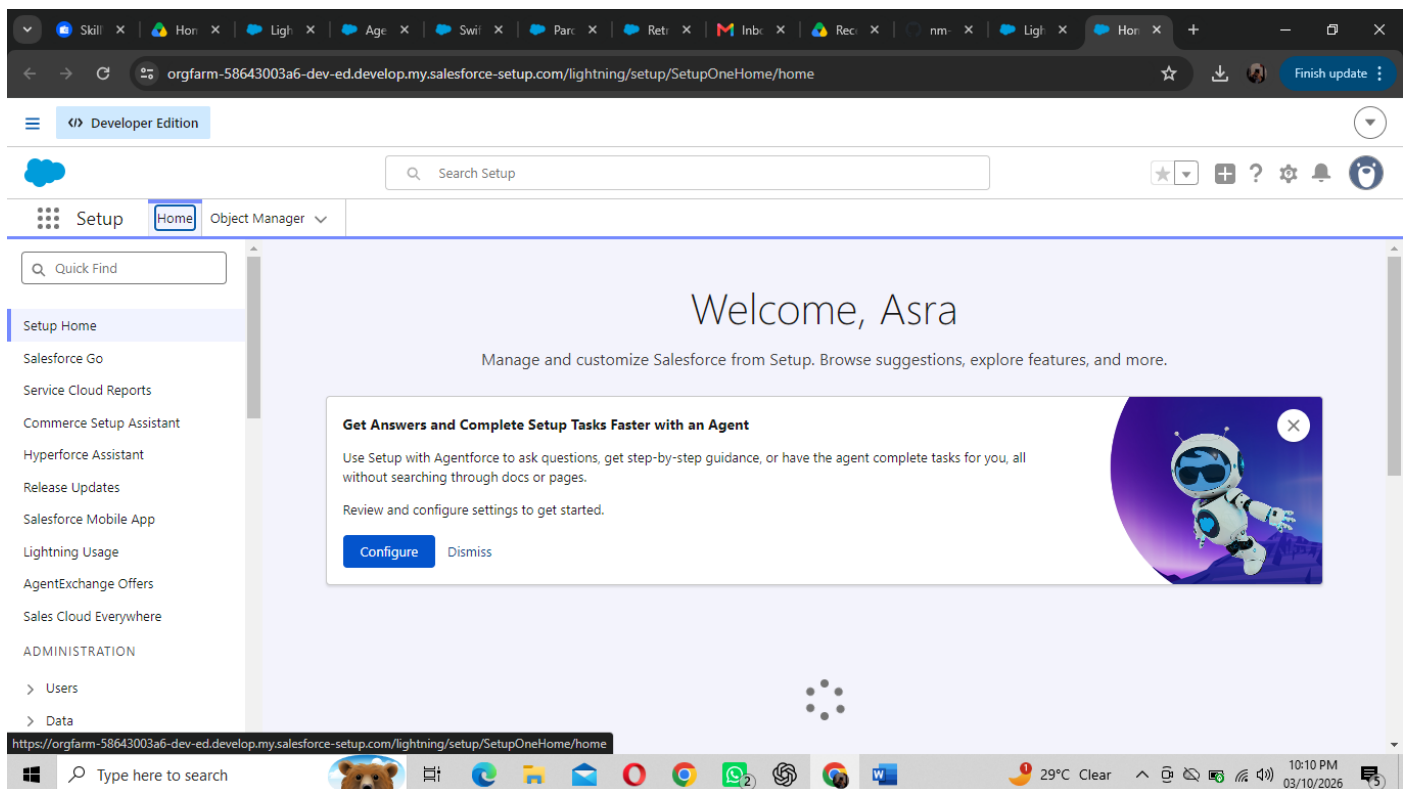

Milestone 2- Objects Creation

To create an object:

1. From the setup page
2. Click on Object Manager
3. Click on Create >> Click on Custom Object.
4. Enter the label name as Parcel
5. Enter Plural label name as Parcels
6. Enter Record Name as Parcel Name
7. Select Data Type as Text: Parcel Name
8. Select Allow reports.
9. Select Allow search.
10. Allow Track Field History
11. Click on Save and New

The screenshot shows the Salesforce Object Manager interface for creating a custom object named 'Parcel'. The browser address bar shows the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/011aj00000FRuAL/Details/view`. The page title is 'Parcel' under 'SETUP > OBJECT MANAGER'. The left sidebar lists various configuration options: Details, Fields & Relationships, Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, Related Lookup Filters, Search Layouts, and List View Button Layout. The 'Details' section is active, showing the following configuration:

Field	Value
Description	
API Name	Parcel__c
Custom	✓
Singular Label	Parcel
Plural Label	Parcels
Enable Reports	✓
Track Activities	✓
Track Field History	✓
Deployment Status	Deployed
Help Settings	Standard salesforce.com Help Window

Buttons for 'Edit' and 'Delete' are visible in the top right corner of the details section. The Windows taskbar at the bottom shows the time as 10:12 PM on 03/10/2026, with a temperature of 29°C and clear weather.

Creating Delivery Object

To create an object:

1. From the setup page
2. Click on Object Manager
3. Click on Create >> Click on Custom Object.
4. Enter the label name as Delivery
5. Enter Plural label name as Deliveries
6. Enter Record Name as DeliveryName
7. Select Data Type as Text: DeliveryName
8. Select Allow reports.
9. Select Allow search.
10. Allow Track Field History
11. Click on Save and New

The screenshot shows the Salesforce Object Manager interface for creating a custom object named 'Delivery'. The browser address bar shows the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/011aj00000FRuFB/Details/view`. The page title is 'Delivery' under 'Object Manager'. The left sidebar contains a navigation menu with options: Details, Fields & Relationships, Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, Related Lookup Filters, Search Layouts, and List View Button Layout. The 'Details' section is active, showing the following configuration:

Field	Value
Description	
API Name	Delivery__c
Custom	✓
Singular Label	Delivery
Plural Label	Deliveries
Enable Reports	✓
Track Activities	✓
Track Field History	✓
Deployment Status	Deployed
Help Settings	Standard salesforce.com Help Window

At the bottom of the page, there is a Windows taskbar with various application icons and a system tray showing the date and time as 10:13 PM on 03/10/2026.

Creating Sender Object

To create an object:

1. From the setup page
2. Click on Object Manager
3. Click on Create >> Click on Custom Object.
4. Enter the label name as Sender
5. Enter Plural label name as Sender's
6. Enter Record Name as SenderName
7. Select Data Type as Text: SenderName
8. Select Allow reports.
9. Select Allow search.
10. Allow Track Field History
11. Click on Save and New

The screenshot shows the Salesforce Setup interface in a web browser. The browser's address bar displays the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/011aj00000FRuIP/Details/view`. The page title is "Developer Edition". The navigation menu includes "Setup", "Home", and "Object Manager". The main content area is titled "Sender" and shows the "Details" tab selected in the left sidebar. The "Details" section contains the following fields and values:

Field	Value
Description	
API Name	Sender__c
Custom	✓
Singular Label	Sender
Plural Label	Senders
Enable Reports	✓
Track Activities	✓
Track Field History	✓
Deployment Status	Deployed
Help Settings	Standard salesforce.com Help Window

The bottom of the screenshot shows the Windows taskbar with various application icons and the system clock displaying 10:14 PM on 03/10/2026.

Creating Receiver Object

To create an object:

1. From the setup page
2. Click on Object Manager
3. Click on Create >> Click on Custom Object.
4. Enter the label name as Receiver
5. Enter Plural label name as Receiver's
6. Enter Record Name as ReceiverName
7. Select Data Type as Text: ReceiverName
8. Select Allow reports.
9. Select Allow search.
10. Allow Track Field History
11. Click on Save and New

The screenshot shows the Salesforce Object Manager setup page for a custom object named 'Receiver'. The browser address bar displays the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/011aj00000FRuK1/Details/view`. The page header includes the Salesforce logo, a search bar, and navigation tabs for Setup, Home, and Object Manager. The main content area is titled 'Receiver' and contains a 'Details' section with various configuration options. A left sidebar lists other setup categories like Fields & Relationships, Page Layouts, and Lightning Record Pages. The bottom of the image shows a Windows taskbar with various application icons and system information.

Details	
Description	
API Name Receiver__c	Enable Reports ✓
Custom ✓	Track Activities ✓
Singular Label Receiver	Track Field History ✓
Plural Label Receivers	Deployment Status Deployed
	Help Settings Standard salesforce.com Help Window

Milestone 3 - Tabs

Creating a tab for Parcel Object

1. Go to the setup page → type Tabs in Quick Find bar
2. Click on tabs
3. Click on New (under custom object tab).
4. Select Object (Parcel) >> Select the tab style
5. Click on Next >> (Add to profiles page) keep it as default >> Click on Next (Add to Custom App) uncheck the include tab.
6. Make sure that the Append tab to the user's existing personal customizations is checked.
7. Click save

More Tab Creation

1. Go to Setup → type Tabs in the Quick Find box.
2. Click Tabs under the User Interface section.
3. Click New under Custom Object Tabs.
4. Select the object (Delivery, Sender, or Receiver) → choose a Tab Style.
5. Click Next → keep the Add to Profiles settings as default → click Next.
6. On the Add to Custom Apps page, uncheck “Include Tab.”
7. Ensure Append tab to the user’s existing personal customizations is checked.
8. Click Save and repeat the steps for each object (Delivery, Sender, Receiver).

The screenshot shows the Salesforce Setup interface for Custom Tabs. The browser address bar displays the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/CustomTabs/home`. The page title is "Custom Tabs". Below the title, there is a description: "You can create new custom tabs to extend Salesforce functionality or to build new application functionality. Custom Object tabs look and behave like the standard tabs provided with Salesforce. Web tabs allow you to embed external web applications and content within the Salesforce window. Visualforce tabs allow you to embed Visualforce pages. Lightning Component tabs allow you to add Lightning components to the navigation menu in Lightning Experience and the mobile app. Lightning Page tabs allow you to add Lightning Pages to Lightning Experience and the mobile app."

The "Custom Object Tabs" section contains a table with the following data:

Action	Label	Tab Style	Description
Edit Del	Deliveries	Globe	
Edit Del	Parcels	Desk	
Edit Del	Receivers	Bell	
Edit Del	Senders	Form	

The "Web Tabs" section shows a message: "No Web Tabs have been defined".

Milestone 4- Fields & Relationships

Create fields and Relationships for the custom objects created in the previous milestone.

Creating Fields and Relationships for Parcel Object

Beside the Quick Find box you have, Object Manager click on it.

1. Search for and select your Parcel object.

Field 1: Parcel ID

- Go to Fields & Relationships → click New

Enter:

- Data type== auto number→P-{000}
- Click Next → Next → Save & New.

3. Follow step 1 and 2 to create the remaining fields(Status, Weight, Estimated Delivery, Sender) of the Parcel object mentioned in the table below.)

Field Name	API Name	Data Type	Description
Parcel ID	Parcel_ID__c	Auto number	Unique ID for each parcel
Status	Status__c	Picklist	[Booked, In Transit, Out for Delivery, Delivered]
Weight	Weight__c	Number	Weight of Parcel
Estimated Delivery	Estimated_Delivery_Date__c	Date	Expected Delivery Date
Sender	Sender__c	Lookup Relationship	Gets Details from Sender

The screenshot shows the Salesforce Setup interface. The breadcrumb trail is: SETUP > OBJECT MANAGER > Parcel. The left sidebar contains a navigation menu with options: Details, Fields & Relationships (selected), Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, Related Lookup Filters, Search Layouts, List View Button Layout, Restriction Rules, Scoping Rules, and Object Access. The main content area is titled 'Fields & Relationships' and shows a list of 11 fields for the 'Parcel' object, sorted by Field Label. The fields are: Created By (Lookup(User)), Estimated Delivery (Date), Estimated Delivery Date (Date), Last Modified By (Lookup(User)), Owner (Lookup(User/Group)), Parcel ID (Auto Number), Parcel Name (Text(80)), Receiver (Lookup(Receiver)), Sender (Lookup(Sender)), Status (Picklist), and Weight (Number(16, 2)). Each field row includes a 'FIELD LABEL', 'FIELD NAME', 'DATA TYPE', 'CONTROLLING FIELD', and an 'INDEXED' checkbox. The 'Parcel ID' field is highlighted with a blue background.

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedBy	Lookup(User)		
Estimated Delivery	Estimated_Delivery__c	Date		
Estimated Delivery Date	Estimated_Delivery_Date__c	Date		
Last Modified By	LastModifiedBy	Lookup(User)		
Owner	OwnerId	Lookup(User/Group)		✓
Parcel ID	Parcel_ID__c	Auto Number		
Parcel Name	Name	Text(80)		✓
Receiver	Receiver__c	Lookup(Receiver)		✓
Sender	Sender__c	Lookup(Sender)		✓
Status	Status__c	Picklist		
Weight	Weight__c	Number(16, 2)		

Creating Fields And Relationships For Delivery Object

Beside the Quick Find box you have, Object Manager click on it.

1. Search for and select your Delivery object.

Field 1: Current Location

- Go to Fields & Relationships → click New
- Choose Data Type: Geolocation → click Next.

Field Label: Current Location

Click Next → Next → Save & New.

- 3. Follow step 1 and 2 to create the remaining fields(Estimated Delivery, Sender, Parcel) of the Delivery object mentioned in the table below.

Field Name	API Name	Data Type	Description
Current Location	Current_Location__c	Geolocation	Location in terms of longitude and latitude.
Estimated Delivery	Estimated_Delivery_Date__c	Date	Expected Delivery Date
Sender	Sender__c	Lookup Relationship	Gets Details from Sender
Parcel	Parcel__c	Lookup Relationship	Gets Details from Parcel

orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/011aj00000FRuFB/FieldsAndRelationships/view

Developer Edition

Search Setup

Setup > OBJECT MANAGER

Delivery

Details

Fields & Relationships

8 Items, Sorted by Field Label

Quick Find

New Deleted Fields Field Dependencies Set History Tracking

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedBy	Lookup(User)		
Current Location	Current_Location__c	Geolocation		
Delivery Name	Name	Text(80)		✓
Estimated Delivery	Estimated_Delivery__c	Date		
Last Modified By	LastModifiedById	Lookup(User)		
Owner	OwnerId	Lookup(User,Group)		✓
Parcel	Parcel__c	Lookup(Parcel)		✓
Sender	Sender__c	Lookup(Sender)		✓

Type here to search

29°C Clear 10:25 PM 03/10/2026

Creating Fields And Relationships For Sender Object

Beside the Quick Find box you have, Object Manager click on it.

1. Search for and select your Sender object.

Field 1: Sender Address

- Go to Fields & Relationships → click New
- Choose Data Type: Geolocation → click Next.

Field Label: Sender Address

Click Next → Next → Save & New.

- 3. Follow step 1 and 2 to create the remaining fields (Sender Contact, Sender Email) of the Sender object mentioned in the table below.

Field Name	API Name	Data Type	Description
Sender Address	Sender_Address__c	Geolocation	Location in terms of longitude and latitude.
Sender Contact	Sende_Contact__c	Phone	To contact the sender
Sender Email	Sender_Email__c	Email	To send email Notification.

The screenshot shows the Salesforce Object Manager interface for the 'Sender' object. The 'Fields & Relationships' tab is active, displaying a list of 7 fields. The fields are: Created By (Lookup(User)), Last Modified By (Lookup(User)), Owner (Lookup(User,Group)), Sender Address (Geolocation), Sender Contact (Phone), Sender Email (Email), and SenderName (Text(80)). The 'Sender Address' field is highlighted in blue. The interface includes a search bar, navigation tabs (Setup, Home, Object Manager), and a sidebar with various setup options.

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedById	Lookup(User)		
Last Modified By	LastModifiedById	Lookup(User)		
Owner	OwnerId	Lookup(User,Group)		✓
Sender Address	Sender_Address__c	Geolocation		
Sender Contact	Sender_Contact__c	Phone		
Sender Email	Sender_Email__c	Email		
SenderName	Name	Text(80)		✓

Creating Fields And Relationships For Receiver Object

Beside the Quick Find box you have, Object Manager click on it.

1. Search for and select your Receiver object.

Field 1: Receiver Address

- Go to Fields & Relationships → click New
- Choose Data Type: Geolocation → click Next.

Field Label: Receiver's Address

Click Next → Next → Save & New.

- 3. Follow step 1 and 2 to create the remaining fields (Receiver Contact, Receiver Email, Sender, Parcel) of the Receiver object mentioned in the table below.

Field Name	API Name	Data Type	Description
Receiver Address	Receiver_Address__c	Geolocation	Location in terms of longitude and latitude.
Receiver Contact	Receiver_Contact__c	Phone	To contact the Receiver
Receiver Email	Receiver_Email__c	Email	To send email Notification.
Sender	Sender__c	Lookup Relationship	Gets Details from Sender
Parcel	Parcel__c	Lookup Relationship	Gets Details from Parcel

orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/ObjectManager/01Iaj00000FRuK1/FieldsAndRelationships/view

Developer Edition

Search Setup

Setup > OBJECT MANAGER

Receiver

Details

Fields & Relationships

9 Items, Sorted by Field Label

Quick Find New Deleted Fields Field Dependencies Set History Tracking

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedById	Lookup(User)		
Last Modified By	LastModifiedById	Lookup(User)		
Owner	OwnerId	Lookup(User,Group)		✓
Parcel	Parcel__c	Lookup(Parcel)		✓
Receiver Address	Receiver_Address__c	Geolocation		
Receiver Contact	Receiver_Contact__c	Phone		
Receiver Email	Receiver_Email__c	Email		
ReceiverName	Name	Text(80)		✓
Sender	Sender__c	Lookup(Sender)		✓

Type here to search

29°C Clear 10:31 PM 03/10/2026

Milestone 5 - Prompt Builder

Designing Prompts for Agent Building.

In Salesforce, go to Setup.

1. In the Quick Find box, type Prompt Templates (or in Agent Console, go to Agent Builder → Prompt Templates).

2. Click New Prompt Template.-- Record summary template

3. Enter the details

- Label: Retrieve Parcel Details
- API Name: Retrieve_Parcel_Details
- Description: Retrieves parcel details where Parcel_ID matches the user input.

The screenshot shows the Salesforce Setup interface. The left sidebar has a search bar with 'prompt builder' entered. Under 'Einstein', 'Einstein Generative AI' is expanded, and 'Prompt Builder' is selected. The main content area displays a list of prompt templates. The 'Retrieve Parcel Details' template is highlighted at the bottom of the list.

Label	API Name	Standard	Status	Last Modified
Anomaly Details	Anomaly Analysis	Standard	Active	
Abandonment Score (Defence)	Agentforce Scorer Multilabel	Standard	Active	
Generate Case Subject - Messa...	Case Details	Standard-Overridable	Active	
Investigation - Investigate User	User Investigation	Standard	Active	
Slack Channel Summary	Slack Channel Summarizer	Standard	Active	
Refine Text	Write with AI	Standard	Active	
Quality Score	Agentforce Scorer Measurement	Standard	Active	
Answer Questions with Knowle...	Knowledge Answers	Standard-Overridable	Active	
Get Household Updates from ...	Household Updates from Meet...	Standard-Overridable	Active	
Search Order Summaries	Global Standard	Standard	Active	
Expand Text	Write with AI	Standard	Active	
Classify Security Risk	Security Risk Analysis	Standard	Active	
Validate Field Generation Refin...	Field Generation	Standard-Overridable	Active	
Summarize Text	Write with AI	Standard	Active	
Search Order Item Summaries	Global Standard	Standard	Active	
Retrieve Parcel Details	Record Summary	Custom	Active	10/03/26

4. Enter the Prompt Template Content

In the Prompt Template Text area, paste the following exactly:

Retrieve details from Parcel c where Parcel_ID__c matches user input. Return response in this format:

Parcel Tracking Update

 Parcel Tracking Update

- Parcel Name: {!\$Input:Parcel__c.Name}
- Parcel ID: {!\$Input:Parcel__c.Parcel_ID__c}
- Status: {!\$Input:Parcel__c.Status__c}
- Weight: {!\$Input:Parcel__c.Weight__c}

- Estimated Delivery Date: {!\$Input:Parcel__c.Estimated_Delivery_Date__c}

6. Add Resource Mapping

7. Scroll down to the Resources / Insert Resources section.

- Click Insert Resource → choose Object.
- Select Parcel__c.
- Add the following fields:
- Name
- Parcel_ID__c
- Status__c
- Weight__c
- Estimated_Delivery_Date__c

8. Click Insert Resource (or Add) for each one.

9. Click Save.

10. Then click Activate to make this Prompt Template available for your agent or flow.

The screenshot displays the Salesforce Einstein Prompt Studio interface. The top navigation bar includes 'Setup', 'Home', and 'Object Manager'. The main workspace is titled 'Prompt Builder' and shows a prompt template for 'Retrieve Parcel Details'. The 'Insert Resource' step is active, showing a list of resources to insert, including 'Parcel Tracking Update' and 'Parcel Tracking Update' (selected). The selected resource is mapped to the prompt variables: 'Parcel Name: Input:Parcel__c.Name', 'Parcel ID: Input:Parcel__c.Parcel_ID__c', 'Status: Input:Parcel__c.Status__c', 'Weight: Input:Parcel__c.Weight__c', and 'Estimated Delivery Date: Input:Parcel__c.Estimated_Delivery_Date__c'. The interface also shows a 'Preview' button and a 'Save' button. The bottom status bar indicates the current temperature is 29°C and the time is 10:34 PM on 03/10/2026.

Testing the Prompt

Test the Prompt:

1. Open your Agent preview.
2. Type: Laptop
3. It should return details from the Parcel record.

The screenshot displays the Salesforce Einstein Prompt Studio interface in the Developer Edition. The browser address bar shows the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/EinsteinPromptStudio/0hfaj00000WzoYXAAZ/edit?c__versionId=3vNaj0000...`. The interface includes a top navigation bar with 'Setup', 'Home', and 'Object Manager' tabs. Below this is a dark blue header with 'Prompt Builder', 'Retrieve Parcel Details', and 'Version 1 (Active)'.

The main workspace is divided into three panels:

- Performance Insights:** Shows 'Response Time: 1.66s' and 'Total Tokens: 531 tokens'.
- Resolved Prompt:** Displays the prompt text: 'Parcel Tracking Update', 'Parcel Tracking Update', 'Parcel Name: Laptop', 'Parcel ID: P-002', 'Status: Pending', 'Weight: 2', and 'Estimated Delivery Date: 10/03/2026'.
- Generated Response:** Shows the AI response: 'Acknowledged. Below is the parcel summary for your review. Parcel summary. • Parcel Name: Laptop. • Parcel ID: P-002. • Status: Pending. • Weight: 2 kg. • Estimated Delivery Date: 10/03/2026. Please confirm receipt or advise if further details are required. Thank you for your prompt attention.'

The bottom of the image shows the Windows taskbar with various application icons and the system clock indicating 10:36 PM on 03/10/2026.

Milestone 6 - Flows

Create flows for capturing the response as shown.

Go to Setup → search Flows → click New Flow.

1. Choose Auto-Launched Flow (No Trigger) → click Create
2. Add Input Variables (to allow Agent to pass values):
 - Click On New Recourse → Variable → Available for Input.
 - Ids → Data Type: Text → Available for Input.
 - Output → Data Type: Text → Available for Output.
3. Click on the Add icon to add Element: Get Records → Label: Get Parcel Records
 - Object: Parcel
 - Field = Parcel_ID__c
 - Operator = Equals
 - Value = ids

The screenshot displays the Salesforce Flow Builder interface. The flow diagram on the left shows a sequence of steps: 'Autolaunched Flow Start', 'Get Parcel Records', 'Parcel Updates', 'Assignment Outputs', and 'End'. The 'Get Records' configuration panel on the right is open, showing the following details:

- Label:** Get Parcel Records
- API Name:** Get_Parcel_Records
- Object:** Parcel
- Filter Parcel Records:** Condition Requirements: All Conditions Are Met (AND). Field: Parcel ID, Operator: Equals, Value: Ids.

4. Element : Action

1. Find Retrieve parcel details
 2. Click Retrieve parcel details
- Label: Parcel Updates.

The screenshot displays the Salesforce Flow Builder interface with the 'Retrieve Parcel Details' configuration panel open. The flow diagram on the left remains the same. The 'Retrieve Parcel Details' panel on the right shows the following details:

- Label:** Retrieve Parcel Details
- API Name:** Parcel_Updates
- Set Input Values:** objectToSummarize is set to 'Parcel from Get Parcel Records'.

5. Element : Assignment

- Label: Assignment Outputs.
- Variable= Output

- Operator = Equals
- Value = Outputs from Action>Prompt Response

The screenshot shows the Salesforce Flow Builder interface. The flow is named 'Parcel Details - V1' and is in the 'Developer Edition'. The flow consists of the following steps:

- Autolaunched Flow Start
- Get Parcel Records (Get Records)
- Parcel Updates (Action)
- Assignment Outputs (Assignment)
- End

The 'Assignment Outputs' step is highlighted, and its configuration panel is open on the right. The configuration shows the label 'Assignment Outputs', API Name 'Assignment_Outputs', and a 'Set Variable Values' section with one variable 'Assignment Outputs' set to 'Equals' and 'Parcel Updates > Prompt Response'.

6. Connect Start → Get Records → Action → Assignment → End.
7. Save Flow → Name: Parcel Details.
8. Activate Flow.
9. Once the flow is saved go back to the flows, Click on the drop down near the flow that is just created, click on edit access.
10. On the top look for flow user access and then assign these available profiles, and click save.

The screenshot shows the Salesforce Setup interface. The 'Profiles' section is open, and the 'Configure user access to run this flow' section is visible. The 'Available Profiles' list includes:

- Analytics Cloud Integration User
- Analytics Cloud Security User
- Anypoint Integration
- Authenticated Website
- B2B Reordering Portal Buyer Profile
- Contract Manager
- Cross Org Data Proxy User
- Custom: Marketing Profile
- Custom: Sales Profile
- Custom: Support Profile
- Customer Community Login User
- Customer Community Plus Login User
- Customer Community Plus User
- Customer Community User

The 'Enabled Profiles' list includes:

- Einstein Agent User

Phase 3: UI/UX Development & Customization

To enable agents to efficiently manage parcel operations and ensure secure access control using permission sets and AI-driven agent experiences built with AgentForce.

Milestone - 1 Creating Permission Sets

In the Quick Find box (left side), type Permission Sets.

1. Click Permission Sets under Users.
2. Click the New button.
3. Enter the following details:
 - Label: Swift Ship
 - API Name: auto-fills
 - License: Choose Einstein Agent.
4. Click Save.

The screenshot displays the Salesforce Lightning Setup interface for creating a new Permission Set. The left-hand navigation pane shows the 'Users' section expanded, with 'Permission Set Groups' and 'Permission Sets' listed. The main content area is titled 'Permission Sets' and shows the configuration for a new Permission Set named 'Swift Ship'. The 'Permission Set Overview' section includes fields for Description, License (Einstein Agent), Session Activation Required (unchecked), and Permission Set Groups Added To (0). Below this, the 'Apps' section is visible, containing links for 'Assigned Apps', 'Assigned Connected Apps', 'Object Settings', 'App Permissions', and 'Apex Class Access'. The bottom of the image shows a Windows taskbar with various application icons and a system tray displaying a temperature of 29°C and the date 03/10/2026.

1. Inside the Permission Set page → under Apps → Object Settings, click Object Settings.
2. 1. Search and click each object one by one
3. 2. Click Edit.
4. Enable the following:
 - ✓ Read
 - ✓ Create
 - ✓ Edit(Optional: Delete, if you want agents to remove records)
5. Under Field Permissions, ensure at least Visible is checked for all key fields.
6. Click Save after each object.

Parcel__c

Developer Edition

Search Setup

Setup Home Object Manager

permission set

Users

Permission Set Groups

Permission Sets

Didn't find what you're looking for? Try using Global Search.

Permission Sets

Parcels

Save Cancel

Tab Settings

Available	Visible
☐	☐

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	Read Access	Edit Access
Created By	CreatedById	☒	☐
Estimated Delivery	Estimated_Delivery__c	☒	☒

Type here to search

29°C Clear 10:47 PM 03/10/2026

Delivery__c

Developer Edition

Search Setup

Setup Home Object Manager

permission set

Users

Permission Set Groups

Permission Sets

Didn't find what you're looking for? Try using Global Search.

Permission Sets

Deliveries

Save Cancel

Tab Settings

Available	Visible
☐	☐

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	Read Access	Edit Access
Created By	CreatedById	☒	☐
Current Location	Current_Location__c	☒	☒

Type here to search

29°C Clear 10:48 PM 03/10/2026

Sender__c

The screenshot shows the Salesforce Setup page for a permission set named "Sender__c". The left sidebar contains a search bar with "permission set" and a list of navigation items: Users, Permission Set Groups, and Permission Sets. The main content area is titled "Permission Sets" and includes a "Senders" section with "Save" and "Cancel" buttons. Below this are three tables: "Tab Settings", "Object Permissions", and "Field Permissions".

Available	Visible
☐	☐

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Name	Field API Name	Read Access	Edit Access
Created By	CreatedById	☒	☐
Last Modified By	LastModifiedById	☒	☐

Receiver__c

The screenshot shows the Salesforce Setup page for a permission set named "Receiver__c". The left sidebar contains a search bar with "permission sets" and a list of navigation items: Users, Permission Set Groups, and Permission Sets. The main content area is titled "Permission Sets" and includes a "Receivers" section with "Save" and "Cancel" buttons. Below this are three tables: "Tab Settings", "Object Permissions", and "Field Permissions".

Available	Visible
☐	☐

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Name	Field API Name	Read Access	Edit Access
Created By	CreatedById	☒	☐
Last Modified By	LastModifiedById	☒	☐

Milestone - 2 Assigning Permissions to your Agent user

In the Quick Find box on the left, type Users.

1. Click Users under the Users section.
2. Open the Agent User Record

From the list of users, find the Einstein Service Agent user to represent your Agent (e.g., “SwiftShip Agent”).

Click on the Full Name of that user to open the record.

4. Scroll down to the section named Permission Set Assignments.

5. Click the Edit Assignments button.

1. On the left side (Available Permission Sets), find and select your permission set:

- SwiftShip

Click the Add → button to move it to the right-side list (Enabled Permission Sets).

Click Save.

The screenshot shows the Salesforce Setup interface. The left sidebar contains a navigation menu with 'Users' selected. The main content area displays the 'EinsteinServiceAgent User' record. The 'User Detail' section includes fields for Name, Alias, Email, Username, Nickname, Title, Company, Department, Division, Address, Time Zone, and Locale. The 'Role' section shows the user's license as 'Einstein Agent' and their profile as 'Einstein Agent User'. The 'Active' checkbox is checked. The 'Marketing User', 'Offline User', 'Knowledge User', 'Flow User', 'Service Cloud User', 'Site.com Contributor User', 'Site.com Publisher User', and 'WDC User' checkboxes are unchecked. The 'Edit', 'Sharing', 'Reset Password', 'Freeze', and 'View Summary' buttons are visible above the details.

Milestone -3 Org Setup for AgentForce

Enable salesforce Default agent from Salesforce Go

1. From Quick find box→ search “Salesforce Go” → Click on it

2. Search for Default agent → click get started→ and turn on

3. And refresh the page

Enable Einstein Setup


Go to Setup → Quick Find → Einstein Setup.

1. Open Einstein Setup → click Get Started if prompted.

Toggle On these key services:

- Turn On Einstein
- Global Languages

• Deploy Prompt Template

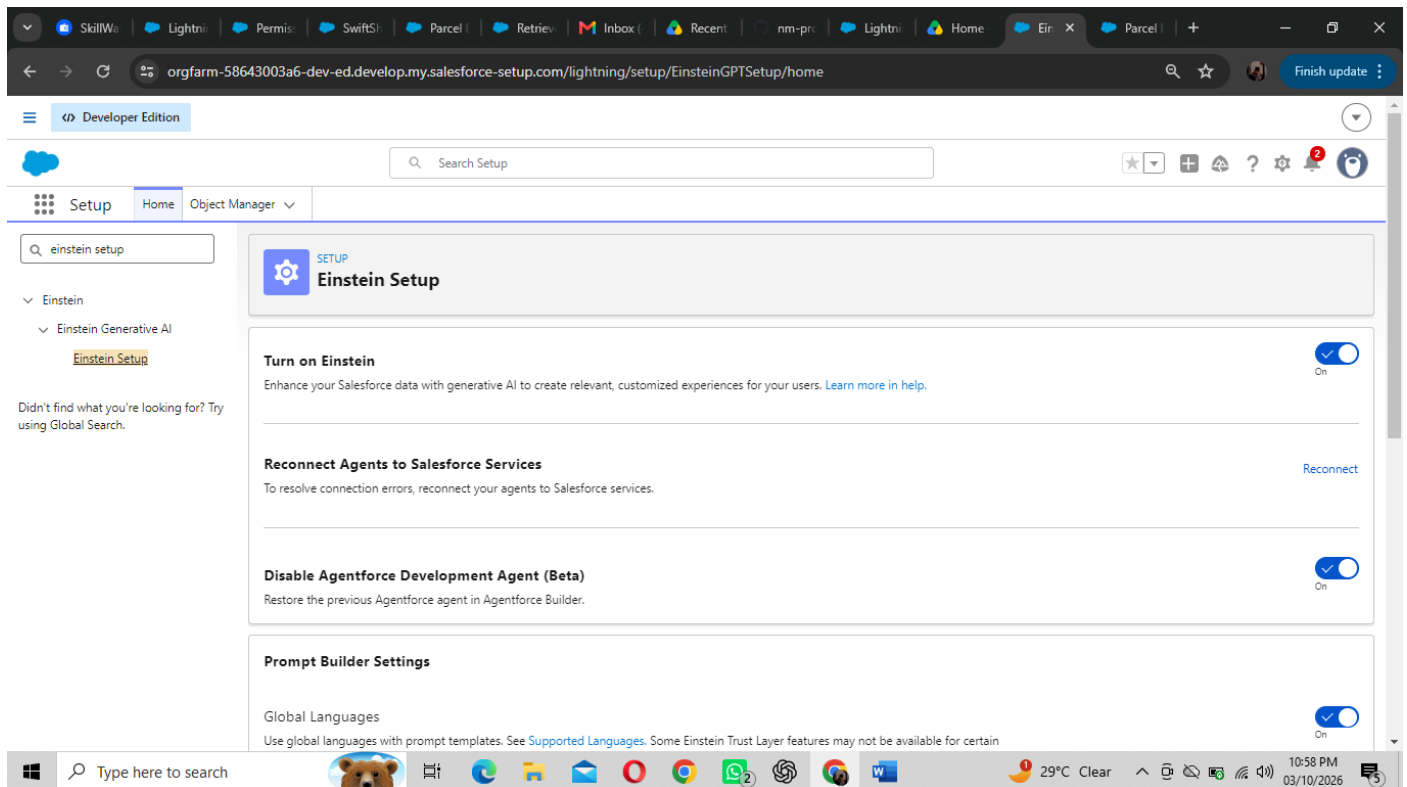


The screenshot shows the Salesforce Einstein Setup page in a web browser. The browser's address bar displays the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/EinsteinGPTSetup/home`. The page header includes the Salesforce logo, a search bar, and navigation tabs for Setup, Home, and Object Manager. The left sidebar shows a search bar with 'einstein setup' and a list of navigation items: Einstein, Einstein Generative AI, and Einstein Setup (highlighted). The main content area is titled 'Einstein Setup' and contains several sections: 'Turn on Einstein' with a toggle switch set to 'On', 'Reconnect Agents to Salesforce Services' with a 'Reconnect' button, 'Disable Agentforce Development Agent (Beta)' with a toggle switch set to 'On', and 'Prompt Builder Settings' with a toggle switch set to 'On'. The Windows taskbar at the bottom shows the search bar, task view button, and several application icons, including Edge, File Explorer, Mail, and various development tools. The system tray shows the date and time as 10:58 PM on 03/10/2026.

2. Refresh your browser page.

3. Go to Setup → Quick Find → AgentForce Agents.

Toggle On these key services:

- Agentforce
- Enable Agentforce Default Agent

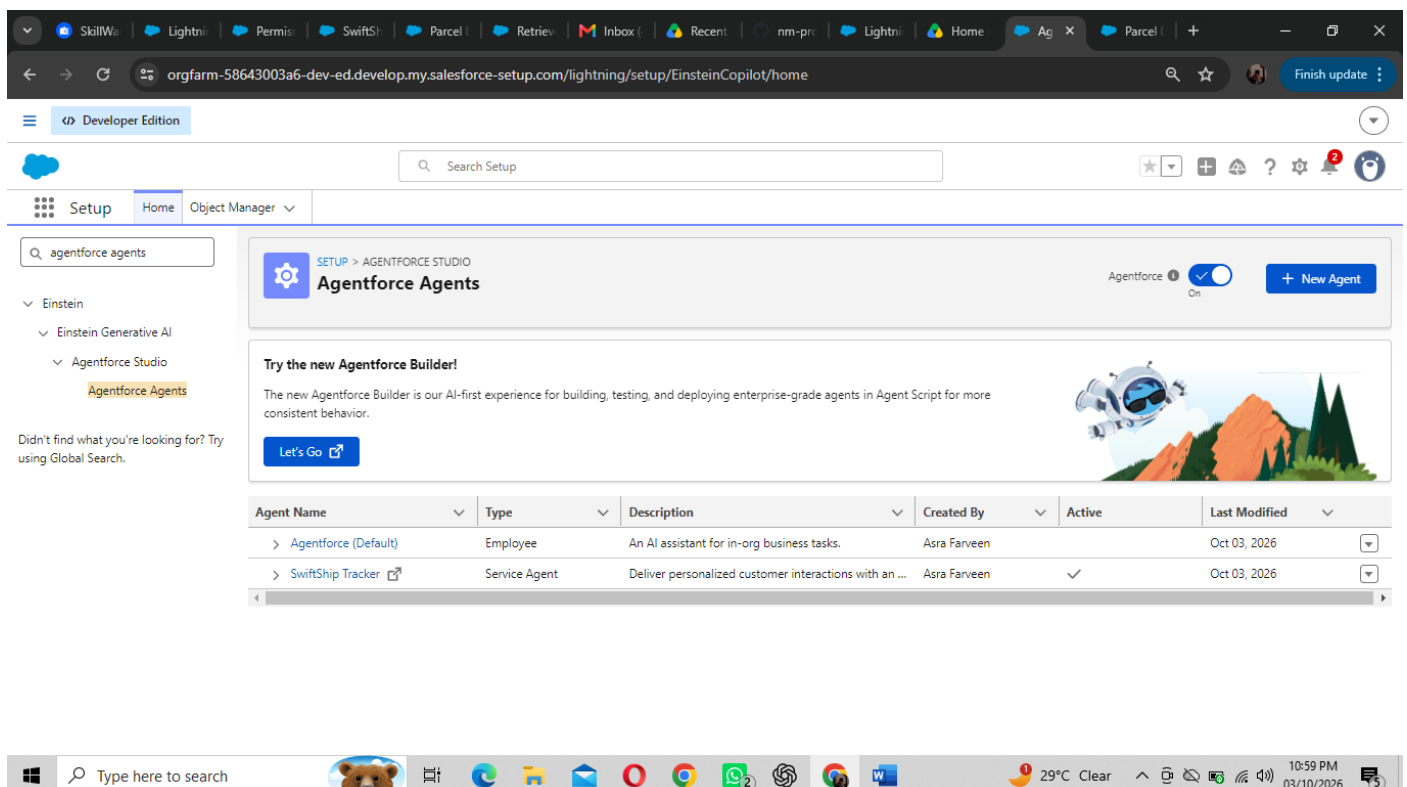

The screenshot shows the Salesforce Agentforce Agents page in a web browser. The browser's address bar displays the URL: `orgfarm-58643003a6-dev-ed.develop.my.salesforce-setup.com/lightning/setup/EinsteinCopilot/home`. The page header includes the Salesforce logo, a search bar, and navigation tabs for Setup, Home, and Object Manager. The left sidebar shows a search bar with 'agentforce agents' and a list of navigation items: Einstein, Einstein Generative AI, and Agentforce Studio (highlighted). The main content area is titled 'Agentforce Agents' and contains several sections: 'Try the new Agentforce Builder!' with a 'Let's Go' button, and a table listing the agents. The table has columns for Agent Name, Type, Description, Created By, Active, and Last Modified. The table lists two agents: 'Agentforce (Default)' and 'SwiftShip Tracker'. The Windows taskbar at the bottom shows the search bar, task view button, and several application icons, including Edge, File Explorer, Mail, and various development tools. The system tray shows the date and time as 10:59 PM on 03/10/2026.

Agent Name	Type	Description	Created By	Active	Last Modified
Agentforce (Default)	Employee	An AI assistant for in-org business tasks.	Asra Farveen		Oct 03, 2026
SwiftShip Tracker	Service Agent	Deliver personalized customer interactions with an ...	Asra Farveen	✓	Oct 03, 2026


Milestone - 4 Building The Agent

1. In Setup, search for Agentforce Agents in Quick Find.
2. Click Agentforce Agents, then click on the default Agent, Then click on Open in Builder.

Assign Sub Agents to the Agent

On the subagents Click on New.

1. Click New Subagent
2. Create a new subagent.
3. Fill in the details as shown.

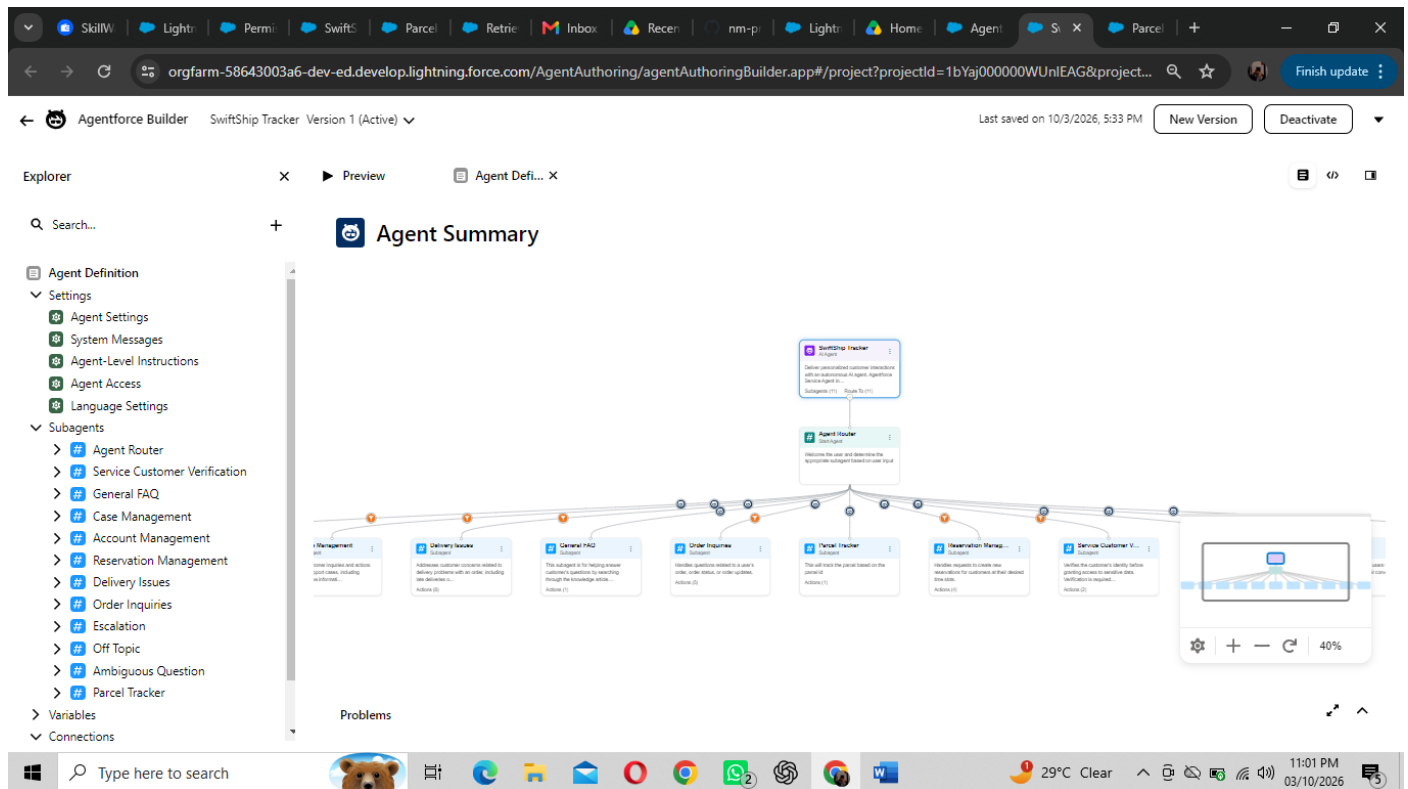


Adding Actions to Agentforce Assets

While still on the Agent Builder in the topics, Click on the Topics Actions

1. Click on New Agent Action.
2. For Action type, Click on Flow then Next.
3. For Reference Flow use the recently created flow, click Next.
4. Fill the details for Agent Configurations.

Assign Subagents Action

1. While on the Agent Builder in Subagent, Click on the Parcel Updates Subagent
2. Click on the subagents Actions, then select Add from asset library.
3. Select the flow action that we created and click on finish.
4. Click on settings , and rename your agent to SwiftShip Tracker
5. Click Save.
6. Click on Ignore and Activate, then Activate.

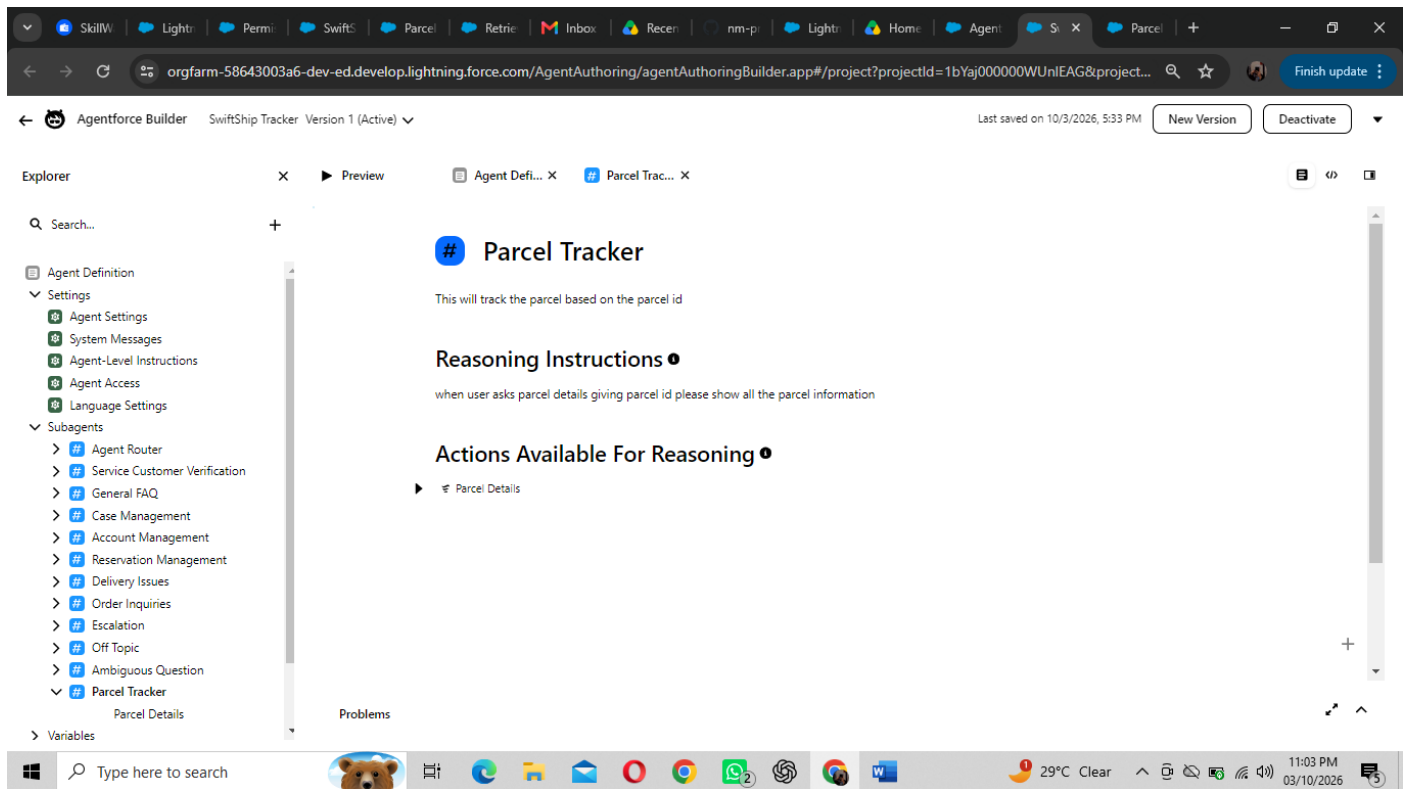

Phase 4: Data Migration, Testing & Security

To validate the functionality and reliability of the Parcel Tracking Agent created in Agent Builder. This phase ensures that the agent correctly recognizes topics, triggers the assigned Flow (SwiftShip Tracker), retrieves or updates parcel data, and performs all intended actions without access or permission issues. The goal is to confirm that the AI-driven agent operates seamlessly within Salesforce and provides accurate, real-time responses to parcel management queries.

Verify Agent

Go to Setup → Agentforce Agents.

1. Open the Agents list and confirm that your agent

Name: Parcel Tracking Agent, appears

Validate Assigned Topic

In Agent Builder → SubAgent, confirm that the SubAgent you created (e.g., Parcel Tracking or SwiftShip Tracker) is listed.

Open the topic to verify:


- It contains a prompt or description related to parcel management.
- The Action/Flow (SwiftShip Tracker) is linked to this topic.

2. Click Save and ensure the topic is Active.

Check the Flow Association


Go to Setup → Flows.

1. Locate the Flow named SwiftShip Tracker.
2. Confirm:
 - The Flow is Activated.
 - The Flow includes screens or actions that handle:
 - Parcel ID input
 - Parcel details retrieval
 - Status update or confirmation message
3. Open the Flow's Advanced Settings → ensure Run in System Context (Without Sharing) if data access is restricted.

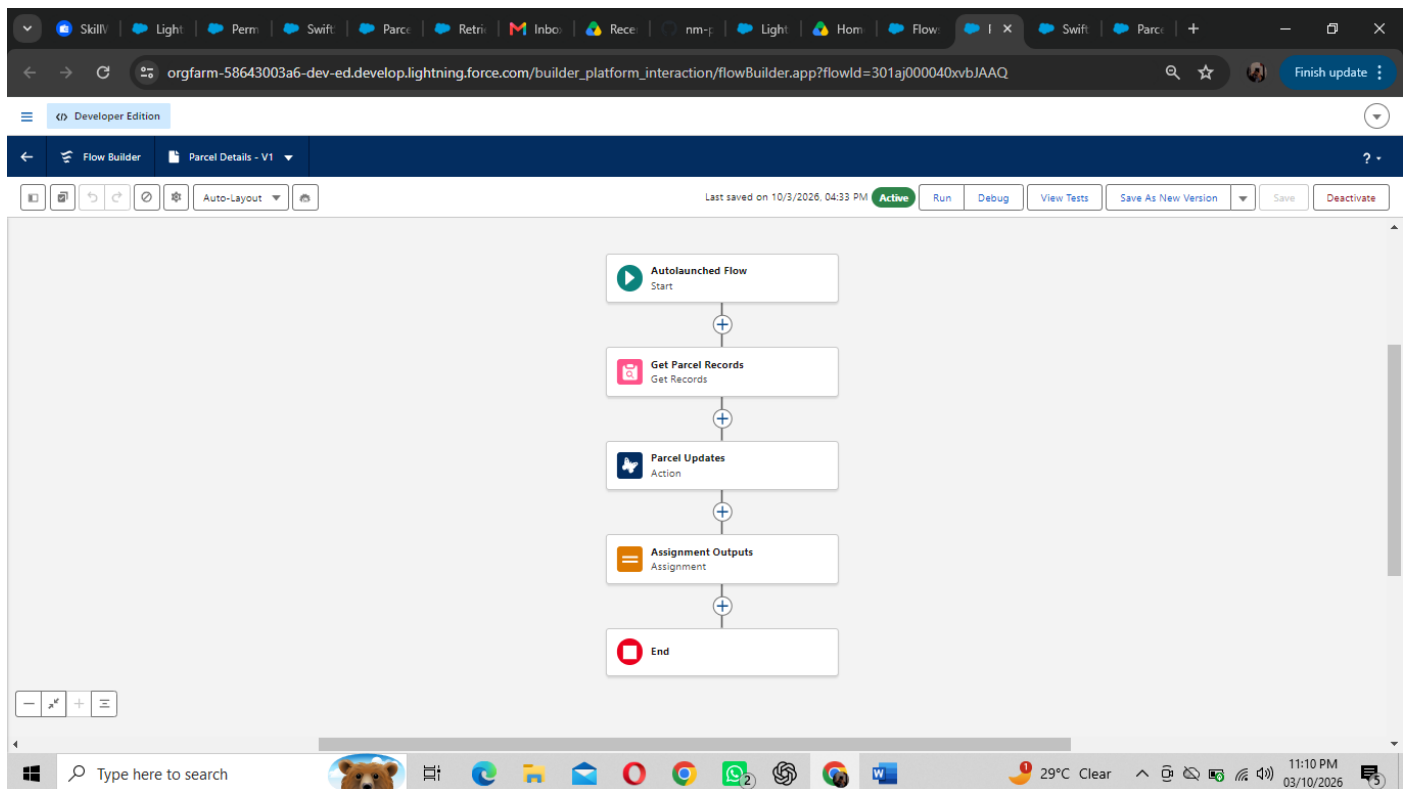

Activate and Test the Agent

1. Return to Setup → Agent Builder → Parcel Tracking Agent.
2. Click Activate (if not already activated).
3. Once active, test using Preview / Try it Out mode:
Type a query such as:
“Give the parcel details of Parcel Id=P-002”
4. Observe the agent's response.

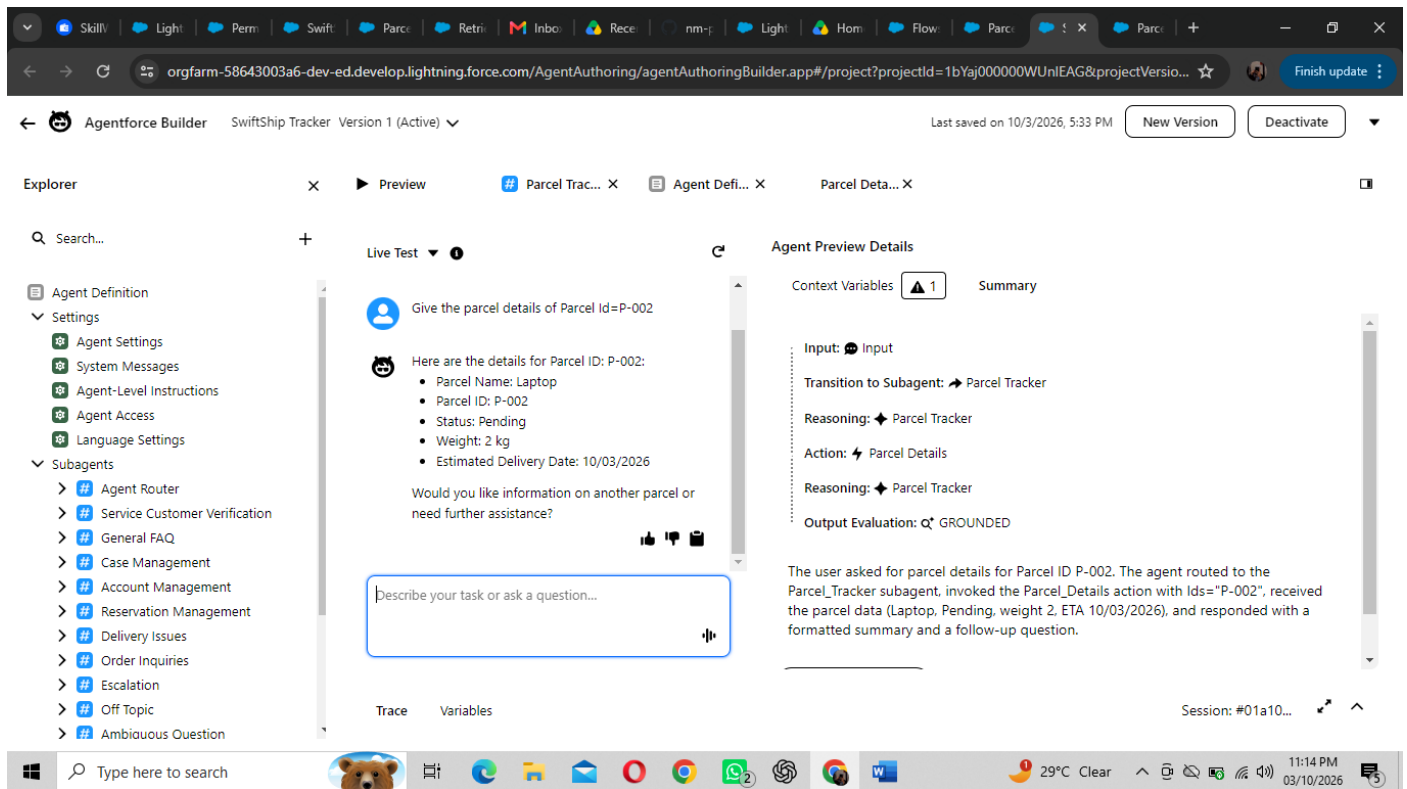

Validate Data in Salesforce

1. After the agent runs the Flow:

- Go to App Launcher → Parcels (Parcel__c).

Search for the Parcel ID you used during testing.

Verify:

- The Status or related field is updated.
- Any Flow-created records (bookings, updates) appear correctly.

Phase 5: Deployment, Documentation & Maintenance

- In the scope of our SwiftShip Tracker (AgentForce) project implementation:
- The purpose of this phase is to validate that the Parcel Tracking Agent, created using Salesforce Agent Builder, works as intended within the Salesforce Developer Org environment.
- The main goal is to understand how an AI-powered Service Agent can be tested to ensure correct topic recognition, Flow execution, and data retrieval from Salesforce custom objects.
- Testing is conducted within the Developer Org to simulate how the Agent would perform in a live setup, ensuring that permissions, flows, and interactions function correctly before any deployment stage.
- Real-world production testing (UAT or sandbox deployment) is not performed in this project because:
- Developer Edition orgs are standalone environments and do not support production-linked testing environments.

- Enterprise-level AgentForce deployment involves sandbox testing, staging environments, and CI/CD automation, which are outside the scope of this academic/prototype implementation.

Maintenance, Monitoring & Troubleshooting

In the SwiftShip Tracker (AgentForce) project, ongoing maintenance ensures that Parcel, Customer, and Delivery data remain accurate, synchronized, and up to date. Regular monitoring helps detect issues such as misrouted agent queries, failed Flow executions, or performance delays in AgentForce responses.

Troubleshooting activities include resolving configuration errors, updating Flow logic, refining agent topics, and improving prompts to enhance user interactions.

Although this project is implemented within a Salesforce Developer Org for learning purposes, in real-world enterprise deployments, these maintenance and monitoring practices are essential. They ensure that AI-powered service agents remain reliable, scalable, and continuously aligned with evolving customer service operations and business goals.

FUNCTIONAL & PERFORMANCE TESTING

During testing, screenshots were captured from Salesforce to validate vehicle creation, dealer assignment, stock validation triggers, order status updates, batch processing, scheduled reminders, and dashboard analytics. All features were verified to ensure correct functionality and performance.

ADVANTAGES & DISADVANTAGES

Advantages

- Centralized parcel and customer information in Salesforce.
- Provides better visibility into parcel booking and delivery tracking.
- Automates key logistics processes using Salesforce Flow.
- Agentforce enables conversational customer support and parcel-status assistance.
- Prompt Builder supports AI-powered responses and self-service.
- Reduces manual effort for customers, support teams, and administrators.
- Provides timely notifications and updates during the delivery process.
- Experience Cloud can provide customers with convenient access to tracking information.
- Supports integration with external logistics systems.
- Can scale to support multiple locations and growing parcel operations.

Disadvantages

- Requires accurate and up-to-date parcel and customer data.
- Dependence on Salesforce configuration and automation.
- Agentforce responses depend on properly configured prompts and available data.
- External logistics integrations may increase implementation complexity.
- Flow and automation logic require regular maintenance when business processes change.
- Users need appropriate Salesforce or Experience Cloud access to use the system.
- Initial Salesforce implementation and configuration can require significant effort.
- Expanding the system to additional locations or integrations may require further customization.

CONCLUSION:

The SwiftShip Tracker demonstrates how Salesforce can be used to build a centralized parcel management and tracking solution. The project integrates custom objects, relationships, Flows, Apex, Email Alerts, Experience Cloud, AgentForce AI, Prompt Builder, security controls, and reporting to support parcel booking, delivery tracking, status updates, and customer communication.

The integration of AgentForce AI with Prompt Builder and Salesforce Flow provides a conversational approach to parcel tracking, enabling customers to obtain shipment information without depending entirely on manual support. The project therefore provides a practical foundation for a scalable and user-friendly parcel management solution.

FUTURE SCOPE

- Extend AgentForce capabilities for more parcel-management queries.
- Enhance real-time delivery tracking.
- Expand customer self-service through Experience Cloud.
- Add more advanced delivery-performance analytics.
- Integrate additional external logistics systems.
- Improve AI prompts and conversational experiences.
- Introduce enterprise-level sandbox and CI/CD deployment.
- Expand automation for additional parcel operations.

The source identifies enterprise deployment, continuous monitoring, prompt refinement,

Flow improvement, and AI-agent scalability as areas for future enhancement.

APPENDIX

- A. Custom Objects: Parcel, Delivery, Sender, Receiver
- B. Standard Objects: Account, Contact, Case, Task, EmailMessage, User
- C. Automation: Flows, Approval Processes, Email Alerts
- D. Apex: Apex Classes, Batch Apex
- E. AI: AgentForce AI, Prompt Builder
- F. UI: Lightning App, Lightning Record Pages, Experience Cloud
- G. Security: Profiles, Roles, Permission Sets, Sharing Rules, Field-Level Security
- H. Analytics: Reports & Dashboards
- I. Testing: Flow, AgentForce, data retrieval, security and permission validation

THANK YOU