1. Runner to board implementation

Discovery and bookmarking converge on AdapterFramework; persistence follows the completed read.

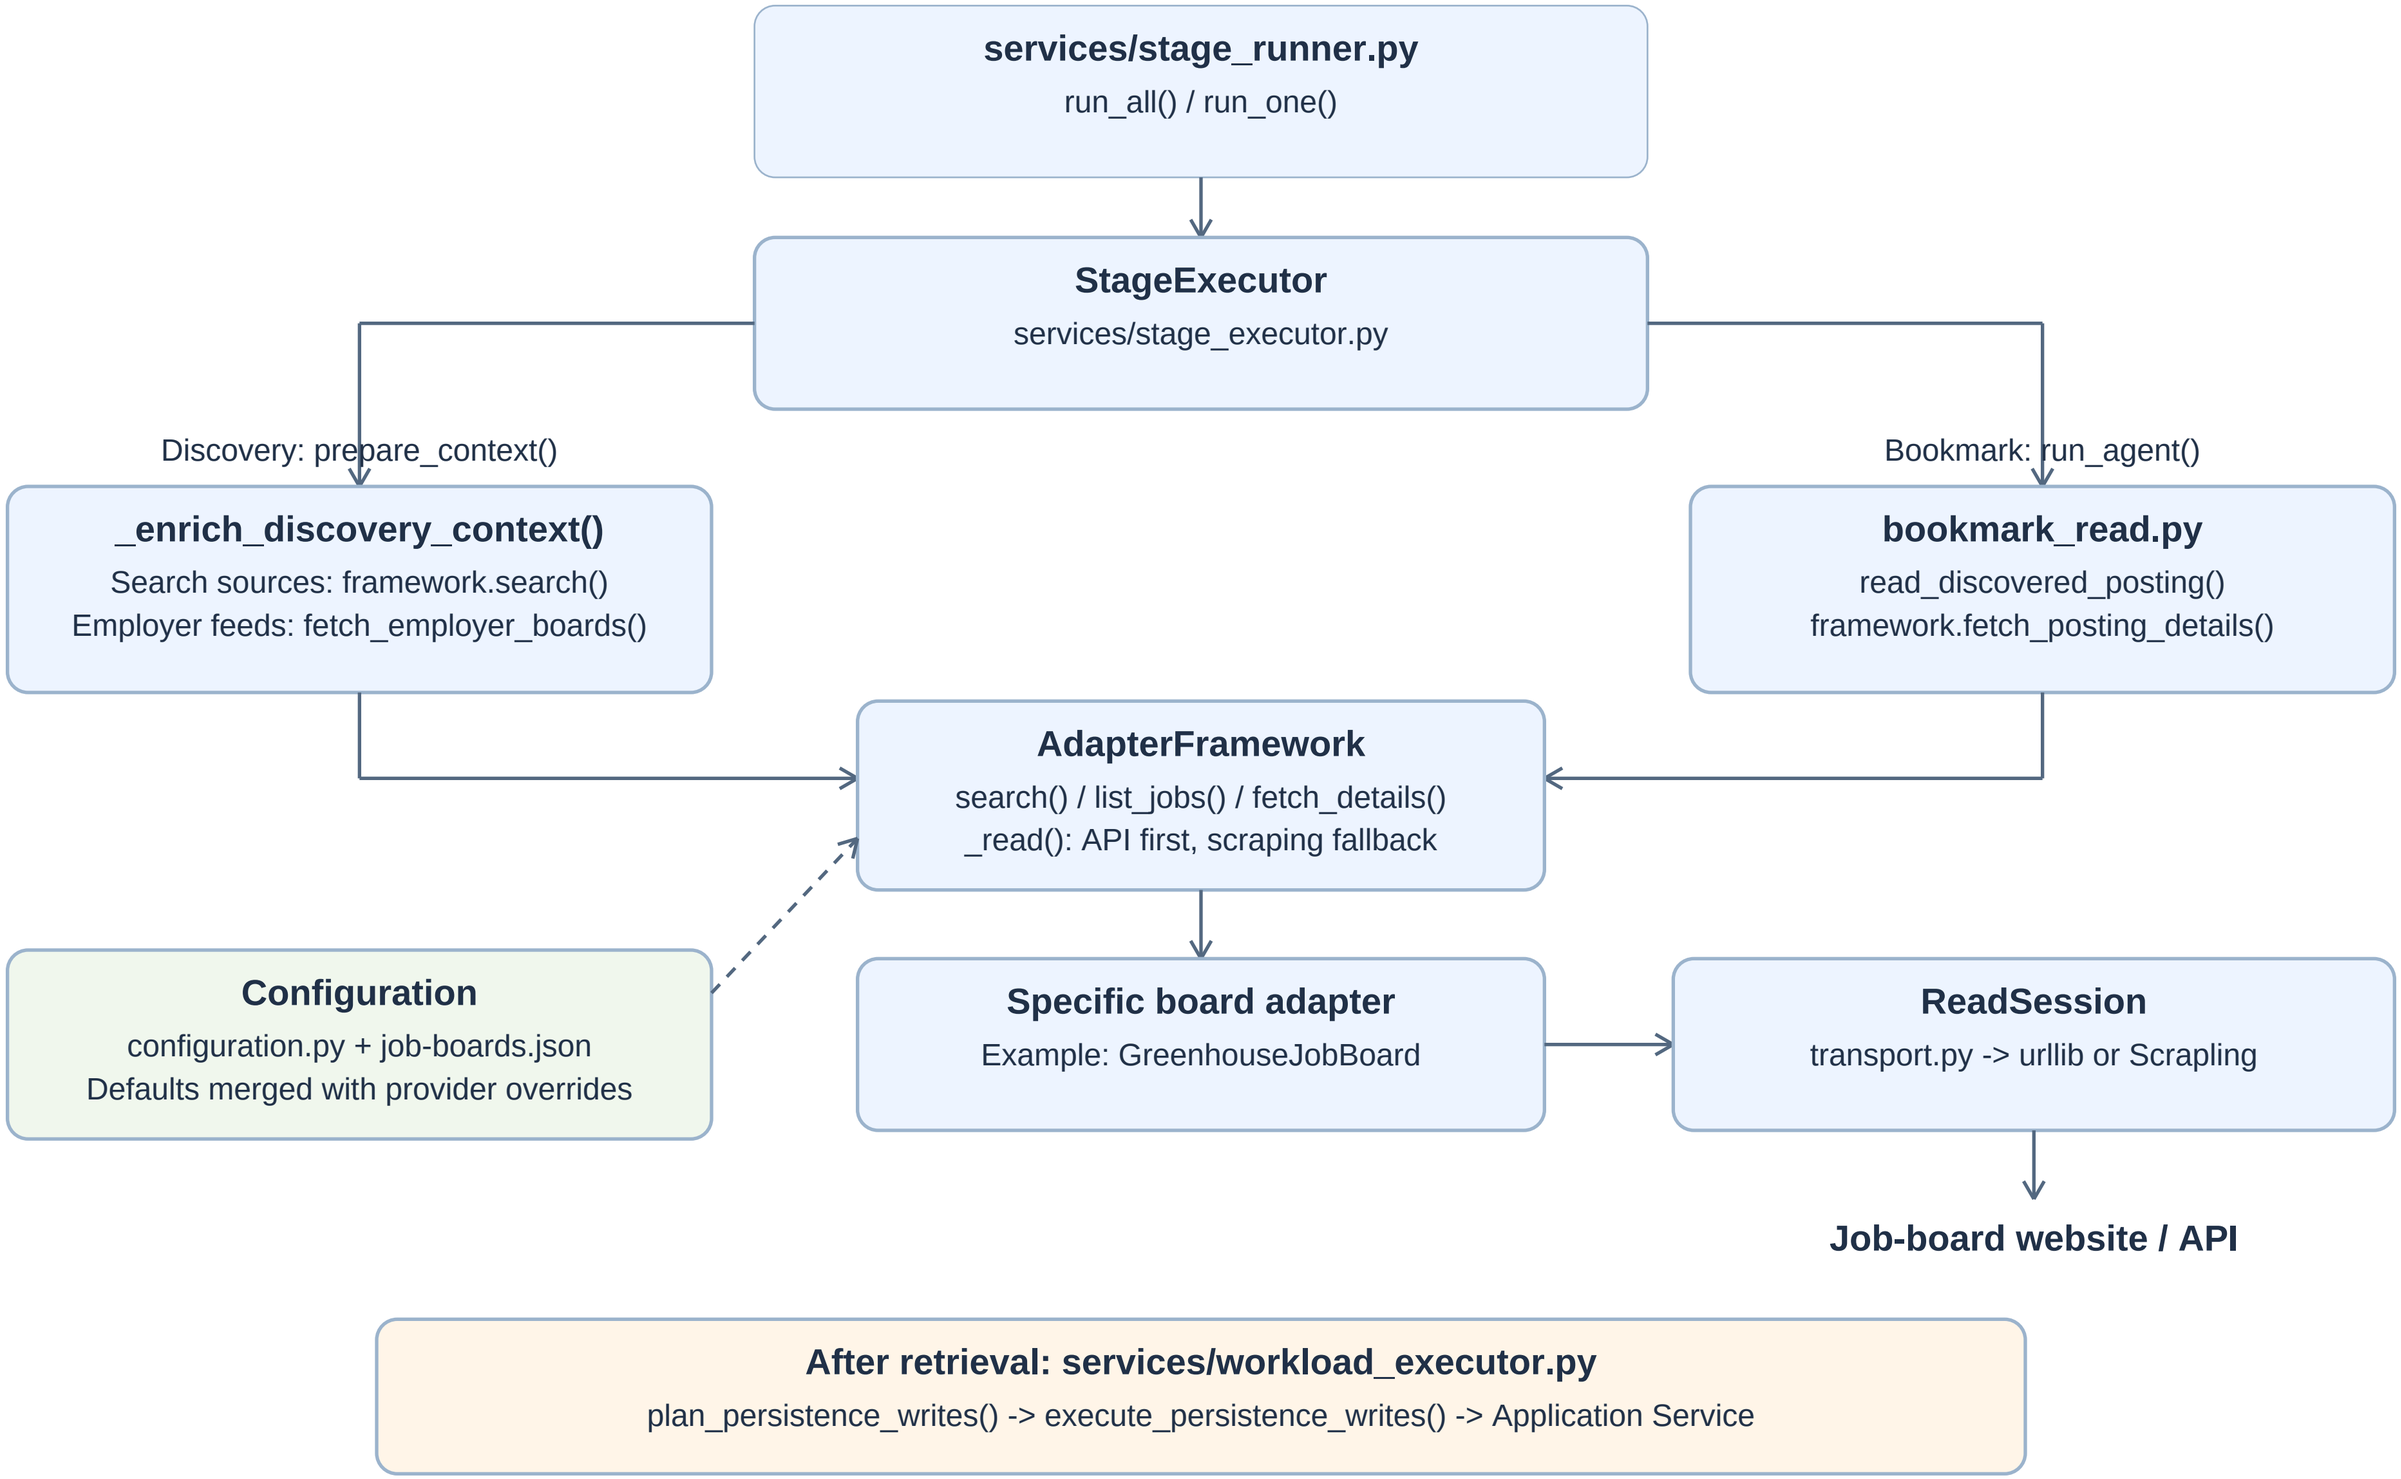

2. Classes and responsibilities

Solid arrows mean calls/uses. Dashed arrows mean inheritance toward the base class.

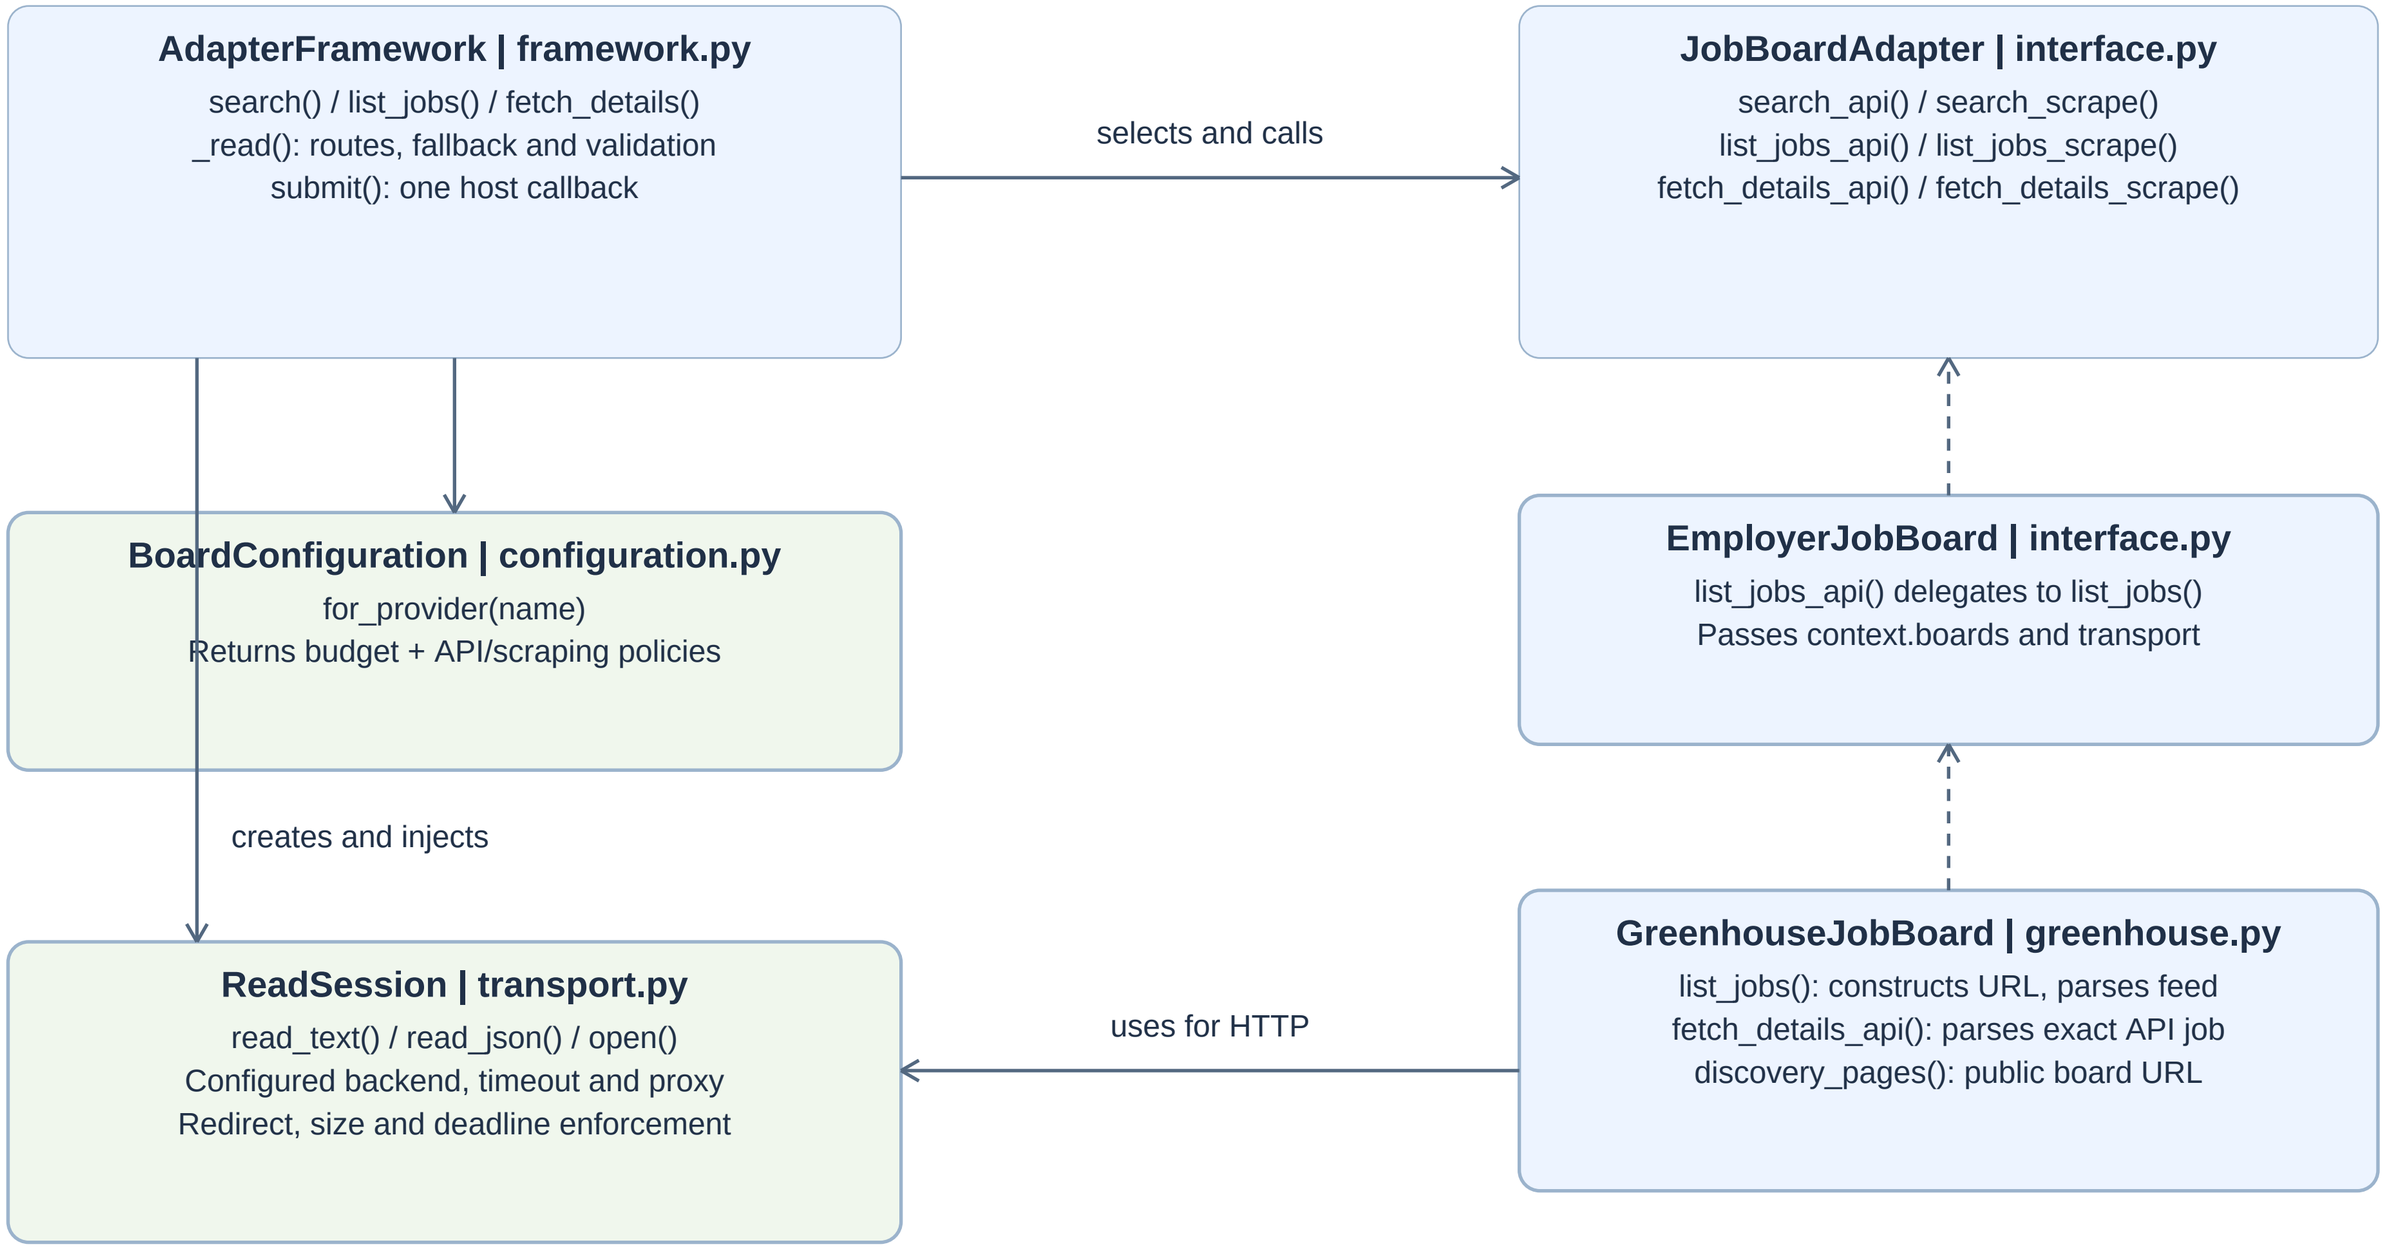

Other providers implement the same contract; generic HTML parsing lives in parsing.py.

3. Bookmark retrieval sequence

A Greenhouse example. API and scraping attempts consume one shared operation deadline.

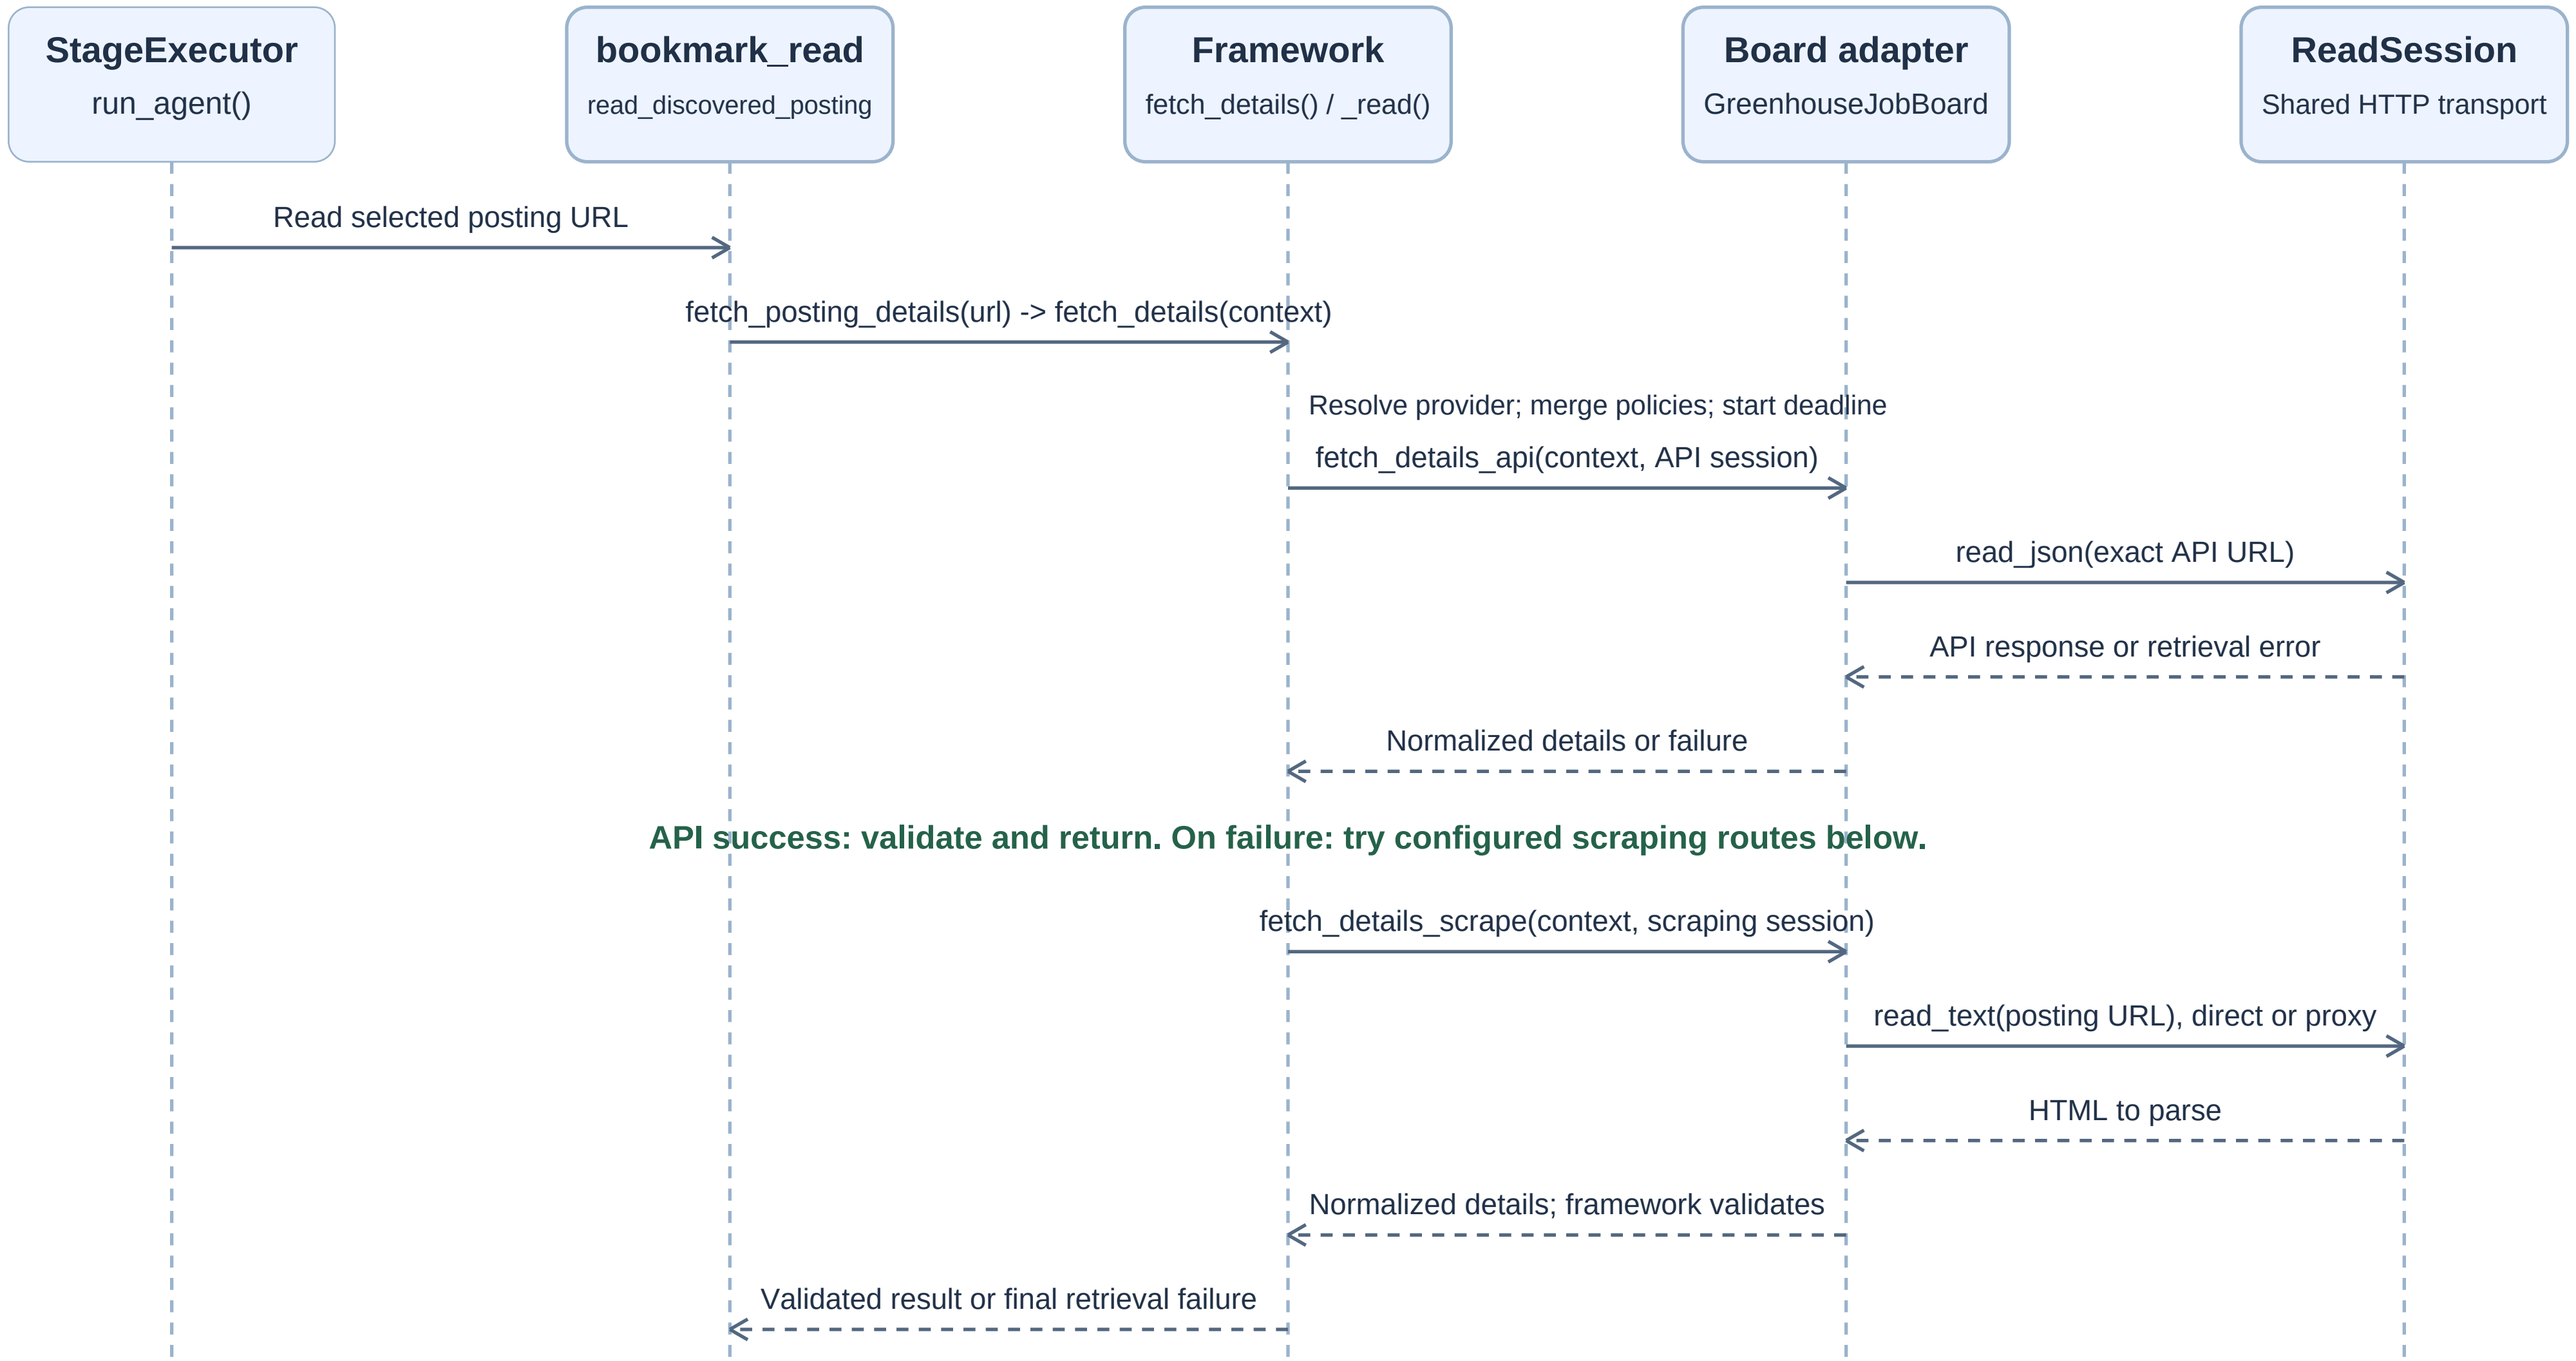

If all HTTP reads fail, bookmark_read tries the configured model fallback before returning to the stage.

4. Live native-browser submission sequence

The live ChatGPT host flow uses Sessions and ReadySubmission helpers; it bypasses framework.submit().

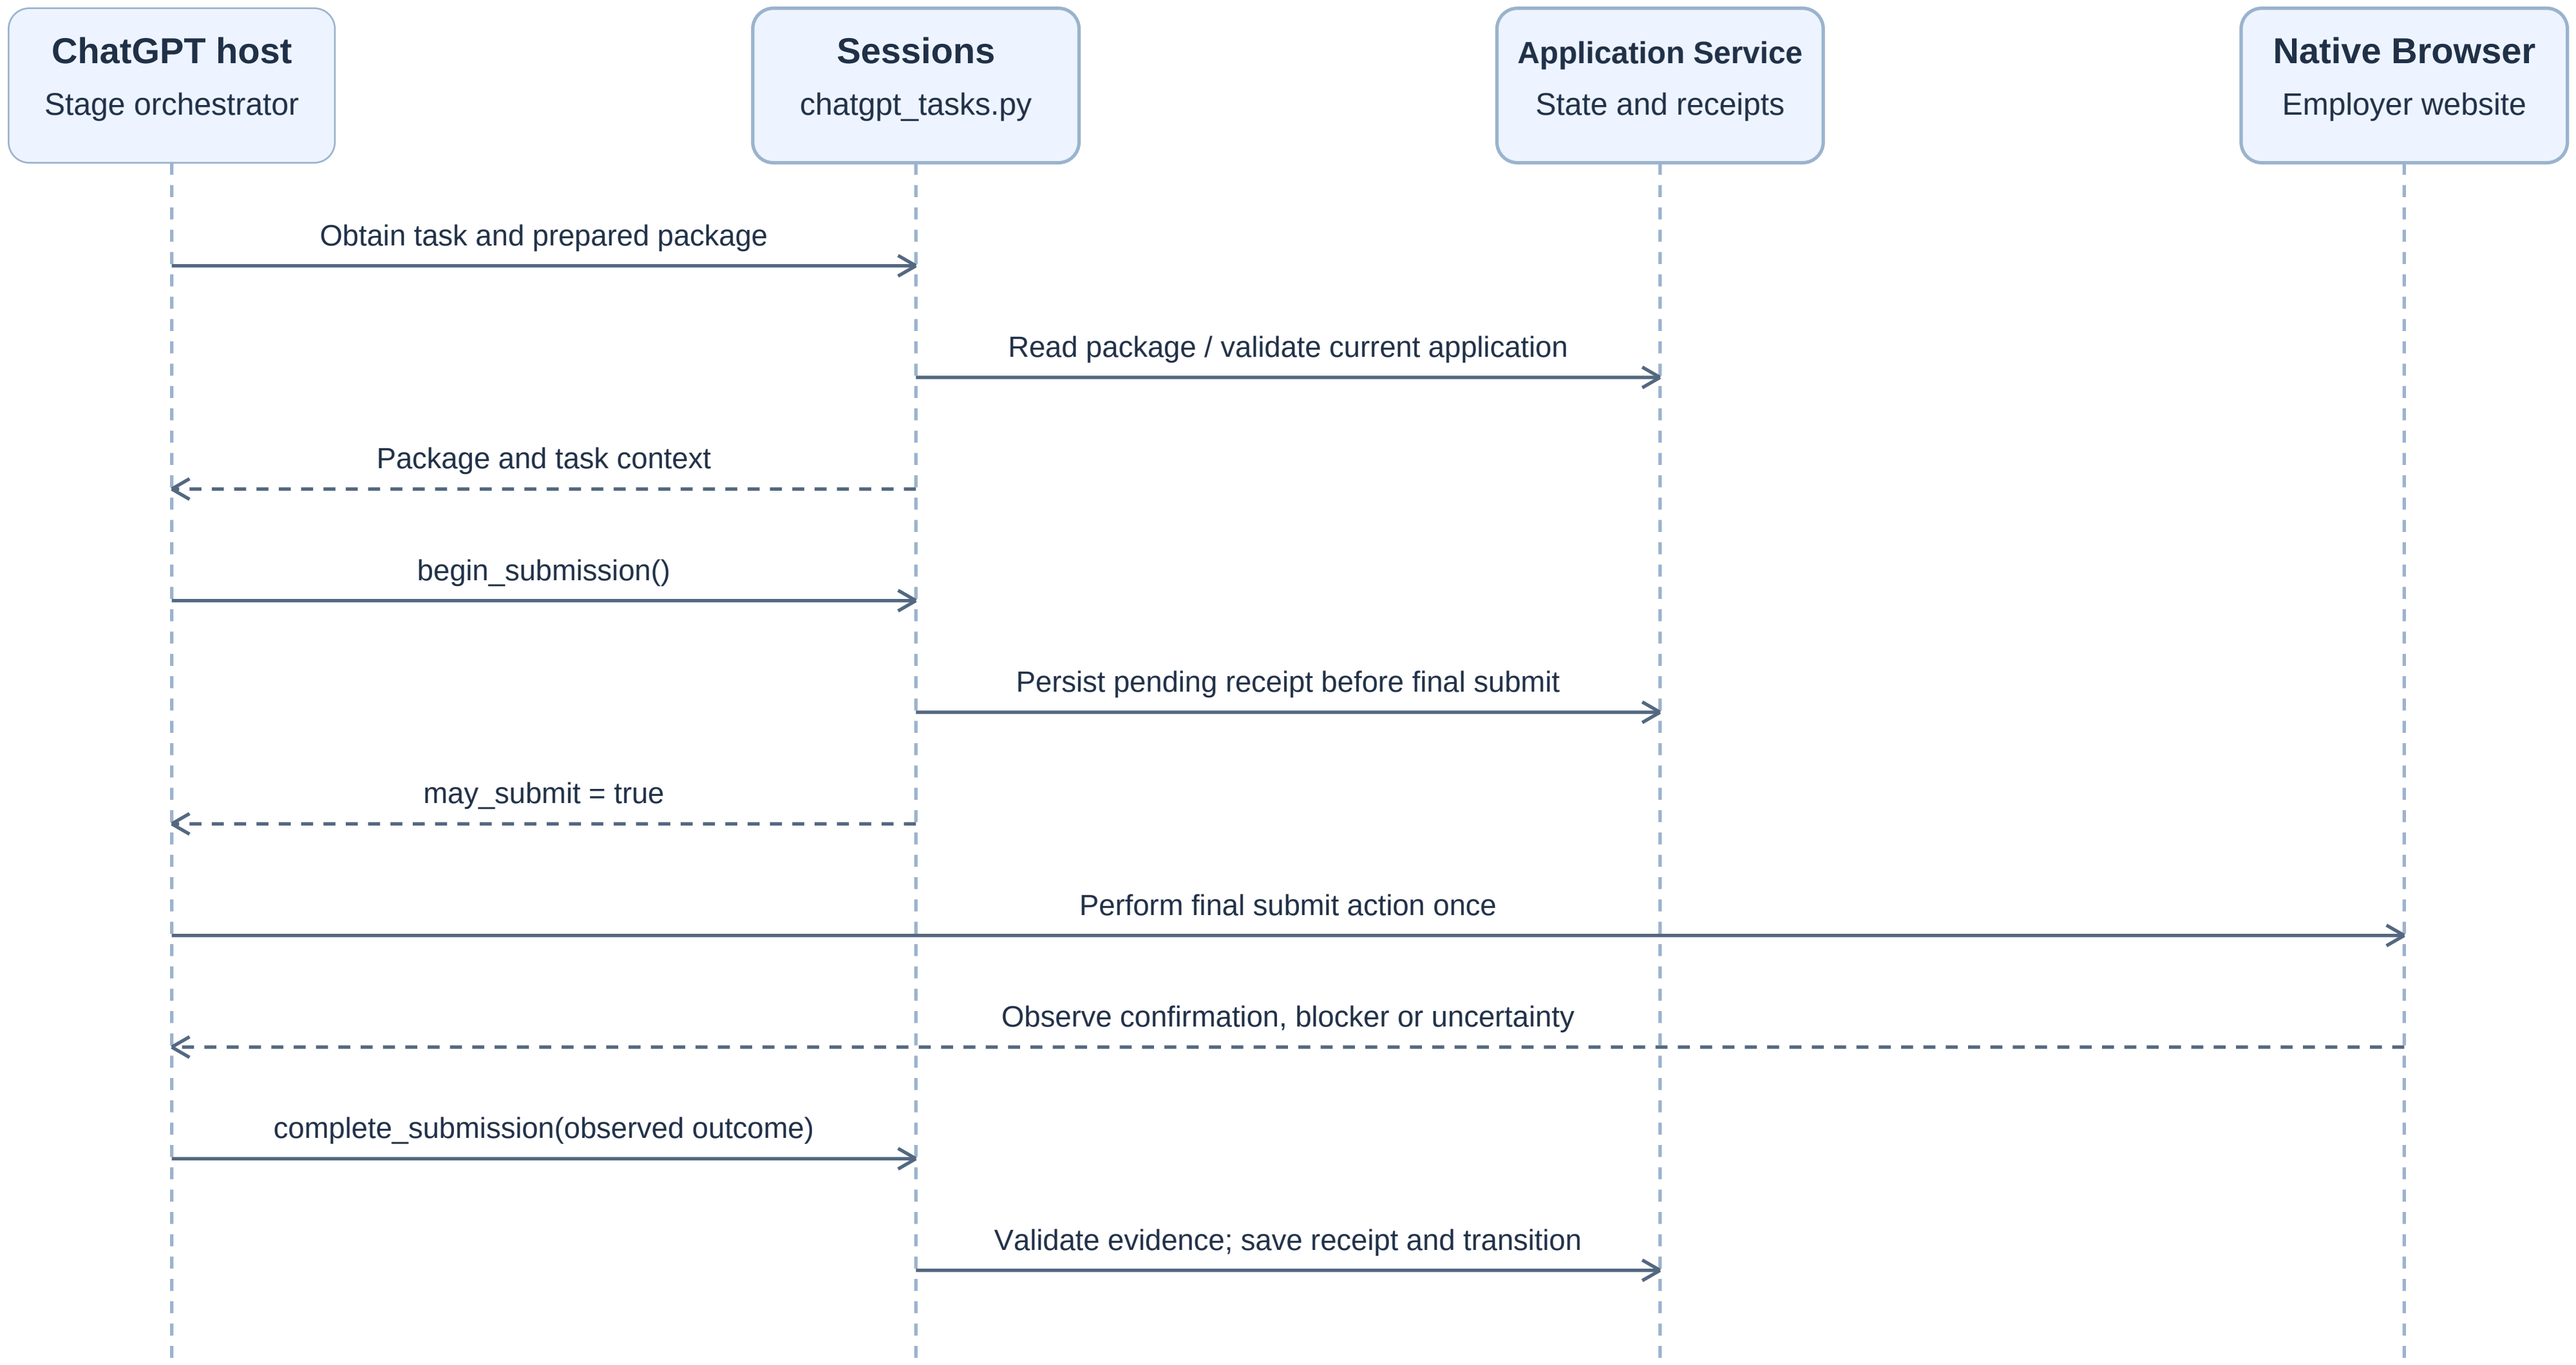

The callback-based ReadySubmission.execute() path separately calls framework.submit() once, with no retry.