



Blog with API

Jordi Arnau Esteban



Lessons learned

- La sencillez de Bootstrap

```
class="toast align-items-center hide start-50 translate-middle bg-light"
```

tipo

alineamiento horizontal

visibility

alineamiento vertical

color



Lessons learned

- Trabajar con APIs

{JSON} Placeholder


Free fake API for testing and prototyping.

Powered by [JSON Server](#) + [LowDB](#)

As of Dec 2020, **serving ~1.8 billion requests each month.**

Lessons learned

- Postman

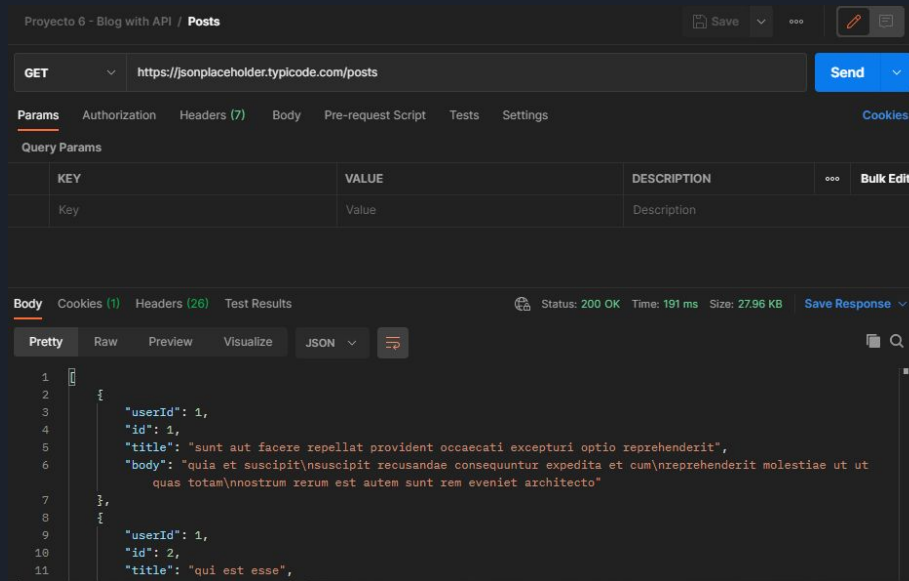

Problems encountered

- La complejidad y poca flexibilidad de Bootstrap





Problems encountered

- Ajax, promesas y todas las variantes

Category: Shorthand Methods

These methods perform the more common types of Ajax requests in less code.

`jQuery.get()`

Load data from the server using a HTTP GET request.

`jQuerygetJSON()`

Load JSON-encoded data from the server using a GET HTTP request.

`jQuery.getScript()`

Load a JavaScript file from the server using a GET HTTP request, then execute it.

`jQuery.post()`

Send data to the server using a HTTP POST request.

`.load()`

Load data from the server and place the returned HTML into the matched elements.