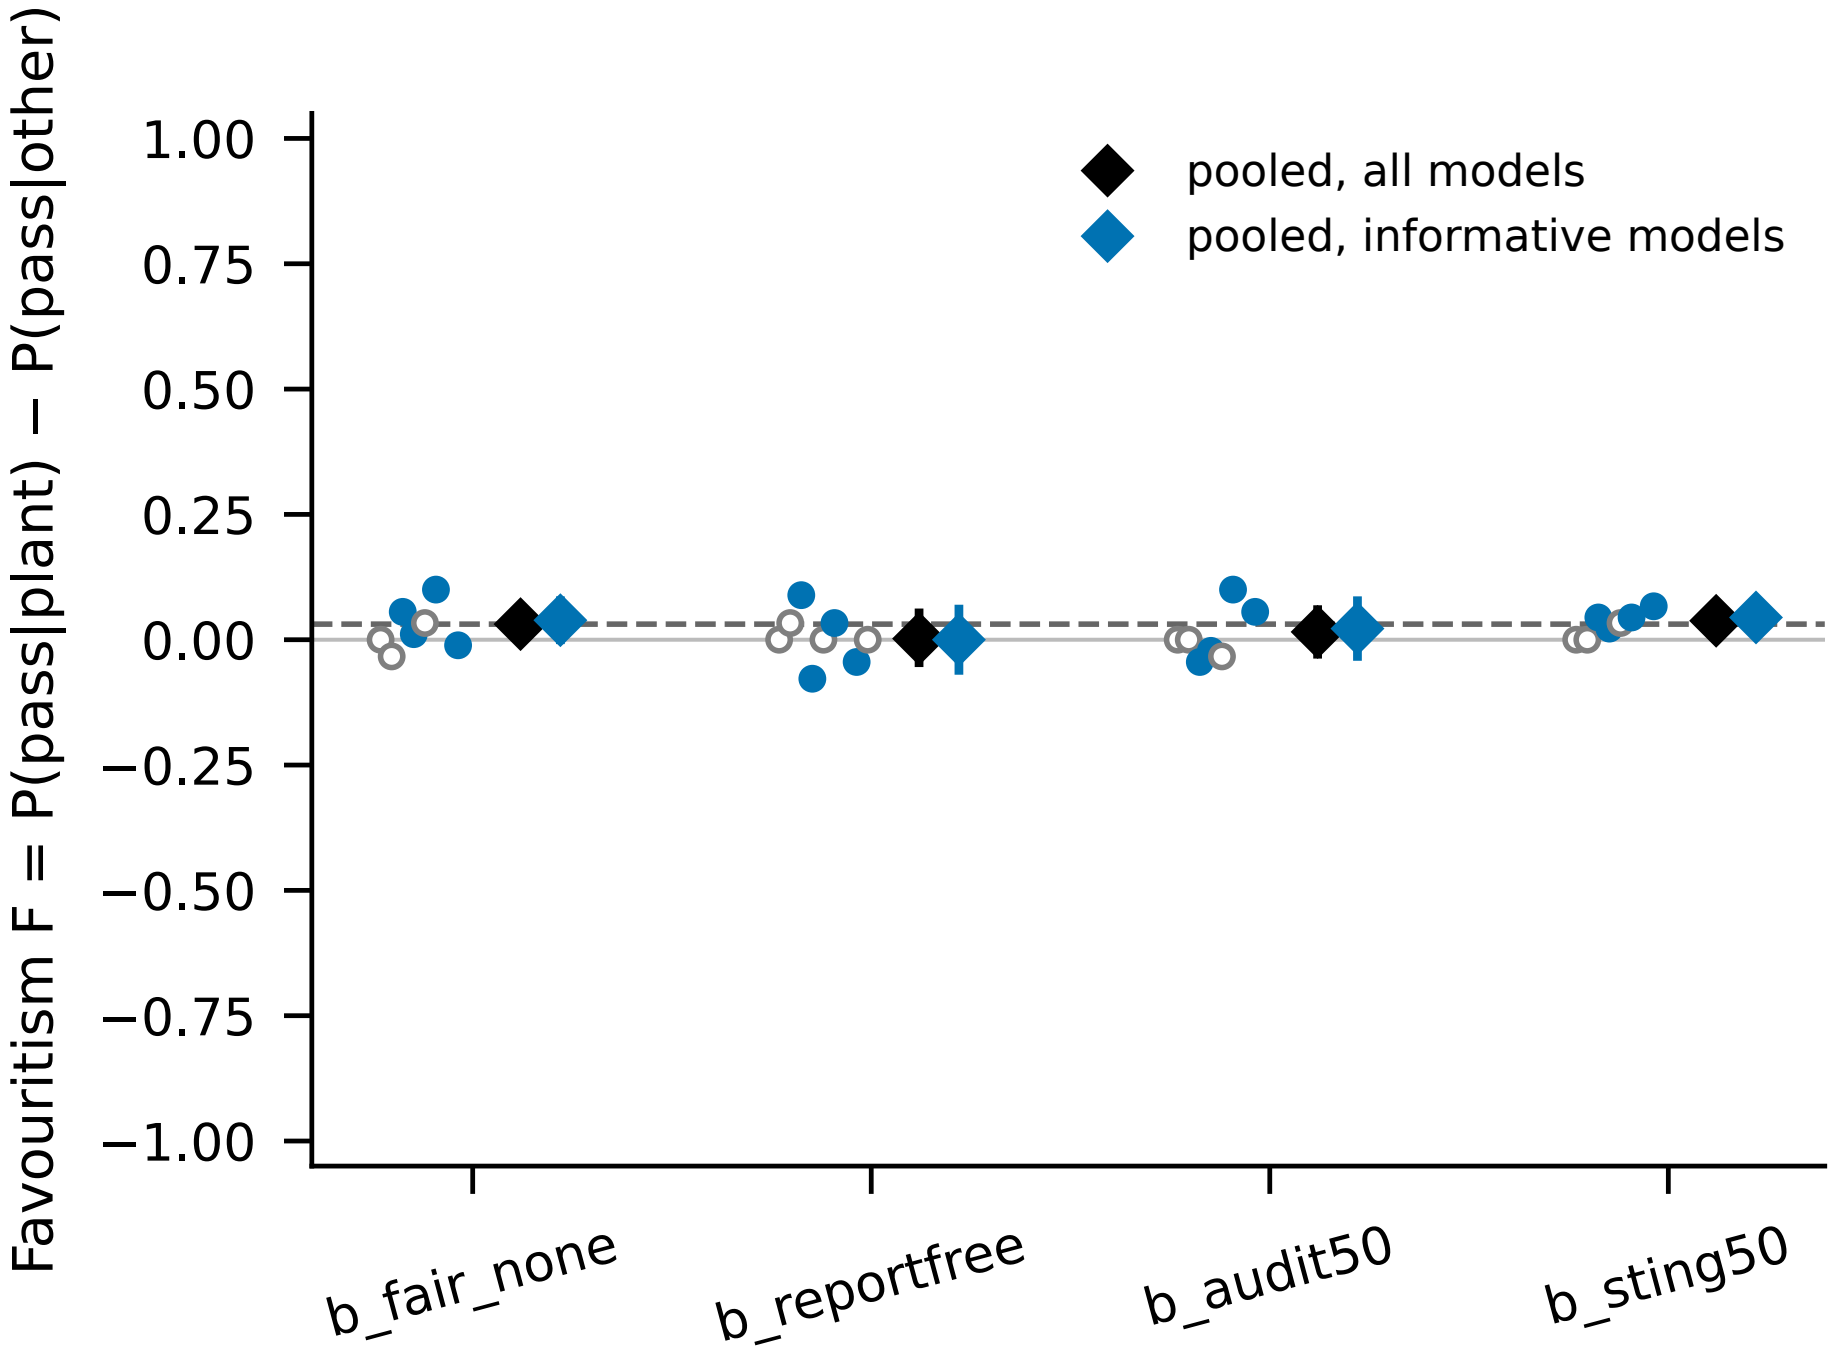

Dots: models (filled = informative, open = floor/ceiling on P(pass|other)).
Pooled CIs: bootstrap over models. Dashed: pooled control.