

Министерство науки и высшего образования Российской Федерации
Севастопольский государственный университет
Кафедра ИС

Отчет
по лабораторной работе №1
«Исследование возможностей языка R для статического анализа данных»
по дисциплине
«ИНТЕЛЛЕКТУАЛЬНЫЙ АНАЛИЗ ДАННЫХ»

Выполнил студент группы ИС/б-17-2-о
Горбенко К. Н.
Проверил
Сырых О.А.

Севастополь
2019

1 ЦЕЛЬ РАБОТЫ

- изучить основные особенности языка R;
- исследовать возможности языка R для работы с графикой.

2 ЗАДАНИЕ НА РАБОТУ

1. Установить R на ПК.
2. Установить RStudio - инсталлятор скачать с официального сайта проекта.
3. Ознакомиться с кратким руководством пользователя RStudio.
4. Исследовать команду «demo()», полученные результаты вставить в отчет.
5. Исследовать основные функции и команды языка R, представленные в данной лабораторной работе, полученные результаты вставить в отчет.
6. Ответить на контрольные вопросы.

3 ХОД РАБОТЫ

Используем консоль R.exe. При входе получаем следующий текст:

```
1 R version 3.6.2 (2019-12-12) -- "Dark and Stormy"
2 Copyright (C) 2019 The R Foundation for Statistical Computing
3 Platform: x86_64-w64-mingw32/x64 (64-bit)
4
5 R is free software and comes with ABSOLUTELY NO WARRANTY.
6 You are welcome to redistribute it under certain conditions.
7 Type 'license()' or 'licence()' for distribution details.
8
9   Natural language support but running in an English locale
10 'citation()' on how to cite R or R packages in publications.
11
12 Type 'demo()' for some demos, 'help()' for on-line help, or
13 'help.start()' for an HTML browser interface to help.
14 Type 'q()' to quit R.
```

Выполним команду demo(). Результат выполнения команды представлен на рисунке 1.

```

R demos
File Edit

Demos in package 'base':

error.catching      More examples on catching and handling errors
is.things            Explore some properties of R objects and
                     is.FOO() functions. Not for newbies!
recursion            Using recursion for adaptive integration
scoping              An illustration of lexical scoping.

Demos in package 'graphics':

Hershey              Tables of the characters in the Hershey vector
                     fonts
Japanese             Tables of the Japanese characters in the
                     Hershey vector fonts
graphics             A show of some of R's graphics capabilities
image                The image-like graphics builtins of R
persp                Extended persp() examples
plotmath             Examples of the use of mathematics annotation

Demos in package 'grDevices':

colors               A show of R's predefined colors()
hclColors            Exploration of hcl() space

Demos in package 'stats':

```

Рисунок 1 – Результат выполнения команды `demo()`

Выполним команду `help(demo)`. Результат ее выполнения изображен на рисунке 2

```

demo {utils}
R Documentation

Demonstrations of R Functionality

Description

demo is a user-friendly interface to running some demonstration R scripts. demo() gives the list of available topics.

Usage

demo(topic, package = NULL, lib.loc = NULL,
      character.only = FALSE, verbose = getOption("verbose"),
      echo = TRUE, ask = getOption("demo.ask"),
      encoding = getOption("encoding"))

Arguments

topic
  the topic which should be demonstrated, given as a name or literal character string, or a character
  string, depending on whether character.only is FALSE (default) or TRUE. If omitted, the list of
  available topics is displayed.

package
  a character vector giving the packages to look into for demos, or NULL. By default, all packages in
  the search path are used.

```

Рисунок 2 – Результат выполнения команды `help(demo)`

Выполним операции над векторами:

```

1 > v1 <- c(1, 2, 3, 4, 5) * 3
2 > v1
3 [1] 3 6 9 12 15
4 > v1[1:3]
5 [1] 3 6 9
6 > v2 = rep(15, 4)
7 > v2
8 [1] 15 15 15 15
9 > length(v2)
10 [1] 4

```

Выполним операции над матрицами:

```

1 > mat1 <- matrix (data=1, nrow=3, ncol=3)
2 > mat1
3      [,1] [,2] [,3]
4 [1,]    1    1    1
5 [2,]    1    1    1
6 [3,]    1    1    1
7 > is.matrix(mat1)
8 [1] TRUE
9 > dim(mat1)
10 [1] 3 3
11 > dim(mat1)
12 [1] 3 3

```

Работа с графикой:

```

1 > x <- c(1, 2, 3, 4, 5)
2 > y <- c(1, 2, 3, 4, 5)
3 > plot(x, y, type="l")
4 > plot(atan, -2 * pi, 2* pi)

```

Результат выполнения программы:

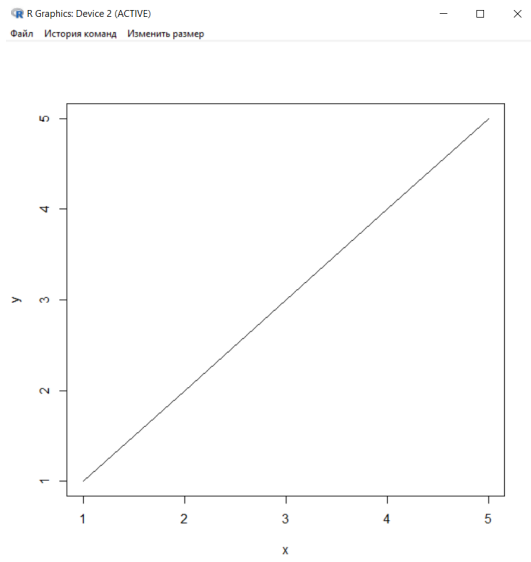
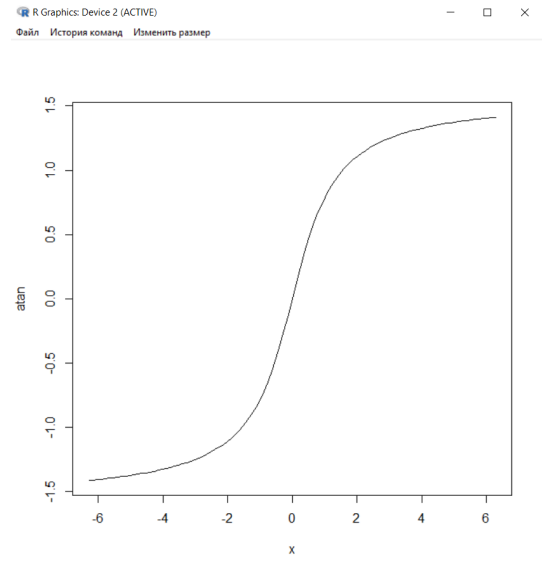
(a) $y = x$ (b) $y = \arctan(x)$

Рисунок 3 – Демонстрация работы с графикой