

Project Design

Script-Controlled ACL – Restrict Record Access Based on Field Value

1. Introduction


Project Design explains the architecture and workflow of the ServiceNow ACL project. The design shows how users, roles, tables, and Access Control Lists work together to protect Institution Details records.

2. System Architecture

The project consists of four main components:

- Users (Admin and EEE User)
- Roles (bb1, bb2, bb3, bb4)
- Institution Details custom table (u_institution_details)
- Access Control Lists (READ, CREATE, WRITE, DELETE)

3. Workflow Diagram

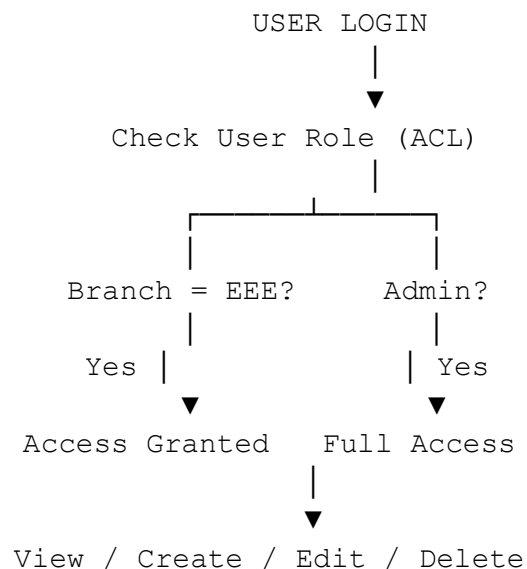

4. Design Components

Component	Purpose
Users	Stores user information and login details.
Roles	Defines permissions for different operations.
Institution Details Table	Stores student records with branch information.

ACL	Controls access based on role and branch value.
-----	---

5. ACL Design

READ ACL: Only bb1 users can read EEE branch records.

CREATE ACL: bb2 users can create new records.

WRITE ACL: bb3 users can edit records.

DELETE ACL: bb4 users can delete records.

Admin users bypass all restrictions and have complete access.

6. Expected Design Output

The design ensures record-level security in ServiceNow. Users receive only the permissions assigned through ACL rules, while administrators maintain unrestricted access.