

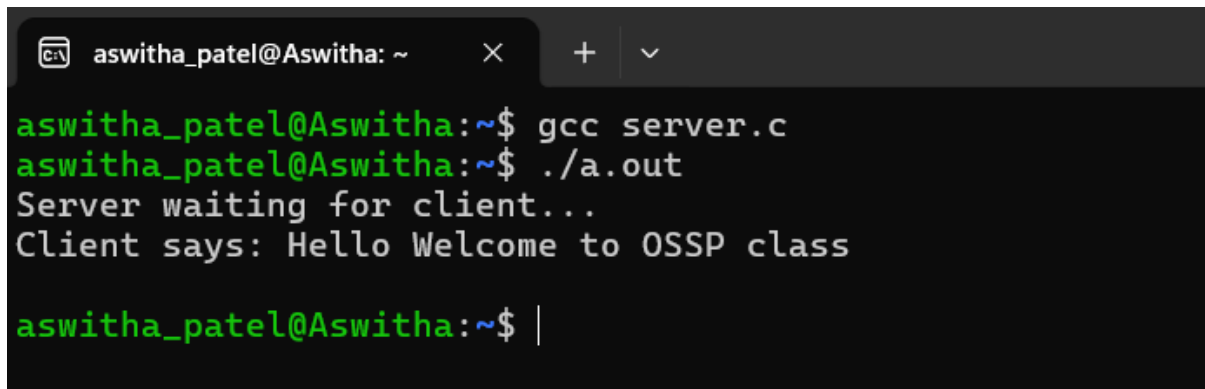
OSSP (Operating Systems And System Programming)

Course code: 25SC2104E

Practical-06 Client-Server Application

A)

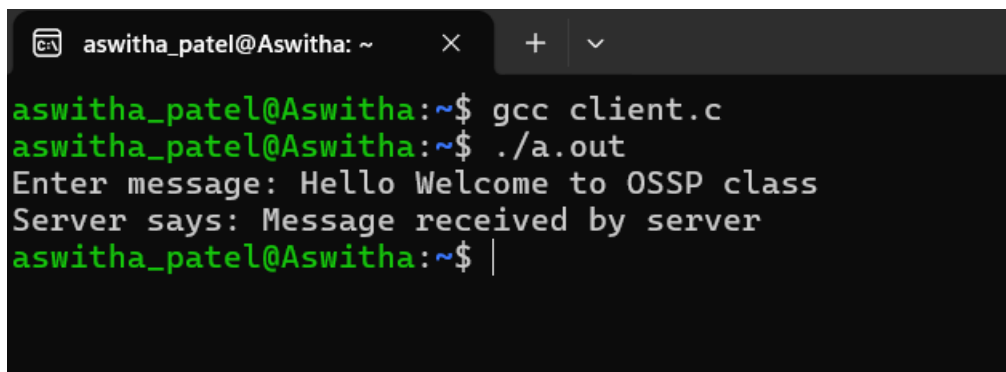
Terminal 1

A screenshot of a terminal window titled 'aswitha_patel@Aswitha: ~'. The terminal shows the following commands and output: 'gcc server.c', './a.out', 'Server waiting for client...', 'Client says: Hello Welcome to OSSP class', and a final prompt 'aswitha_patel@Aswitha:~\$ |' with a cursor.

```
aswitha_patel@Aswitha:~$ gcc server.c
aswitha_patel@Aswitha:~$ ./a.out
Server waiting for client...
Client says: Hello Welcome to OSSP class

aswitha_patel@Aswitha:~$ |
```

Terminal 2

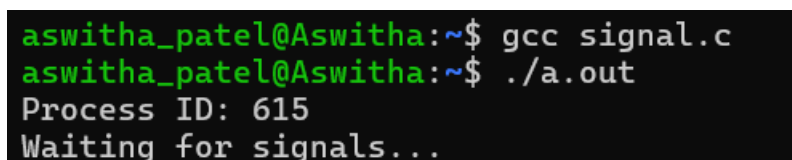
A screenshot of a terminal window titled 'aswitha_patel@Aswitha: ~'. The terminal shows the following commands and output: 'gcc client.c', './a.out', 'Enter message: Hello Welcome to OSSP class', 'Server says: Message received by server', and a final prompt 'aswitha_patel@Aswitha:~\$ |' with a cursor.

```
aswitha_patel@Aswitha:~$ gcc client.c
aswitha_patel@Aswitha:~$ ./a.out
Enter message: Hello Welcome to OSSP class
Server says: Message received by server

aswitha_patel@Aswitha:~$ |
```

B)

Terminal 1

A screenshot of a terminal window titled 'aswitha_patel@Aswitha: ~'. The terminal shows the following commands and output: 'gcc signal.c', './a.out', 'Process ID: 615', and 'Waiting for signals...'.

```
aswitha_patel@Aswitha:~$ gcc signal.c
aswitha_patel@Aswitha:~$ ./a.out
Process ID: 615
Waiting for signals...
```

Press ctrl+c

```
aswitha_patel@Aswitha:~$ gcc signal.c
aswitha_patel@Aswitha:~$ ./a.out
Process ID: 615
Waiting for signals...
^C
SIGINT received
```

Terminal 2

```
aswitha_patel@Aswitha:~$ kill -SIGUSR1 615
```

Now in Terminal 1

The output is: -

```
aswitha_patel@Aswitha:~$ gcc signal.c
aswitha_patel@Aswitha:~$ ./a.out
Process ID: 615
Waiting for signals...
^C
SIGINT received
SIGUSR1 received
```