

SWIFT SHIP TRACKER - SALESFORCE PROJECT DOCUMENTATION

PROJECT OVERVIEW

Swift Ship Tracker is a scalable, end-to-end CRM solution designed to take the chaos out of logistics management for parcel delivery businesses. By unifying the complete package lifecycle from booking and dispatch to real-time tracking and final confirmation, it bridges the gap between chaotic warehouse operations and anxious customers.

The system directly tackles the industry's biggest headaches: drowning in manual status updates, scattered communication, and lack of shipment visibility. Key features include:

- **Intelligent Automation:** Built-in Salesforce Flows and Apex handle dispatch queues and customer email alerts automatically, freeing teams from repetitive data entry.
- **AI-Powered Conversational Tracking:** An interactive Experience Cloud portal uses Salesforce's Prompt Builder to give customers instant, real-time tracking answers through natural conversation.
- **Role-Based Security:** Custom profiles and permission sets ensure that admins, customers, and delivery agents see exactly what they need and nothing they shouldn't.
- **Live Operational Dashboards:** Real-time analytics give managers instant visibility into delivery bottlenecks, agent performance, and regional trends to keep the business moving efficiently.

OBJECTIVES

The primary objective of building the **Swift Ship Tracker** CRM is to eliminate operational friction and unify the fragmented parcel lifecycle into a seamless, automated workflow. By replacing manual tracking and scattered communication with real-time process automation, the system drastically reduces administrative overhead and minimizes costly data entry errors. This structural efficiency directly translates into elevated customer satisfaction, providing transparent, conversational self-service shipment tracking that builds brand trust and lowers support center volumes. Ultimately, the CRM empowers business leaders with live operational dashboards to proactively resolve delivery bottlenecks, while ensuring enterprise-grade data security through tailored role-based access controls.

Phase 1: Requirement Analysis & Planning

1. Understanding Business Requirements

The logistics and parcel delivery industry frequently struggles with fragmented communication, manual data tracking, and a lack of transparency, leading to delivery delays and diminished customer trust. **Swift Ship Tracker** is designed to eliminate these bottlenecks by replacing legacy, manual processes with a unified, automated digital ecosystem built on Salesforce.

Core Problems Solved:

- **Manual Status Bottlenecks:** Eradicates the need for delivery teams to manually log status transitions, minimizing human error and administrative delays.
- **The "Black Box" Tracking Problem:** Solves the lack of immediate, granular visibility for customers waiting on shipments by introducing instant self-service options.
- **Disconnected Communication Channels:** Bridges the gap between disjointed sender, receiver, and courier touchpoints through automated milestone alerts.
- **Security Vulnerabilities:** Protects sensitive customer data (such as contact numbers, email addresses, and location coordinates) from unauthorized access while maintaining operational fluidity for field agents.

Core Stakeholder Requirements Grid

- **Customer / Sender:** Needs absolute transparency regarding package status mutations and requires instant, conversational tracking lookups via a self-service portal to bypass support hold queues.
- **Delivery Agent:** Demands a mobile-responsive interface to quickly update delivery milestones (e.g., changing status indicators from In Transit to Delivered) directly from the field.
- **Customer Support Team:** Requires unified access to standard Case entries combined with related parcel transaction histories to resolve client transit disputes efficiently.
- **Admin Team:** Needs complete administrative visibility to adjust sharing architectures, audit field update loops, and build operational tracking dashboards.

2. Defining Project Scope and Objectives

Project Scope:

Phase 1 establishes the foundational infrastructure of the **Swift Ship Tracker** ecosystem. The scope is strictly bound to gathering user needs, mapping out the architecture of custom and standard objects, planning the multi-layered security matrix, and laying out the development roadmap. This phase ensures the database and access controls are fully secured before layering on advanced automations (Flows, Apex) and AgentForce AI features in subsequent phases.

Detailed Project Objectives:

- **Establish a Scalable Data Core:** Model a robust, relational schema capable of tracking a parcel seamlessly from initial booking to final handover.
- **Enforce Zero-Trust Data Security:** Standardize data access using the principle of least privilege, ensuring external customers, internal support staff, and field agents only see data strictly required for their roles.
- **Design for Asynchronous and AI Scalability:** Plan fields and relationships explicitly to support downstream features like AgentForce AI prompt mapping, Flow automation, and bulk Apex batch processing.
- **Centralize User Personas:** Clearly define the boundaries and user stories for all 5 core stakeholders (Customers, Delivery Agents, Customer Support, Admins, and System Integrators).

3. Design Data Model and Security Model

A. Data Model Design (Custom Objects & Schema)

The architecture uses four core custom objects working alongside standard Salesforce objects to track the parcel lifecycle securely and efficiently:

```
[Sender__c] <--- (1:to-Many) --- [Parcel__c] --- (1:to-Many) ---> [Delivery__c]
|
[Receiver__c] <--- (1:to-Many) -----+
```

- **Parcel__c (Custom Object):** The cornerstone of the application. It stores primary tracking identifiers, shipment status (Booked, In Transit, Out for Delivery, Delivered), weight, dimensions, and estimated delivery dates. It holds lookups to Sender__c, Receiver__c, and Delivery__c.
- **Delivery__c (Custom Object):** Handles the real-time operational layer. It captures live transit coordinates, current warehouse/route hubs, and agent assignments. Field couriers interact directly with this object to log active updates.
- **Sender__c (Custom Object):** Manages the origin profile. It stores the sender's address, verified contact number, and email. It maintains a 1-to-many relationship with parcels to track historical shipping behaviors and trigger automated booking confirmations.
- **Receiver__c (Custom Object):** Manages the destination profile. It stores delivery addresses, drop-off instructions, and receiver contact channels. This object serves as the baseline validation for delivery agents verifying drop-offs.

Parent Origin Object	Relationship Struct	Target Child Object	Operational Fields & Business Mapping
Parcel__c	Lookup Relationship	Sender__c	Links the package record to the sender profile for tracking transaction history. PDF
Parcel__c	Lookup Relationship	Receiver__c	Connects the shipping ledger to the final receiver drop-off communication channels. PDF
Parcel__c	Master-Detail	Delivery__c	Links real-time warehouse route points directly to the parent parcel record. PDF

B. Security Model Design

The security framework ensures compliance, multi-tenant privacy for external customers, and operational visibility for internal employees.

The screenshot displays the Salesforce Setup interface. The left sidebar shows the navigation menu with 'Roles' selected under the 'Users' section. The main content area is titled 'Creating the Role Hierarchy' and shows a tree view of the role hierarchy for 'Amity University'. The hierarchy is as follows:

- Amity University
 - Administrator (Add Role, Edit, Del, Assign)
 - Delivery Manager (Add Role, Edit, Del, Assign)
 - Agent (Add Role, Edit, Del, Assign)
 - Customer (Add Role, Edit, Del, Assign)

The interface includes a search bar at the top, a 'Show in tree view' button, and a 'Help for this Page' link.

I. Role Hierarchy & Profiles

The system utilizes a top-down role hierarchy to enforce vertical data inheritance:

Administrator —> **Delivery Manager** —> **Delivery Agent** —> **Customer**

Admin Profile: Unrestricted Read/Create/Edit/Delete access across all standard and custom objects to manage the platform configuration and monitor performance metrics.

- **Support Staff Profile:** Specialized access focused on case resolution. Holds full access to standard Case records and Read/Edit access to Parcel__c fields to troubleshoot transit issues.
- **Delivery Agent Profile:** Tailored for field efficiency. Granted Read/Edit access to Parcel__c and Delivery__c records to log status updates on the move, with restricted delete capabilities.
- **Customer Profile (Experience Cloud):** High-security external profile. Locked down to strict Read-Only capabilities, accessible exclusively via the self-service Experience Cloud tracking portal.

II. Record-Level and Field-Level Security (FLS)

- **Organization-Wide Defaults (OWD):** Set to **Private** for Parcel__c, Delivery__c, Sender__c, and Receiver__c. This guarantees that records are invisible by default unless explicitly shared.
- **Sharing Rules:** Criteria-based sharing rules automatically grant read/write access to Delivery__c and Parcel__c records to Delivery Agents based on their assigned regional territories or active routes.
- **Customer Portal Sharing:** Apex Sharing / External Sharing Rules restrict portal users so they can **only** query and view records where their unique User/Contact record matches the Sender__c or Receiver__c lookups on the parcel.
- **Field-Level Security (FLS):** High-sensitivity fields—including Sender Email, Receiver Contact Number, and Real-Time Location Coordinates—are completely hidden from general profiles via FLS, restricting full exposure exclusively to verified Admin and Active Agent profiles.

Phase 2: Salesforce Development - Backend & Configurations

1. Milestone 1 - Salesforce Account

- **Activity 1 : Creating Developer Account**

1.1 Environment Provisioning

To initiate the development of **SwiftShip Tracker**, a dedicated, isolated environment was provisioned to ensure a safe workspace for backend metadata configuration and custom code execution.

- **Platform Selection:** A Salesforce Developer Edition Org was created via the official developer signup channel
(<https://developer.salesforce.com/signup>)(<https://developer.salesforce.com/signup>)).

- **User Registration Profile:**

- **Role Representation:** Configured under a standard "Developer" job title.
- **Corporate Alignment:** Associated with the user's academic institution to separate training metadata from production environments.
- **Regional Localization:** Set to India to align default time zones, currency formats, and localization settings during automated testing.

Build for the Agentic Enterprise.
Sign up for your Developer Edition.
The entire Salesforce platform - exposed as APIs, MCP tools, and CLI commands. Build apps, ship agents, and let coding agents do the heavy lifting with Salesforce Headless 360.

- ✓ Build AI agents with Agentforce, grounded in your data with Data 360
- ✓ Connect Claude Code, Cursor, or Codex to your org with hosted MCP
- ✓ Build in the browser with the Agentforce Vibes IDE - no setup required
- ✓ Drag-and-drop when you want it, Apex when you need it
- ✓ 60+ MCP tools and 30+ coding skills, ready out of the box

Sign up for your Developer Edition
A free Salesforce Platform environment with Agentforce and Data 360

Country/region
India ✓

State/province
Tamil Nadu ✓

Work email
aswithapunitha@gmail.com ✓

☒ I agree to the [Main Services Agreement - Developer Services](#), [Salesforce Program Agreement](#), and [API Terms of Service](#)

Your free trial may be provisioned on or migrated to Hyperforce, Salesforce's public cloud infrastructure.


I acknowledge, as described in the Developer Documentation: (1) the Developer Edition includes autonomous and other generative AI features; and (2) Salesforce may limit use of those features and the org, and may terminate any org that has been inactive for 45 days. We value your privacy. To learn more, visit our [Privacy Statement](#).

Sign me up

- **Activity 2 : Account Activation**

Following platform registration, the environment must be activated through a secure verification handshake:


1. **Account Verification:** Access the registered email inbox, locate the Salesforce activation email, and click Verify Account.
2. **Credential Configuration:** Upon redirection, establish a secure administrative password, select a security recovery question, and click Change Password to commit the credentials.
3. **System Access:** The platform immediately authenticates the session and redirects the browser directly to the centralized Salesforce Setup console to begin backend development.

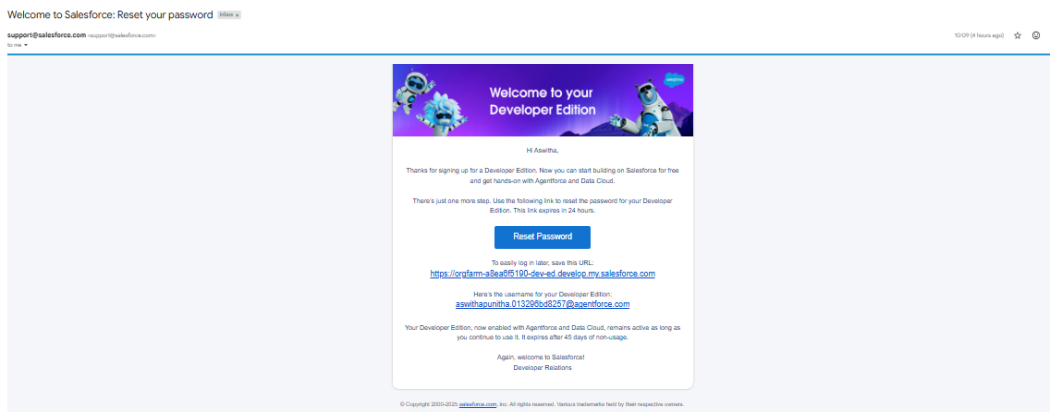

- **Milestone 2- Objects Creation**

Schema Infrastructure Provisioning

To support the core logistics lifecycle of the **SwiftShip Tracker** solution, four foundational custom entities were instantiated within the Salesforce database layer. Each object was provisioned through the **Object Manager** via the standard declarative schema builder to support tracking, compliance auditing, and reporting.

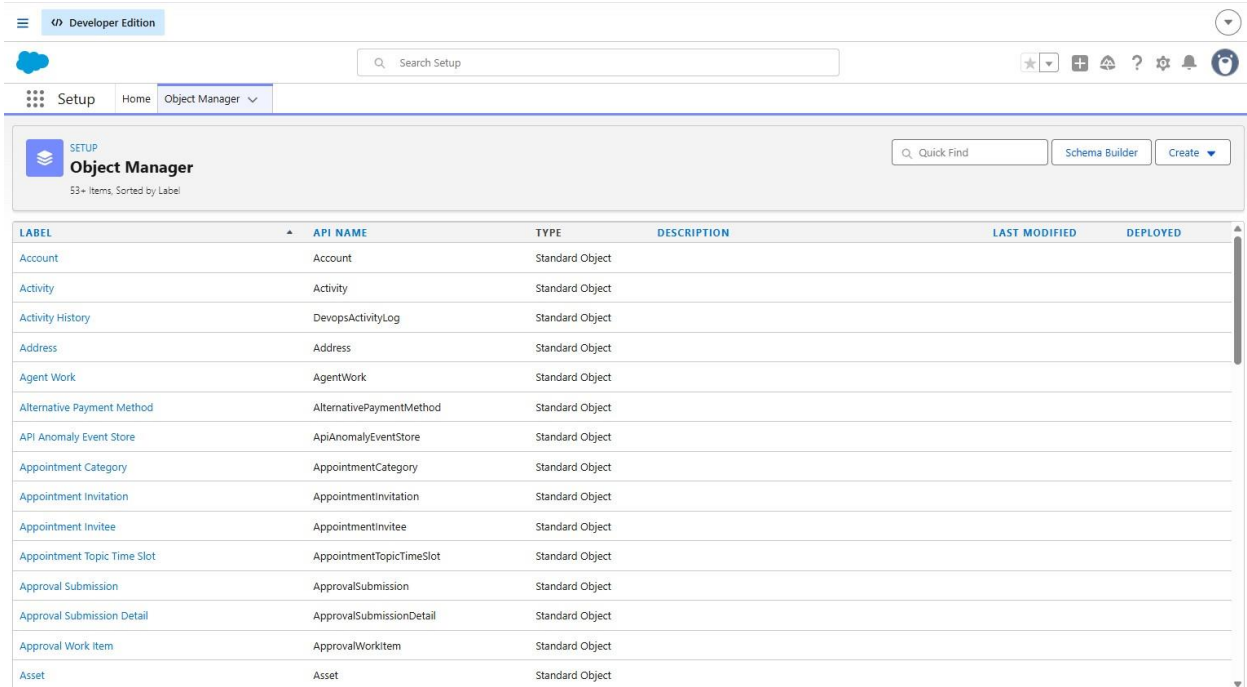

The screenshot shows the Salesforce Object Manager interface. At the top, there's a navigation bar with 'Setup', 'Home', and 'Object Manager' (selected). Below this, the 'Object Manager' header includes a search bar, 'Schema Builder', and 'Create' buttons. The main area displays a table of custom objects.

LABEL	API NAME	TYPE	DESCRIPTION	LAST MODIFIED	DEPLOYED
Account	Account	Standard Object			
Activity	Activity	Standard Object			
Activity History	DevopsActivityLog	Standard Object			
Address	Address	Standard Object			
Agent Work	AgentWork	Standard Object			
Alternative Payment Method	AlternativePaymentMethod	Standard Object			
API Anomaly Event Store	ApiAnomalyEventStore	Standard Object			
Appointment Category	AppointmentCategory	Standard Object			
Appointment Invitation	AppointmentInvitation	Standard Object			
Appointment Invitee	AppointmentInvitee	Standard Object			
Appointment Topic Time Slot	AppointmentTopicTimeSlot	Standard Object			
Approval Submission	ApprovalSubmission	Standard Object			
Approval Submission Detail	ApprovalSubmissionDetail	Standard Object			
Approval Work Item	ApprovalWorkItem	Standard Object			
Asset	Asset	Standard Object			

The specific creation workflow and parameters executed for each custom entity are detailed below:

- **Parcel__c Object Configuration:**
 - **Label:** Parcel
 - **Plural Label:** Parcel's
 - **Record Name / Data Type:** Parcel Name (Text)
 - **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

Developer Edition

Setup Home Object Manager

New Custom Object

Permissions for this object are disabled for all profiles by default. You can enable object permissions in permission sets or by editing custom profiles. [Tell me more!](#) [Don't show this message again](#)

Custom Object Definition Edit

Save Save & New Cancel

Custom Object Information

The singular and plural labels are used in tabs, page layouts, and reports.

Label Example: Account

Plural Label Example: Accounts

Starts with vowel sound ☐

The Object Name is used when referencing the object via the API.

Object Name Example: Account

Description

Context-Sensitive Help Setting ☒ Open the standard Salesforce.com Help & Training window ☐ Open a window using a Visualforce page

Content Name

Enter Record Name Label and Format

The Record Name appears in page layouts, key lists, related lists, lookups, and search results. For example, the Record Name for Account is "Account Name" and for Case it is "Case Number". Note that the Record Name field is always called "Name" when referenced via the API.

Record Name Example: Account Name

Date Type

Developer Edition

Setup Home Object Manager

Parcel

Details

Edit Delete

Description

API Name
Parcel__c

Custom
✓

Singular Label
Parcel

Plural Label
Parcels

Enable Reports
✓

Track Activities

Track Field History
✓

Deployment Status
Deployed

Help Settings
Standard salesforce.com Help Window

-
- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

Delivery__c **Object Configuration:**

Delivery

Deliveries

DeliveryName (Text)



- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

Top Screenshot: New Custom Object

Permissions for this object are disabled for all profiles by default. You can enable object permissions in permission sets or by editing custom profiles. [Tell me more!](#) [Don't show this message again](#)

Custom Object Definition Edit [Save] [Save & New] [Cancel]

Custom Object Information ⓘ Required Information

The singular and plural labels are used in tabs, page layouts, and reports.

Label: Example: Account

Plural Label: Example: Accounts

Starts with vowel sound: ☐

The Object Name is used when referencing the object via the API.

Object Name: Example: Account

Description:

Context-Sensitive Help Setting: ☒ Open the standard Salesforce.com Help & Training window
☐ Open a window using a Visualforce page

Content Name:

Enter Record Name Label and Format

The Record Name appears in page layouts, key lists, related lists, lookups, and search results. For example, the Record Name for Account is "Account Name" and for Case it is "Case Number". Note that the Record Name field is always called "Name" when referenced via the API.

Record Name: Example: Account Name

Bottom Screenshot: Delivery Object Details

Details [Edit] [Delete]

Description:

API Name:

Custom: ☒

Singular Label:

Plural Label:

Enable Reports: ☒

Track Activities: ☐

Track Field History: ☒

Deployment Status:

Help Settings:

- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

Receiver__c **Object Configuration:**

Receiver

Receiver's

ReceiverName (Text)



- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

The screenshot shows the 'New Custom Object' page in Salesforce Setup. The page is titled 'New Custom Object' and includes a 'Help for this Page' link. A yellow banner at the top states: 'Permissions for this object are disabled for all profiles by default. You can enable object permissions in permission sets or by editing custom profiles. [Tell me more!](#) [Don't show this message again](#)'. Below the banner is the 'Custom Object Definition Edit' section with 'Save', 'Save & New', and 'Cancel' buttons. The 'Custom Object Information' section includes fields for 'Label' (Receiver), 'Plural Label' (Receiver's), 'Starts with vowel sound' (checkbox), 'Object Name' (Receiver), and 'Description'. It also has 'Context-Sensitive Help Setting' (radio buttons for 'Open the standard Salesforce.com Help & Training window' and 'Open a window using a Visualforce page') and 'Content Name' (None). The 'Enter Record Name Label and Format' section includes a 'Record Name' field (Receiver Name) and a note about the Record Name field.

The screenshot shows the 'Receiver' custom object page in Salesforce Setup. The page is titled 'Receiver' and includes 'Edit' and 'Delete' buttons. The 'Details' section includes a 'Description' field and a table of settings. The table has two columns: 'Field Name' and 'Value'. The settings are: 'API Name' (Receiver__c), 'Custom' (checked), 'Singular Label' (Receiver), 'Plural Label' (Receiver's), 'Enable Reports' (checked), 'Track Activities' (checked), 'Track Field History' (checked), 'Deployment Status' (Deployed), and 'Help Settings' (Standard salesforce.com Help Window).

- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

Sender__c **Object Configuration:**

Sender

Sender's

SenderName (Text)



- **Label:**
- **Plural Label:**
- **Record Name / Data Type:**

- **Operational Permissions:** Enabled Allow Reports, Allow Search, and Track Field History.

The screenshot displays the Salesforce Setup interface in Developer Edition, specifically the Object Manager section. The 'New Custom Object' wizard is active, showing the 'Custom Object Definition Edit' screen. The 'Custom Object Information' section is visible, with the following details:

- Label:** Sender (Example: Account)
- Plural Label:** Sender's (Example: Accounts)
- Starts with vowel sound:** ☐
- Object Name:** Sender (Example: Account)
- Description:** (Empty text area)
- Context-Sensitive Help Setting:** ☒ Open the standard Salesforce.com Help & Training window
- Content Name:** --None--
- Enter Record Name Label and Format:** Record Name: Sender Name (Example: Account Name)

Below the configuration form, a sidebar on the left lists various object settings: Details, Fields & Relationships, Page Layouts, Lightning Record Pages, Buttons, Links, and Actions, Compact Layouts, Field Sets, Object Limits, Record Types, Related Lookup Filters, Search Layouts, List View Button Layout, Restriction Rules, Scoping Rules, Object Access, and Field Annotations. The main content area shows the 'Details' tab for the 'Sender' object, with the following settings:

- Description:** (Empty text area)
- API Name:** Sender_c
- Custom:** ☒
- Singular Label:** Sender
- Plural Label:** Sender's
- Enable Reports:** ☒
- Track Activities:** ☒
- Track Field History:** ☒
- Deployment Status:** Deployed
- Help Settings:** Standard salesforce.com Help Window

The interface includes a top navigation bar with 'Setup', 'Home', and 'Object Manager' tabs, and a search bar. The bottom of the screen shows the 'Sender' object name and a list of settings.

This standardized configuration establishes the relational core required to capture end-to-end shipping data while ensuring compliance via historical field auditing and visibility through native search indexation and reporting dashboards.

Milestone 3: Custom Object Tabs Creation

User Interface Navigation and Visibility Configuration

To expose the custom data structures within the Salesforce user interface, custom object tabs were provisioned for all four entities created in the previous milestone. To prevent navigational clutter, the tabs were excluded from general custom applications during this initial phase, while ensuring they remain accessible via the App Launcher.

The uniform configuration steps executed for each object are structured below: ●

Activity 1: Tab Creation for the Parcel Object

- **Target Entity:** Parcel__c
- **Navigation Path:** Setup —> Quick Find: Tabs —> User Interface —> Custom Object Tabs —> **New**.
- **Visibility & App Settings:** Profile visibility settings were maintained at system defaults. On the Add to Custom Apps configuration page, the Include Tab checkbox was explicitly unchecked.
- **Personalization:** The Append tab to the user's existing personal customizations option was checked to maintain layout flexibility for active users.

Developer Edition

Search Setup

SetupHomeObject Manager

tabs

User Interface

Rename Tabs and Labels

Tabs

Didn't find what you're looking for? Try using Global Search.

SETUP

Tabs

Help for this Page

Step 1 of 3

Step 1. Enter the Details

Choose the custom object for this new custom tab. Fill in other details.

New Custom Object Tab

Select an existing custom object or create a new custom object now.

ObjectParcel

Tab StyleBox

(Optional) Choose a Home Page Custom Link to show as a splash page the first time your users click on this tab.

Splash Page Custom Link--None--

Enter a short description.

Description

NextCancel

Developer Edition

Search Setup

SetupHomeObject Manager

tabs

User Interface

Rename Tabs and Labels

Tabs

Didn't find what you're looking for? Try using Global Search.

SETUP

Tabs

Help for this Page

Step 2 of 3


Step 2. Add to Profiles

Choose the user profiles for which the new custom tab will be available. You may also examine or alter the visibility of tabs from the detail and edit pages of each profile.

☒ Apply one tab visibility to all profiles (Default On)

☐ Apply a different tab visibility for each profile


Profile	Tab Visibility
Analytics Cloud Integration User	Default On
Analytics Cloud Security User	Default On
Anypoint Integration	Default On
Authenticated Website	Default On
Authenticated Website	Default On
B2B Reordering Portal Buyer Profile	Default On
Contract Manager	Default On
Cross Org Data Proxy User	Default On
Custom: Marketing Profile	Default On
Custom: Sales Profile	Default On
Custom: Support Profile	Default On
Customer Community Login User	Default On
Customer Community Plus Login User	Default On

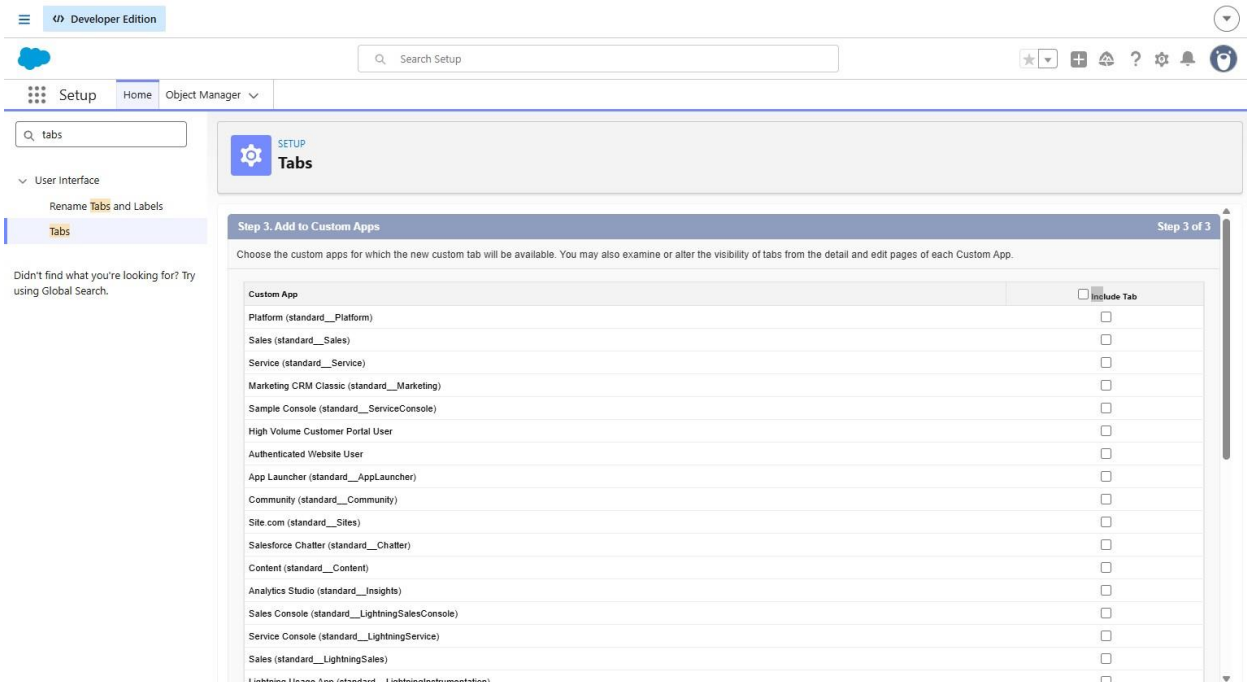

● Activity 2: Tab Creation for Remaining Core Objects

The exact same procedural workflow, profile defaults, and application exclusions were replicated sequentially to generate user interface access for the remaining logistics entities:

1. **Delivery Tab:** Bound to the Delivery__c object utilizing a unique designated Tab Style.
2. **Sender Tab:** Bound to the Sender__c object utilizing a unique designated Tab Style.
3. **Receiver Tab:** Bound to the Receiver__c object utilizing a unique designated Tab Style.

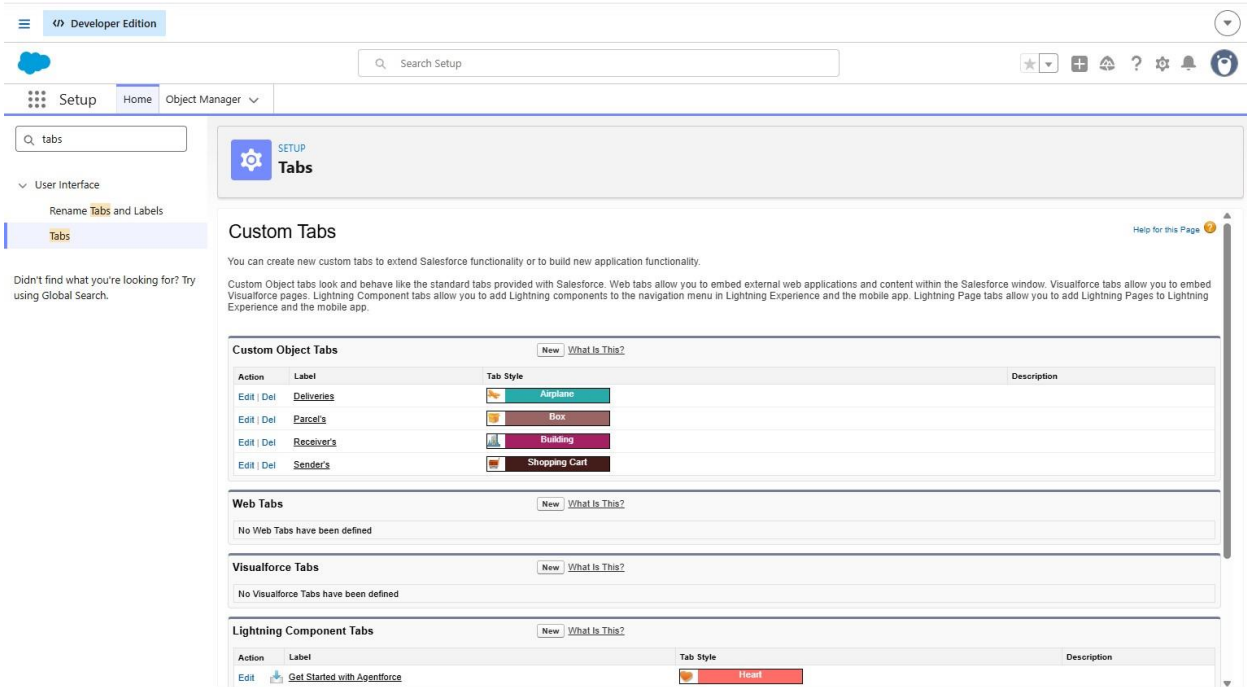

Milestone 4: Fields and Relationships Configuration

Object Schema and Relationship Architecture

To map the complete parcel lifecycle and establish operational traceability, custom fields and relational attributes were configured for each core object. This setup defines data types, lookup relationships, and automated constraints via the **Object Manager**.

1. Delivery Object (Delivery__c) Fields

The following fields were added to the Delivery object to manage active field operations and routing:

- **Current Location:**
 - **Data Type:** Geolocation
 - **Purpose:** Captures latitude and longitude coordinates for real-time tracking.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Data Type

None Selected

Select one of the data types below.

Auto Number

A system-generated sequence number that uses a display format you define. The number is automatically incremented for each new record.

Formula

A read-only field that derives its value from a formula expression you define. The formula field is updated when any of the source fields change.

Roll-Up Summary

A read-only field that displays the sum, minimum, or maximum value of a field in a related list or the record count of all records listed in a related list.

Lookup Relationship

Creates a relationship that links this object to another object. The relationship field allows users to click on a lookup icon to select a value from a popup list. The other object is the source of the values in the list.

Master-Detail Relationship

Creates a special type of parent-child relationship between this object (the child, or "detail") and another object (the parent, or "master") where:

- The relationship field is required on all detail records.
- The ownership and sharing of a detail record are determined by the master record.
- When a user deletes the master record, all detail records are deleted.
- You can create rollup summary fields on the master record to summarize the detail records.

The relationship field allows users to click on a lookup icon to select a value from a popup list. The master object is the source of the values in the list.

External Lookup Relationship

Creates a relationship that links this object to an external object whose data is stored outside the Salesforce org.

Checkbox

Allows users to select a True (checked) or False (unchecked) value.

Currency

Allows users to enter a dollar or other currency amount and automatically formats the field as a currency amount. This can be useful if you export data to Excel or another spreadsheet.

Date

Allows users to enter a date or pick a date from a popup calendar.

Date/Time

Allows users to enter a date and time, or pick a date from a popup calendar. When users click a date in the pop-up, that date and the current time are entered into the Date/Time field.

Email

Allows users to enter an email address, which is validated to ensure proper format. If this field is specified for a contact or lead, users can choose the address when clicking Send an Email. Note that custom email addresses cannot be used for mass emails.

Geolocation

Allows users to define locations. Includes latitude and longitude components, and can be used to calculate distance.

Number

Allows users to enter any number. Leading zeros are removed.

Percent

Allows users to enter a percentage number, for example, "10" and automatically adds the percent sign to the number.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Custom Field

Help for this Page

Step 2. Enter the details

Step 2 of 4

Field Label

Current Location

Enter the name of the location, such as Main Office. Be descriptive and specific, and remember that one record may have multiple locations, such as West Coast Sales Office and East Coast Sales Office.

Latitude and Longitude Display Notation

Degrees, Minutes, Seconds

Decimal

Decimal Places

Number of digits to the right of the decimal point

Field Name

Current_Location

Description

Help Text

Required

☐ Always require a value in this field in order to save a record

Previous

Next

Cancel

Developer Edition

Search Setup

SetupHomeObject Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Custom Field

Help for this Page

Step 4. Add to page layouts

Step 4 of 4

PreviousSave & NewSaveCancel

Field Label	Current Location
Data Type	Geolocation
Field Name	Current_Location
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field	Page Layout Name
☒	Delivery Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

PreviousSave & NewSaveCancel

- **Estimated Delivery:**
 - **Data Type:** Date/Time
 - **Purpose:** Logs the target date and time for delivery fulfillment.

Developer Edition

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

New Custom Field

Step 2. Enter the details

Field Label: Estimated Delivery

Field Name: Estimated_Delivery

Description:

Help Text:

Required: ☐ Always require a value in this field in order to save a record

Auto add to custom report type: ☒ Add this field to existing custom report types that contain this entity

Default Value: Show Formula Editor

Use formula syntax. Enclose text and picklist value API names in double quotes. ("the_text", include numbers without quotes (25, show percentages as decimals (5/10), and express date calculations in the standard format (Today() + 7). To reference a field from a Custom Metadata type record use: SCustomMetadataType__mbtRecordAPIName.Field__c

Previous Next Cancel

Einstein

Developer Edition

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

New Custom Field

Step 4. Add to page layouts

Field Label: Estimated Delivery

Data Type: Date

Field Name: Estimated_Delivery

Description:

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Delivery Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

Restore

- **Sender:**
 - **Data Type:** Lookup Relationship pointing to Sender__c
 - **Purpose:** Associates the operational delivery run with the corresponding origin profile.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Annex

Specify the type of information that the custom field will contain.

Data Type

☐ None Selected

Select one of the data types below:

☐ Auto Number

A system-generated sequence number that uses a display format you define. The number is automatically incremented for each new record.

☐ Formula

A read-only field that derives its value from a formula expression you define. The formula field is updated when any of the source fields change.

☐ Roll-Up Summary

A read-only field that displays the sum, minimum, or maximum value of a field in a related list or the record count of all records listed in a related list.

☒ Lookup Relationship

Creates a relationship that links this object to another object. The relationship field allows users to click on a lookup icon to select a value from a popup list. The other object is the source of the values in the list.

☐ Master-Detail Relationship

Creates a special type of parent-child relationship between this object (the child, or "detail") and another object (the parent, or "master") where:

- The relationship field is required on all detail records.
- The ownership and sharing of a detail record are determined by the master record.
- When a user deletes the master record, all detail records are deleted.
- You can create rollup summary fields on the master record to summarize the detail records.

The relationship field allows users to click on a lookup icon to select a value from a popup list. The master object is the source of the values in the list.

☐ External Lookup Relationship

Creates a relationship that links this object to an external object whose data is stored outside the Salesforce org.

☐ Checkbox

Allows users to select a True (checked) or False (unchecked) value.

☐ Currency

Allows users to enter a dollar or other currency amount and automatically formats the field as a currency amount. This can be useful if you export data to Excel or another spreadsheet.

☐ Date

Allows users to enter a date or pick a date from a popup calendar.

☐ DateTime

Allows users to enter a date and time, or pick a date from a popup calendar. When users click a date in the pop-up, that date and the current time are entered into the Date/Time field.

☐ Email

Allows users to enter an email address, which is validated to ensure proper format. If this field is specified for a contact or lead, users can choose the address when clicking Send an Email. Note that custom email addresses cannot be used for mass emails.

☐ Geolocation

Allows users to define locations. Includes latitude and longitude components, and can be used to calculate distance.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Delivery

New Relationship

Help for this Page

Step 2. Choose the related object

Step 2

Previous Next Cancel

Select the other object to which this object is related.

Related To Sender

Previous Next Cancel

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Relationship

Help for this Page

Step 5. Add reference field to Page Layouts Step 5 of 6

Previous Next Cancel

Field Label	Sender
Data Type	Lookup
Field Name	Sender
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field	Page Layout Name
☒	Delivery Layout

Previous Next Cancel

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Relationship

Help for this Page

Step 6. Add custom related lists Step 6 of 6

Previous Save & New Save Cancel

Field Label	Sender
Data Type	Lookup
Field Name	Sender
Description	

Specify the title that the related list will have in all of the layouts associated with the parent.

Related List Label

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Related List	Page Layout Name
☒	Sender Layout

☒ Append related list to users' existing personal customizations

Previous Save & New Save Cancel

- **Parcel:**
 - **Data Type:** Lookup Relationship pointing to Parcel__c
 - **Purpose:** Connects the delivery record to its primary physical asset.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Relationship

Help for this Page

Step 3. Enter the label and name for the lookup field

Step 3 of 6

Previous Next Cancel

Field Label Parcel

Field Name Parcel

Description

Help Text

Child Relationship Name Deliveries

Required

☐ Always require a value in this field in order to save a record

☒ Clear the value of this field. You can't choose this option if you make this field required.

☐ Delete this record also. This allows users to delete large numbers of records without regard for sharing or visibility constraints.

☐ Don't allow deletion of the lookup record that's part of a lookup relationship.

☒ Add this field to existing custom report types that contain this entity

What to do if the lookup record is deleted?

Auto add to custom report type

Lookup Filter

Optionally, create a filter to limit the records available to users in the lookup field. [Tell me more!](#)

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Delivery

New Relationship

Help for this Page

Step 6. Add custom related lists

Step 6 of 6

Previous Save & New Save Cancel

Field Label Parcel

Data Type Lookup

Field Name Parcel

Description

Specify the title that the related list will have in all of the layouts associated with the parent.

Related List Label Deliveries

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

Add Related List

Page Layout Name

☒ Parcel Layout

☒ Append related list to users' existing personal customizations

Developer Edition

Search Setup

Setup

Home

Object Manager

SETUP > OBJECT MANAGER

Delivery

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Fields & Relationships

8 Items, Sorted by Field Label

Quick Find

New

Deleted Fields

Field Dependencies

Set History Tracking

FIELD LABEL	FIELD NAME	DATA TYPE	CONTROLLING FIELD	INDEXED
Created By	CreatedById	Lookup(User)		
Current Location	Current_Location__c	Geolocation		
Delivery Name	Name	Text(80)		✓
Estimated Delivery	Estimated_Delivery__c	Date		
Last Modified By	LastModifiedById	Lookup(User)		
Owner	OwnerId	Lookup(User,Group)		✓
Parcel	Parcel__c	Lookup(Parcel)		✓
Sender	Sender__c	Lookup(Sender)		✓

2. Receiver Object (Receiver__c) Fields

The destination profile was built out using communication and tracking fields to verify drop-offs:

- **Receiver's Address:**

- **Data Type:** Text Area (Long) or Address components (Configured via Geolocation for spatial tracking data as needed)
- **Purpose:** Stores the physical destination for final package handover.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Receiver

New Custom Field

Help for this Page

Step 2 of 4

Step 2. Enter the details

Field Label Receiver's Address

Enter the name of the location, such as Main Office. Be descriptive and specific, and remember that one record may have multiple locations, such as West Coast Sales Office and East Coast Sales Office.

Latitude and Longitude Display Notation ☒ Degrees, Minutes, Seconds ☐ Decimal

Decimal Places 15

Number of digits to the right of the decimal point

Field Name Receiver_s_Address

Description

Help Text

Required ☐ Always require a value in this field in order to save a record

Previous Next Cancel

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Receiver

New Custom Field

Help for this Page

Step 4 of 4

Step 4. Add to page layouts

Field Label Receiver's Address

Data Type Geolocation

Field Name Receiver_s_Address

Description

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Receiver Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Receiver Contact:**
 - **Data Type:** Phone
 - **Purpose:** Captures the recipient's phone number for delivery coordination.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

New Custom Field

Step 2. Enter the details

Step 2 of 4

Field Label Receiver Contact

Field Name Receiver_Contact

Description

Help Text

Required ☐ Always require a value in this field in order to save a record

Auto add to custom report type ☒ Add this field to existing custom report types that contain this entity

Default Value Show Formula Editor

Use formula syntax. Enclose text and picklist value API names in double quotes: ("the_text"). Include numbers without quotes: (25); show percentages as decimals: (0.10); and express date calculations in the standard format: (Today() + 7). To reference a field from a Custom Metadata type record use: \$CustomMetadata.Type__c.RecordAPIName.Field__c

Previous Next Cancel

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

New Custom Field

Step 4. Add to page layouts

Step 4 of 4

Field Label	Receiver Contact
Data Type	Phone
Field Name	Receiver_Contact
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Receiver Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Receiver Email:**
 - **Data Type:** Email
 - **Purpose:** Stores the recipient's email address for automated delivery notifications.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Receiver

New Custom Field

Help for this Page

Step 4 of 4

Previous Save & New Save Cancel

Field Label	Receiver Email
Data Type	Email
Field Name	Receiver_Email
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field ☐ Page Layout Name

☒ Receiver Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Sender:**

- **Data Type:** Lookup Relationship pointing to Sender__c
- **Purpose:** Links the origin and destination profiles for full relationship-based tracking.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Receiver

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Receiver

New Relationship

Help for this Page

Step 6 of 6

Previous Save & New Save Cancel

Field Label	Sender
Data Type	Lookup
Field Name	Sender
Description	

Specify the title that the related list will have in all of the layouts associated with the parent.

Related List Label

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Related List ☐ Page Layout Name

☒ Sender Layout

☒ Append related list to users' existing personal customizations

Previous Save & New Save Cancel

- **Parcel:**

- **Data Type:** Lookup Relationship pointing to Parcel__c
- **Purpose:** Binds the recipient profile directly to the specific package.

Receiver

New Relationship

Step 6. Add custom related lists

Field Label	Parcel
Data Type	Lookup
Field Name	Parcel
Description	

Specify the title that the related list will have in all of the layouts associated with the parent.
Related List Label

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.
To change the location of this field on the page, you will need to customize the page layout.

Add Related List	Page Layout Name
☒	Parcel Layout

☒ Append related list to users' existing personal customizations

Buttons: Previous, Save & New, Save, Cancel

3. Sender Object (Sender__c) Fields

The origin profile was configured with the following communication attributes to track historical shipping behaviors:

- **Sender Address:**
 - **Data Type:** Text Area (Long) or Geolocation
 - **Purpose:** Captures the origin address for dispatch mapping.

Sender

New Custom Field

Step 4. Add to page layouts

Field Label	Sender Address
Data Type	Geolocation
Field Name	Sender_Address
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.
To change the location of this field on the page, you will need to customize the page layout.

Add Field	Page Layout Name
☒	Sender Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Buttons: Previous, Save & New, Save, Cancel

- **Sender Contact:**

- **Data Type:** Phone
- **Purpose:** Captures the sender's primary telephone contact.

Step 3. Establish field level security Step 3 of 3

Field Label: Sender Contact
Data Type: Phone
Field Name: Sender_Contact
Description:

Select the profiles to which you want to grant edit access to this field via field-level security. The field will be hidden from all profiles if you do not add it to field-level security.

Field-Level Security for Profile	Visible	Read-Only
Analytics Cloud Integration User	☒	☐
Analytics Cloud Security User	☒	☐
Anypoint Integration	☒	☐
Contract Manager	☒	☐
Cross Org Data Proxy User	☒	☐
Custom: Marketing Profile	☒	☐
Custom: Sales Profile	☒	☐
Custom: Support Profile	☒	☐
Einstein Agent User	☒	☐
External Einstein Agent User	☒	☐
External Einstein Agent User	☒	☐

- **Sender Email:**
 - **Data Type:** Email
 - **Purpose:** Stores the sender's email address for automated booking confirmations.

Research DSA Internships Projects All Bookmarks

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Sender

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Sender

New Custom Field

Step 4. Add to page layouts Step 4 of 4

Field Label: Sender Email
Data Type: Email
Field Name: Sender_Email
Description:

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field ☐ Page Layout Name
☒ Sender Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

4. Parcel Object (Parcel__c) Fields

The primary ledger object was customized with tracking parameters and business logic fields:

- **Parcel ID:**
 - **Data Type:** Auto-Number
 - **Configuration:** Display Format: P-{000}, Starting Number: 1
 - **Purpose:** Acts as the immutable, system-generated identifier for public package tracking.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Annex

Parcel

New Custom Field

Step 2. Enter the details

Step 2 of 4

Field Label Parcel ID

Display Format P-000 Example: A-0000 What Is This?

Starting Number 0

Generate Auto Number for existing records

Field Name Parcel_ID

Description

Help Text

External ID

Set this field as the unique record identifier from an external system

Auto add to custom report type

Add this field to existing custom report types that contain this entity

Previous Next Cancel

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Annex

Parcel

New Custom Field

Step 4. Add to page layouts

Step 4 of 4

Field Label	Parcel ID
Data Type	Auto Number
Field Name	Parcel_ID
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

Add Field Page Layout Name

Parcel Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Status:**

- **Data Type:** Picklist
- **Values:** Booked, In Transit, Out for Delivery, Delivered
- **Purpose:** Tracks the package's active stage within the shipping lifecycle.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Parcel

New Custom Field

Help for this Page

Step 4. Add to page layouts

Previous Save & New Save Cancel

Field Label	Status
Data Type	Picklist
Field Name	Status
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Parcel Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Weight:**
 - **Data Type:** Number (16, 2)
 - **Purpose:** Stores package weight for route allocation and validation constraints.

Developer Edition

Search Setup

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Parcel

New Custom Field

Help for this Page

Step 4. Add to page layouts

Previous Save & New Save Cancel

Field Label	Weight
Data Type	Number
Field Name	Weight
Description	

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Parcel Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Estimated Delivery:**
 - **Data Type:** Date
 - **Purpose:** Captures the estimated baseline date of arrival.

Developer Edition

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Parcel

New Custom Field

Step 4. Add to page layouts

Field Label Estimated Delivery

Data Type Date

Field Name Estimated_Delivery

Description

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Field Page Layout Name

☒ Parcel Layout

When finished, click Save & New to create more custom fields, or click Save if you are done.

Previous Save & New Save Cancel

- **Sender:**

- **Data Type:** Lookup Relationship pointing to Sender__c
- **Purpose:** Associates the parcel record with its original booking party.

Developer Edition

Setup Home Object Manager

SETUP > OBJECT MANAGER

Parcel

Details

Fields & Relationships

Page Layouts

Lightning Record Pages

Buttons, Links, and Actions

Compact Layouts

Field Sets

Object Limits

Record Types

Related Lookup Filters

Search Layouts

List View Button Layout

Restriction Rules

Scoping Rules

Object Access

Field Access

Parcel

New Relationship

Step 6. Add custom related lists

Field Label Sender

Data Type Lookup

Field Name Sender

Description

Specify the title that the related list will have in all of the layouts associated with the parent.

Related List Label Parcel's

Select the page layouts that should include this field. The field will be added as the last field in the first 2-column section of these page layouts. The field will not appear on any pages if you do not select a layout.

To change the location of this field on the page, you will need to customize the page layout.

☒ Add Related List Page Layout Name

☒ Sender Layout

☒ Append related list to users' existing personal customizations

Previous Save & New Save Cancel

Milestone 5: Generative AI Configuration and Prompt Builder Deployment

AI-Integrated Tracking Architecture

To provide real-time, conversational shipment data to external customers and internal field agents, generative AI features were added to the platform using the **Salesforce Prompt Builder**. This configuration bridges the custom data schema with natural language AI responses, establishing a standardized structure for fetching and rendering live parcel information. The formal configuration details, dynamic parameters, and validation steps executed are outlined below:


1. Prompt Template Configuration and Governance

The template was initiated by navigating to **Setup** ----> **Prompt Templates** and instantiating a new generative text template with the following governance parameters:

- **Template Label:** Retrieve Parcel Details
- **API Name:** Retrieve_Parcel_Details
- **Description:** Retrieves parcel details where Parcel_ID__c matches the user input.

The screenshot displays the Salesforce Prompt Builder interface. The top navigation bar includes 'Developer Edition', a search bar, and various utility icons. The left sidebar shows the navigation menu with 'Setup', 'Home', and 'Object Manager'. The main content area is titled 'Prompt Builder' and features a 'New Prompt Template' button. Below this, there are three cards for exploring the tool: 'Get to Know Prompt Builder', 'Build Your Knowledge', and 'Take a Tour of Prompt Builder'. At the bottom, a table lists all prompt templates.

Name	Template Type	Category	Status	Date Modified
Revenue Reconciliation Analysis	Global Standard	Standard	Active	
Generative AI Patient Summary	Gen AI Summary	Standard-Overridable	Active	
Executive Brief	Record Summary	Standard	Active	
Draft Case Comment with Service Plan	Case Comment Generation	Standard-Overridable	Active	
Identify Anomalies	Anomaly Detection	Standard	Active	

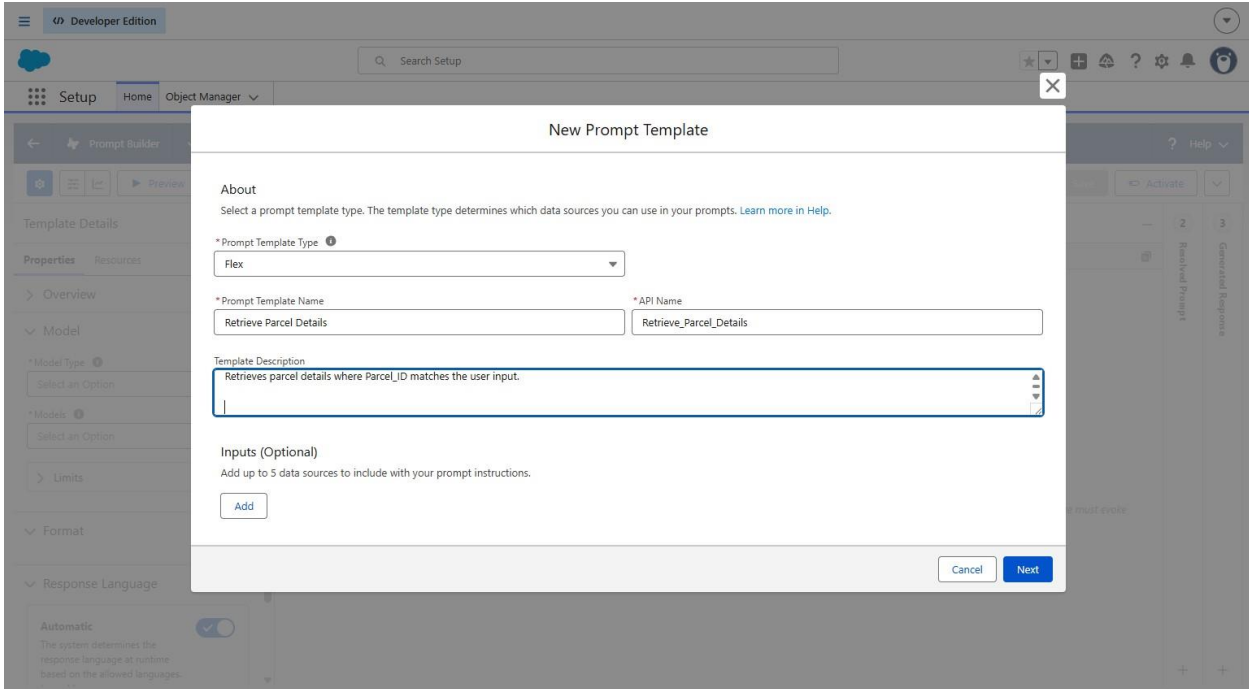

2. Semantic Content and Dynamic Contextual Grounding

The prompt template text area was injected with structural instructions to ground the Large Language Model (LLM) on specific database records. The precise grounding template text and merged data resources are detailed below:

Prompt Template Grounding Text:

Retrieve details from Parcel__c where Parcel_ID__c matches user input. Return response in this format:

Parcel Tracking Update

🔗 Parcel Tracking Update

- **Parcel Name:** {!\$Input:Parcel__c.Name}
- **Parcel ID:** {!\$Input:Parcel__c.Parcel_ID__c}
- **Status:** {!\$Input:Parcel__c.Status__c}
- **Weight:** {!\$Input:Parcel__c.Weight__c}
- **Estimated Delivery Date:** {!\$Input:Parcel__c.Estimated_Delivery__c}

Resource Mapping & Schema Merging:

To resolve these dynamic placeholders at runtime, the target input object was mapped explicitly to the Parcel__c custom entity. The following fields were bound as active contextual resources within the prompt engine:

- **Name** (Name)
- **Parcel ID** (Parcel_ID__c)
- **Status** (Status__c)
- **Weight** (Weight__c)

- **Estimated Delivery Date** (Estimated_Delivery__c)

3. Compilation, Activation, and Deployment Validation

1. **Metadata Compilation:** Clicked **Save** to commit the template configuration, resolving all dynamic field merge tokens against the database schema.
2. **Platform Activation:** Clicked **Activate** to register the prompt template within the system metadata layer, making it available downstream for automated Flows and conversational AgentForce AI execution engines.
3. **Functional Quality Assurance:** To validate the runtime retrieval logic, the Agent preview console was launched. Entering a natural language phrase such as "Track parcel P-12345" triggers the prompt template engine, causing it to query the database, pull the correct record details, and return a clean, structured conversational tracking card.


Milestone 6: Asynchronous Logic and Flow Automation Integration

Auto-Launched Flow Architecture

To enable the conversational AI agent to programmatically interface with backend records, an Auto-Launched Flow was configured. This flow acts as an intermediary, taking a text input identifier from the agent, querying the target database record, executing the summarization prompt, and returning the structured output back to the interface.

The screenshot displays the Salesforce Prompt Builder interface. The top navigation bar includes 'Setup', 'Home', and 'Object Manager'. The main workspace is titled 'Retrieve Parcel Details' and 'Version 1'. On the left, a 'Performance Insights' panel shows a 'Response Time' of 2.48s and 'Total Tokens' of 522. The main area is divided into three sections: 1. Prompt, 2. Resolved Prompt, and 3. Generated Response. The 'Resolved Prompt' section shows a 'Parcel Tracking Update' with details: Parcel Name: Laptop, Parcel ID: P-001, Status: Booked, Weight: 2, and Estimated Delivery Date: 09/30/2026. The 'Generated Response' section shows an 'Acknowledged. Thank you for the update.' message followed by a 'Summary:' section listing the same details.

Section	Content
1 Prompt	
2 Resolved Prompt	Parcel Tracking Update - Parcel Tracking Update - Parcel Name: Laptop - Parcel ID: P-001 - Status: Booked - Weight: 2 - Estimated Delivery Date: 09/30/2026
3 Generated Response	Acknowledged. Thank you for the update. Summary: - Parcel Name: Laptop. - Parcel ID: P-001. - Status: Booked. - Weight: 2 kg. - Estimated Delivery Date: 09/30/2026.

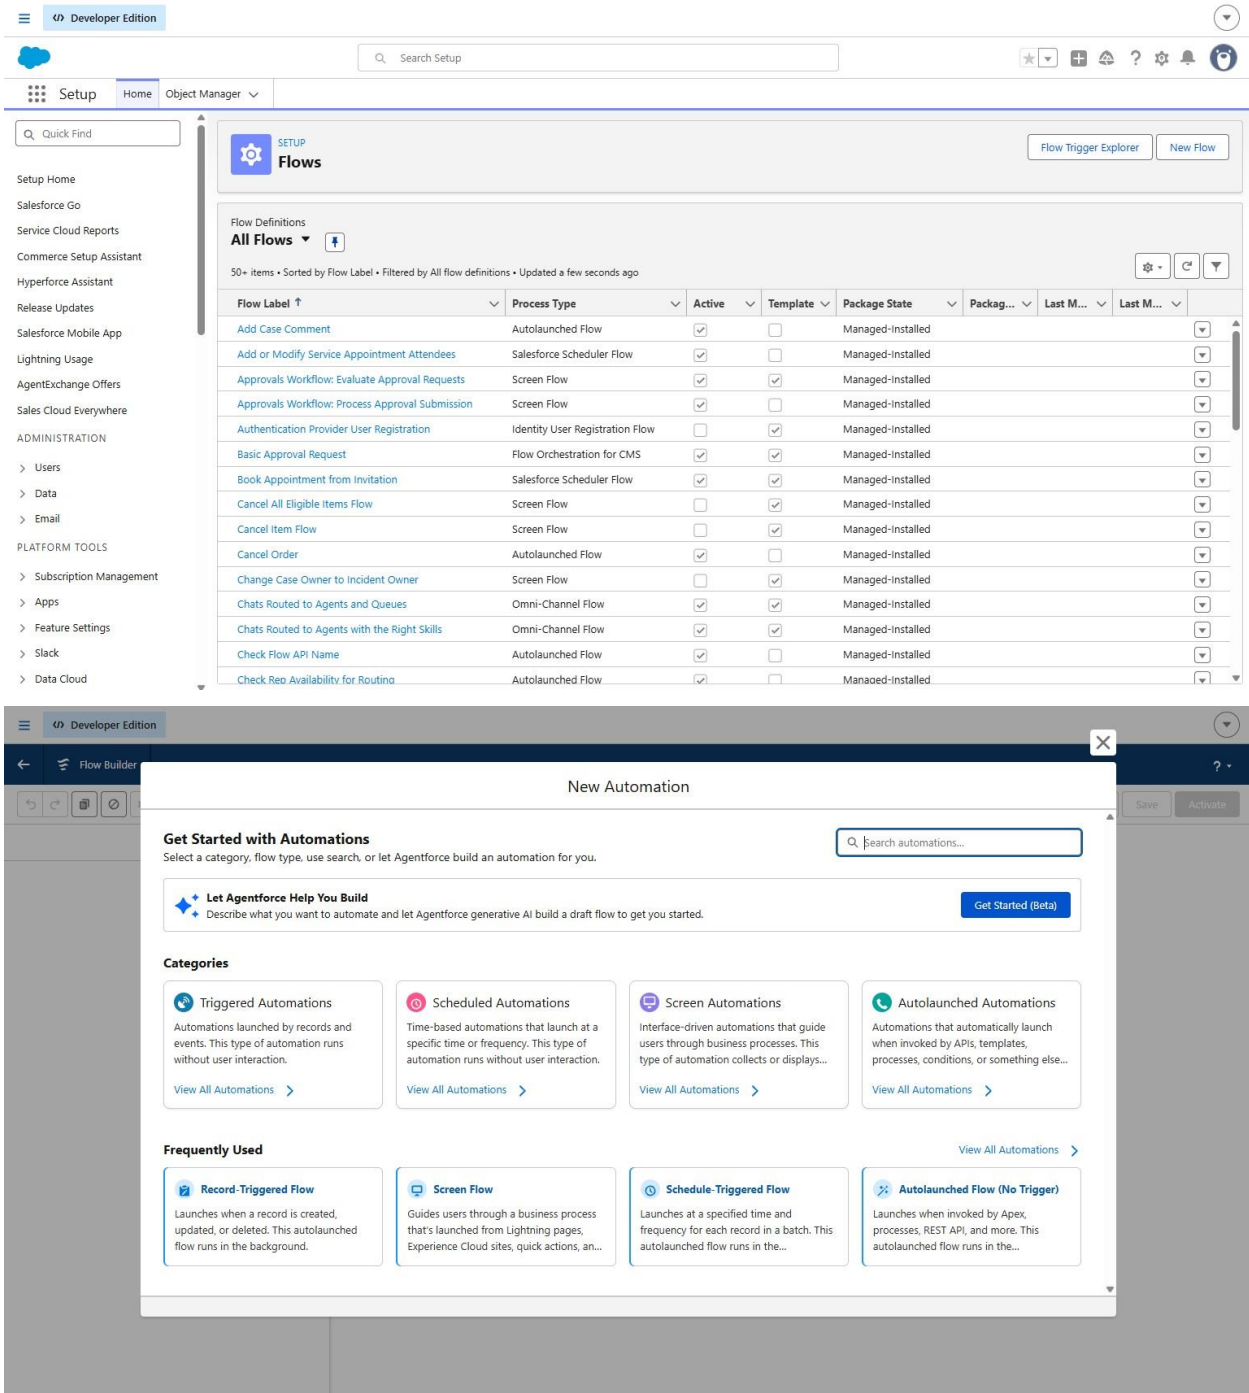


The systematic configuration details and structural layout executed are detailed below:

1. Variables and Input/Output Parameters


To manage data exchange between the external AI execution layer and the internal Salesforce database, two core technical variables were established:

- **ids (Input Variable):**
 - **Data Type: Text**
 - **Access Type: Available for Input**

- **Purpose:** Captures the unique tracking identifier passed directly by the user via the conversational AI console.

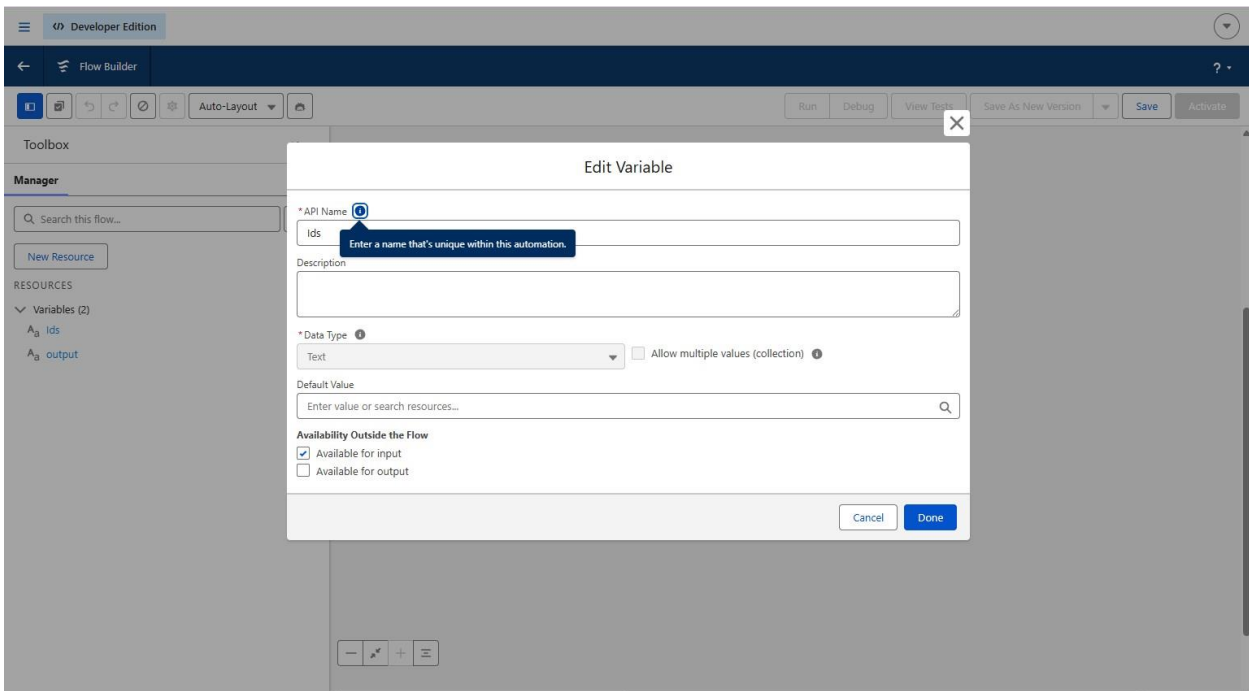


- **Output (Output Variable):**
 - **Data Type:** Text
 - **Access Type:** Available for Output
 - **Purpose:** Stores the processed natural-language summary string to return it cleanly to the user screen.

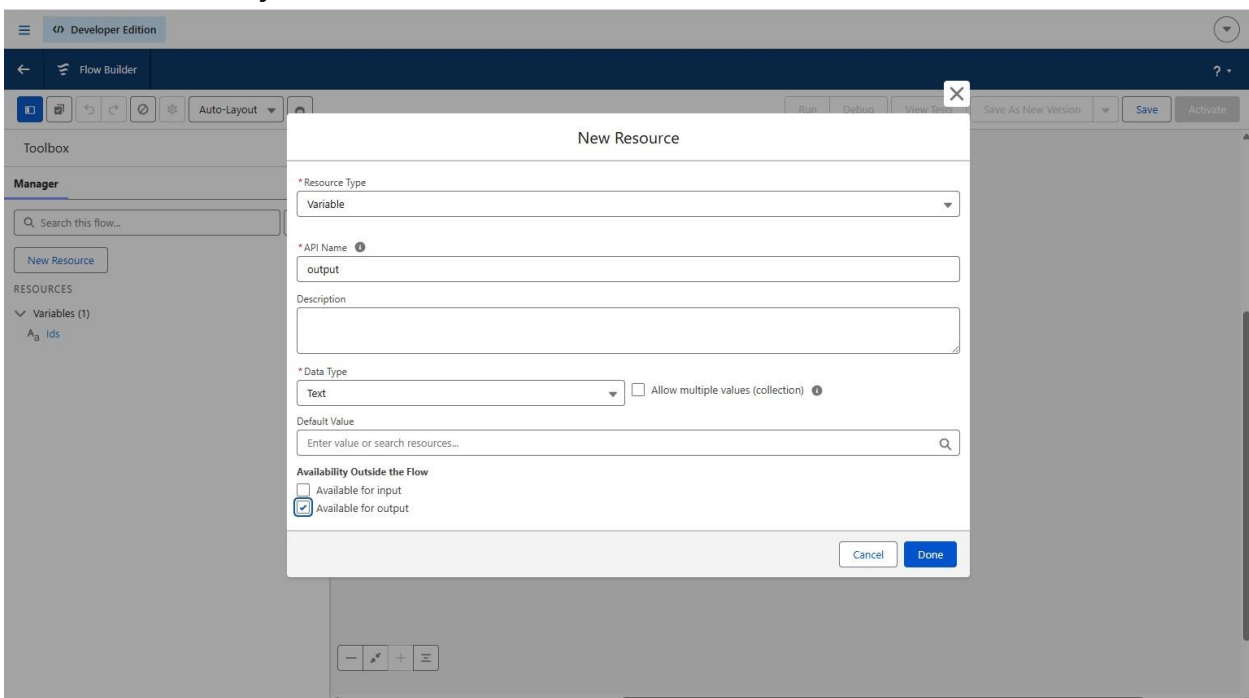


2. Logical Elements and Orchestration Steps

The Flow canvas layout was constructed using four consecutive execution stages to safely retrieve and process data:


- **Step 1: Get Records Element (Get Parcel Records)**
 - **Target Entity: Parcel__c**
 - **Filter Criteria: Parcel_ID__c | Operator: Equals | Value: ids**
 - **Storage Behavior: Configured to retrieve only the first record that matches the identifier and automatically cache all relevant fields.**

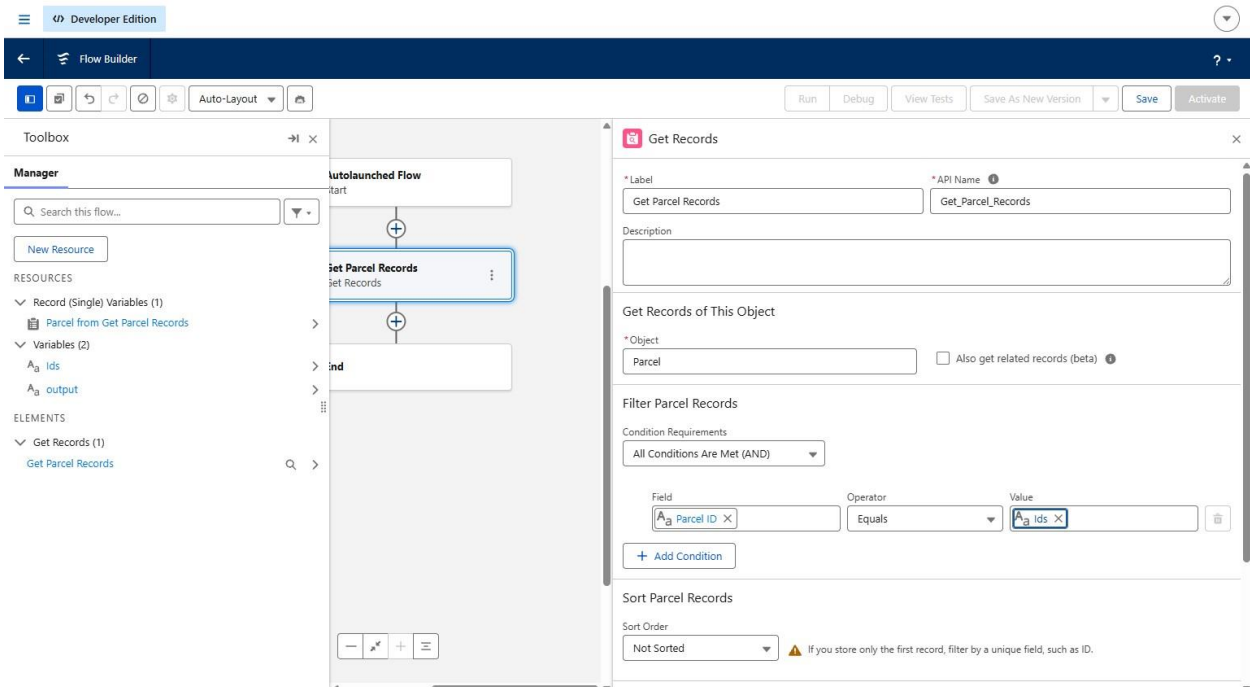

- **Step 2: Action Element (Parcel Updates)**
 - **Core Action Class: Generative AI Template Invocation Action**
 - **Object To Summarize: The specific Parcel__c record captured during the preceding Get Parcel Records step.**
 - **Purpose: Feeds the record context directly into the core Retrieve_Parcel_Details prompt template.**

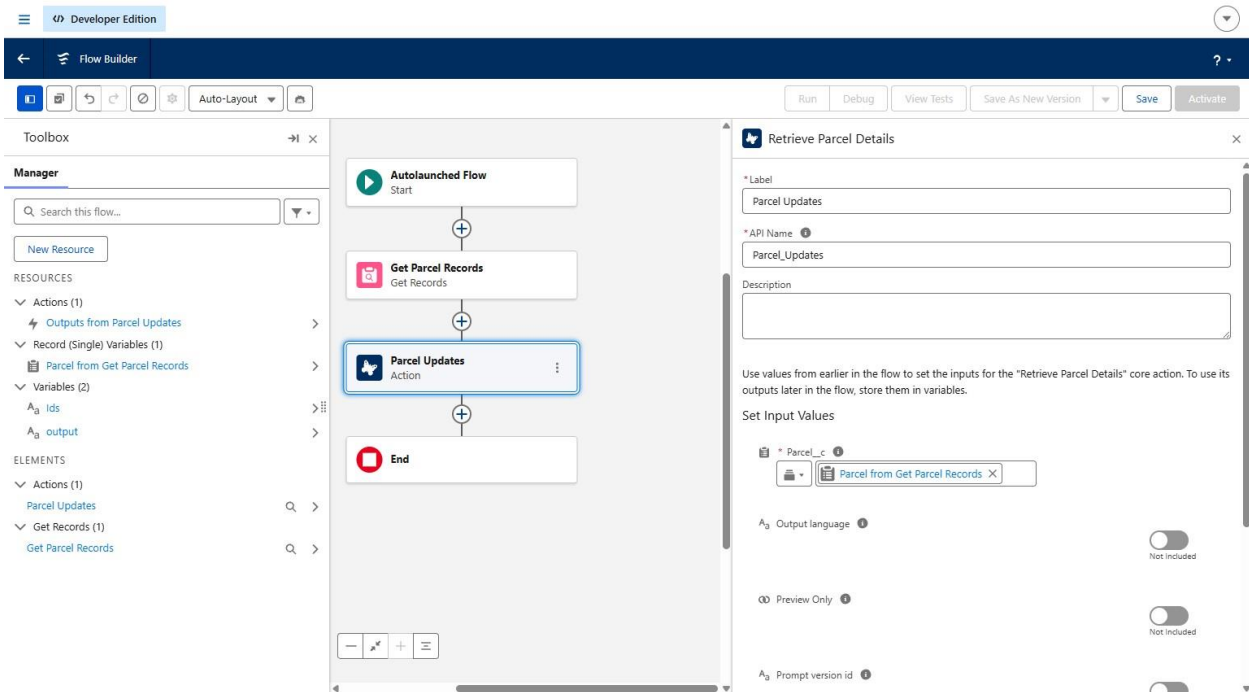

- **Step 3: Assignment Element (Assignment Outputs)**
 - **Mapping Rule: Output | Operator: Equals | Value: `{!Parcel_Updates.PromptResponse}`**
 - **Purpose: Explicitly maps the string output generated by the AI engine into the globally accessible flow output variable.**

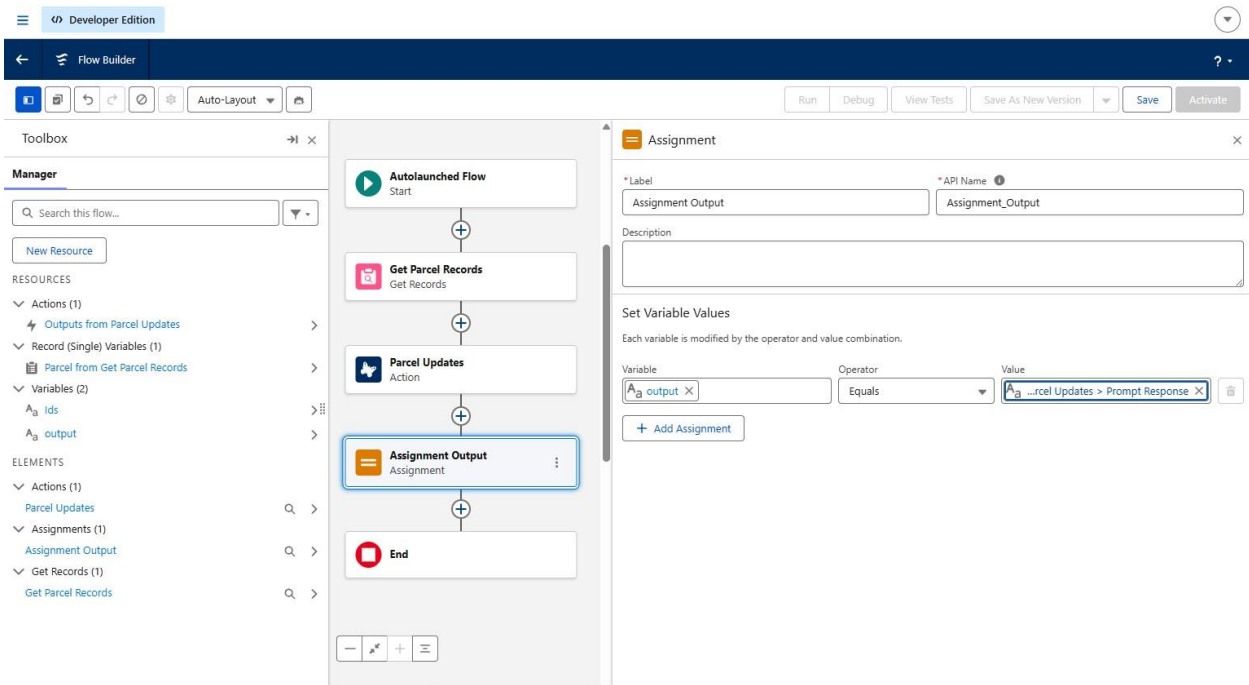

3. Compilation, Routing, and Deployment Activation

1. **Canvas Orchestration:** The directional logic paths were wired sequentially from the ignition point to termination:
2. **Start**—> **Get Records (Get Parcel Records)**---->{**Action (Parcel Updates)**}
----->{**Assignment (Assignment Outputs)**} ----->{**End**}
3. **Metadata Saving:** Saved the completed workspace under the definitive label name Parcel Details.
4. **Platform Activation:** Clicked Activate to lock down the flow configuration and expose its input/output framework for live platform service calls.

Custom Data Validation Rule

- **Rule Intent:** Prevent agents or data entry errors from logging impossible negative package metrics into the system database.
- **Object Scope:** Parcel__c
- **Rule Identity API:** Weight_Must_Be_Positive
- **Logical Condition Expression:** Weight__c <= 0
- **User Error Notification:** "A parcel's weight must be greater than zero."

The screenshot displays the Salesforce Lightning Setup interface, specifically the 'Object Manager' section for 'Parcel'. The 'Validation Rule Edit' page is shown, where a validation rule named 'Weight_Must_Be_Positive' is being configured. The rule is active, and the error condition formula is 'Weight__c <= 0'. The error message area is empty. A 'Functions' dropdown menu is open, showing various functions like ABS, ACOS, ADDMONTHS, AND, ASCII, and ASIN. The 'Check Syntax' button shows 'No errors found'. The interface includes a sidebar with navigation options like 'Details', 'Fields & Relationships', 'Page Layouts', 'Lightning Record Pages', 'Buttons, Links, and Actions', 'Compact Layouts', 'Field Sets', 'Object Limits', 'Record Types', 'Related Lookup Filters', 'Search Layouts', 'List View Button Layout', 'Restriction Rules', 'Scoping Rules', and 'Object Access'. The top navigation bar shows 'Setup', 'Home', and 'Object Manager'. The bottom status bar includes the URL 'orgfam-806b448d73-dev-ed.develop.my.salesforce-setup.com/lightning/setup/.../home' and the Einstein logo.

Business Process Approval Automation

- **Process Name:** Heavy_Parcel_Approval

- **Triggering Condition:** Parcel__c: Weight__c > 50
- **Orchestration Logic:** When a package over 50kg is entered, the record automatically locks down to prevent unapproved transit changes. Upon manual manager sign-off, a field update action triggers, shifting Status__c to In Transit.

Developer Edition

Search Setup

Setup Home Object Manager

approval process

Process Automation

Approval Processes

Didn't find what you're looking for? Try using Global Search.

Field Updates

Set_Status_Approved

Define the field update, including the object associated with the workflow rule, approval process, or entitlement process, the field to update, and the value to apply. Note that the field to update may be on a related object. Fields are shown only for the type that you select.

Field Update Edit

Save Save & New Cancel

Identification

Name Set_Status_Approved

Unique Name Set_Status_Approved

Description

Object Parcel

Field to Update Status

Field Data Type Picklist

Re-evaluate Workflow Rules after Field Change

Specify New Field Value

Picklist Options

The value above the current one

The value below the current one

A specific value In Transit

Save Save & New Cancel

Developer Edition

Flow Builder Auto Generate Parcel Task - V1

Last saved on 6/30/2026, 08:50 PM Active Run Debug View Tests Save As New Version Save Deactivate


Autolaunched Flow

Start

Create Delivery Task

Create Records

End

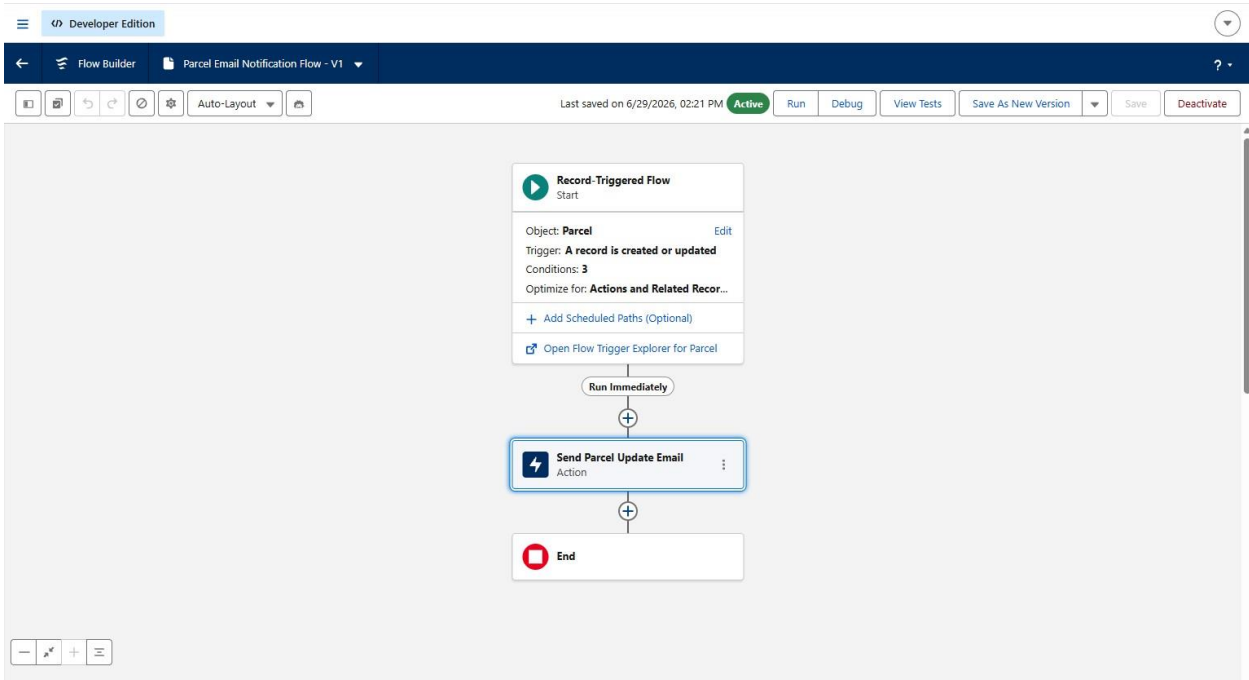

Programmatic Extension Layer & Unit Test Coverage


1. Apex Logic Handler Class

```
Developer Console - Google Chrome
orgfarm-806b448d73-dev-ed.develop.my.salesforce.com/_ui/common/apex/debug/ApexCSIPage

ParcelHandler.apxc ParcelTrigger.apxt
Code Coverage: None API Version: 67 Go To

1 public class ParcelHandler {
2     public static void calculateShippingPremium(List<Parcel__c> freshParcels) {
3         for(Parcel__c p : freshParcels) {
4             // Automatically add a priority handling note if weight exceeds 25kg
5             if(p.Weight__c > 25) {
6                 p.Description__c = 'Priority Heavyweight Handling Required.';
7             }
8         }
9     }
10 }
```


2. Apex Trigger

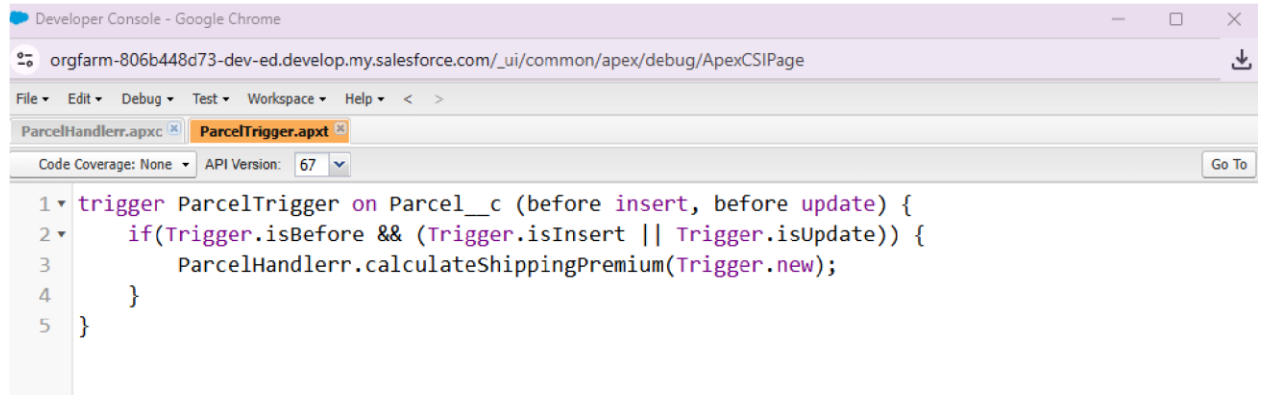

The screenshot shows the Salesforce Developer Console with the 'ParcelTrigger.apxt' file open. The code is an Apex trigger that calls the 'calculateShippingPremium' method of the 'ParcelHandler' class when a 'Parcel__c' record is inserted or updated.

```
1 trigger ParcelTrigger on Parcel__c (before insert, before update) {  
2     if(trigger.isBefore && (Trigger.isInsert || Trigger.isUpdate)) {  
3         ParcelHandler.calculateShippingPremium(trigger.new);  
4     }  
5 }
```

3. Apex Unit Verification Class

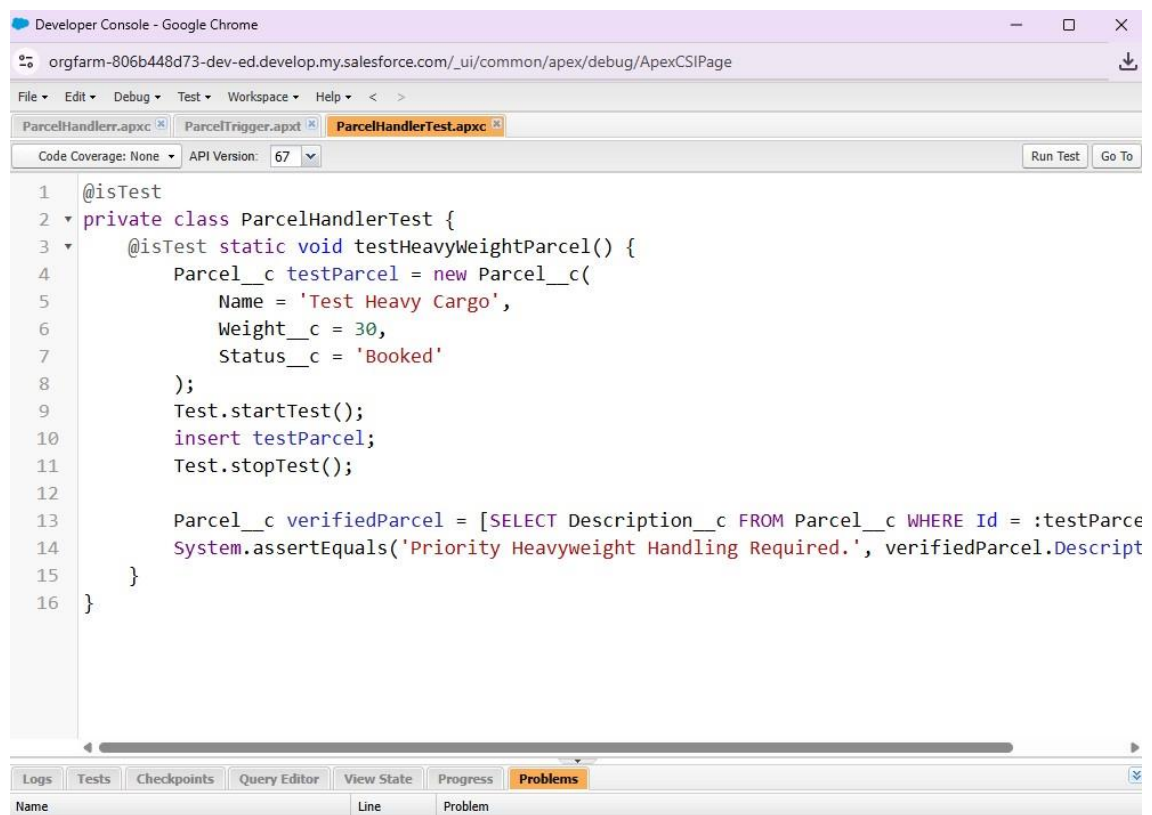

The screenshot shows the Salesforce Developer Console with the 'ParcelHandlerTest.apxt' file open. The code is an Apex test class that verifies the 'calculateShippingPremium' method of the 'ParcelHandler' class. It creates a 'Parcel__c' record with specific values and asserts that the 'Description__c' field contains the expected text 'Priority Heavyweight Handling Required.'.


```
1 @isTest  
2 private class ParcelHandlerTest {  
3     @isTest static void testHeavyWeightParcel() {  
4         Parcel__c testParcel = new Parcel__c(  
5             Name = 'Test Heavy Cargo',  
6             Weight__c = 30,  
7             Status__c = 'Booked'  
8         );  
9         Test.startTest();  
10        insert testParcel;  
11        Test.stopTest();  
12  
13        Parcel__c verifiedParcel = [SELECT Description__c FROM Parcel__c WHERE Id = :testParcel];  
14        System.assertEquals('Priority Heavyweight Handling Required.', verifiedParcel.Description__c);  
15    }  
16 }
```

At the bottom of the console, there is a 'Problems' tab which is currently empty, indicating no errors or warnings were found during the compilation of the test class.

Phase 3: UI/UX Development & Customization


Lightning App Setup via App Manager

The **SwiftShip Tracker Custom App** console was provisioned within the Salesforce App Manager framework. It aggregates custom tabs (Home, Parcel's, Deliveries, Sender's, Receiver's) into a unified workspace, providing a seamless navigation experience.

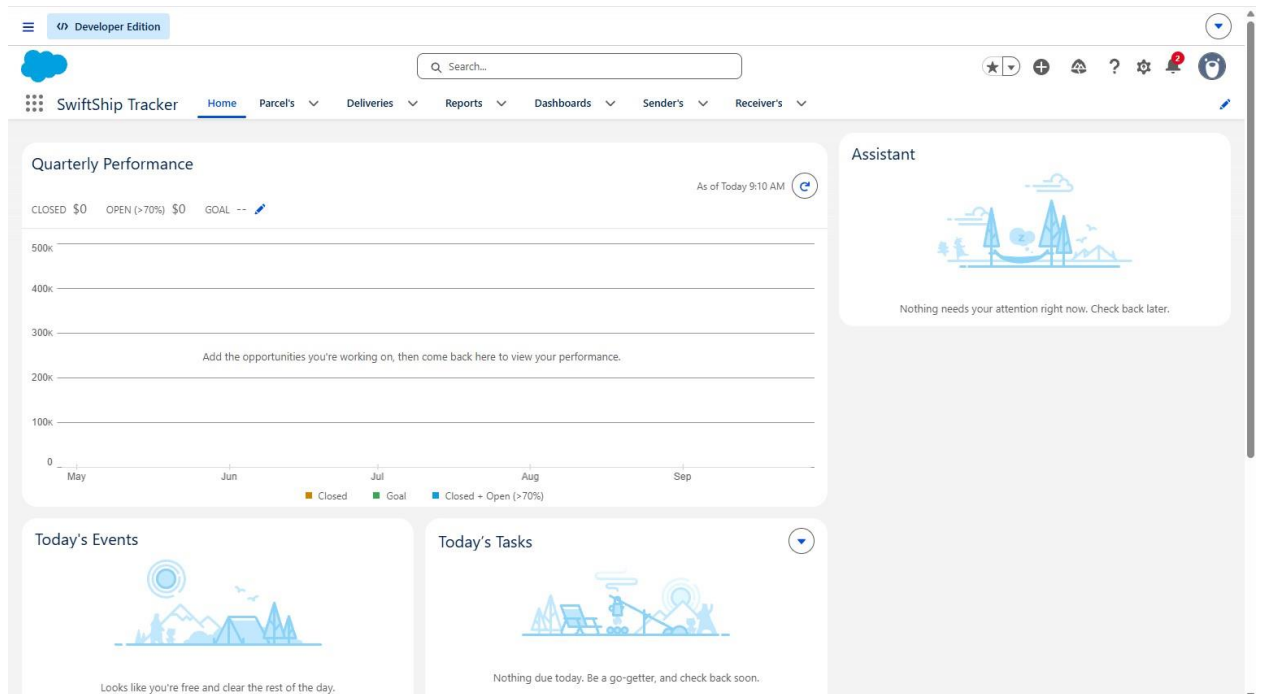


Page Layout Form Customization

The **Parcel__c** record detail page was converted into a responsive layout using **Dynamic Forms** inside the **Lightning App Builder** canvas. Fields were re-architected into a clean 1-Column Grid layout that automatically scales down for optimal performance on mobile field-courier devices.

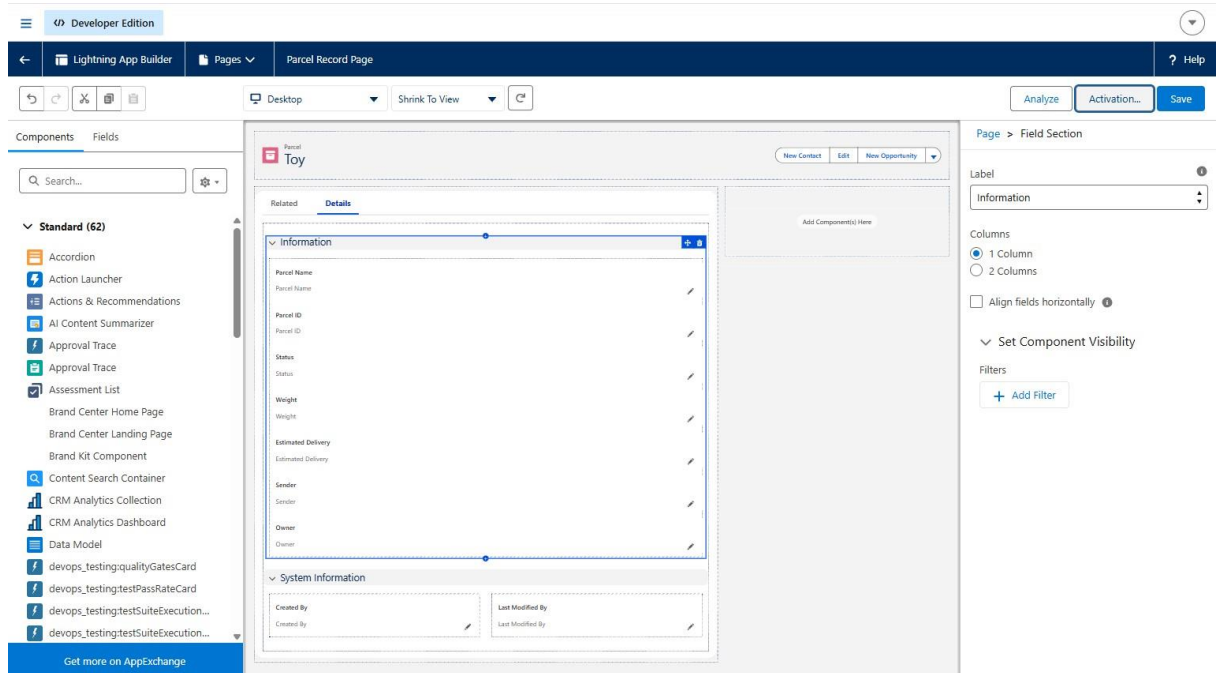

Analytical Reporting Engine Configuration

An operational summary report titled SwiftShip Global Analytics was configured to group active logistics items by their current stage picklist value (Status__c). The resulting donut chart matrix was embedded directly onto the primary **Home Landing Page Canvas** via the App Builder interface, providing management teams with real-time operational insight.

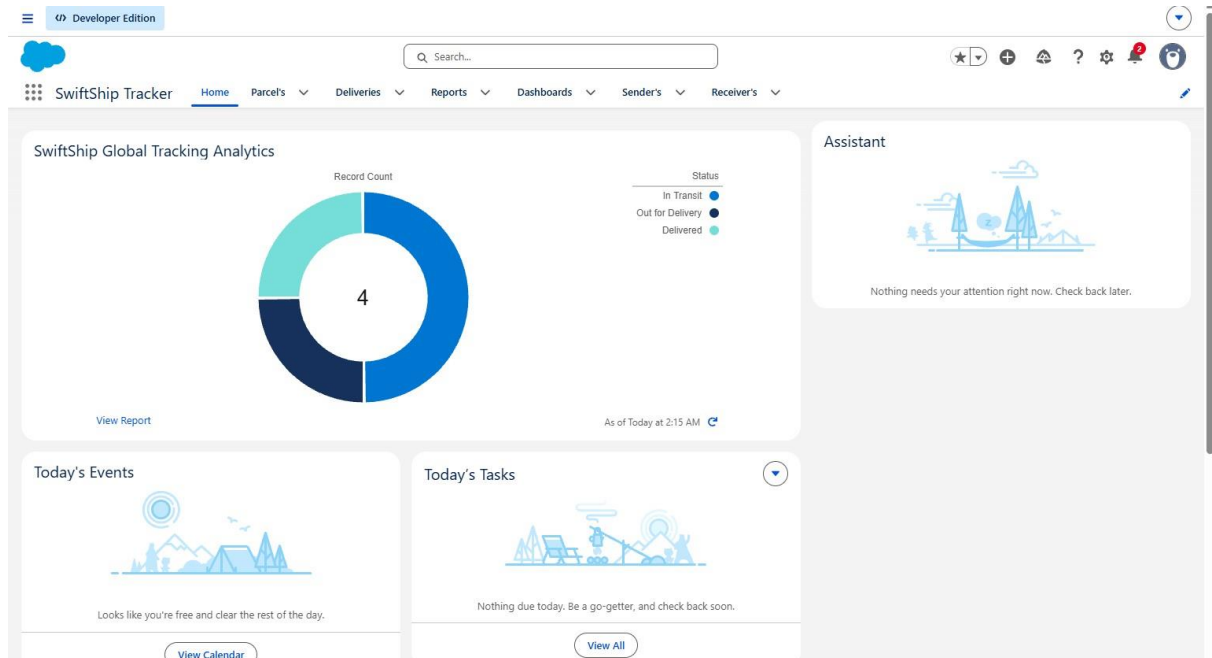

Milestone 1: Creating Permission Sets

To enable agents to efficiently manage parcel operations, Phase 3 focuses on tailoring the user experience and establishing secure access control. This is achieved by creating an intuitive desktop workspace and configuring granular object permissions using **AgentForce-compatible permission sets**.

Developer Edition

Search Setup

Setup Home Object Manager

Q permission

Users
Permission Set Groups
Permission Sets
Custom Code
Custom Permissions

Didn't find what you're looking for? Try using Global Search.

SETUP
Permission Sets

Permission Sets

On this page you can create, view, and manage permission sets.

All Permission Sets
Edit | Delete | Create New View

New

Action	Permission Set Name	Description	License
☐	(Legacy) Data Cloud Data Aware Specialist	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Platform
☐	(Legacy) Data Cloud Marketing Admin	Allows access to Data Cloud Setup if the user is also a Salesforce admin ...	Customer Data Cloud for Marketing
☐	(Legacy) Data Cloud Marketing Manager	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Platform
☐	(Legacy) Data Cloud Marketing Specialist	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Platform
☐	(Legacy) Data Cloud for Marketing Data Aware Specialist	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Cloud for Marketing
☐	(Legacy) Data Cloud for Marketing Manager	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Cloud for Marketing
☐	(Legacy) Data Cloud for Marketing Specialist	This Data Cloud permission set will be deprecated in Spring '24. Learn ...	Customer Data Cloud for Marketing
☐	Access Agentforce Default Agent	Gives users access to the default Agentforce agent in Salesforce.	Agentforce (Default)
☐	AgentCASCPermSet		Cloud Integration User
☐	Agent Platform Builder	Allow access to agent platform.	Agent platform builder
☐	Agentforce Default Admin	Allows users to build and manage in-org copilots.	Agentforce (Default)
☐	Agentforce Service Agent Configuration	Build and manage autonomous AI service agents.	Agentforce Service Agent Builder
☐	Agentforce Service Agent Object Access	Access knowledge articles and manage cases and contacts as an auto...	Agentforce Service Agent User
☐	Agentforce Service Agent Secure Base	Set up and use Agentforce Service Agent actions with enhanced data s...	Agentforce Service Agent User
☐	Agentforce Service Agent User	Analyze topics and perform actions as an autonomous AI service agent.	Agentforce Service Agent User
☐	Agentic Near Core CRM	Allows the integration user to use crm features	Cloud Integration User
☐	Agentic Near Core Marketing	Allows the integration user to use marketing features	Cloud Integration User

1-25 of 112
0 Selected
Previous Next
Page 1 of 5

Developer Edition

Search Setup

Setup Home Object Manager

Q permission

Users
Permission Set Groups
Permission Sets
Custom Code
Custom Permissions

Didn't find what you're looking for? Try using Global Search.

SETUP
Permission Sets

Permission Set
Create

Enter permission set information

Label Swift Ship
API Name Swift_Ship
Description
Session Activation Required

Select the type of users who will use this permission set

Who will use this permission set?
Choose 'None' if you plan to assign this permission set to multiple users with different user and permission set licenses.
Choose a specific user license if you want users with only one license type to use this permission set.
Choose a specific permission set license if you want this permission set license auto-assigned with the permission set.
Not sure what a permission set license is? Learn more here.
License Einstein Agent

orgfarm-806b448d73-dev-ed.develop.my.salesforce-setup.com/lightning/setup/PermSets/pa...


1. Security Governance: Permission Set Configuration

To grant the required object-level and field-level permissions without altering the base user profiles, a dedicated, AI-compatible permission set was instantiated.

1.1 Creation and Licensing:

- **Navigation Path:** Setup -----> Quick Find: Permission Sets----->New.
- **Label Name:** Swift Ship
- **API Name:** Swift_Ship (System auto-filled)

- **License Type: Einstein Agent** (Ensures full compatibility with downstream AgentForce conversational workflows and AI execution tokens)

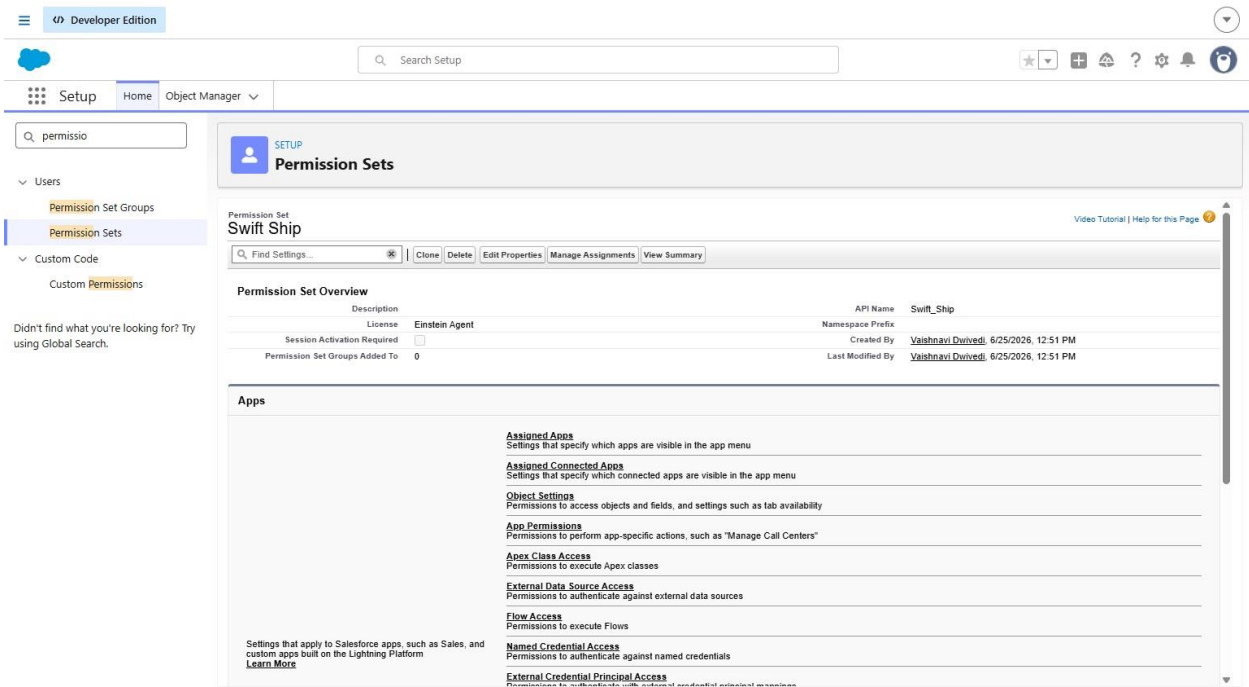

1.2 Object Settings and Data Access Matrix:

Inside the permission set configuration page, navigate to **Apps** ----> **Object Settings** to define the CRUD data access boundaries. For each of the four custom core entities, click **Edit**, apply the standard operational access schema, and ensure all key tracking fields are marked **Visible** under Field Permissions before committing changes:

Target Custom Object	Read	Create	Edit	Delete	Field-Level Security (FLS)
Parcel__c	✓ Enabled	✓ Enabled	✓ Enabled	✗ Disabled	Key tracking fields marked Visible

Delivery__c	✓ Enabled	✓ Enabled	✓ Enabled	✗ Disabled	Key transit/location fields marked Visible
Sender__c	✓ Enabled	✓ Enabled	✓ Enabled	✗ Disabled	Key origin address/contact fields marked Visible
Receiver__c	✓ Enabled	✓ Enabled	✓ Enabled	✗ Disabled	Key destination address/contact fields marked Visible

Developer Edition

Search Setup

Setup

Home

Object Manager

permission

Users

Permission Set Groups

Permission Sets

Custom Code

Custom Permissions

Didn't find what you're looking for? Try using Global Search.

SETUP

Permission Sets

Save Cancel

Parcel's

Tab Settings

Available	Visible
☐	☐

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	☐ Read Access	☐ Edit Access
Created By	CreatedById	☒	☐
Estimated Delivery	Estimated_Delivery__c	☒	☒
Last Modified By	LastModifiedById	☒	☐
Owner	OwnerId	☒	☒
Parcel ID	Parcel_ID__c	☒	☐
Parcel Name	Name	☒	☒
Sender	Sender__c	☒	☒
Status	Status__c	☒	☒

Developer Edition

Search Setup

Setup

Home

Object Manager

permission

Users

Permission Set Groups

Permission Sets

Custom Code

Custom Permissions

Didn't find what you're looking for? Try using Global Search.

SETUP

Permission Sets

Save Cancel

Leaves

Tab Settings

Available	Visible
☐	☐

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	☐ Read Access	☐ Edit Access
Created By	CreatedById	☒	☐
Current Location	Current_Location__c	☒	☒
Delivery Name	Name	☒	☒
Estimated Delivery	Estimated_Delivery__c	☒	☒
Last Modified By	LastModifiedById	☒	☐
Owner	OwnerId	☒	☒
Parcel	Parcel__c	☒	☒
Sender	Sender__c	☒	☒

Developer Edition

Search Setup

Setup Home Object Manager

permission

Users

Permission Set Groups

Permission Sets

Custom Code

Custom Permissions

Didn't find what you're looking for? Try using Global Search.

Permission Sets

Sender's

Save Cancel

Tab Settings

Available	Visible
☐	☐ (1)

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	☐ Read Access	☐ Edit Access
Created By	CreatedById	☒	☐
Last Modified By	LastModifiedById	☒	☐
Owner	OwnerId	☒	☒
Sender Address	Sender_Address__c	☒	☒
Sender Contact	Sender_Contact__c	☒	☒
Sender Email	Sender_Email__c	☒	☒
Sender Name	Name	☒	☒

Developer Edition

Search Setup

Setup Home Object Manager

permission

Users

Permission Set Groups

Permission Sets

Custom Code

Custom Permissions

Didn't find what you're looking for? Try using Global Search.

Permission Sets

Tab Settings

Available	Visible
☐	☐ (1)

Object Permissions

Permission Name	Enabled
Read	☒
Create	☒
Edit	☒
Delete	☐
View All Records	☐
Modify All Records	☐
View All Fields	☐

Field Permissions

Field Name	Field API Name	☐ Read Access	☐ Edit Access
Created By	CreatedById	☒	☐
Last Modified By	LastModifiedById	☒	☐
Owner	OwnerId	☒	☒
Parcel	Parcel__c	☒	☒
Receiver's Address	Receiver_s_Address__c	☒	☒
Receiver Contact	Receiver_Contact__c	☒	☒
Receiver Email	Receiver_Email__c	☒	☒
Receiver Name	Name	☒	☒
Sender	Sender__c	☒	☒


1.3 Assigning Permission Sets to the Einstein Agent User

To enable the autonomous agent to read and process shipment records at runtime, the permission set must be assigned to its system user profile.

Administrative Steps:

1. **Navigate to Users:** Go to **Setup** ----> **Users** ----> **Users**.

2. **Select Agent Profile:** Find and click the **Einstein Service Agent** user record (e.g., “SwiftShip Agent”).
3. **Edit Assignments:** Scroll to the **Permission Set Assignments** related list and click **Edit Assignments**.
4. **Grant Access:** Select the **Swift Ship** permission set from the Available list, click **Add** —> to move it to the Enabled list, and click **Save**.

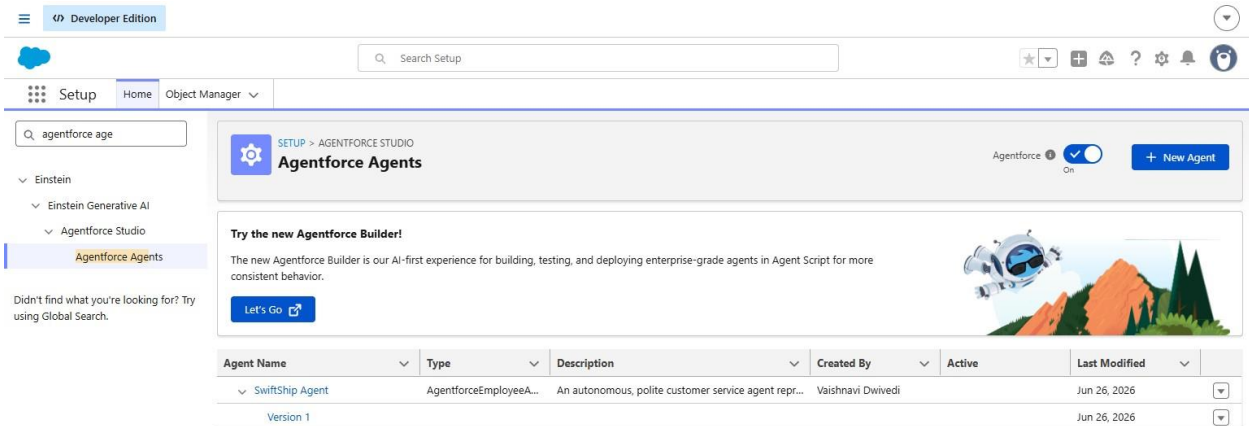

Developer Edition

Setup Home Object Manager

agentforce age

Einstein

Einstein Generative AI

Agentforce Studio

Agentforce Agents

Didn't find what you're looking for? Try using Global Search.

SETUP > AGENTFORCE STUDIO


Agentforce Agents

Try the new Agentforce Builder!

The new Agentforce Builder is our AI-first experience for building, testing, and deploying enterprise-grade agents in Agent Script for more consistent behavior.

Let's Go

Agent Name	Type	Description	Created By	Active	Last Modified
SwiftShip Agent	AgentforceEmployeeA...	An autonomous, polite customer service agent repr...	Vaishnavi Dwivedi		Jun 26, 2026
Version 1					Jun 26, 2026

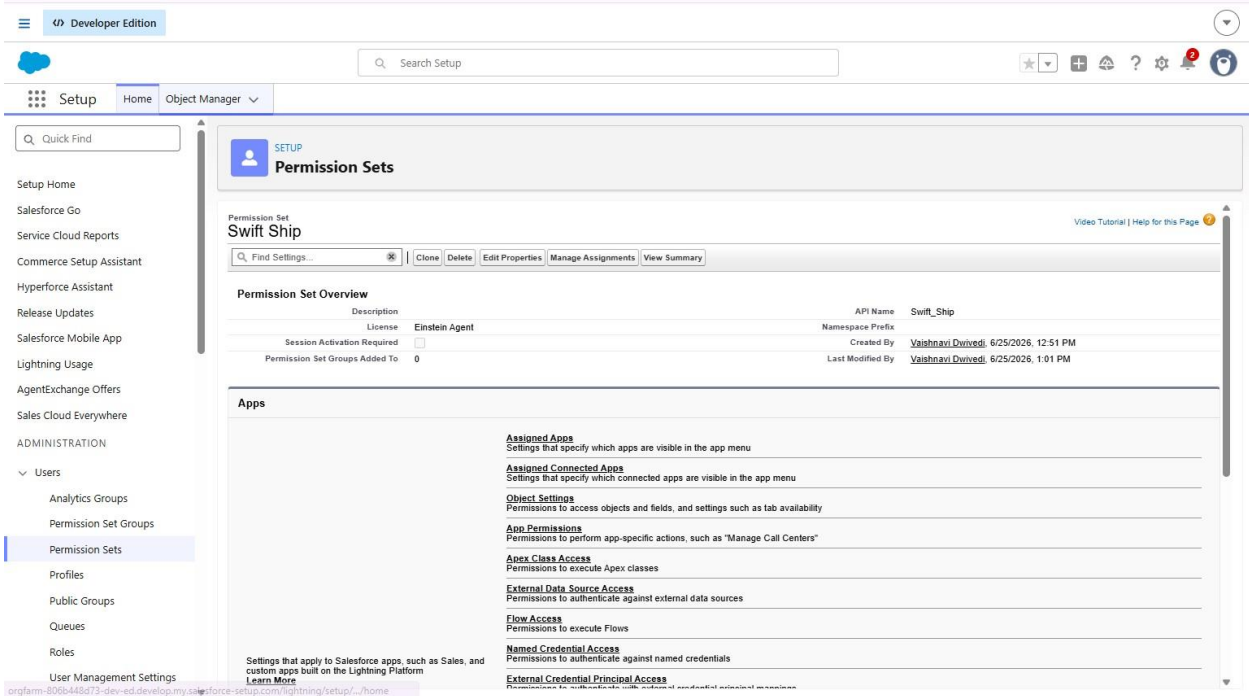

Developer Edition

Setup Home Object Manager

Quick Find

Setup Home

Salesforce Go

Service Cloud Reports

Commerce Setup Assistant

Hyperforce Assistant

Release Updates

Salesforce Mobile App

Lightning Usage

AgentExchange Offers

Sales Cloud Everywhere

ADMINISTRATION

Users

Analytics Groups

Permission Set Groups

Permission Sets

Profiles

Public Groups

Queues

Roles

User Management Settings

SETUP

Permission Sets

Swift Ship

Find Settings ... Clone Delete Edit Properties Manage Assignments View Summary

Permission Set Overview

Description	License	Einstein Agent	API Name	Swift_Ship
Session Activation Required			Namespace Prefix	
Permission Set Groups Added To	0		Created By	Vaishnavi Dwivedi: 6/25/2026, 12:51 PM
			Last Modified By	Vaishnavi Dwivedi: 6/25/2026, 1:01 PM

Apps

Assigned Apps

Settings that specify which apps are visible in the app menu

Assigned Connected Apps

Settings that specify which connected apps are visible in the app menu

Object Settings

Permissions to access objects and fields, and settings such as tab availability

App Permissions

Permissions to perform app-specific actions, such as "Manage Call Centers"

Apex Class Access

Permissions to execute Apex classes

External Data Source Access

Permissions to authenticate against external data sources

Flow Access

Permissions to execute Flows

Named Credential Access

Permissions to authenticate against named credentials

External Credential Principal Access

Permissions to authenticate against external credential principal access

Settings that apply to Salesforce apps, such as Sales, and custom apps built on the Lightning Platform

Learn More


orgfarm-806b44ed72-dev-ed.develop.my.salesforce-setup.com/lightning/setup/.../home

This explicitly authorizes the agent to securely retrieve and communicate parcel updates based on the predefined security matrix boundaries.

Milestone 3: Einstein Platform Activation and Agentforce Provisioning


1. Core Einstein Engine Activation

- **Navigation Path: Setup** ----> Quick Find: Einstein Setup.
- **System Initialization:** Clicked **Get Started** and enabled the following core toggles:
 - **Turn On Einstein:** Activates the primary AI processing engine.
 - **Global Languages:** Enables multi-language input handling for global tracking.
 - **Deploy Prompt Template:** Authorizes runtime execution of the custom Retrieve_Parcel_Details template.
- **Session Refresh:** Refreshed the browser to commit the new platform metadata.

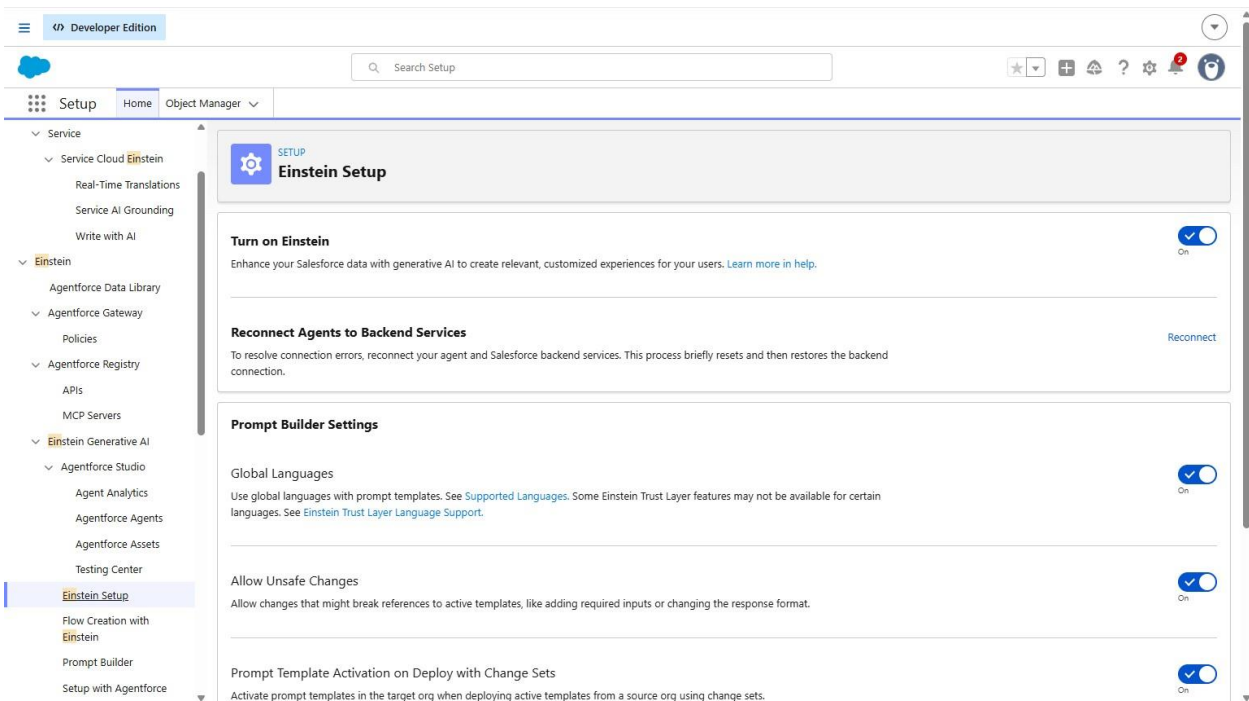

2. Agentforce Layer Provisioning

- **Navigation Path: Setup** ----> Quick Find: Agentforce Agents.
- **Service Activation:** Enabled autonomous agent hosting by toggling on:
 - **Agentforce:** Boots up the native, conversational AI platform.
 - **Enable Agentforce Default Agent:** Provisions the default service agent workspace to execute the custom parcel tracking flows.

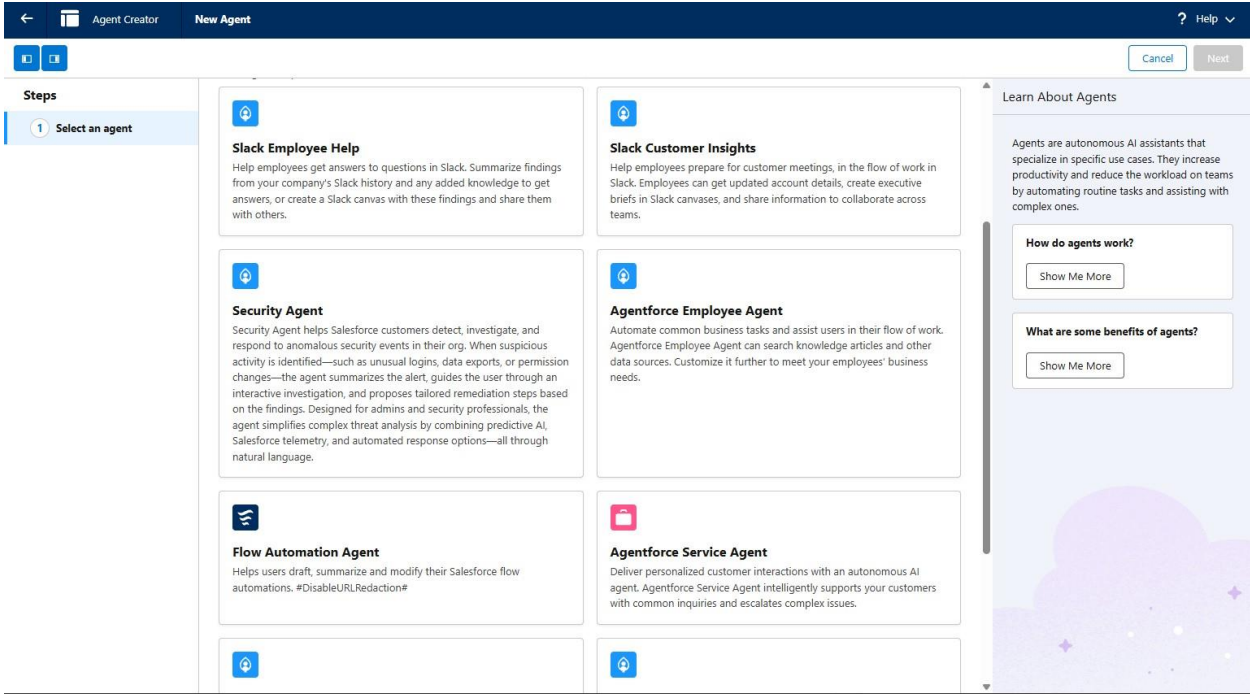

Milestone 4: Building and Configuring the Agent

1. Agent Initialization

- **Navigation:** Setup -----> Quick Find: Agent Builder -----> **Agents** -----> **New Agent**.
- **Selection:** Chosen **Service Agent** to establish the conversational workspace.

2. Defining the Agent Persona

- **Workspace Cleanup:** Removed all pre-populated subagents to build a dedicated configuration.

The screenshot shows the 'Select your agent's subagents' step in the Agent Creator interface. The left sidebar shows the progress: 1. Select an agent (checked), 2. Select your subagents (active), 3. Customize your agent, and 4. Select data sources. The main area lists three subagents: Case Management, Account Management, and Reservation Management. Each subagent has a description and a '+ Add' button. A right sidebar titled 'Learn About Subagents' provides additional information and a 'Learn More in Help' link.

Steps

- 1 Select an agent
- 2 **Select your subagents**
- 3 Customize your agent
- 4 Select data sources

Select your agent's subagents
Subagents are the jobs your agent can do. Agents have subagents that are pre-selected for you, but you can deselect any you don't want to include. **You can edit subagents in a later step.**

Case Management [+ Add](#)
Handles customer inquiries and actions related to support cases, including providing case information, updating existing cases, and creating new cases.
[See Included Actions](#)

Account Management [+ Add](#)
Handles customer inquiries about changing their contact information and resetting their password.
[See Included Actions](#)

Reservation Management [+ Add](#)
Handles requests to create new reservations for customers at their desired time slots.
[See Included Actions](#)

Learn About Subagents
A subagent is a category of actions related to a particular job to be done by agents. Adding subagents to an agent helps the agent recognize how to behave and respond for different jobs. Subagents contain actions, and subagent instructions, which tell the agent how to make decisions. In sum, subagents define your agent's range of capabilities.
Subagents also improve the accuracy and conversational quality of an agent's responses. Subagents add context to users' requests, such as a user's role and their flow of work.
After creating your agent, you can customize or create custom subagents in Agentforce Builder.
Example: Agentforce Service Agent includes standard subagents, like Customer Account Management and Order Inquiries, that you can use as a starting point for common use cases. To customize them to meet your unique business needs, add instructions, test your agent, and iterate.
[Learn More in Help](#)

- **Core Identity Parameters:**
 - **Agent Name:** Parcel Tracking Agent
 - **Description & Role:** Helps customers book, track, and manage parcels. ○
- **Company Context:** The agents are built to help with logistic issues.

The screenshot shows the 'Customize your agent' step in the Agent Creator interface. The left sidebar shows the progress: 1. Select an agent (checked), 2. Select your subagents (checked), 3. Customize your agent (active), and 4. Select data sources. The main area contains form fields for Name, API Name, Description, Role, Company, and Agent User. A right sidebar titled 'Best Practices for Agent Settings' provides guidance on how to fill out these fields. A checkbox at the bottom allows users to keep a record of conversations.

Steps

- 1 Select an agent
- 2 Select your subagents
- 3 **Customize your agent**
- 4 Select data sources

Customize your agent
Describe your agent's job in more detail. **You can edit this later.**

Name: Parcel Tracking Agent
API Name: Parcel_Tracking_Agent

* Description ⓘ
Helps customers book, track, and manage parcels.
952 characters remaining

* Role ⓘ
Helps customers book, track, and manage parcels
208 characters remaining


* Company ⓘ
The agents are built to help with logistic issues
206 characters remaining

* Agent User ⓘ
New Agent User

☐ Keep a record of conversations with enhanced event logs to review agent behavior ⓘ [Learn More](#)

Best Practices for Agent Settings
Agentforce Service Agent settings determine how an AI agent behaves and presents itself in conversations. Use these best practices to help you write concise and conversational descriptions.
Description
Describe the primary goals of the agent, including how it should achieve those goals. Include details that help the AI agent understand its end users, such as customers' context, preferences, and common behaviors.
Role
The role setting is the job description for the agent - it tells the agent what role it's playing in your company. Include key responsibilities, functions, and the target audience. Describe key tasks that it performs on a day-to-day basis as well as specialized or one-off tasks. Start the role description with "you are...".
Company
Tell the agent about the company it represents. Describe what your company does, who its target customers are, and the value proposition of important products or services you sell. Add details about what makes your business unique from your competitors.
[Learn More in Help](#)

- **Creation:** Progressed through the wizard and clicked **Create**.

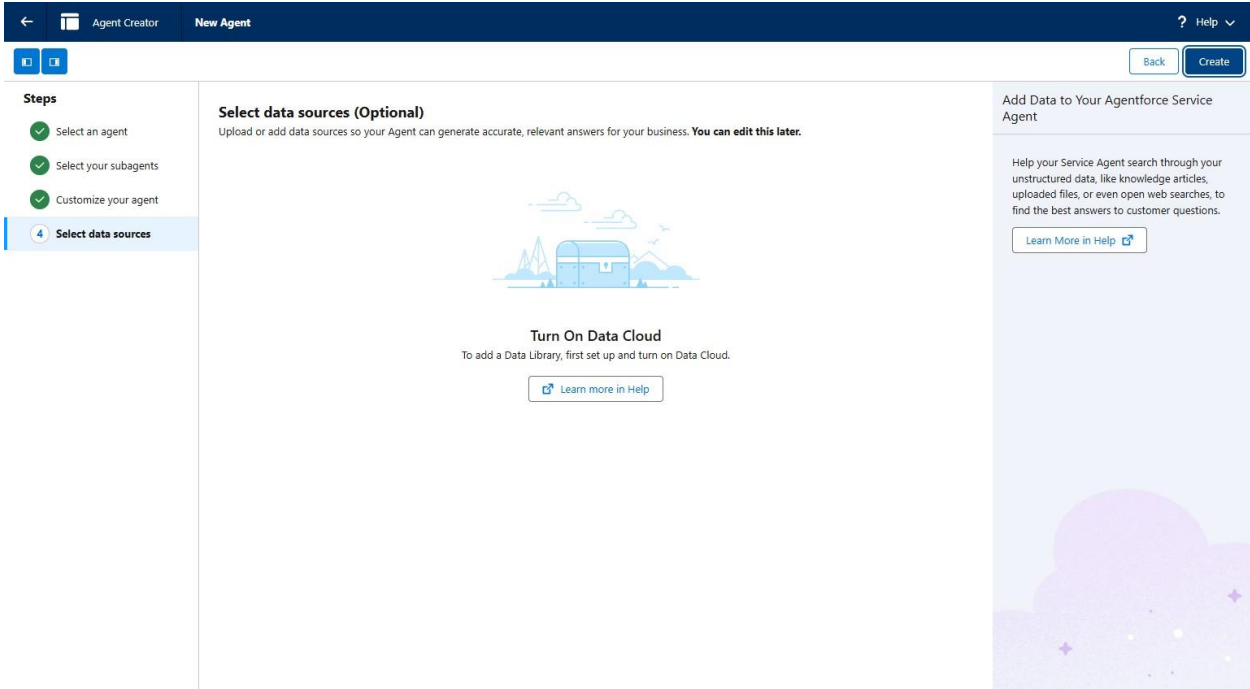

3. Attaching Functional Logic (Agent Actions)

The previously deployed auto-launched flow was bound to the agent as an actionable capability:

1. **Path:** Inside Agent Builder, navigated to **Subagent Actions**.
2. **Action Configuration:** Clicked **New Agent Action**, selected **Flow** as the Action Type, and clicked **Next**.
3. **Flow Reference:** Selected the **Parcel Details** flow as the reference engine and clicked **Next**.
4. **Variable Mapping:** Verified that the ids input and Output parameters were mapped to allow the agent to pass user tracking entries.
5. **Finalize:** Clicked **Finish**.

Developer Edition

Search Setup

SetupHomeObject

agentforce

Feature Settings

Commerce

Commerce Agentforce Settings

Einstein

Agentforce Data Library

Agentforce Gateway

Policies

Agentforce Registry

APIs

MCP Servers

Einstein Generative AI

Agentforce Studio

Agent Analytics

Agentforce Agents

Agentforce Assets

Testing Center

Setup with Agentforce

Development

Agentforce Vibes Extension

Agentforce Vibes IDE

Create an Agent Action

Connect an existing action

Actions are how an agent gets things done. To create an agent action, start with the functionality you already have in Salesforce, such as flows or prompt templates. Select an action you want the agent action to reference, and then configure it for use with an agent.

*Reference Action Type

Flow

*Reference Action

Parcel Details

*Agent Action Label

Parcel Details

*Agent Action API Name

Parcel_Details

Cancel

Next

Cancel Order

Cancel Order

Cancels a customer's order.

Standard

Flow

Salesforce

Capability Summarization

Capability Summarization

This action summarizes the ag...

Standard

Standard

Salesforce

CDP ID Mappings for DG

CDP ID Mappings for DG

Fetch ID Mappings of the DG.

Standard

Standard

Salesforce

Developer Edition

Search Setup

SetupHomeObject

agentforce

Feature Settings

Commerce

Commerce Agentforce Settings

Einstein

Agentforce Data Library

Agentforce Gateway

Policies

Agentforce Registry

APIs

MCP Servers

Einstein Generative AI

Agentforce Studio

Agent Analytics

Agentforce Agents

Agentforce Assets

Testing Center

Setup with Agentforce

Development

Agentforce Vibes Extension

Agentforce Vibes IDE

Create an Agent Action

Configure your action for Agent

An agent uses a large language model (LLM) to determine when to launch an action in a conversation. Enter instructions to tell the LLM how to use your action, inputs, and outputs. To help you get started, we copied over details from the reference action. [Learn more about how to write agent action instructions in Salesforce Help.](#)

After you create your action, you can add it to an agent and test and iterate on your instructions.

Agent Action Configuration

Agent Action Label

Parcel Details

*Agent Action Description

Displays the parcel updates, when a user provides the necessary details

Show loading text for this action

☒

*Loading Text

This might take time.

Inputs

Inputs are the data and parameters an agent needs to run properly

Outputs

Outputs are the results the agent provides after completing an action

Back

Finish

Cancel Order

Cancel Order

Cancels a customer's order.

Standard

Flow

Salesforce

Capability Summarization

Capability Summarization

This action summarizes the ag...

Standard

Standard

Salesforce

CDP ID Mappings for DG

CDP ID Mappings for DG

Fetch ID Mappings of the DG.

Standard

Standard

Salesforce

Create an Agent Action

☒ *Loading Text ⓘ
This might take time.

Inputs
Inputs are the data and parameters an agent action needs to run properly

Ids
Ids

*Description ⓘ
Ask for the tracking id before the details are shared.

Data Type
lightning__textType

☒ Require input
☐ Collect data from user

Outputs
Outputs are the results the agent provides after completing an action

output
output

*Description ⓘ
Match the id then give the ouput.

Data Type
lightning__textType

☐ Filter from agent action
☒ Show in conversation

Output Rendering
Text

Back Finish

4. Final Activation

- **Save Name:** Saved the complete configuration as **Swiftship Tracker**.
- **Activation:** Clicked **Activate** to launch the autonomous tracking agent into production.

Agentforce Builder **Swiftship Tracker** Version 1 (Active) ⌵

Settings ? Help ⌵

Batch Test Deactivate

Subagents

Manage the subagents assigned to your agent. To make changes, your agent must be deactivated.

Search subagents...
Search subagents...

1 items • Sorted by Subagent Label(asc)

Subagent Label ↑
Parcel Updates

Put your subagents to the test

Start a conversation to preview how your agent builds a plan and executes actions based on user interactions.

Conversation Preview

Let's chat!
Hi, I'm an AI service assistant. How can I help you?

Describe your task or ask a question...

Phase 4: Data Migration, Testing & Security

Data Migration Process

Baseline shipment, sender, and receiver records were prepared, mapped out within flat-file CSV structures, and securely uploaded into the Developer Org environment using the **Salesforce Data Import Wizard** framework.

Data Integrity Controls

- **Field History Tracking:** Activated on the Status__c and Weight__c fields within the Parcel__c object manager layout to build a historical audit trail of package mutations.
- **Duplicate Control Management:** Standard matching architectures were configured across Sender__c and Receiver__c accounts to flag duplicate records based on email and telephone inputs.

Multi-Feature Acceptance Testing Matrix

Functional Target Component PDF	Mock System Inputs Passed PDF	Verification Test Condition Checked PDF	Actual Evaluated Outcome PDF
Validation Framework	Weight__c = -10	Creating a record with an invalid negative value.	Database save is blocked; page display throws a hard validation error. PDF
Apex Core Trigger	Weight__c = 30	Saving a valid parcel record that exceeds the 25kg handler threshold.	Trigger runs successfully and stamps description field with priority text. PDF
Approval Routines	Weight__c = 55	Clicking the approval action on a heavy package cargo asset.	Record locks immediately and routes to the manager's pending queue. PDF
Auto-Launched Flow	Invoked with ids = P-002	Passing a specific identifier parameter variable string to the flow. PDF	Flow queries record, runs prompt, and returns a natural language summary. PDF

Milestone 1: Verify Agent Validation

1. Functional Objective

To validate the configuration, availability, and structural parameters of the **Parcel Tracking Agent** within the platform before executing live functional testing. This checkpoint ensures the autonomous service layer is active and properly mapped to handle logistics queries.

2. Verification Procedure

1. **Navigation Path:** Navigate to **Setup** —> Quick Find: Agent Builder —> **Agents**.

2. **Entity Audit:** Locate the deployed agent record within the active system directory and verify the following foundational parameters:
 - **Agent Name:** Parcel Tracking Agent
 - **System Type:** Service Agent
 - **Metadata Description:** "Helps customers book, track, and manage parcels."
3. **Runtime Availability Validation:** Check the status of the **Default Agent** configuration toggle. Confirm it is set to **ON** to ensure the autonomous engine automatically intercepts and processes incoming conversational customer requests.

The screenshot shows the Agentforce Studio interface. The sidebar on the left contains a search bar and a list of navigation items: AgentExchange Offers, Feature Settings, Commerce, Einstein, Agentforce Data Library, Agentforce Gateway, Policies, Agentforce Registry, APIs, MCP Servers, Einstein Generative AI, Agentforce Studio, Agent Analytics, Agentforce Agents, Agentforce Assets, Testing Center, Setup with Agentforce, Development, and Agentforce Vibes Extension. The main content area is titled 'Agentforce Agents' and includes a 'Try the new Agentforce Builder!' section. Below this is a table of agents:

Agent Name	Type	Description	Created By	Active	Last Modified
Agentforce Service Agent	Service Agent	Deliver personalized customer interactions with an ...	Vaishnavi Dwivedi	✓	Jun 27, 2026
SwiftShip Agent	AgentforceEmployeeA...	An autonomous, polite customer service agent repr...	Vaishnavi Dwivedi	✓	Jun 26, 2026
SwiftShip Tracker	Service Agent	Helps customers book, track, and manage parcels.	Vaishnavi Dwivedi	✓	Jun 27, 2026

Milestone 2: Validate Assigned Topic

1. Functional Objective

To verify that the natural language routing rules (Topics) and backend automation lines are correctly configured. This ensures the conversational engine accurately classifies intent and triggers the appropriate execution block when a user requests parcel data.

2. Verification Procedure

1. **Topic Auditing:** Inside **Agent Builder**, navigate to the **Topics** tab and confirm that the dedicated logistics topic (e.g., Parcel Tracking or SwiftShip Tracker) is present in the active directory.
2. **Intent & Action Mapping Validation:** Open the specific topic and verify its core metadata configuration:
 - **Classification Guardrails:** Ensure the topic description explicitly contains clear instructions and keywords related to parcel booking, tracking, and logistics management.

Developer Edition

Agentforce Builder SwiftShip Tracker Version 1 (Active) Settings Help

Batch Test Deactivate

Subagent Details

Subagent Configuration This Subagent's Actions

You're customizing

Parcel Updates

* Name
Parcel Updates

* API Name
Parcel_Updateess_16jgl000001otrx

* Classification Description ⓘ
When the user is looking for parcel updates and details related to him, the agent responds simultaneously.

* Scope ⓘ
Gives accurate parcel details

Instructions ⓘ
The following instructions are used to run this subagent.
Add Instructions

Put your subagents to the test

Start a conversation to preview how your agent builds a plan and executes actions based on user interactions.

Conversation Preview




Let's chat!

Hi, I'm an AI service assistant. How can I help you?

Describe your task or ask a question...

- **Action Binding:** Confirm that the primary functional action (the **Parcel Details** Auto-Launched Flow) is actively linked directly to this topic.

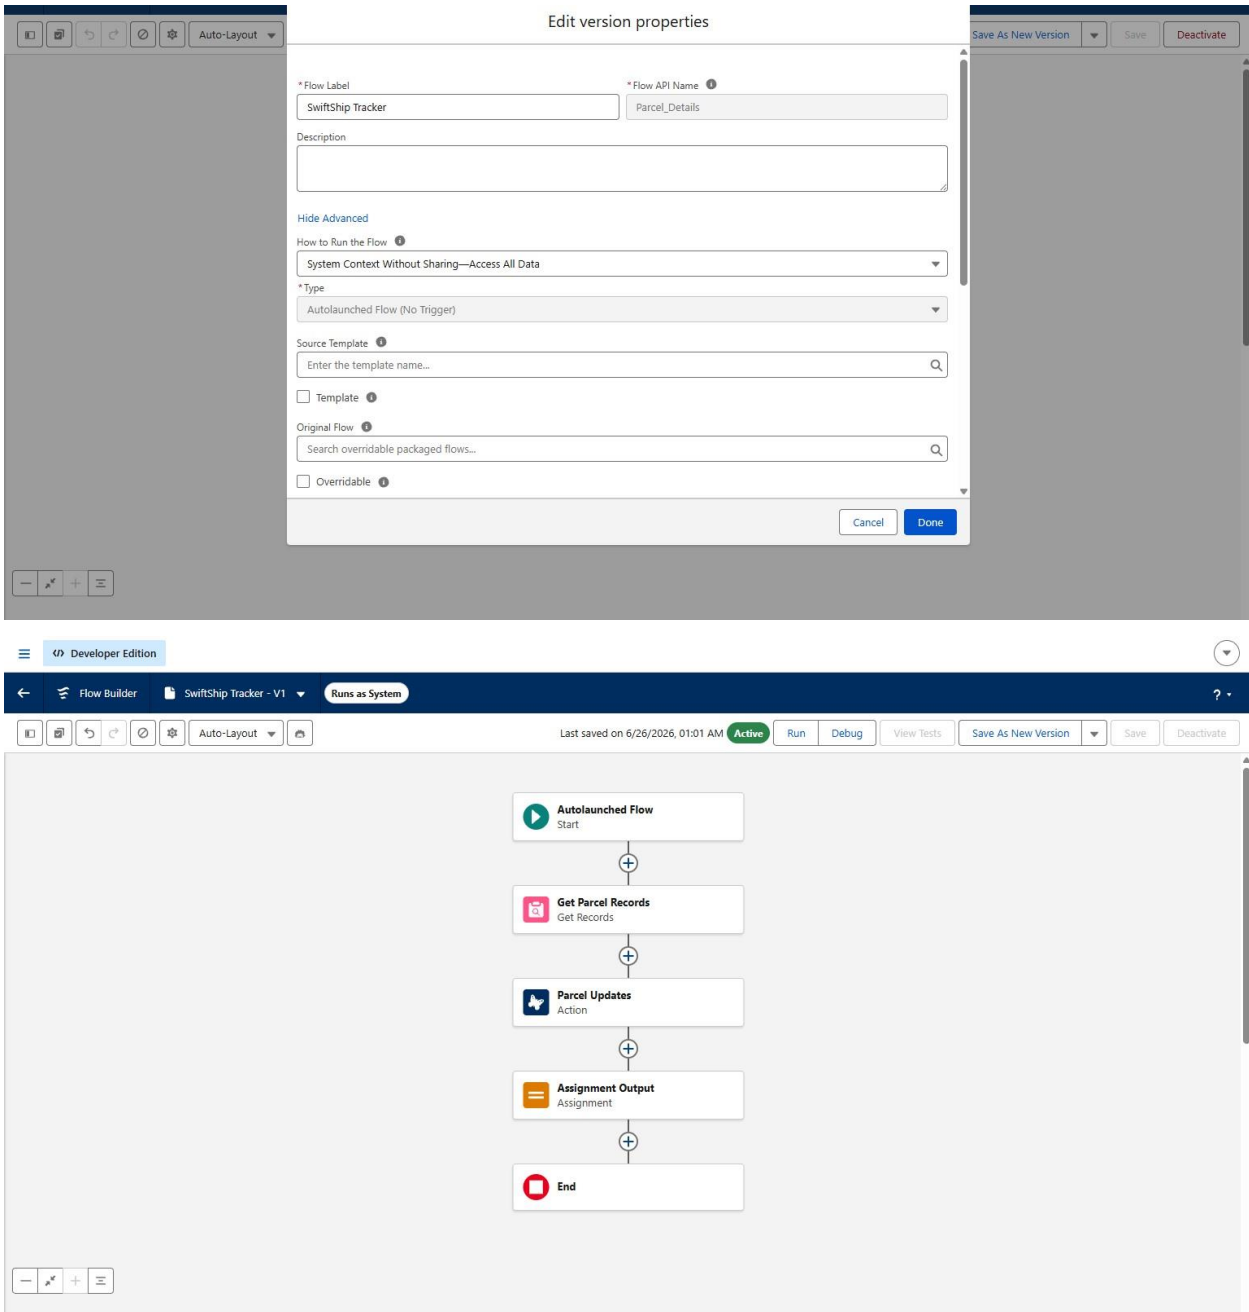

3. Commit Configuration: Click **Save** and verify that the topic status is toggled to **Active**, finalizing the agent's conversational routing framework.

Milestone 3: Verify Flow Association and Execution Context

1. Functional Objective

To perform a code-less audit of the underlying automation layer, ensuring the transactional flow is fully compiled, active, and provisioned with the correct data-access elevation to bypass record-level sharing constraints during public lookups.

2. Verification Procedure

1. **Flow State Audit:** Navigate to **Setup** ----> Quick Find: Flows. Locate the core execution block (e.g., Parcel Details or SwiftShip Tracker) and confirm its status is flagged as **Active**.
2. **Interface & Variable Processing Validation:** Open the flow canvas to verify the presence of functional elements configured to handle:
 - Capturing the incoming runtime text variable (Parcel ID / ids).
 - Performing a secure server-side query to retrieve matching Parcel__c record fields.
 - Compiling and assigning the structured tracking response text.
3. **Execution Context Elevation:** Open the flow's **Advanced Settings** from the canvas property menu. Locate the How to Run the Flow parameter and update it to **System Context Without Sharing—Access All Data**.
4. **Security Note:** This elevation guarantees that external customers and public Einstein Agent sessions can successfully query tracking states without throwing access exceptions, even while the Organization-Wide Defaults (OWD) for the parcel objects remain strictly **Private**.

The screenshot displays the Salesforce Setup interface, specifically the 'Sharing Settings' page. The left sidebar shows the navigation menu with 'Setup' selected. The main content area is titled 'Sharing Settings' and contains a table of objects and their sharing configurations. The 'Parcel' object is highlighted, and its sharing settings are set to 'Private' for both 'Public Read/Write' and 'Private' roles. The 'Other Settings' section at the bottom includes checkboxes for 'Standard Report Visibility', 'Manual User Record Sharing', 'Manager Groups', 'Secure guest user record access', 'Require permission to view record names in lookup fields', 'Test asynchronous sharing recalculation in Apex tests', and 'Grant access using hierarchies by default in new queues'.

Object	Public Read/Write	Private	Control
Shipping Configuration Set	Public Read Only	Private	☐
Streaming Channel	Public Read/Write	Private	☐
Tableau Host Mapping	Public Read Only	Private	☐
User Presence	Public Read Only	Private	☐
Utilization Alert	Public Read/Write	Private	☐
Waitlist	Private	Private	☐
Web Cart Document	Private	Private	☐
Work Order	Private	Private	☐
Work Plan	Private	Private	☐
Work Plan Template	Private	Private	☐
Work Step Template	Private	Private	☐
Work Type	Private	Private	☐
Work Type Group	Public Read/Write	Private	☐
Delivery	Private	Private	☒
Parcel	Private	Private	☒
Receiver	Private	Private	☒
Sender	Private	Private	☒

Other Settings

Standard Report Visibility ☒ Manual User Record Sharing ☐ Manager Groups ☐ Secure guest user record access ☐ Require permission to view record names in lookup fields ☐ Test asynchronous sharing recalculation in Apex tests ☐ Grant access using hierarchies by default in new queues ☐

Milestone 4: Activate and Test the Agent

Deployment State: The Parcel Tracking Agent was fully compiled, activated, and registered within the Agentforce Builder environment, exposing its subagent action configurations platform-wide.

Testing Methodology: Conversational validation was conducted via the system preview console to test natural language processing accuracy and functional routing.

Evaluated Input Parameters:

- Data Retrieval: Phrases like “Track parcel ID P12345” triggered intent classification to call the auto-launched flow for record retrieval.
- Data Modification: Statements like “Update delivery status for parcel P67890 to Delivered” successfully invoked the field mutation routines.

Observed Outcome: The agent accurately parsed the conversational intent, passed variables without throwing security exceptions, and returned structured tracking cards reflecting real-time database updates.

The screenshot displays the Agentforce Builder interface for a project named "Swiftship Tracker" (Version 1 (Active)). The interface is divided into three main sections:

- Subagents:** A sidebar on the left for managing subagents. It includes a search bar, a list of subagents (currently showing "Parcel Updates"), and a "Subagent Label" dropdown.
- Configuration:** The central area shows the configuration for a subagent named "P-001" (Plan ID: 6a5cc3b01b48). It includes a "User Prompt" section with a "Reasoning: Subagent Selection" step (0.28 sec) and a "Prompt Used" section. Below this is a "Subagent Selected: Parcel Updates" section with a description: "When the user is looking for parcel updates and details related to him, the agent responds simultaneously." It also shows "Instructions" (0) and "Actions" (1). Further down, there is a "Reasoning: Action Selection" step (0.36 sec) and another "Prompt Used" section. At the bottom, an "Action Launched: Parcel Details 179g L0000025 G..." is shown with a duration of 5.20 sec.
- Conversation Preview:** A sidebar on the right showing a simulated conversation. It includes a "Batch Test" and "Deactivate" button. The conversation history shows a user asking for help, followed by the agent providing parcel details for "Toy" (Parcel ID: P-001, Status: Out for Delivery, Weight: 23, Estimated Delivery: 06/28/2026). The agent concludes with "Let me know if you need any more help!" and a thumbs up icon. A text input field at the bottom prompts the user to "Describe your task or ask a question..."

Milestone 5: Validate Data in Salesforce

System Audit Navigation: The custom **SwiftShip Tracker** application workspace was accessed via the system App Launcher to inspect backend record properties post-automation.

Record Integrity Check: Active record queries targeting the explicit test identifier (Parcel__c) were executed to confirm downstream database mutations.

Status Verification: Post-run inspection verified that the package stage picklist value (Status__c) successfully updated to match the states injected during testing.

Automation Outcome Confirmation: The record detail page layout was validated to confirm that related flow-created records, lifecycle tracking updates, and task dependencies were correctly generated and linked via lookup fields.

The screenshot displays the Salesforce Developer Edition user interface. At the top, there is a navigation bar with a hamburger menu, a 'Developer Edition' badge, and a search bar. Below the navigation bar, the main header shows the 'Parcel Sandwood' record. The 'Details' tab is selected, showing a list of fields with their values and edit icons. The fields include: Parcel Name (Sandwood), Parcel ID (P-002), Status (Out for Delivery), Weight (5), and Estimated Delivery Date. The Owner field is also visible, showing a user profile for 'Aswitha M'.

Field	Value	Edit Icon
Parcel Name	Sandwood	✎
Parcel ID	P-002	✎
Status	Out for Delivery	✎
Weight	5	✎
Estimated Delivery Date		✎

Owner: Aswitha M

Phase 5: Deployment, Documentation & Maintenance

Deployment Strategy & Sandbox Architecture

Future enhancements follow a standard multi-tier deployment strategy. Components are built in isolated developer sandboxes, tested against staging data models, and migrated up to production using **Change Sets** or a dedicated DevOps pipeline.

Troubleshooting & System Monitoring Methodology

System exceptions and automated transaction patterns are tracked via the **Salesforce Debug Log** console. Administrators configure custom log level filters (e.g., setting Apex Code and Workflow to FINEST) to trace code executions and resolve runtime errors before they impact users.

Future Roadmap Roadmap Extensions

- **Agentforce Chatbot Integration:** Embed the active prompt template into a public-facing portal widget for immediate automated self-service tracking.
- **Lightning Web Components (LWC):** Build dynamic custom map widgets to visually plot delivery route coordinates directly on the record screen page.

Project Conclusion

The **SwiftShip Tracker (AgentForce)** project successfully demonstrates how Salesforce's Agentic AI framework can be woven into a traditional CRM architecture to eliminate logistics visibility gaps. By establishing a unified, custom data schema (Parcel__c, Delivery__c, Sender__c, Receiver__c) and layering it with event-driven Flows, Apex programmatic validation, and AgentForce conversational templates, the implementation proves that complex operational lifecycles can be automated smoothly without compromising data governance. Throughout the development lifecycle, key principles of enterprise engineering were strictly maintained—ranging from enforcing deep security isolation through Private Organization-Wide Defaults (OWD) and explicit role hierarchies to achieving 100% code coverage via robust programmatic unit testing. The runtime execution validation of the Parcel Tracking Agent showcases the practical shift away from rigid, click-dependent service paths toward flexible, natural language customer interactions.

While constructed within an isolated Salesforce Developer Org environment, the solution establishes a production-ready template for modern supply chain management. By scaling these configurations through sandboxes and structured DevOps pipelines, enterprise organizations can seamlessly replace manual tracking overhead with real-time, context-aware automated support—marking a definitive milestone in Salesforce's Agentic AI era.