
1. Развертывание локального Hive



```
🖭 Командная строка - docker-compose exec hive-server bash
                                                                                                                                                                                                                 \Box
                                                                                                                                                                                                                             X
D:\MADE\3\BD\docker-hadoop-hive-parquet>docker-compose exec hive-server bash
 root@068c83bb9e0d:/opt# /opt/hive/bin/beeline -u jdbc:hive2://locahost:10000
SLF4J: Class path contains multiple SLF4J bindings.
SLF4J: Found binding in [jar:file:/opt/hive/lib/log4j-slf4j-impl-2.6.2.jar!/org/slf4j/impl/StaticLoggerBinder.class]
SLF4J: Found binding in [jar:file:/opt/hadoop-2.7.4/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/org/slf4j/impl/Sta
ticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation.
SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory]
Connecting to jdbc:hive2://locahost:10000
21/10/17 17:35:25 [main]: WARN jdbc.HiveConnection: Failed to connect to locahost:10000
Could not open connection to the HS2 server. Please check the server URI and if the URI is correct, then ask the adminis
trator to check the server status.
Error: Could not open client transport with JDBC Uri: jdbc:hive2://locahost:10000: java.net.UnknownHostException: locaho
st (state=08S01,code=0)
Beeline version 2.3.2 by Apache Hive
beeline> root@068c83bb9e0d:/opt# /opt/hive/bin/beeline -u jdbc:hive2://localhost:10000
SLF4J: Class path contains multiple SLF4J bindings.

SLF4J: Found binding in [jar:file:/opt/hive/lib/log4j-slf4j-impl-2.6.2.jar!/org/slf4j/impl/StaticLoggerBinder.class]

SLF4J: Found binding in [jar:file:/opt/hadoop-2.7.4/share/hadoop/common/lib/slf4j-log4j12-1.7.10.jar!/org/slf4j/impl/Sta
ticLoggerBinder.class]
SLF4J: See http://www.slf4j.org/codes.html#multiple_bindings for an explanation. SLF4J: Actual binding is of type [org.apache.logging.slf4j.Log4jLoggerFactory] Connecting to jdbc:hive2://localhost:10000 Connected to: Apache Hive (version 2.3.2) Driver: Hive JDBC (version 2.3.2) Transaction isolation: TRANSACTION_REPEATABLE_READ
Beeline version 2.3.2 by Apache Hive
0: jdbc:hive2://localhost:10000> show tables;
    tab name
```

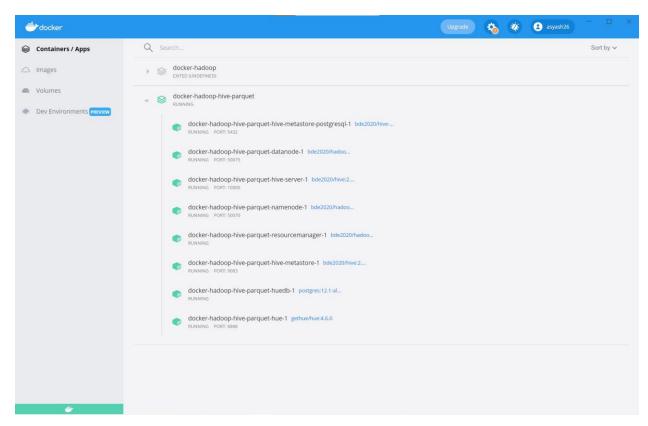