



# CARE Knowledge Base

Knowledge Engine for CARE, by CARE!

## Search by Category

All categories

▼

Search

Enter a search term, select a category and click **Search** or select an icon below.

[All Articles](#) [G2](#) [G3](#) [Car Park RMS](#) [RevPlan](#) [SmartSpace](#) [Casper](#) [Optix](#) [Assets](#)

## Guidelines for Retrieving & Verifying G3 Decisions for Various Integrations

### Overview:

This post describes multiple ways for retrieving and verifying G3 decisions for different integration flavors like OXI, Opera Agent & HTNG etc.

### Intended Audience:

This post is designed to assist various teams including, but not limited to SPM, ICS and ROA for

- Investigating decision upload related discrepancies.
- Troubleshooting decision upload related failures.
- Verifying decisions generated by G3 for any specific outbound.

### Procedure:

Scenario 1: Investigate decision upload failure for any NGI/OXI property while uploading to Opera PMS.

i). Find out the *NucleusDecisionDeliveryTracker Id*:

- Go to -> Support -> Jobs -> Select the required Chain & Property in the filter and click Apply.

### Categories

Select Category

### Recent Posts

[HLTN/hiltonEnableSmallGroupProductsAndInventoryLimitForNewPropertyStep](#)

[Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

[Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

[Dynamic Optimization](#)

[HLTN/Handling Error for SAS Dataset Encoding Job](#)


- Click on the magnify icon for the failed job and navigate to the failed step under Execution Steps tab.
- Now copy the **NucleusDecisionDeliveryTracker Id** mentioned in the **RESPONSE**.



## ii). Find out the **CorrelationId**:

Now input the earlier copied **NucleusDecisionDeliveryTracker Id** in the below URL and fire this in the address bar of the browser-

- URL Syntax –**  
http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/**NucleusDecisionDeliveryTracker Id**
- Example –**  
http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/**5a17f4c59129d04704b9e7b7**

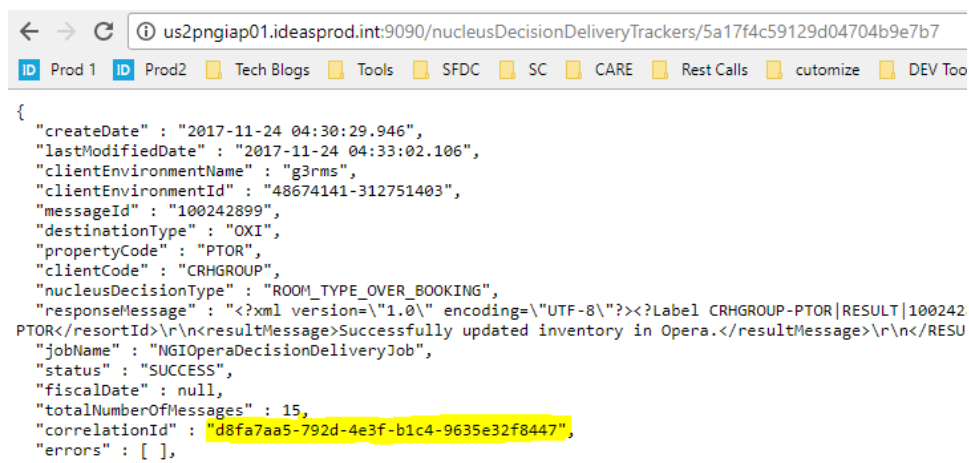


## iii). Find the Error

- Input the earlier copied correlationId along with the clientCode and propertyCode in the below URL –

http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientCode==**Client\_Code**;propertyCode==**Property\_Code**;correlationId=**CorrelationId**;status!=SUCCESS&size=1

This will give you the error message.



## iv). Bonus URL's for further investigations –

- You can further modify the URL in step iii) by changing the status to SUCCESS or FAILED. You can also remove the size=1 modifier from URL to get more results.

## Recent Comments

Pranav Thakar on  
[Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

Ranjit on [Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

Ranjit on [Accor Client Handling Process Guide](#)

Example: `http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientId==Client_Code;propertyCode==Property_Code;correlationId==CorrelationId;status!=SUCCESS`

- URL Syntax –  
`http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientId==Client_Code;propertyCode==Property_Code;nucleusDecisionType==Decision_Type;lastModifiedDate=gt=Date;status==Status`

Example –  
`http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientId==CRHGROUP;propertyCode==LIWI;nucleusDecisionType=LAST_ROOM_VALUE;lastModifiedDate=gt=2017-11-07;status==SENT`

| Valid <b>STATUS</b> entries |        |
|-----------------------------|--------|
| SENT                        | FAILED |

| Valid <b>nucleusDecisionType</b> entries |                        |
|------------------------------------------|------------------------|
| LAST_ROOM_VALUE                          | HOTEL_OVER_BOOKING     |
| BAR_FPLOS_BY_HIERARCHY                   | ROOM_TYPE_OVER_BOOKING |
| BAR_FPLOS_BY_ROOMTYPE                    | DAILY_BAR              |

---

## Scenario 2: To retrieve or verify G3 decisions while uploading to Opera PMS or ORS.

i). Enable the ***pacman.feature.attachDecisionsToJobSteps*** parameter.

- Go to Support –> Configuration –> Click on Property tab –> Select the required Client & Property.
- This will enable decisions to be attached to the job steps for all G3 Agent based uploads.

ii). Retrieve decision upload logs:

- Once the decision upload job is completed, click on the magnify icon of the completed upload job and navigate to the completed steps under Execution Steps tab.

iii). Click the arrow icon to expand it and then click on the Value against **Response\_String**. You will find the desired decisions in JSON format.

---

## Scenario 3: Enable logging in G3 Agent to identify what decisions are getting uploaded to Opera or ORS. (G3 Agent level Investigation)

Note:- As per QA, we should use this method only if it is necessary and configuration must be reverted back once investigation is completed as this will create huge volume of decision related logs.

i). Take the connectivity of the agent.

ii). Browse to the IDeaS G3 agent folder

***C:\IDeaSG3Agent\IDeaSOperaAgent\IDeaS\webapps\opera-agent\WEB-INF\classes***

iii). Open log4j2.xml file. (Important – Take a backup of this file first)

iv). Scroll down and enter the below set of XML code inside <Loggers> & </Loggers> tags.

**<Logger name="com.ideas.g3.integration.opera.agent.db.decisions"  
level="debug"/>**

v). Save the log4j2.xml file and retry opening it in chrome browser. (If it throws any parsing error, then it means we have made an error while entering the above XML code.)

vi). If there are no issues, then in next decision upload – this will generate huge volume of decision related logs which we can use it for further investigation as per our requirement.

vii). Copy the logs from the remote location to your local machine. Do not use Request Logs feature from the installation screen as the size of logs is huge.

vii). Revert the above configurations once your investigation is completed.

---

## Scenario 4: To verify decisions generated by G3 for any specific outbound channel. (Opera, SynXis, Protel etc)

Once the processing job gets completed (Data load, Deferred Delivery etc), then it will trigger respective decision delivery jobs based on the outbound configurations. Once the Decision Delivery job triggered, then –

i). Stop the Decision Delivery job for the required channel.

ii). Ensure that you're Logged In into **g3rms.ideas.com**.

iii). Go to below URL and input **DecisionType**, **PID** and **ExternalSystem** for the property as highlighted below –

Syntax URL – <https://g3rms.ideas.com/pacman-platformsecurity/rest/agentDecision/DecisionType?propertyId=PId&externalSystem=ExternalSystem>

Example – <https://g3rms.ideas.com/pacman-platformsecurity/rest/agentDecision/BarByLOS?propertyId=990039&externalSystem=protel>

Please refer the below table for all available DecisionType's in G3 to input in the above URL.

|    |                           |    |                                             |
|----|---------------------------|----|---------------------------------------------|
| 1  | RoomTypeOverbooking       | 11 | LRAControlMinLOS                            |
| 2  | HotelOverbooking          | 12 | FplosByRateCategoryByRoomType               |
| 3  | BarFplosByHierarchy       | 13 | MinimumLengthOfStayByRateCode               |
| 4  | BarFplosByRoomType        | 14 | MinimumLengthOfStayByRateCategory           |
| 5  | BarFplosByHotel           | 15 | MinimumLengthOfStayByRateCodeByRoomType     |
| 6  | FplosByRateCode           | 16 | MinimumLengthOfStayByRateCategoryByRoomType |
| 7  | FplosByRateCategory       | 17 | BarByLOS                                    |
| 8  | FplosByRateCodeByRoomType | 18 | DBAR                                        |
| 9  | LRAControlFPLOS           | 19 | DailyBAR                                    |
| 10 | LastRoomValuebyRoomClass  | 20 | decisionUpdates                             |

iv). You will get a response in JSON format in your browser tab. You may now check this formatted JSON data to find out what decisions were uploaded and use it as per your requirement.

v). Resume the earlier stopped job.

Note: You may install a JSON plugin in your browser or use sites like <https://jsonformatter.curiousconcept.com> to format the JSON data.

[Here](#) is a sample BarByLOS G3 decisions generated for Protel outbound.

## Scenario 5: To retrieve or verify G3 decision logs for HTNG flavors. (Protel, Synxis & iHotelier etc)

We use Kibana to retrieve G3 decisions logs for integration flavors which uses HTNG transport mechanism.

i). Go to **Kibana** –

Note: Allow the Kibana dashboard to load **completely**.

ii). Find the **CorrelationID** for the HTNG Decision Delivery Job

- Go to -> Support -> Jobs -> Select the required Chain & Property in the filter and click Apply.
- Click the magnify icon for the desired HTNG Decision Delivery Job.

- From drop down list for “Loop Number” select ALL
- You will find the **CorrelationID** in “RESPONSE\_STRING” of decision delivery step.

NOTE : You will have to find **CorrelationID** for each chunk of every decision type which is being uploaded to that channel.

For Example : If we are uploading three types of decisions with 4 chunks each, this step needs to be repeated for 3×4 i.e. total of 12 CorrelationID.

iii). Fetch the decisions upload logs.

- Input the **CorrelationID** in the empty text field available in the **Dashboard**
- This will give you access to all server logs for the earlier entered **CorrelationID**.

NOTE : Below SOAP messages are decisions for one chunk of a particular decision type.

---

## Scenario 5: To investigate G3 decision upload errors related to TARS.

i). Find the TARS\_FileName

- Go to -> Support -> Jobs -> Select the required Chain & Property in the filter and click Apply.
- Click the magnify icon for the desired NGI TARS Decision Delivery Job.
- Click the arrow icon to expand it and then click on the Value against **Response**. Copy only the file name excluding the XML extension.

ii) Go to below location from your browser –

- <http://us2pngiap01.ideasprod.int/NGI/Data/NGI.Springboot/tars/download/>

iii). Search the earlier copied file name and open it. The

iv). Verify the decision logs and error –

- You can now verify the decisions uploaded to TARS. The errors during the upload are generally recorded at the end of the file.

- Please [click me](#) for more info on TARS error codes.

---

---

## Scenario 6: To verify decisions generated by G3 for OXI properties:

- The tool/script is available [here](#)
- Copy the file on your machine.
- Create a folder called Temp\OXI\_decision on the C:

To get the decisions –

1. Run the Tool –

It will ask for the Tracker ID –

2. Go to G3 -> Search the Job –

Go to to a particular decision type to find the tracker ID:

Enter the tracker ID and hit OK

The tool will fetch the decisions for that particular Tracker ID and will give you a below message –

The decisions file will be created at the location

Open the file in notepad++

To find the TrackerID when it is not present in the Decision upload job.

1)Collect The Client Code, Property Code, DecisionType and Job ID.

Please find below list of Decisions supported(nucleusDecisionType) by OXI

**LAST\_ROOM\_VALUE**

**HOTEL\_OVER\_BOOKING**

**ROOM\_TYPE\_OVER\_BOOKING**

**DAILY\_BAR**

**BAR\_FPLOS\_BY\_HIERARCHY**

2) Use below Nucleus link for the Tracking ID

<http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientCode==<<CLIENTCODE>>;propertyCode==<<PROPETYCODE>>;nucleusDecisionType==<<NUCLEUSDECISIONTYPE>>;clientEnvironmentId==<<JOBID>>>

Refer below Example for finding trackerID of Last Room Value(LRV)

[http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientCode==CRHGROUP;propertyCode==ABER;nucleusDecisionType==LAST\\_ROOM\\_VALUE;clientEnvironmentId==18007074](http://us2pngiap01.ideasprod.int:9090/nucleusDecisionDeliveryTrackers/criteria?search=clientCode==CRHGROUP;propertyCode==ABER;nucleusDecisionType==LAST_ROOM_VALUE;clientEnvironmentId==18007074)

The above URL will provide the TrackerID

Then use the same script for Generating decision file.

**Note:** Almost all methods in this post refers to access of decision logs and not actual decision files as we do not have them in G3 as compared to G2 (unless the integration uses file based transport mechanism like TARS).

 0

Tagged on: G3 decision issues G3 decision monitoring

## 4 thoughts on “Guidelines for Retrieving & Verifying G3 Decisions for Various Integrations”

 Basil Pappachen

 01/08/2018 at 23:10

 [Permalink](#)

Hello Team, to use the Debug mode, use the following command;  
ensure that the quotes ("" )are used correctly.

 Reply

 Chinmay Mogare

 10/08/2018 at 15:47

 [Permalink](#)

\*\*\* Use this quote \*\*\*

 Reply

 Pranav Thakar

 13/02/2019 at 15:57

 [Permalink](#)

,

 Reply

 Basil Pappachen

 24/01/2020 at 02:03

 [Permalink](#)

Use the below tags to enable the debugger;

<!-->

<!-->

<!-->

 Reply

# Leave a Reply

Your email address will not be published. Required fields are marked \*

Comment \*

Name \*

Email \*

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment