



CARE Knowledge Base

Knowledge Engine for CARE, by CARE!

Search by Category

All categories 

Search

Enter a search term, select a category and click **Search** or select an icon below.

[All Articles](#) [G2](#) [G3](#) [Car Park RMS](#) [RevPlan](#) [SmartSpace](#) [Casper](#) [Optix](#) [Assets](#)

HLTN/How to trigger processing for a file-based property

This document illustrates the process of triggering the processing for the file-based properties.

1. Open WINSCP and enter the hostname as gro-prod.hilton.com. The username is ideas and the password is provided to you in SSH (check with the Shift Leads). Now search for the extract by property name in the extract folder on gro-prod.hilton.com. If you are unable to find it, check in 'ack' (acknowledgement) folder.
2. Now download the extract on your local PC.
3. Then copy the extract to the extract folder on gro-prod.hilton.com
4. Once this is done, go to the property's installation screen and check for Agent ID.
5. Then go to the IDG Agent screen. Click on Actions of the required Agent ID and select edit. Now go to Schedule Job. Then use the JEMSPullExtract task (whichever is active, and not disabled). Click on Actions again and click on Run Now.

Reference screenshots for logging in –

Categories

Select Category

Recent Posts

- HLTN/hiltonEnableSmallGroupProductsAndInventoryLimitForNewPropertyStep
- Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State
- Processing Failures Due to Data Type Mismatch for MGM Resorts
- Dynamic Optimization
- HLTN/Handling Error for SAS Dataset Encoding Job

Environment

- Directories
- Recycle bin
- Encryption
- SFTP
- Shell
- Connection
 - Proxy
 - Tunnel
- SSH**
 - Key exchange
 - Authentication**
 - Bugs
- Note

Server environment

End-of-line characters (if not indicated by server): LF

UTF-8 encoding for filenames: Auto

Time zone offset: 0 hours 0 minutes

☒ Detect automatically

☐ Trim VMS version numbers

Daylight saving time

☐ Adjust remote timestamp to local conventions

☒ Adjust remote timestamp with DST

☐ Preserve remote timestamp

PuTTY

PuTTY terminal settings:

Edit in PuTTY...

Color OK Cancel Help

Recent Comments

Pranav Thakar on

[Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

Ranjit on [Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

Ranjit on [Accor Client Handling Process Guide](#)

Environment

- Directories
- Recycle bin
- Encryption
- SFTP
- Shell
- Connection
 - Proxy
 - Tunnel
- SSH**
 - Key exchange
 - Authentication**
 - Bugs
- Note

☐ Bypass authentication entirely

Authentication options

☒ Attempt authentication using Pageant

☒ Attempt 'keyboard-interactive' authentication

☒ Respond with a password to the first prompt

Authentication parameters

☐ Allow agent forwarding

Private key file: ...

Display Public Key Tools


Certificate to use with the private key: ...

GSSAPI

☒ Attempt GSSAPI authentication

☐ Allow GSSAPI credential delegation

Color OK Cancel Help

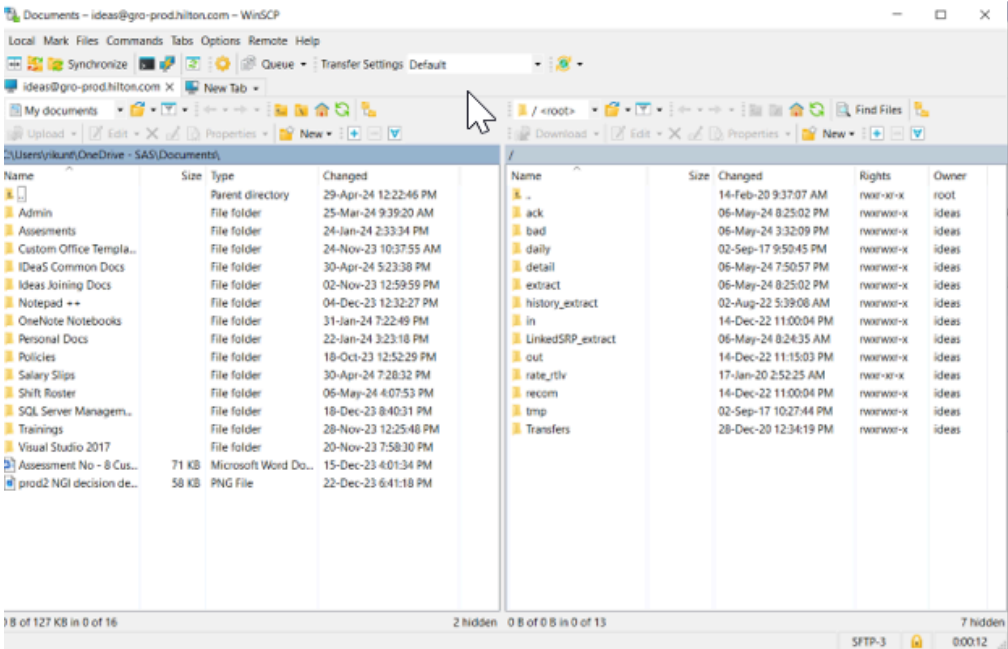

Vinayak Salunkhe 21/08/2024

G3 Procedures, G3 Processes, Hilton Monitoring Documents

No Comments

← IDeaS/Amar Megaplex Office/Pune/Printer setup

DU to OCP via Core OHIP for Opera Cloud Agent and NGI Agent property.

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment *

Name *

Email *

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment