



CARE Knowledge Base

Knowledge Engine for CARE, by CARE!

Search by Category

All categories ▼


Search

Enter a search term, select a category and click **Search** or select an icon below.

[All Articles](#) [G2](#) [G3](#) [Car Park RMS](#) [RevPlan](#) [SmartSpace](#) [Casper](#) [Optix](#) [Assets](#)

How to add an OXI client on a G3 system (IDeaS Task: G3-I2 Add Client)

Add Client is a onetime activity per Client (i.e. **Chain**). Comparable step of this in G2 is 'G2 Support Creation' via Jenkins

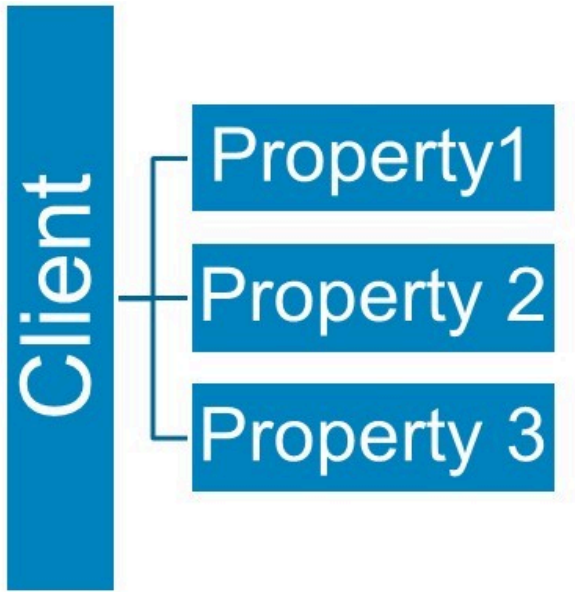

Categories

Select Category

Recent Posts

[HLTN/hiltonEnableSmallGroupProductsAndInventoryLimitForNewPropertyStep](#)

[Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

[Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

[Dynamic Optimization](#)

[HLTN/Handling Error for SAS Dataset Encoding Job](#)

Typically OXI Properties will be added to the environment with the URL:

<http://g3rms.ideas.com>

Add Property is then performed for each new property to be added for a Client. This would be done at a *later* stage. This topic covers only the addition of a Client (Chain).


Add Client Pre-requisites :

The required information to Add Client is

- Client Name
- Client Code
- External System (this would be **NGI** for OXI)
- Sub System (This would be **OXI** for OXI installation)

Note : All of these should be documented in the Case/SFDC. If you do not have this please reach out to a CARE Shift Co-ordinator who can help you with finding this information on the case.

Here is a screen shot of the **Add Client** form accessed from the [Support | Installation | Client] screen, and clicking the [Add Client] button:

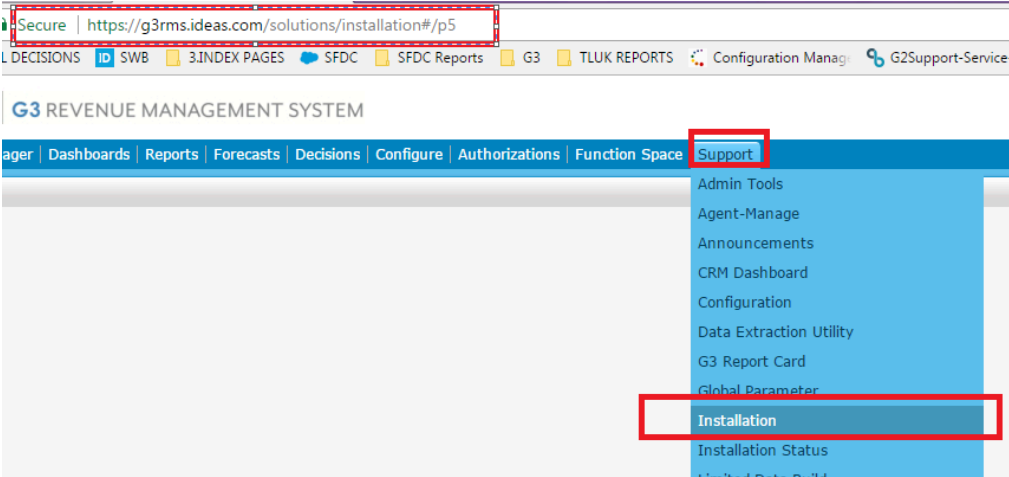

Installation				
Client	Property	Vendor	Opera Agent	IDG Agent
Add Client				
Client Code (142)	Client Name		Total Properties (1419)	Data
1554	Destination Hotels & Resorts		0	0

Then Add Client should offer a screen like below :

Recent Comments

- Pranav Thakar on [Hilton/Processing Failure – non positive offset value for Product](#)
- Ranjit on [Hilton/Processing Failure – non positive offset value for Product](#)
- Ranjit on [Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)
- Ranjit on [Processing Failures Due to Data Type Mismatch for MGM Resorts](#)
- Ranjit on [Accor Client Handling Process Guide](#)

[Client Name] is a potentially longer descriptive name such as “Luxury Resorts International” or “Scandic” (Character limit is 40 characters)

[Client Code] is a shorter name such as “Luxury” or “Scandic” that will be used more often in the UI to save on screen real estate. (Check Account page in SFDC for G3ClientCode)

[External System] for Opera clients should be set to “NGI”

[Sub System] This would be **OXI** for OXI installation

Once you click on Save, an Add Client job will be triggered which you need to monitor for completion. This job can be searched in Support>Monitoring Dashboard>Jobs by selecting appropriate filters. In case of failures, escalate to SD/QA with your findings for further investigation.

Then go to Support>Configuration like below :

After that – You’d land on a default Configuration page . You should tread delicately from here onward to ensure you **do not make any inadvertent changes** .

Do note that we’d be going to a page to check ‘client’ parameters (chain level parameters) and that any inadvertent change will have ‘sweeping’ effects for all the properties belonging to a chain.

Below is a sample for a chain .

Configuration >Client > select Client . It should result in something like below :

This is typically true when most of the properties to be added on that chain will be of the OXI integration type .

Select the correct chain and verify that the parameters are update as below to the values defined :

pacman.core.property.externalSystem	NGI
pacman.core.property.externalSystem.subSystem	OXI
pacman.integration.suspendBdeAndCdp	TRUE

Last but not the least – you should update your task with these values as you track your progress.



Tagged on: G3 OXI Add client

idnyos

09/01/2018

G3 Procedures

No Comments

← How to convert G3 SAS Date and Time into standard dates?

G3: Process to de-install a property using G3 RMS →

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment *

Name *

Email *

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment

