



CARE Knowledge Base

Knowledge Engine for CARE, by CARE!

Search by Category

All categories

Search

Enter a search term, select a category and click **Search** or select an icon below.

[All Articles](#) [G2](#) [G3](#) [Car Park RMS](#) [RevPlan](#) [SmartSpace](#) [Casper](#) [Optix](#) [Assets](#)

Investigating the Data Flow Issue – OHIP

Document Control

Document Information			
Name of Document	Process Document_Investigating the Data Flow Issue_1.00	-	-
Version Number	1.00	-	-
Prepared By	Sr. Process Analyst	Name	Sneha Nirgude
Reviewed By	Technical Project Manager	Name	Pranav Thakar
Approved By	Sr.Manager	Name	KJ Antony

Categories

Select Category

Recent Posts

- HLTN/hiltonEnableSmallGroupProductsAndInventoryLimitForNewPropertyStep
- Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State
- Processing Failures Due to Data Type Mismatch for MGM Resorts
- Dynamic Optimization
- HLTN/Handling Error for SAS Dataset Encoding Job

1 Introduction

1.1 Purpose

The purpose of this document is to explain the possible sources of issues that may disrupt the flow of data in the Agent integration via OHIP emulator.

1.2 Scope

The scope of this document is to explain the investigation steps for the possible sources of issues that may disrupt the flow of data.

1.3 Intended Audience

The target audience for this document is the team and the stakeholders involved in OHIP integration

E.g. – Project Manager, Project Lead, Team Members etc.

1.4 Abbreviation

Abbreviation	Description
ICS	Installation, Configuration & Support
OHIP	Oracle Hospitality Integration Platform
NGI	Next Generation Integration
FIFO	First In First Out
On Prem	On Premise
PMS	Property Management System
RMS	Revenue Management System

2 Entry Criteria

- Any project that involves OHIP integration via the OHIP emulator.

3 Pre-Requisites & Assumptions

- It is assumed that the project team has access to the following tools & has the required knowledge to use the tools and execute the project
- [Amazon S3](#)
- [Datadog](#)

All the logs can be checked from the data dog. User can enter the Stats correlation ID or Correlation Id or Property Code and check the same

Recent Comments

Pranav Thakar on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

Ranjit on [Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

Ranjit on [Accor Client Handling Process Guide](#)

The screenshot shows the Datadog Logs interface. A search filter is applied: `"65554f78a584b196ae599"`. A red box highlights this filter, with a note: "StatsCorrelation ID that you have fetched from the OHIP Emulator URL".

The log list shows multiple entries from the service `reciprocity-ehp`. A red box highlights a specific log entry with the message: "This column will also give you an idea as to where the error lies in case of breakage in the data communication".

The detailed log entry on the right shows a `StatsCorrelation` record with the status `READY_FOR_PULLING`. A red box highlights the `statsCorrelationId` field, which contains the value `65554f78a584b196ae599`.

■ G3 RMS

In the G3 → Go To Monitoring dashboard → Remote Tasks

Here you can see the list of the tasks along with the status mapped to the different agents and properties.


The screenshot shows the IDEAS G3 RMS Monitoring Dashboard. The "Remote Tasks" tab is selected. A table lists various tasks with columns: Agent ID, Description, Class, Type, Parameters, Property Code, Status, Created Date, and Completed Date.

A red box highlights the "Type" column, with a note: "These tasks can be seen in the log". The tasks listed include `DOWNLOAD_LOG`, `RESET_AGENT`, `DELETE_PROPERTY`, `ADD_PROPERTY`, and `DOWNLOAD_LOG`.

- NGI (PMS Inbound)

E.g. – <https://pmsinbound-internal.ideasrms.com/nucleusStatisticsCorrelations/criteria?search=clientCode==Hyatt;propertyCode==LGAJN;fiscalDate==2023-11-15>

Update the Client Code, Property Code & the Fiscal Date as per needed.

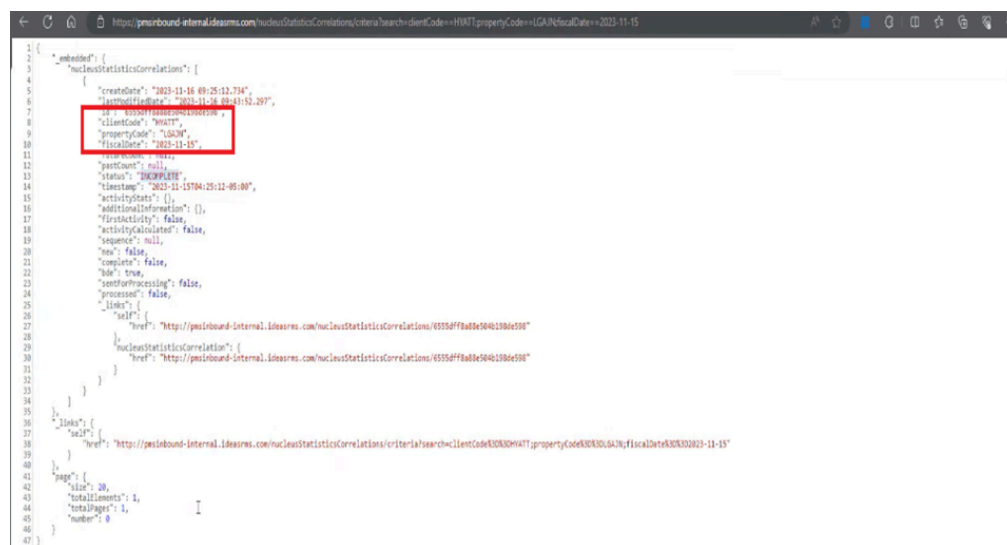

```
1 {
2   "embeds": {
3     "nucleusStatisticsCorrelations": [
4       {
5         "createDate": "2023-11-16 09:25:12.734",
6         "timestamp": "2023-11-16 09:25:12.297",
7         "id": "6556ff8a0e30461986e598",
8         "clientCode": "HYATT",
9         "propertyCode": "LGAJN",
10        "fiscalDate": "2023-11-15",
11        "nucleus": {
12          "parentCode": null,
13          "status": "DRAFT",
14          "timestamp": "2023-11-17 04:25:12:05:00",
15          "activityDate": {},
16          "additionalInformation": {},
17          "firstActivity": false,
18          "activityCalculated": false,
19          "sequence": null,
20          "new": false,
21          "complete": false,
22          "done": true,
23          "sentForProcessing": false,
24          "processed": false,
25          "_links": {
26            "self": {
27              "href": "http://pmsinbound-internal.ideasrms.com/nucleusStatisticsCorrelations/6556ff8a0e30461986e598"
28            }
29          },
30          "nucleusStatisticsCorrelation": {
31            "href": "http://pmsinbound-internal.ideasrms.com/nucleusStatisticsCorrelations/6556ff8a0e30461986e598"
32          }
33        }
34      }
35    ],
36    "_links": {
37      "self": {
38        "href": "http://pmsinbound-internal.ideasrms.com/nucleusStatisticsCorrelations/criteria?search=clientCode==Hyatt;propertyCode==LGAJN;fiscalDate==2023-11-15"
39      }
40    },
41    "page": {
42      "size": 20,
43      "totalElements": 1,
44      "totalPages": 1,
45      "number": 0
46    }
47  }
```

- [NGI Agent Admin](#)

This URL will give you the status of communication between Agent & IDaaS system.

- OHIP Emulator

All remote tasks will be registered on this URL

E.g. – <https://ohip-emulator-internal.ideasrms.com/api/v1/propertyTask/HYATT/CKGUB>

Update the Client Code & Property Code based on the requirement

New Business Date can be checked on this URL

E.g. – <https://ohip-emulator-internal.ideasrms.com/api/v1/operaMetaData/HYATT/LGAJN>

Update the Client Code & Property Code based on the requirement

4 Sources of disruption in Data Flow – OHIP Inbound

- When any system is communicating with each other there are multiple possibilities that the communication may get disrupted due to several reasons.
- If the communication is broken in the OHIP integration it can be further tracked or analyzed by using the logs available on the Data Dog.
- If we check the logs in the Data Dog & observed that the time taken for a particular task or job to complete is much higher than the usual time, then it is an alarming situation where in we must check where the issue has occurred.
- Once the issue is identified resolve the same else co-ordinate with the necessary internal or external teams to get the issue resolved on priority
- Below we will list out the possible source of communication barriers along with the steps to identify the same.

Note – All the data flow will happen as shown in the OHIP Integration diagram.

Step 1 – Check Business Date

- Check if the fresh Business Date is rolled over using the following
- URL . – <https://ohip-emulator-internal.ideasrms.com/api/v1/operaMetaData/HYATT/LGAJN>

Note – Update the Client Code & Property Code in the URL based on the requirement

is an error.

- Note – When a new task request is sent for the 1st time after a New Business Date is rolled over then the system will always receive the message “Requested Fiscal Date was not rolled over yet.” This does not mean there

- If date is rolled over, check when the date was rolled over (We check this to understand how much time has passed after the G3 system received the updated date – it will help us to understand the establishment of the communication between the G3 and PMS working)
- To check it, access the Summary statistics rest call of the property for respective date and you can see that an ID is created as shown in the screen shot below with the status 'Ready for pulling'.

- Open [Datadog](#) à Enter the Correlation ID in the Search field à Compare the time in Data dog with the current time. This will help you get an idea as to when was the message received, whether it was received recently or long time back.

- **Alarming Situation** – When the time in Datadog for the respective correlation ID is more than 30 mins to 1 hour, then it is understood that there is some disruption in the data flow. There can be 2 main causes for the same
- **Data flow disruption in OHIP Inbound (Step 2 – Step 5)**
- **Property did not complete Night Audit (Step 6)**
- If the data flow gets back in place within 15-20 mins, then the next task of pulling data will be initiated.
- Monitor if all the 6 of 6 stats are received
-
- Check if the remote tasks are getting executed.
- Hit the following <https://ohip-emulator-internal.ideasrms.com/api/v1/propertyTask/HYATT/LBCJB?size=12&page=0>

Note – Update the Client Code & Property Code in the URL based on the requirement

Step 2 – Check communication between Agent &

IDeaS

- [illegible]

- The status of communication can be tracked through the NGI Agent Page using the following link [NGI Agent Admin](#)
- But before we move to the status, we will need to find the Agent ID. This can be done by following one of the below mentioned options.
- **Option 1** For Identifying the Agent ID
- To track this, you need to find the Agent ID. The same can be fetched from the Agent ID's and Properties.xlsx
- Search the property code that is having issues, and then the same row will give you the Agent ID as shown below

Note – One Agent can be mapped across multiple properties

- **Option 2** For Identifying the Agent ID
- To track to check the heartbeat go the URL – [NGI Agent](#) à Click On Properties à Once the page is loaded Click on the Search Icon besides the Property Code column -> Click on the Funnel Icon -> Enter the Property Code -> Hit the “Enter” button

- You will get the Agent ID in the 1st column

- Once the respective Agent ID details are fetched come to the following page
[NGI Agent Admin](#)
- Click the Opera Agent -> Click Search Icon in the Remote Agent column -> Click on the filter icon -> Enter the Agent ID that you are searching for -> Click on the Remote Agent column

Note – Do not Click on Apply. Even if you click on Apply the search will not happen unless you click on Remote Agent column.

- As we can see the Agent with broken heart icon is not communicating, in this case do the following

- Identify where the machine is located
- If Hyatt DC – We have access to the Hyatt Grid

Note – If you are not the authorized individual to access the Grid kindly communicate with your team lead or team manager to discuss the issue and get the same resolved.

- If Oracle DC – Ask Client to open a ticket
- If Standalone Machine – Send Still Alive messages
- As we can see the Agent with red heart icon is communicating fine, in this case do the following
- Add logs and check them to see if Communication between the Agent and PMS is working fine

Step 3 – Connection between PMS & Agent

- It may happen that the communication between Agent & IDaaS is working fine but there can also be a communication error between Agent & PMS
- To check if there is an error @ PMS end, we will follow the below steps.
- **Option 1**

- From the downloaded logs, check If the agent is able to communicate to PMS.
As shown in the example below

- This indicates that the Agent is not able to communicate to the PMS to query for Data and business date

Note – In this scenario, contact the client to have the credentials validated.

- **Option 2**
- IdeaS system is always sending a request in the form of task to the PMS via Agent.
- These tasks are tracked through the [OHIP Emulator](#). When we hit this URL we will get a list of all the remote tasks along with multiple details & status as shown below.
- Check if there is any task of “Download_Feed_Data” which is a “Metadata” type and has the status pending.

- With the Correlation ID or Stats Correlation ID we can get the details as to when the request was sent. (Same can be checked from Data Dog)

- **Option 3**
- Moving ahead the PMS connection and Agent connection can be checked by going to the respective grid for the Agent -> Enter the required credentials -> Once the user is authenticated -> Under the "Properties Settings" section you

can check the configuration of the PMS and you can also do a test connect check by clicking on “Test PMS Connection”.

- If there is no connection issue between PMS and Agent, then the following message will be displayed else it will throw a connection error message which we will check in step 4.

Note – If you are not the authorized individual to access the Grid kindly communicate with your team lead or team manager to discuss the issue and get the same resolved.

If IDEaS do not have access to the make the changes (Incase of Standalone properties) the same needs to be conveyed to the client and followed up.

Step 4 – Download Logs

- If there is no communication issue between Agent and PMS, then we can download the logs from the Agent.
- Go to the NGI Admin page à Search the appropriate Agent -> Click on Actions -> Click on Download Logs

- The Logs will be downloaded & available in S3 bucket on the [Amazon S3](#) page
- Go to Amazon S3 -> Click on Buckets à Click on OHIP Emulator Prod

- Now click on Agent-logs -> Pull the logs

- Once the logs are downloaded -> Select the appropriate Property ID file (You will get the property ID from the Agent ID's and Properties.xlsx)

- When you open this log, you will find all the logs related to that Property ID.

E.g. – As shown below we can see that the PMS connection is having issue related to the credentials.

- In this case we will inform the client that the credentials are incorrect that is causing a problem in data flow.
- **Client Credential Folder Path** – We can also share with client the folder path where they can check and update the configurations correctly.
- Click on Performance Reports –> Download the required report that you need

- In the Downloaded report –> Go to Detailed System Information –> JVM Arguments
This will help us to give the details to client as to which folder has the configurations settings.
This is also the name of the Service

Step 5 – Tracking of the Source of Issue @ IDeaS end

- The data flow issue can either be coz of
- G3 system down – This can be easily found out because the entire system will be down across the globe. (Probability – Extremely Low)
- Unfortunately, if we have the error @ G3 then the same will be tracked through the logs on Data Dog.
- To see if the error is @ G3 end, we will go to Data Dog -> enter the Stats correlation ID -> Check the logs -> Check the name of the service in the Host or Service Column
- If the error is @ G3 end then we will see the Service Column mentioned as “g3.wildfly”
- It will also mark the status as Error, with the red line besides the date section

- So to understand if there is an issue we have to see if a particular task is pending from a long time than usual we will find the remote task from the **OHIP Emulator**. In the OHIP emulator you will not see any new task until the Pending task is Completed.
- From the below screen we can understand which task is pending against which property.

- From the above screen we can understand which task is pending against which property.
- With the property code we will check the logs for past 1 day.
- In the below screen we see that the G3 has sent a request for new task, but the response received from the OHIP Emulator is that the Meta Data task is already in progress.

- But to understand since how long the task is pending, we will check the Data Dog log as shown below

NGI system down – This can be tracked with the logs as explained below

- As shown in the image above the data in the NGI (PMS Inbound) is stored On Premise and On Cloud simultaneously.
- Let's assume that the NGI system is On Premise, then the data will be stored on On Premise, the OHIP emulator will receive an acknowledgement of successful data transfer.
- The same data is also saved On Cloud, the NGI system will receive an acknowledgment of successful data transfer.
- For the system to communicate flawlessly it is mandate that data that is available On Premise should be exact copy of the data available On Cloud or vice versa.
- If the data On Premise and On Cloud is not similar due to loss of packet during the data sync activity, then the communication between the 2 systems is disrupted.
- If the issue is @ NGI end this will put a halt on all the further jobs that are in queue as the system works on a FIFO concept.
- The jobs will not be triggered unless and until the current job is completed.
- To see if the error is @ NGI end, we will go to Data Dog -> enter the Stats correlation ID -> Check the logs -> Check the name of the service in the Host or Service Column
- If the error is @ NGI end then we will see the Host or Service Column mentioned as "internal-pmsinbound-internal"
- It will also mark the status as Error, with the red line besides the date section.

OHIP Issue

- Now if the communication is broken @ OHIP then it can be further tracked or analyzed by using the logs available on the Data Dog.
- To see if the error is @ OHIP end, we will go to Data Dog à enter the Stats correlation ID -> Check the logs -> Check the name of the service in the Host or Service Column
- If the error is @ OHIP end then we will see the Host or Service Column mentioned as "ecs/prod/OHIP"
- It will also mark the status as Error, with the red line besides the date section

OHIP Emulator Issue

- Now if the communication is broken @ OHIP Emulator then it can be further tracked or analyzed by using the logs available on the Data Dog.

- To see if the error is @ OHIP end, we will go to Data Dog -> enter the Stats correlation ID -> Check the logs -> Check the name of the service in the Host or Service Column
- If the error is @ OHIP emulator end then we will see the Host or Service Column mentioned as "ecs/prod/OHIP-emulator"
- It will also mark the status as Error, with the red line besides the date section

Step 6 – Property did not complete Night Audit

- In this case, add the logs to check what business date is returned
- If it is not the latest and the time printed in the logs is real-time, then the client have not completed the Night audit.

5 Exit Criteria

- Issue Identified & successfully resolved.



👤 Sneha Nirgude 📅 22/12/2023

📁 G3 Procedures, G3 Processes, G3 Solutions, Procedures, Processes

💬 No Comments

← SIHOT : Acknowledgement job is not getting triggered

Finding Minimum occupancy date for a given property →

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment *

Name *

Email *

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment