



CARE Knowledge Base

Knowledge Engine for CARE, by CARE!

Search by Category

All categories

▼

Search

Enter a search term, select a category and click **Search** or select an icon below.

[All Articles](#) [G2](#) [G3](#) [Car Park RMS](#) [RevPlan](#) [SmartSpace](#) [Casper](#) [Optix](#) [Assets](#)

ROOM_TYPE_NOT_IN_RATE – Understanding the cause of the Error

This Article delves in the details of the error below –

ROOM_TYPE_NOT_IN_RATE

Reason for this Error:-

This error occurs when the room types which are present in IDeaS system does not match with the one's present in the selling system. (This error is primarily observed in Opera and ORS).

eg: If IDeaS have Room types R1,R2,R3,.....,R10 in the application, and we are receiving data for these room types from the data extract, then IDeaS will generate the decisions for these room types (i.e R1,R2,R3,.....,R10) and will upload to the selling systems.

It is also expected that the selling system should have these roomtypes configured in it to receive decisions from IDeaS

IDeaS Selling System

R1 <-->R1

R2 <-->R2

R3 <-->R3

.

Categories

Select Category

Recent Posts

[HLTN/hiltonEnableSmallGroupProductsAndInventoryLimitForNewPropertyStep](#)

[Service Recovery Procedure – IDeaSOperaAgent Service in “Stopping” State](#)

[Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

[Dynamic Optimization](#)

[HLTN/Handling Error for SAS Dataset Encoding Job](#)

- .
- .
- .
- .

R10 <-->R10

We need to explain the client that this error is due to a room type missing/unable to accept decisions which IDEaS is sending.

Thus, they need to review the configuration in IDEaS and in the selling system and match the room configuration.

To assist the client in identifying the impacted room type, we can enable the debug logging of the agent logs (if the agent is installed in their premise or can get accessibility. If Agent is installed in Oracle DC, then we do not get the access.)

- To Enable Debug mode, follow the below process-
 - Take Remote Connection to the IDEaS Agent machine (details can be found in the agent-performance-reports log)
 -

Recent Comments

Pranav Thakar on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Hilton/Processing Failure – non positive offset value for Product](#)

Ranjit on [Service Recovery Procedure – IDEaSOperaAgent Service in “Stopping” State](#)


Ranjit on [Processing Failures Due to Data Type Mismatch for MGM Resorts](#)

Ranjit on [Accor Client Handling Process Guide](#)

Monitoring JavaMelody on /opera-agent_CKGUBFINIT-098 - 1 week



Statistics of JavaMelody monitoring taken at 11/17/23 2:35 PM on /opera-agent)

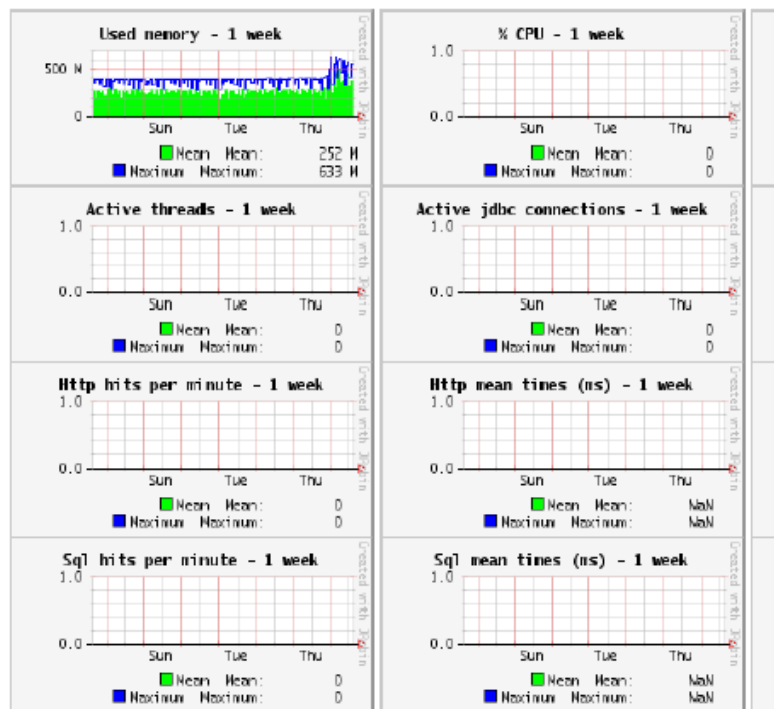

Statistics http - 1 week

None



Statistics sql - 1 week

None



Statistics http system errors - 1 week

None



Statistics system errors logs - 1 week

None



Current requests


None



System information

Host: CKGUBFINIT-098@10.138.44.98
Java memory used: 426 Mb / 2,731 Mb
Nb of http sessions: 0
Nb of active threads (current http requests): 0
Nb of active jdbc connections: 0

- Browse to the IDEaS G3 Agent Folder
 - C:\IDEaSG3Agent\IDEaSOperaAgent\IDEaS\webapps\opera-agent\WEB-INF\classes

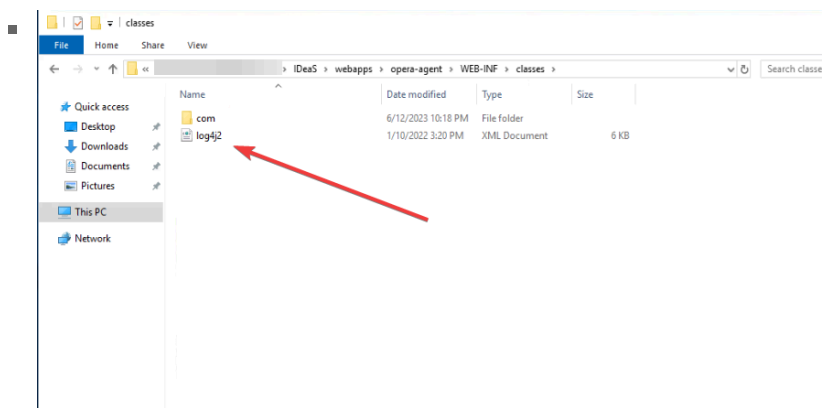

- Ensure that you back up the log4j file before you enable the debug (Make a copy of it)
- Stop the IDEaS service.
- Open the log4j in notepad (Admin)
- Add the below logger in the logger section
 - `<Logger name="com.ideas.g3.integration.opera.agent.db" level="debug" ><AppenderRef ref="RoutingAppender"/></Logger>`



- Once added, save and close the file. Now open that file in IE (internet explorer or any browser.)
 - If the file opens, then the syntax is correctly applied.
 - If the file doesn't open, then there is some issue with either the way you've copied the logger syntax, or the format.
 - Review it with someone senior.
- Once the logger is updated, restart the service. (As a best practice, move the agent logs from the log folder to somewhere in the IDEaS folder.)
- Review the logs (it is advisable that you don't abandon the decision upload job if you are sure of getting the connectivity. However, if the job is abandoned, reprocess the BDE to initiate a new DU job.)
- The failed roomtype will be revealed in the log (verify that it is in Debug mode though)

- You can share the impacted room type with the client.
- Also, revert the changes in the Log4j file (replace it with the one backed up earlier)



+4

Tagged on:

G3 decision issues

G3

Solutions

OperaDU

ROOM_TYPE_NOT_IN_RATE

Pranav Thakar

18/03/2024

G3 Procedures, G3 Processes, G3 Solutions, Uncategorized

No Comments

[← FDS Check For G3 Add Property](#)

[Contract Overview →](#)

Leave a Reply

Your email address will not be published. Required fields are marked *

Comment *

Name *

Email *

Website

☐ Save my name, email, and website in this browser for the next time I comment.

Post Comment