





Parts Catalog

QSM 11

TIER 3 EMISSIONS
INDUSTRIAL

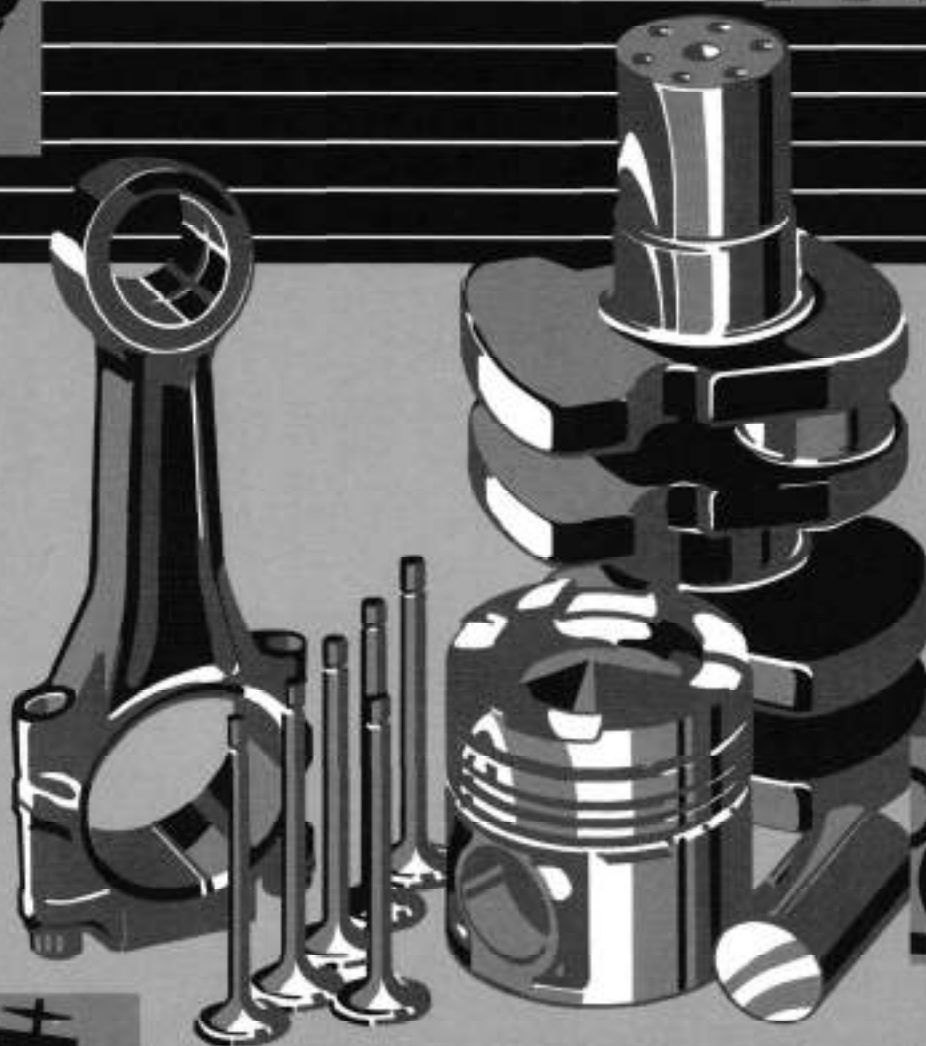



Cummins Inc.

New Parts Warranty Heavy Duty

COVERAGE

PRODUCTS WARRANTED

These warranties apply to New Parts marketed by Cummins for its engines (except those for A, B, and C series engines). They apply anywhere in the world where service is available through a Cummins distributor or full service dealer.*

BASE WARRANTY

The Base Warranty covers any failures of parts on or after March 31, 1986, which result, under normal use and service, from defects in workmanship or material (Warrantable Failures). The coverage on cylinder kits designated by Cummins as "Premium Plus" extends two years, 200,000 miles (321,870 kilometers) or 7,200 hours of operation, whichever occurs first, from the date of first installation. The coverage on other parts extends one year, 100,000 miles (160,935 kilometers) or 3,600 hours of operation, whichever occurs first, from the date of first installation.

EXTENDED MAJOR COMPONENTS WARRANTY

The Extended Major Components Warranty covers Warrantable Failures on or after March 31, 1986, of engine cylinder blocks, crankshafts, flangeless NT camshafts** and connecting rods (Covered Parts). Bushing and bearing failures are not included. This coverage begins with the expiration of the Base Warranty and ends three years, 300,000 miles (482,805 kilometers) or 10,800 hours of operation, whichever occurs first, from the date of first installation.

Both the Base Warranty and Extended Major Components Warranty apply to all Owners in the chain of distribution, and coverage continues to all subsequent Owners until the end of the respective periods of coverage.

CUMMINS RESPONSIBILITIES

DURING THE BASE WARRANTY

Cummins will pay for all parts and labor needed to repair the damage to the engine resulting from the Warrantable Failure. All labor costs will be paid in accordance with Cummins published Standard Repair Operation guidelines.

Cummins will pay for the lubricating oil, antifreeze, filter elements, and other maintenance items that are not reusable due to the Warrantable Failure.

Cummins will pay reasonable labor costs for engine removal and reinstallation when necessary to make the warranty repair.

When the parts are installed in a non automotive engine, Cummins will pay reasonable travel expenses for mechanics to and from the engine site, or the repair dock in the case of a marine engine, including meals, mileage and lodging when it is necessary for mechanics to make on-site warranty repairs.

DURING THE EXTENDED MAJOR COMPONENTS WARRANTY

Cummins will pay for the Covered Part and for any Covered Part damaged by a Warrantable Failure of another Covered Part.

OWNER RESPONSIBILITIES

DURING THE BASE WARRANTY

Before expiration of the warranty, Owner must give notice to a Cummins distributor or full service dealer* of a failure considered to be warrantable and have the repair performed by such facility. If the part was installed in an automotive engine, the Owner must deliver the engine to the repair location. If installed in a marine engine, Owner is responsible for the cost of towing the boat to a repair dock and for any associated docking and harbor charges.

Owner is responsible for the cost of lubricating oil, antifreeze, filter elements and other maintenance items replaced during warranty repairs except where such items are not reusable due to a Warrantable Failure.

DURING THE EXTENDED MAJOR COMPONENTS WARRANTY

Before expiration of the warranty, Owner must give notice to a Cummins distributor or full service dealer* of a failure considered to be warrantable and deliver the defective and damaged Covered Parts to such facility.

Owner is responsible for the cost of all parts needed for the repair except for the defective Covered Part and for any Covered Part damaged by a Warrantable Failure of another Covered Part.

Owner is responsible for the cost of all labor needed to repair the engine, including the labor to remove and reinstall the engine. When Cummins elects to repair a part instead of replacing it, Owner is not responsible for the labor needed to repair the part.

Owner is responsible for the cost of lubricating oil, antifreeze, filter elements and other maintenance items replaced during the repair.

DURING BOTH WARRANTIES

At the time when the parts are installed, Owner is responsible for the preparation of a written record containing the following: (1) the date of installation of the parts; (2) the engine serial number; (3) the engine miles, hours or kilometers of operation; (4) the parts installed; and (5) the location of the parts in the engine. The purpose of this record is to protect Owner's interests and support any claim for a Warrantable Failure.

Owner is responsible for the operation and maintenance of the engine as specified in Cummins Operation and Maintenance Manuals.

Owner is responsible for communication expenses, meals, lodging and similar costs incurred by Owner as a result of a Warrantable Failure. Owner is responsible for non-engine repairs and for "downtime" expenses, cargo damage and all business costs and losses resulting from a Warrantable Failure. CUMMINS IS NOT RESPONSIBLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.

LIMITATIONS

Cummins is not responsible for failures resulting from Owner or Operator abuse or neglect, such as: operation without adequate coolant, fuel or lubricants; overloading; oversteering; oversteering; lack of maintenance of lubricating, cooling or air intake systems; improper storage, starting, warm-up, run-in or shutdown practices. Cummins is also not responsible for failures caused by incorrect fuel, or by water, dirt or other contaminants in the fuel.

Cummins does not warrant parts supplied by Cummins which bear the name of another company. These parts are warranted by their manufacturers and not by Cummins. This category of parts includes, but is not limited to: hydraulic pumps, alternators, starters, fans, air conditioning compressors, clutches, steering pumps, transmissions, torque converters, marine gears, air cleaners, filters and non-Cummins air compressors, power steering pumps, and engine compression brakes.

Parts provided may be new Cummins, Cummins approved rebuilt parts, or repaired parts. Cummins is not responsible for failures resulting from the use of parts not approved by Cummins.

Before a claim for excessive oil consumption will be considered, Owner must submit adequate documentation to show that consumption exceeds Cummins published standards.

This warranty does not apply to parts furnished by Cummins at no charge to the Owner.

INVEST IN THE BEST

Product Identification Information

Data plates should be referred for parts identification.

1. ENGINE DATA PLATE

Engine No. Moteur No.	Advert. HP Puiss. Indiquée (ch)	at	RPM	E.C.S.	
Model Modèle	Exhaust Qg (Gals/Min) Débit d'échappement (gal/min)		12 Dry 12 Humid sec	Spark Plug Gap Ecartement des Electrodes	In. PO
E.O. No. Commande No.	Peak Torque (FT-LBS) Torque Cme	at	RPM	C.I.D./L Pouce Cube	
Date of Mfg. Date Fabrication	Valve Lash Cold Jeux Soupapes à Froid	Int. Achs.	Ech. Ech.	CPL	Family Famille
Idle Speed Vitesse de Réglage	Spark Timing Point d'allumage		Regm. RPM Regm. RPM	Governed Speed Vitesse Souveraine	RPM
Reference No.	Manufactured by Fabrique par				Made in U.S.A.

1. Shop order number
2. Model designation
3. Engine serial number
4. Control parts list

2. ELECTRONIC CONTROL MODULE DATA PLATE

ESN xxxxxxxx	1
DO xxxxx	2
SC xxxxx	3
PH xxxxx	4

1. Engine serial number
2. Customer interface
3. Rating features
4. Hardware

This catalog was compiled by Garry Wilber in Parts Communications.

Customer Service Information

This standard Parts Catalog contains parts information for the following Cummins Engine Model(s):

QSM 11 Tier 3 Emissions

D353020CX03

CPL 8543

Certain basic engine components have been matched to give optimum performance to your engine. The part numbers listed in this catalog for these components are for a standard engine configuration. When ordering any of the Control Parts List (CPL) components listed below, please order by part description and engine serial number. Reference to the CPL number stamped on the engine data (name) plate will also help identify the proper service parts for your engine.

Control Parts List (CPL) Components

Camshaft
Cylinder Head
Exhaust Manifold
Injector

Page 88
Page 91
Page 110, 111
Page 92

Piston
Pump, Fuel
Turbocharger

Page 87
Page 43
Page 95, 97

USER INFORMATION

- Parts numbers appearing in () are for identification purposes only and should not be used when ordering service replacement parts.
- The reference numbers appearing on the art pages is for publication use only.
- Assembly content is shown by part number indentation.
- Options are engineered production part groupings, specifically used for compiling engine orders.
- Option numbers are for reference only and are not sold for service.
- Use assembly and not option content to determine service parts replacement.

ALWAYS SPECIFY ENGINE MODEL AND SERIAL NUMBER WHEN ORDERING PARTS FROM THIS CATALOG

Engine Model _____ Engine Serial No. _____

MFG Make _____ Model _____ Chassis No. _____

Fuel Pump Assembly No. _____ Injector No. _____

Belt, Fan _____ Belt, Water Pump _____ Belt, Gen. _____


Element, Fuel Filter _____ Full Flow Lub. Filter _____

Air Cleaner _____ By-Pass Lub. Filter _____

Special Equipment _____

Table of Contents


	Page No.		Page No.
Accessory Drive Pulley	2	Oil Cooler Water Plumbing	123
Air Cleaner Plumbing	18	Oil Filler Arrangement	75
Air Compressor Inlet Conne	20	Oil Filter Cooler Head	65
Air Compressor Plumbing	21	Oil Level Gauge	71
Air Intake Connection	54, 55	Oil Pan	79
Air Intake Manifold	56	Piston Cooling Nozzle	82
Air Intake Manifold Mounti	59	Radiator Plumbing	106
Air Transfer Connection	61	Rear Engine Support	100
Alternator	27	Rocker Lever	103
Alternator Drive Pulley	30	Starting Motor	109
Alternator Mounting	29	Starting Motor Mounting	107
Cam Follower Lever	15	Thermostat	26
Camshaft	88	Thermostat Housing	113
Connecting Rod	85	Thermostat Hsg Plumbing	114
Coolant Heater Starting Ai	19	Torque Converter Cooler	115
Corrosion Resistor	121	Turbocharger	95, 97
Crankcase Breather Plumbin	17	Turbocharger Arrangement	110
Crankshaft	7	Turbocharger Plumbing	117, 119
Cylinder Block	5	Vibration Damper	22
Cylinder Block Plumbing	16	Water Pump	125
Cylinder Head	91	Option Number Index	A-1
Cylinder Liner Kit	6	Part Number Index	B-1
Electronic Control Cooler	81		
Engine Brake Control	25		
Engine Piston Kit	87		
Exhaust Clamp	128		
Exhaust Manifold	111		
External Control Module Wi	127		
Fan Drive	34		
Fan Drive Belt	35		
Fan Pilot Spacer	108		
Flywheel	50		
Flywheel Housing	41		
Front Engine Support	33		
Front Gear Cover	53		
Front Gear Train	23		
Fuel Filter	37		
Fuel Plumbing	49		
Fuel Pump	43		
Fuel Pump Coupling	46		
Fuel Pump Drive	24		
Fuel Pump Fitting	38		
Full Flow Oil Filter	69		
Gear Housing	11		
Hand Hole Cover	76		
Idler Gears	13		
Injectors	92		
Lifting Bracket	62		
Lube Oil Pump	72		
Main Bearings	9		

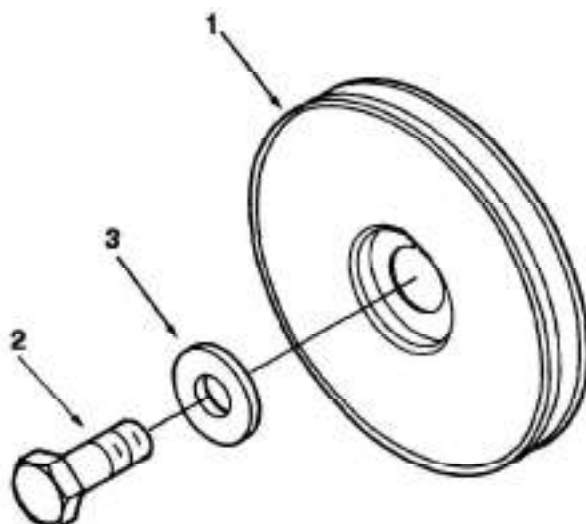


ad200gj

Ref No.	Part Number	Part Name	Req	Remarks
		ACCESSORY DRIVE PULLEY OPTION AD2031		Intended Drive: Refrigerant Compressor Pulley Rotation: Same as Engine Crankshaft Horsepower Drive Limitation (hp): 20 Side Load Limitation (lb): 380 Pulley Diameter: 191.81mm (7.55in) Pulley Groove: Single Groove 1/2in. "V" Pulley Groove Location: 90.0mm (3.54in) Drive Ratio: Turns at Engine Speed. Use on Fuel Pump Side (Left Side) of Engine. Can be adapted for Customer supplied alternator and mounting. If no drive requirement from left side, use this option for timing marks
1	3046203	Pulley, Accessory Drive	1	
2	3818229	Screw, Hexagon Head Cap	1	M20 x 2.50 x 50
3	3818463	Washer, Plain	1	M20

[illegible]

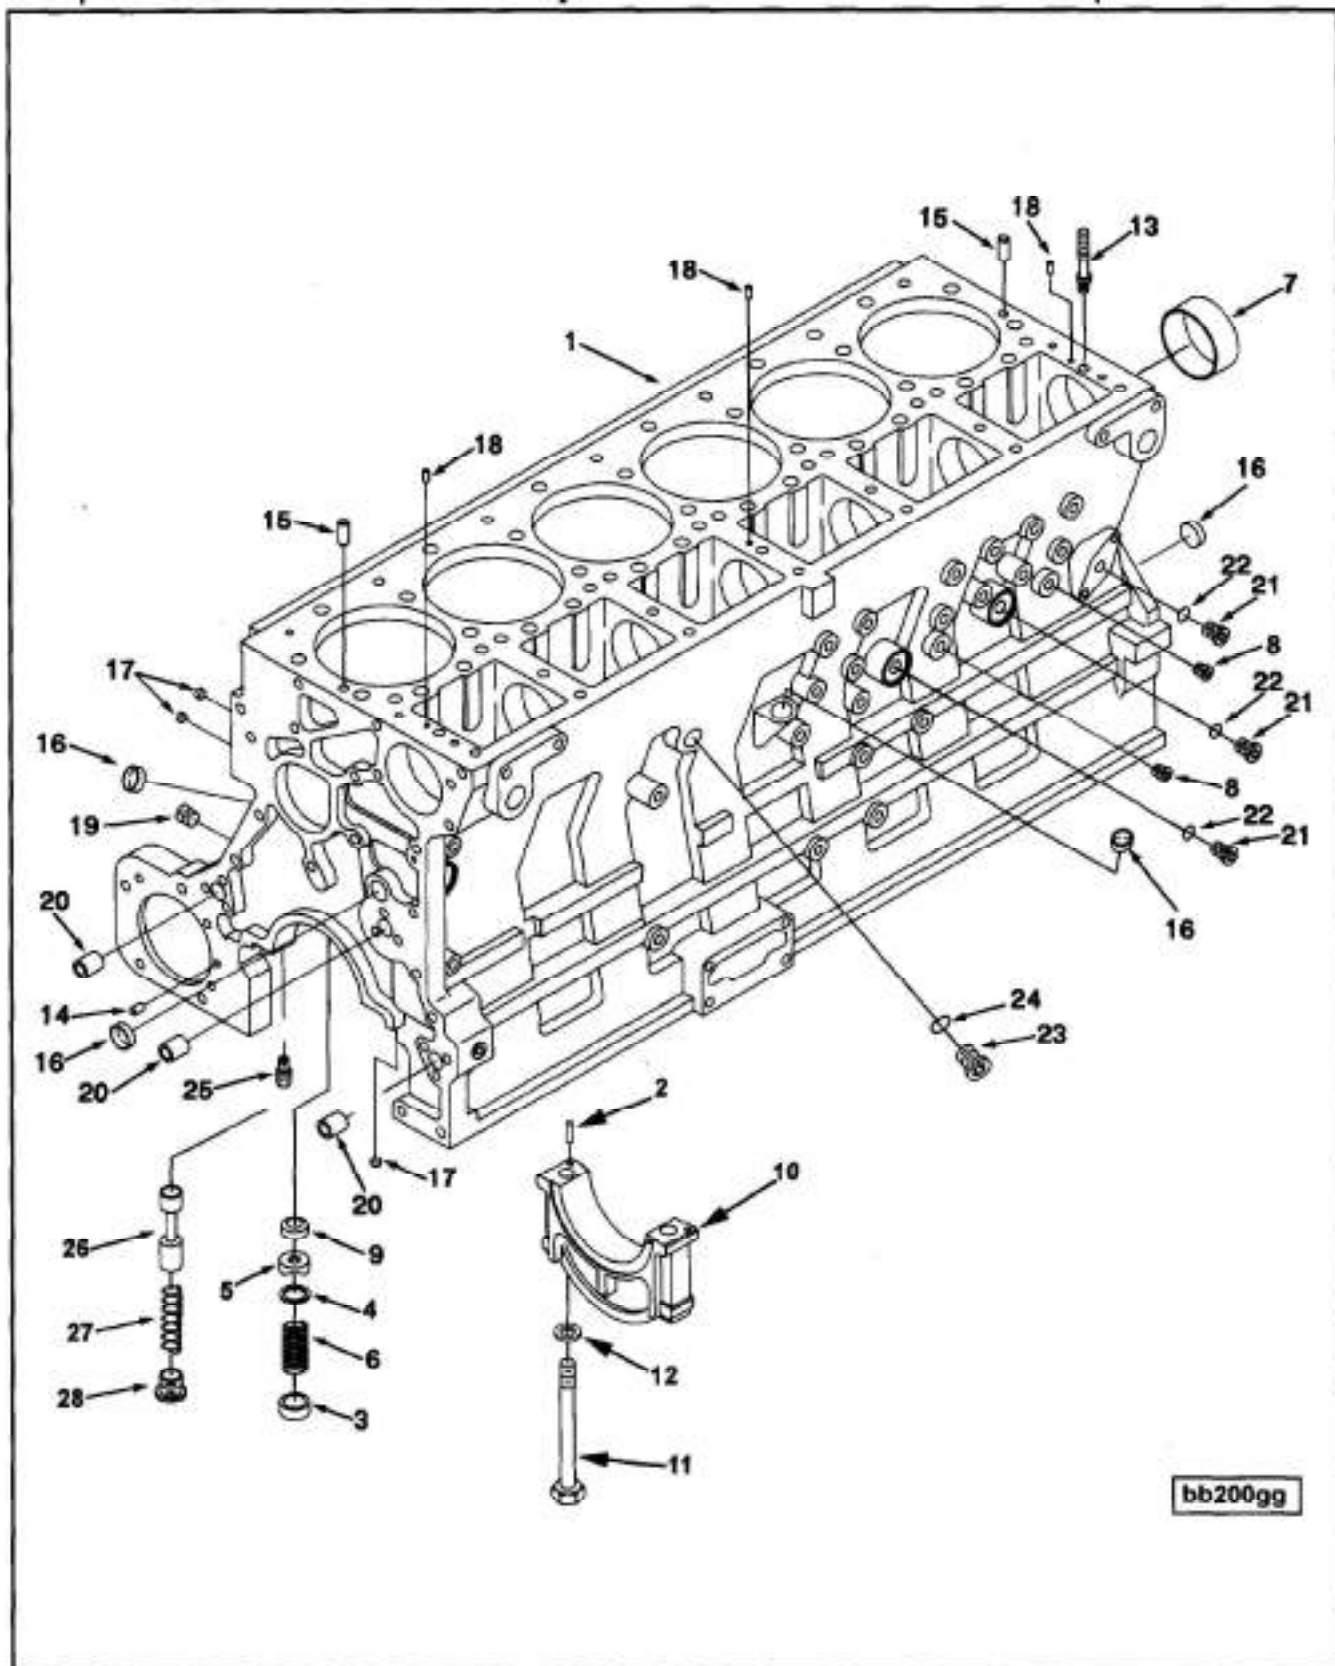


Ref No.	Part Number	Part Name	Req	Remarks
		CYLINDER BLOCK OPTION BB2712		No Future Adaptation For Hydraulic Pump Drive Increased Soot Level Capability: No Geometry Revised: No
1	(4060393)	Block, Cylinder	1	
2	(4060392)	Block, Cylinder	1	
3	148555	Dowel, Pin	2	
4	179063	Plug, Retainer	1	
5	3014754	Washer, Plain	1	3/4 inch
6	3014755	Disc, Valve	1	
7	3014756	Spring, Compression	1	
8	3820566	Bushing	7	
9	3008466	Plug, Pipe	2	1/4 NPT
10	3026758	Seat, Prs Regulator Valve	1	
11	(4060387)	Cap, Main Bearing	1	No. 4 only
12	4060391	Cap, Main Bearing	5	No. 1,2,3,5,&6 only
13	3026961	Cap, Main Bearing	1	No. 7 only
14	3803504	Kit, Screw Hex Head Cap	14	
15	3326742	Screw, Hexagon Head Cap	14	M14 x 1.50 x 160
16	3019631	Washer, Plain	14	1/2 inch.
17	3895832	Stud	7	M10 x 1.00 x 50
18	70550	Dowel, Pin	1	
19	142207	Dowel, Pin	2	
20	3007635	Plug, Expansion	4	
21	3007632	Plug, Expansion	9	
22	3008446	Dowel, Pin	3	
23	3008466	Plug, Pipe	1	1/2 NPT
24	3026231	Dowel, Ring	3	
25	3037536	Plug, Threaded	4	9/16 - 18 UNF
26	(3040813)	Plug, Threaded	1	9/16 - 18 UNF
27	3037537	Seal, O Ring	1	
28	3046202	Plug, Threaded	1	3/4 - 16 UNF
29	3040810	Plug, Threaded	1	
30	3046201	Seal, O Ring	1	
31	3069728	Sensor, Viscosity	1	
32	3068979	Plunger, Prs Regulator	1	
33	3010146	Spring, Compression	1	
34	3821725	Plug, Retainer	1	
		SERVICE PLUG		
	3053349	Dowel, Pin	1	Replaces ref 20 for applications not requiring hydraulic drive

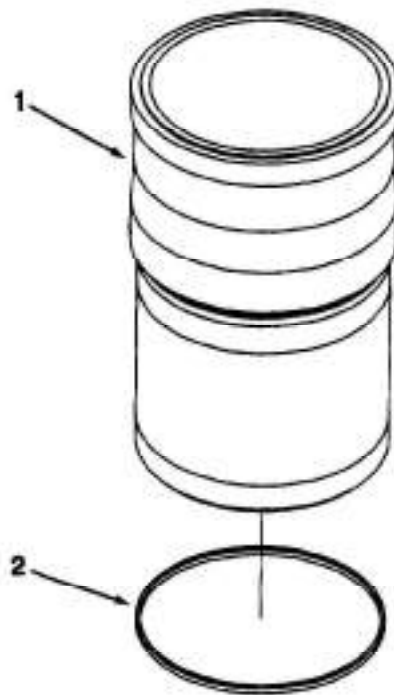


cy200gc


Ref No.	Part Number	Part Name	Req	Remarks
		CYLINDER LINER KIT OPTION BB2712		
1	3803703 (3080760)	Kit, Cylinder Liner	6	
2	3047188	Liner, Cylinder Seal, Rectangular	1 1	
		LINER SHIM		
	3032623	Shim	A/R	0.005 inch
	3034663	Shim	A/R	0.008 inch

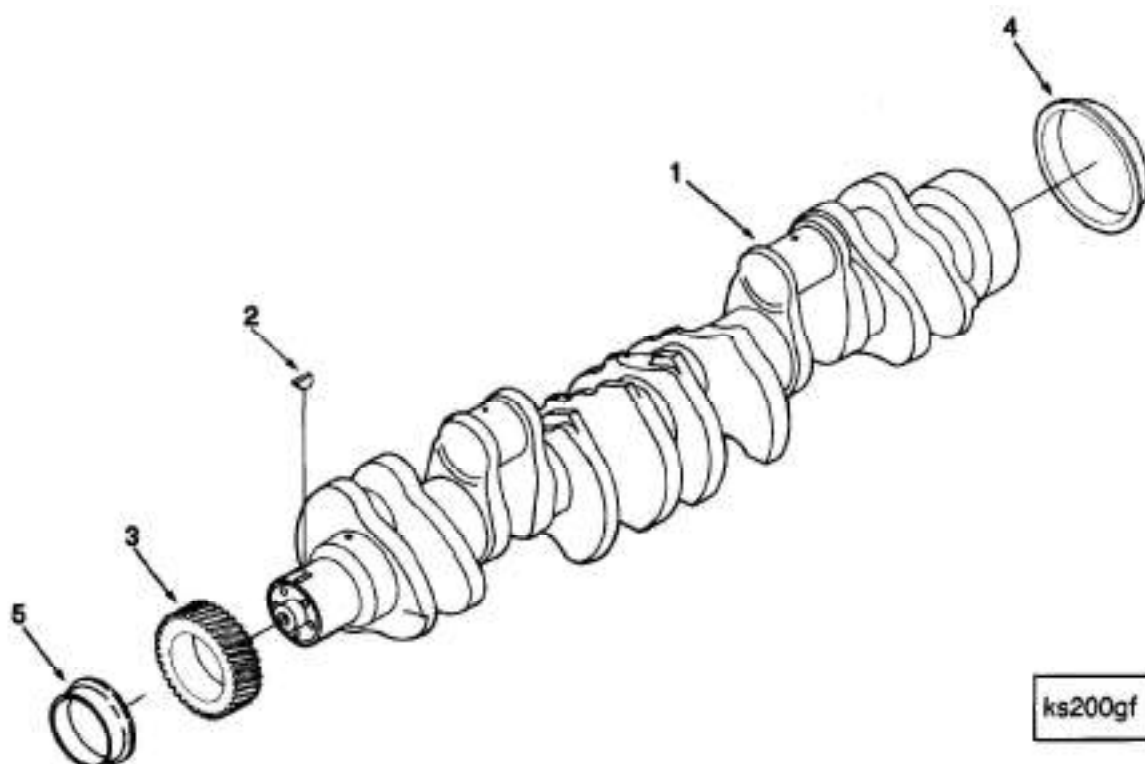

Ref No.	Part Number	Part Name	Req	Remarks
		CRANKSHAFT OPTION BB2712		
1	3073707	Crankshaft	1	
2	S 300	Key, Plain Woodruff	1	
3	3084445	Gear, Crankshaft	1	
		REPAIR PARTS		
4	4004652	Sleeve, Wear	1	Rear
5	3820918	Sleeve, Wear	1	Front

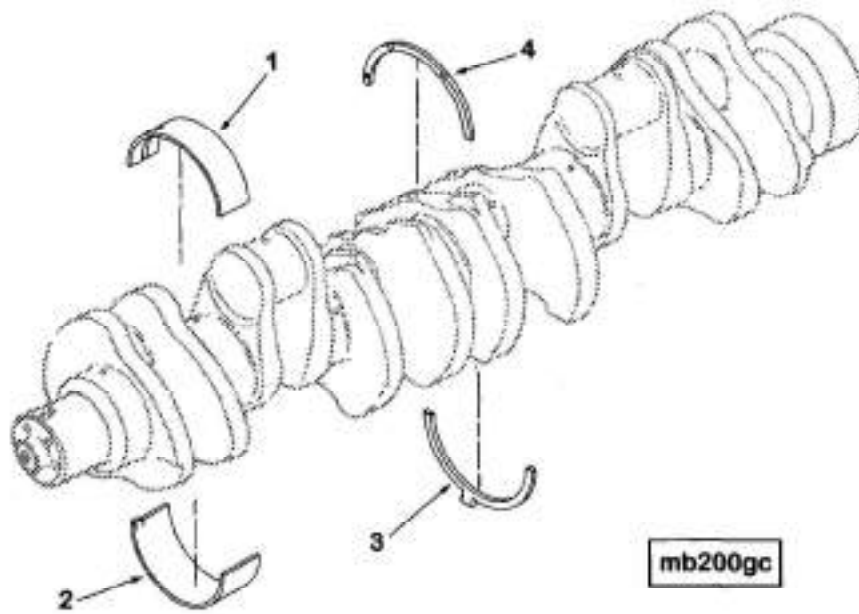


Ref No.	Part Number	Part Name	Req	Remarks
		MAIN BEARINGS OPTION BB2712		
1	4025120	Set, Main Bearing	1	Std
2	3016770	Bearing, Main	7	Upper
3	3016780	Bearing, Main	7	Lower
4	4023083	Bearing, Thrust	2	No. 4 Main Standard
4	4023203	Bearing, Thrust	2	No. 4 Main Standard
1	4025121	Set, Main Bearing	1	.25 mm oversize
2	3016771	Bearing, Main	7	Upper
3	3016781	Bearing, Main	7	Lower
4	4023083	Bearing, Thrust	2	No. 4 Main Standard
4	4023203	Bearing, Thrust	2	No. 4 Main Standard
1	4025122	Set, Main Bearing	1	.50 mm oversize
2	3016772	Bearing, Main	7	Upper
3	3016782	Bearing, Main	7	Lower
4	4023083	Bearing, Thrust	2	No. 4 Main Standard
4	4023203	Bearing, Thrust	2	No. 4 Main Standard
1	4025123	Set, Main Bearing	1	.75 mm oversize
2	3016773	Bearing, Main	7	Upper
3	3016783	Bearing, Main	7	Lower
4	4023083	Bearing, Thrust	2	No. 4 Main Standard
4	4023203	Bearing, Thrust	2	No. 4 Main Standard
1	4025124	Set, Main Bearing	1	1.00 mm oversize
2	3016774	Bearing, Main	7	Upper
3	3016784	Bearing, Main	7	Lower
4	4023083	Bearing, Thrust	2	No. 4 Main Standard
4	4023203	Bearing, Thrust	2	No. 4 Main Standard
1	4025125	Set, Main Bearing	1	Std
2	3016770	Bearing, Main	7	Upper
4	3016780	Bearing, Main	7	Lower
4	4023203	Bearing, Thrust	4	No. 4 Main Standard
1	4025126	Set, Main Bearing	1	.25 mm oversize
2	3016771	Bearing, Main	7	Upper
4	3016781	Bearing, Main	7	Lower
4	4023203	Bearing, Thrust	4	No. 4 Main Standard
1	4025127	Set, Main Bearing	1	.50 mm oversize
2	3016772	Bearing, Main	7	Upper
4	3016782	Bearing, Main	7	Lower
4	4023203	Bearing, Thrust	4	No. 4 Main Standard
1	4025128	Set, Main Bearing	1	.75 mm oversize
2	3016773	Bearing, Main	7	Upper
4	3016783	Bearing, Main	7	Lower
4	4023203	Bearing, Thrust	4	No. 4 Main Standard
1	4025129	Set, Main Bearing	1	1.00 mm oversize
2	3016774	Bearing, Main	7	Upper
4	3016784	Bearing, Main	7	Lower
4	4023203	Bearing, Thrust	4	No. 4 Main Standard

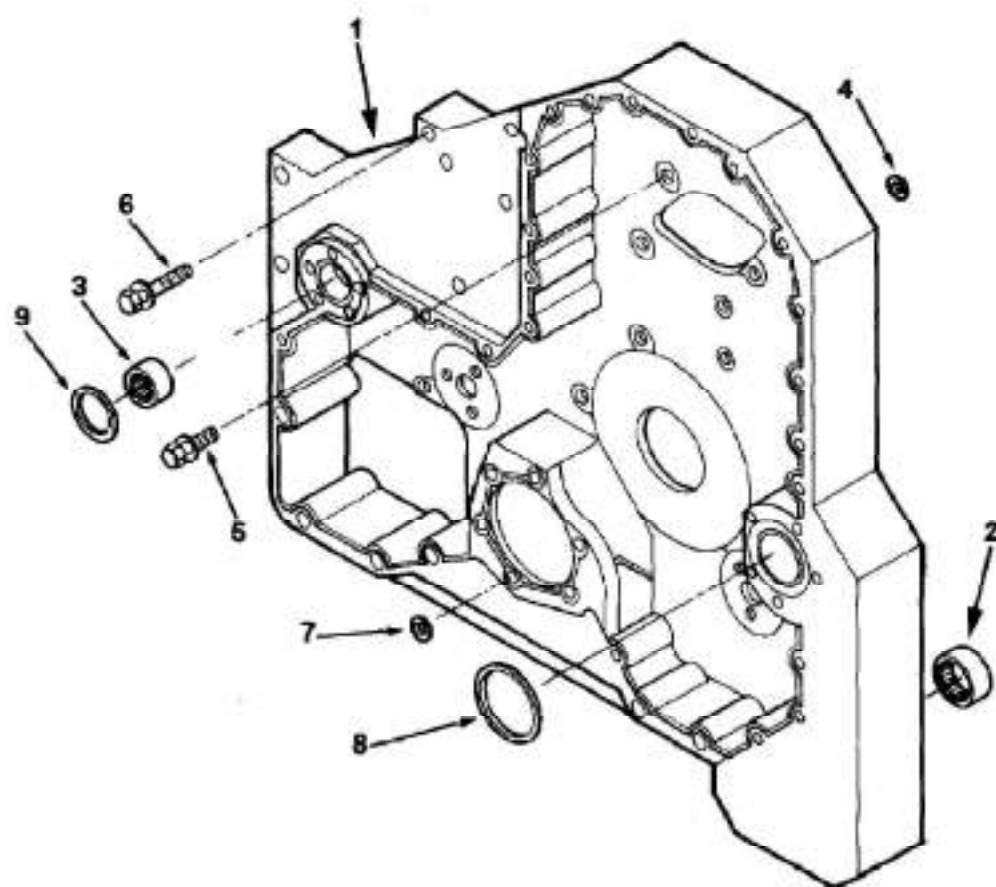


gc202gb

Ref No.	Part Number	Part Name	Req	Remarks
		GEAR HOUSING OPTION BB2712		Adapter flange size: No future adaptation Design phase: To be determined Cylinder block with extended nose crankshaft and gear housing for belt driven or no future fan drive provisions.
	4906948	Housing, Gear	1	
1	(3102777)	Housing, Gear	1	
2	3025354	Bearing, Needle	1	
3	3893913	Bearing, Needle	1	
4	3883150	Seal, O Ring	1	
5	3818060	Screw, Captive Washer Cap	11	M10 x 1.50 x 25
6	3820186	Screw, Captive Washer Cap	5	M10 x 1.50 x 50
7	3201659	Seal, Rectangular Ring	6	
8	3820945	Seal, Rectangular Ring	1	
9	3820946	Seal, Rectangular Ring	1	

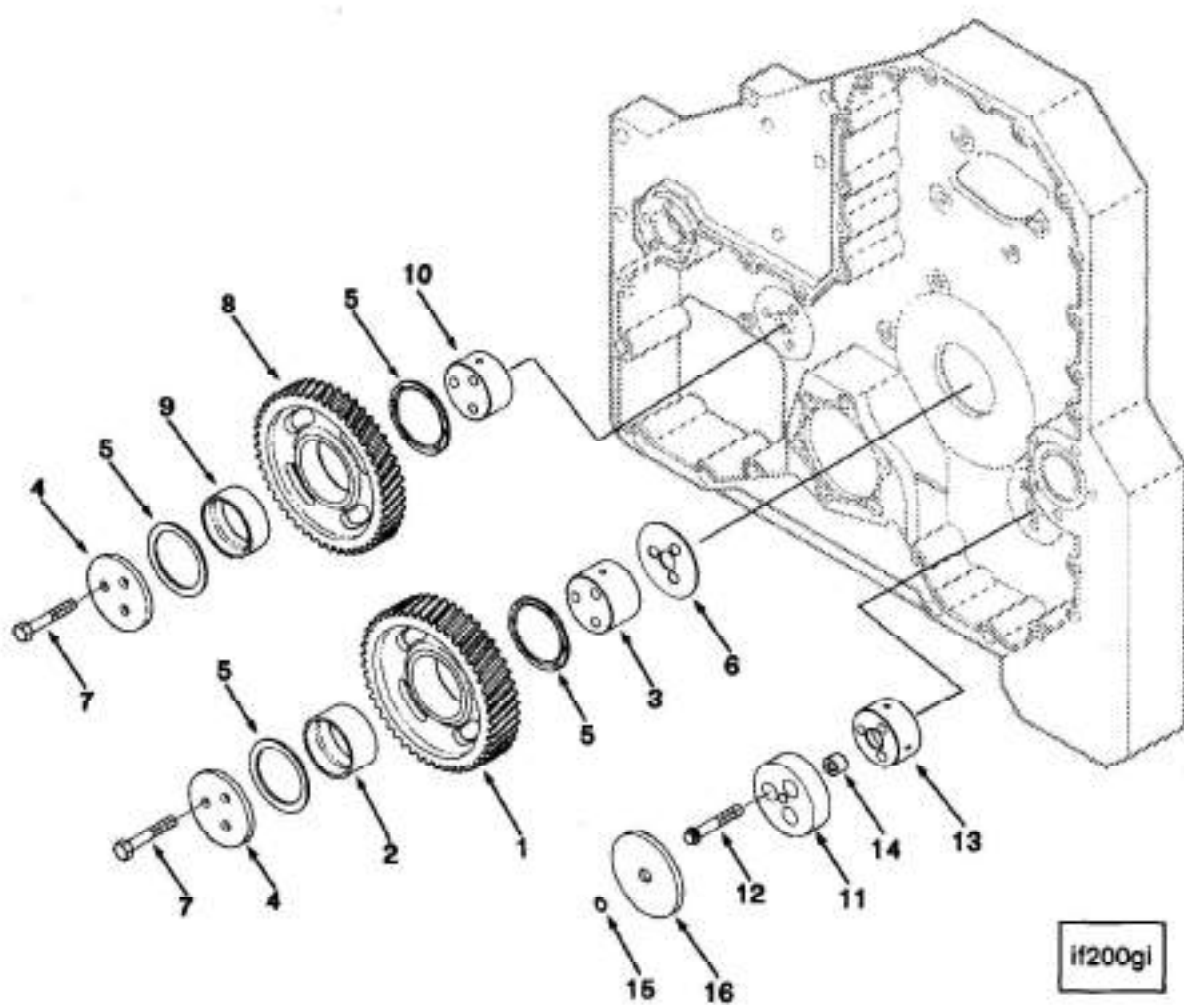

Ref No.	Part Number	Part Name	Req	Remarks
		IDLER GEARS		
		OPTION BB2712		
		CAMSHAFT IDLER GEAR		Adapter flange size: no future adaptation
	3084532	Gear, Idler	1	
1	(3084447)	Gear, Idler	1	
2	3026188	Bushing	1	
3	3026166	Shaft, Idler	1	
4	3026233	Retainer, Gear	1	
5	3084899	Bearing, Thrust	2	
6	3088161	Plate, Thrust Bearing Wear	1	
7	3088162	Screw, Hexagon Head Cap	3	M10 x 1.50 x 60
		WATER PUMP IDLER GEAR		
	3084533	Gear, Idler	1	
8	(3084448)	Gear, Idler	1	
9	3026189	Bushing	1	
4	3026233	Retainer, Gear	1	
5	3084899	Bearing, Thrust	2	
7	3088162	Screw, Hexagon Head Cap	3	M10 x 1.50 x 60
10	3026167	Shaft, Idler	1	
		HYDRAULIC PUMP SPACER		
11	3882528	Retainer, Gear	1	
12	3882922	Screw, Twelve Point Cap	3	M10 x 1.50 x 60
13	3882902	Spacer, Hydraulic Pump	1	
14	3026231	Dowel, Ring	1	
15	3883510	Seal, Rectangular Ring	1	
16	3882513	Spacer, Mounting	1	

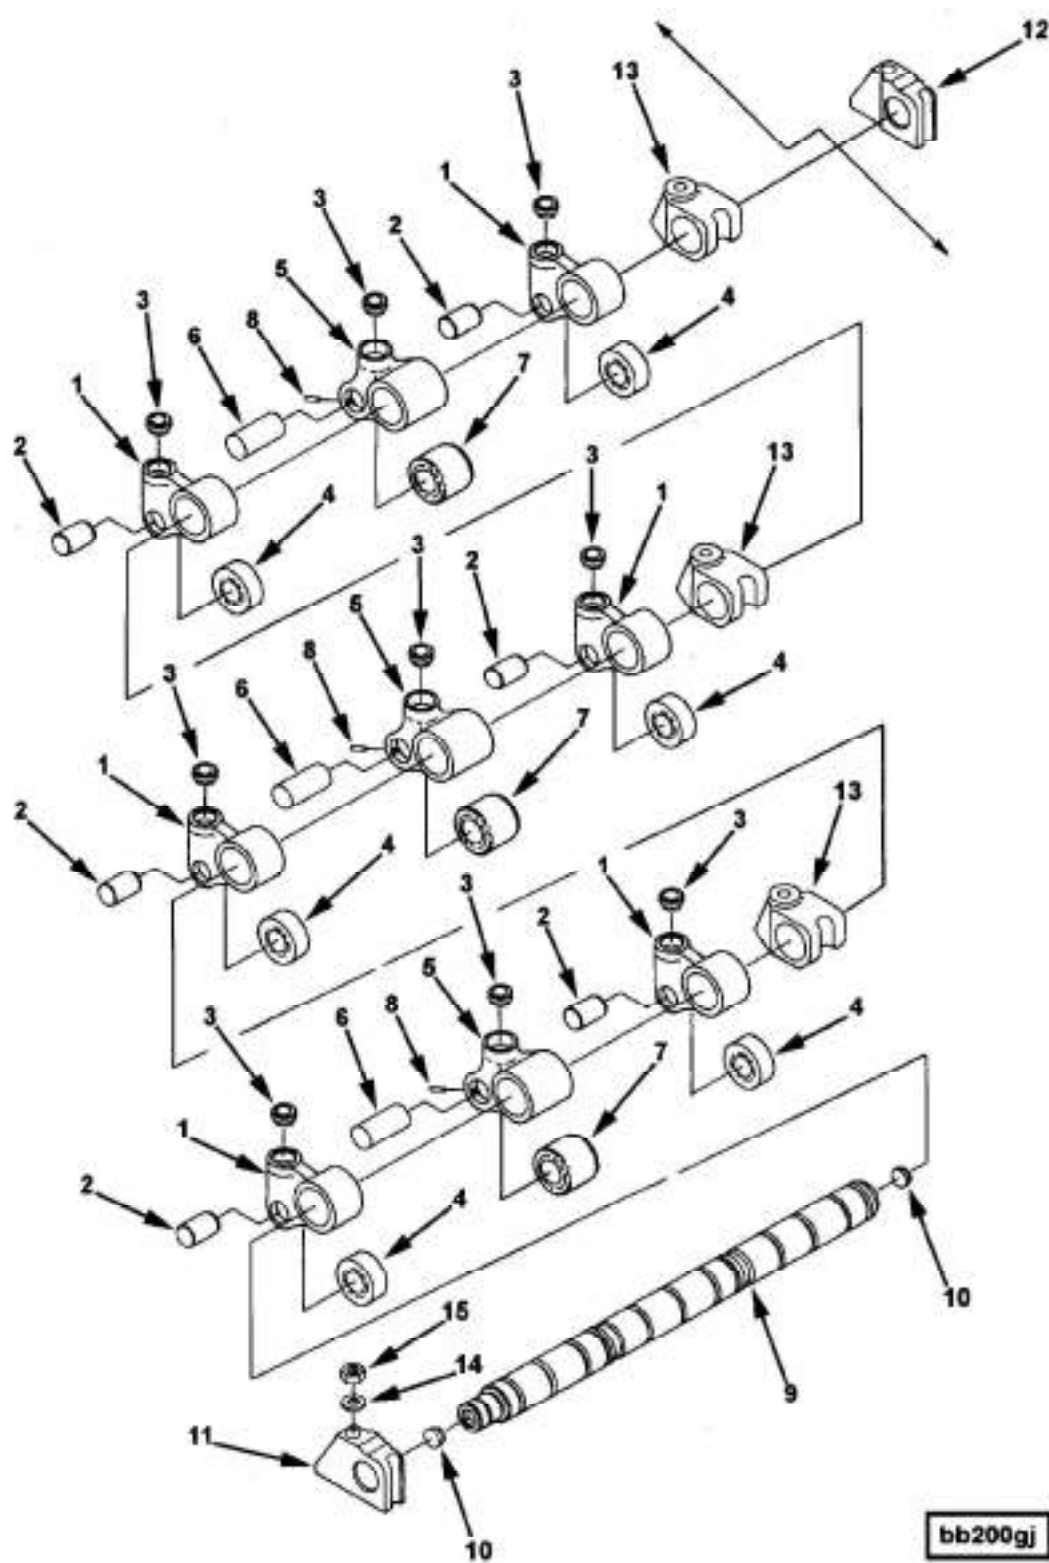


bb200gj

Group No. 04.01


Cam Follower Lever

Option No. BB2712

Ref No.	Part Number	Part Name	Req	Remarks
		CAM FOLLOWER LEVER OPTION BB2712		
	3161475	Lever, Cam Follower	12	Valve
1	(3821160)	Lever, Cam Follower	1	
2	3335342	Pin, Cam Follower Roller	1	
3	3064621	Socket, Tappet	1	
4	3895488	Roller, Cam Follower	1	
	3417645	Lever, Cam Follower	6	Injector
5	3161423	Roller, Cam Follower	1	
6	3335343	Pin, Cam Follower Roller	1	
3	3064621	Socket, Tappet	1	
7	(3079589)	Lever, Cam Follower	1	
8	3029920	Pin, Roll	1	
	3417766	Shaft, Cam Follower	2	
9	(3417769)	Shaft, Cam Follower	1	
10	(4060455)	Plug, Expansion	2	
11	3064582	Support, Cam Fol Shaft	1	
12	3064583	Support, Cam Fol Shaft	1	
13	3895830	Support, Cam Fol Shaft	5	
14	3009330	Washer, Plain	7	M10
15	3044360	Nut, Regular Hexagon	7	M10 x 1.50

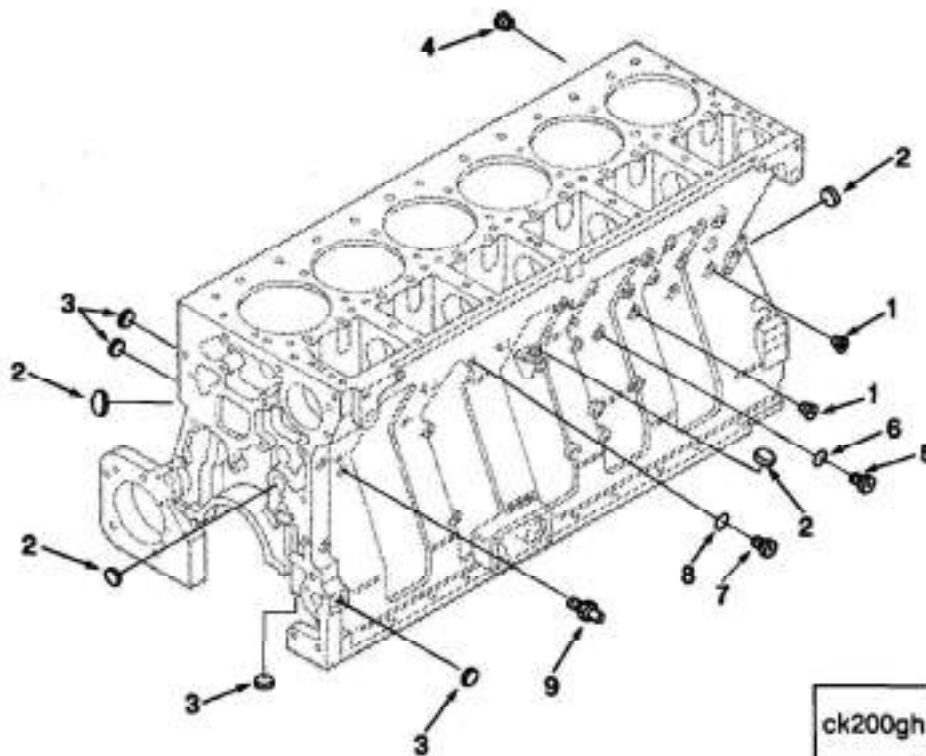


Ref No.	Part Number	Part Name	Req	Remarks
		CYLINDER BLOCK PLUMBING OPTION BB2737		Block Hole #302 (3/4-16): Plugged Block Hole #316 (1/4 NPT): Plugged Block Hole #338 (9/16-18): Plugged Block Hole #339 (9/16-18): Open Block Hole #336 (9/16-18): Plugged with Threaded Plug Block Hole #317 (1/4 NPT): Plugged Block Hole #337 (9/16-18): Plugged
1	3008466	Plug, Pipe	2	1/4 NPT
2	3007635	Plug, Expansion	4	1 inch
3	3007632	Plug, Expansion	9	0.378 Dia
4	3008466	Plug, Pipe	1	1/2 NPT
	3037536	Plug, Threaded	2	9/16 - 18 UNF
5	(3040813)	Plug, Threaded	1	
6	3037537	Seal, O Ring	1	
	3046202	Plug, Threaded	1	3/4 - 16 UNF
7	(3040810)	Plug, Threaded	1	
8	3046201	Seal, O Ring	1	
	3042619	Nipple, Coupling	1	
6	3037537	Seal, O Ring	1	
9	(3042620)	Nipple, Coupling	1	

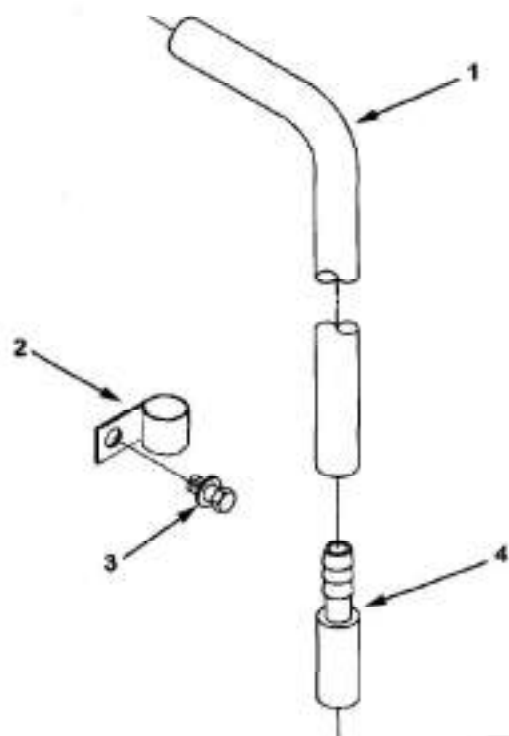


bt200gd


Ref No.	Part Number	Part Name	Req	Remarks
		CRANKCASE BREATHER PLUMBING OPTION BR2708		Breather System: Open Breather Location: Internal Vent Location: Side Vent Tube Routing: Left Center Block Hole Clipping Location: #328 Facing Rear Vent Tube End Location: 6in Below Pan Rail CENTINEL Provision: No
1	3394702	Hose, Plain	1	
2	107460	Clip	1	
3	3818060	Screw, Captive Washer Cap	1	M10 x 1.50 x 25
4	3819475	Tube, Breather	1	

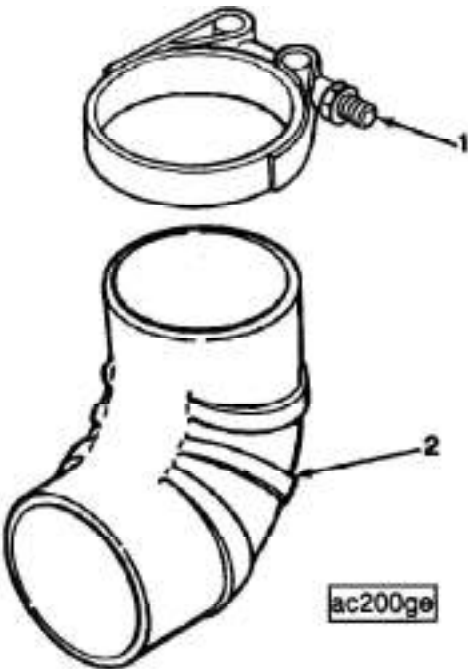


Ref No.	Part Number	Part Name	Req	Remarks
		AIR CLEANER PLUMBING OPTION CA2041		Air Cleaner Plumbing Plumbing Hose Type: 90 Degree Elbow Hose Size: 5.0in to 5.0in Hose Material: Rubber Hose Clamps Included: One T- Bolt Plumbing Supplied: Mounted, 5 1/2 Inch.
1	149437	Clamp, T Bolt	2	
2	3105225	Hose, Elbow	1	

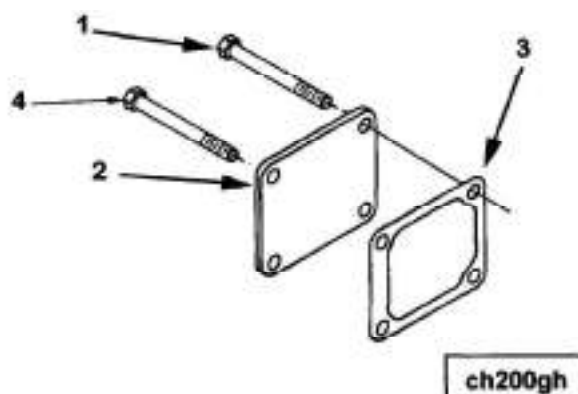

Ref No.	Part Number	Part Name	Req	Remarks
		COOLANT HEATER STARTING AI OPTION CH2021		Heater Element Supplier: None No future requirement to install an engine coolant heater, Kim Hotstart or other external heaters mounted in heater housing located right rear on water header plate. Heating Element Mtg Style: No element - Blanking Plate installed Heater Hsg Acc Plmb Hole: None Stud Provided: Stud - Upper R.H. Corner
1	3034836	Screw, Hexagon Head Cap	3	M10 x 1.50 x 30
2	3253334	Plate, Cover	1	
3	3893690	Gasket, Heater Housing	1	To Be Used On M11 Engine Only
4	3883394	Screw, Hexagon Head Cap	1	M8x1.25x20 - M10x1.50x70

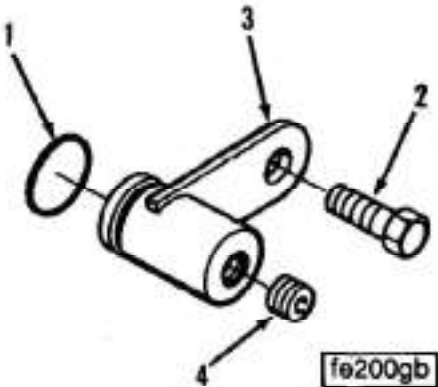


Ref No.	Part Number	Part Name	Req	Remarks
		AIR COMPRESSOR INLET CONNE OPTION CI2705		CPR Air Inlet Plumbing Air Inlet Tube Supplier: Customer or None.
1	3819871	Seal, O Ring	1	
2	3036230	Screw, Hexagon Head Cap	1	M10 x 1.50 x 20
3	3600825	Connection, Air Intake	1	
4	3008465	Plug, Pipe	1	1/8 NPT

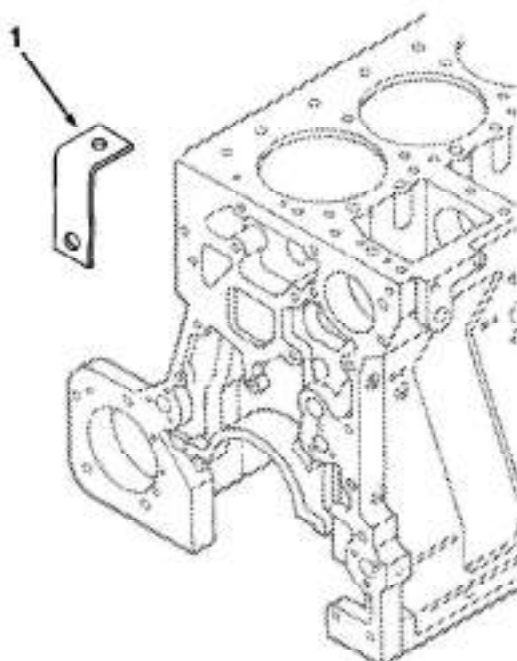


cc200gu

Ref No.	Part Number	Part Name	Req	Remarks
1	3820047	BRACE, TUBE	1	Supplier: None Inlet Air Supply Method: Turbocharged or Naturally Aspirated Drive: None

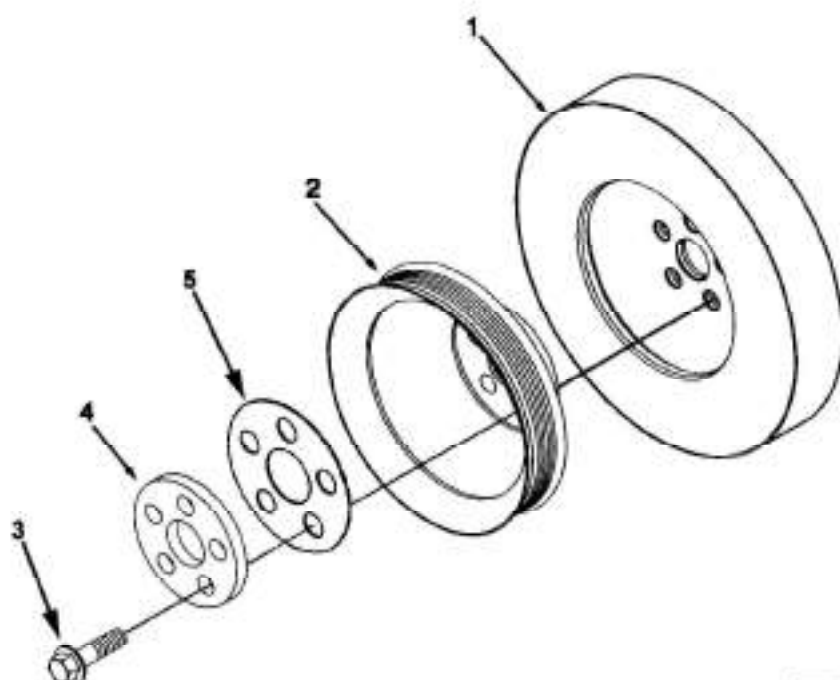


da202gy

Ref No.	Part Number	Part Name	Req	Remarks
		VIBRATION DAMPER OPTION DA2070		Intended Drive: Fan Drive Only Crank Pulley Diameter: 190.70mm (7.51in) Crank Pulley Groove Location: 140.0mm (5.51in) Crank Pulley Groove Type: Poly V 8 Rib "K" Threaded Bolt Hole MTG Provision: None
1	3161942	Damper, Vibration	1	Recon equivalent 3161942 RX
2	3073676	Pulley, Crankshaft	1	
3	3896790	Screw, Hexagon Head Cap	5	
4	3896043	Plate, Clamping	1	
5	3882675	Plate, Clamping	1	

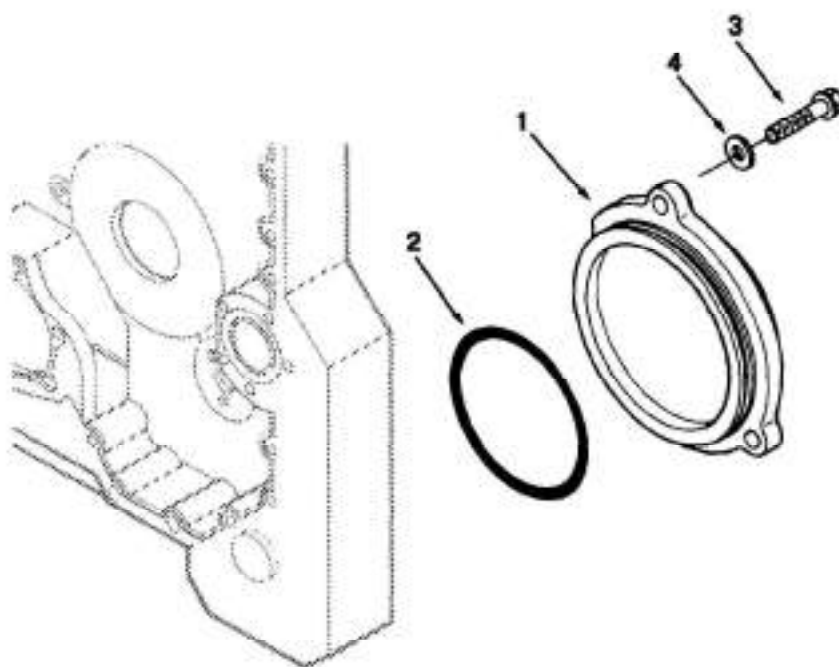


df200gp


Ref No.	Part Number	Part Name	Req	Remarks
		FRONT GEAR TRAIN OPTION DF2036		Accessory Drive Provision: None Adapter Flange Size: No Future Adaptation This option does not supply hydraulic pump tail support
1	3882680	Plug, Gear Housing	1	
2	3883042	Seal, O Ring	1	
3	3819521	Screw, Hex Flange Head Cap	3	M10 x 1.50 x 20
4	100330	Washer, Plain	3	3/8 inch

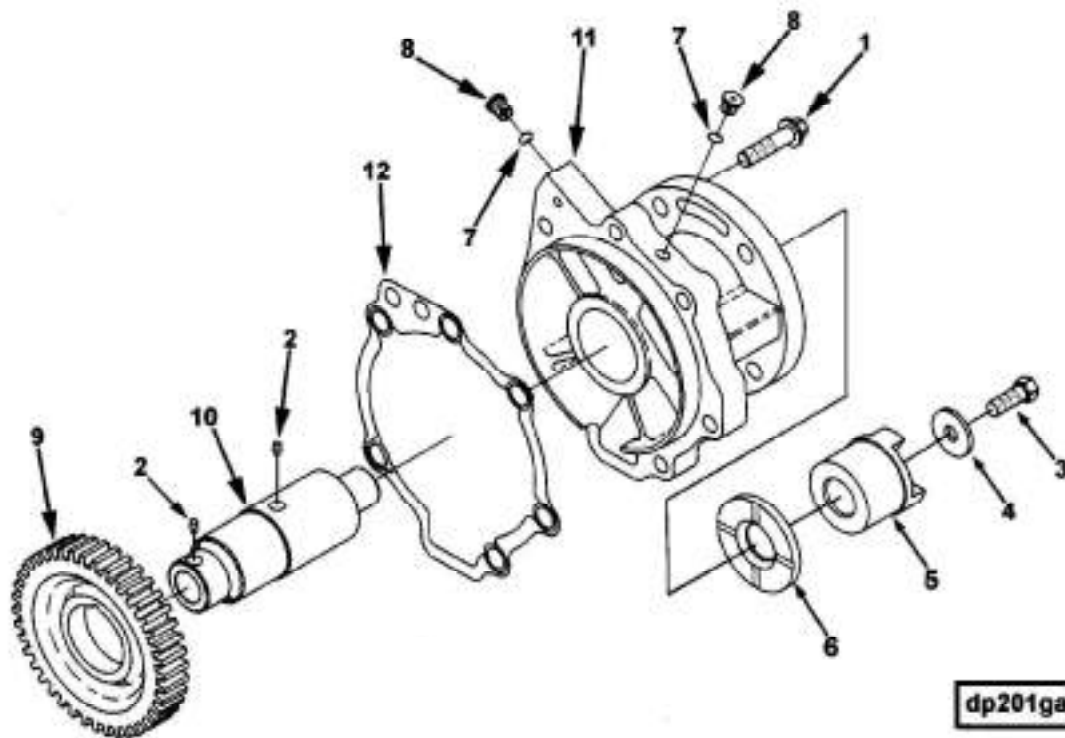


Ref No.	Part Number	Part Name	Req	Remarks
		FUEL PUMP DRIVE OPTION DP2701		
				Drive Provision: Less Air Compressor
1	3883123	Screw, Hex Flange Head Cap	6	M10 x 1.50 x 40
	3896047	Shaft & Gear, Acc Drive	1	Recon equivalent 3896047 RX
2	S 3193	Pin, Groove	1	
3	129510	Screw, Hexagon Head Cap	1	3/8 - 16 X 1 Inch.
4	170664	Washer, Plain	1	3/8 Inch.
5	3000175	Hub, Jaw Coupling	1	
6	3028309	Bearing, Thrust	1	
	4903443	Plug, Threaded	2	3/8 inch
7	3034412	Seal, O Ring	1	
8	(4903442)	Plug, Threaded	1	
	3041048	Gear & Shaft	1	
2	S 3193	Pin, Groove	1	
9	3041042	Gear, Accessory Drive	1	
10	3041043	Shaft, Accessory Drive	1	
11	3896048	Support, Accessory Drive	1	
12	3899746	Gasket, Acc Drive Support	1	




Ref No.	Part Number	Part Name	Req	Remarks
1	3070175	Crosshead, Valve	6	ENGINE BRAKE CONTROL OPTION EB2047 Engine Brake Installed: No Control System: Celect & IS2 Brake Supplier: None



Ref No.	Part Number	Part Name	Req	Remarks
		THERMOSTAT OPTION EC2701		
1	3335550	Thermostat	1	Opening Temperature(c): 82 (180F) full open Temperature(c): 94 (201F) Venting Arrangement: Non-Vented Quantity: 1
2	3335548	Seal, Thermostat	1	
	(3335549)	Thermostat	1	

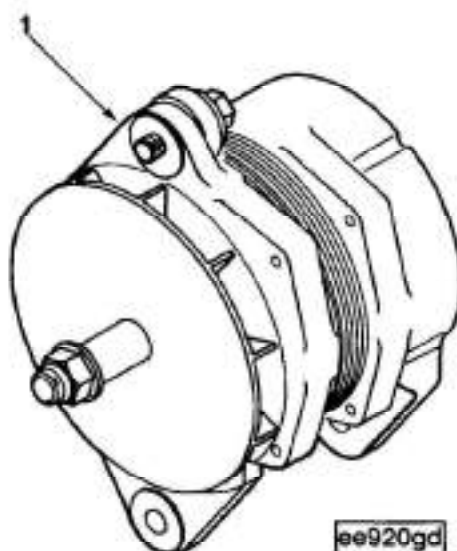

Ref No.	Part Number	Part Name	Req	Remarks
1	3935530	Alternator OPTION EE2050	1	Alternator Quantity: One Manufacturer/Model/Type: Delco Remy 22 SI350/355 Volts: 24 Amps: 70 Alternator Grounding Provision: Frame Ground Only Sealing Provision: No Voltage Regulator: Built In Ground Wire Supplier: Customer Alternator Length: 162mm (6.38in) Charging System: 1 Wire Battery Terminal: M6 R or D Terminal: M4 I Terminal: M4 Cummins Branded: Yes Alternator Mounting Style: 4 Inch Double Lug.

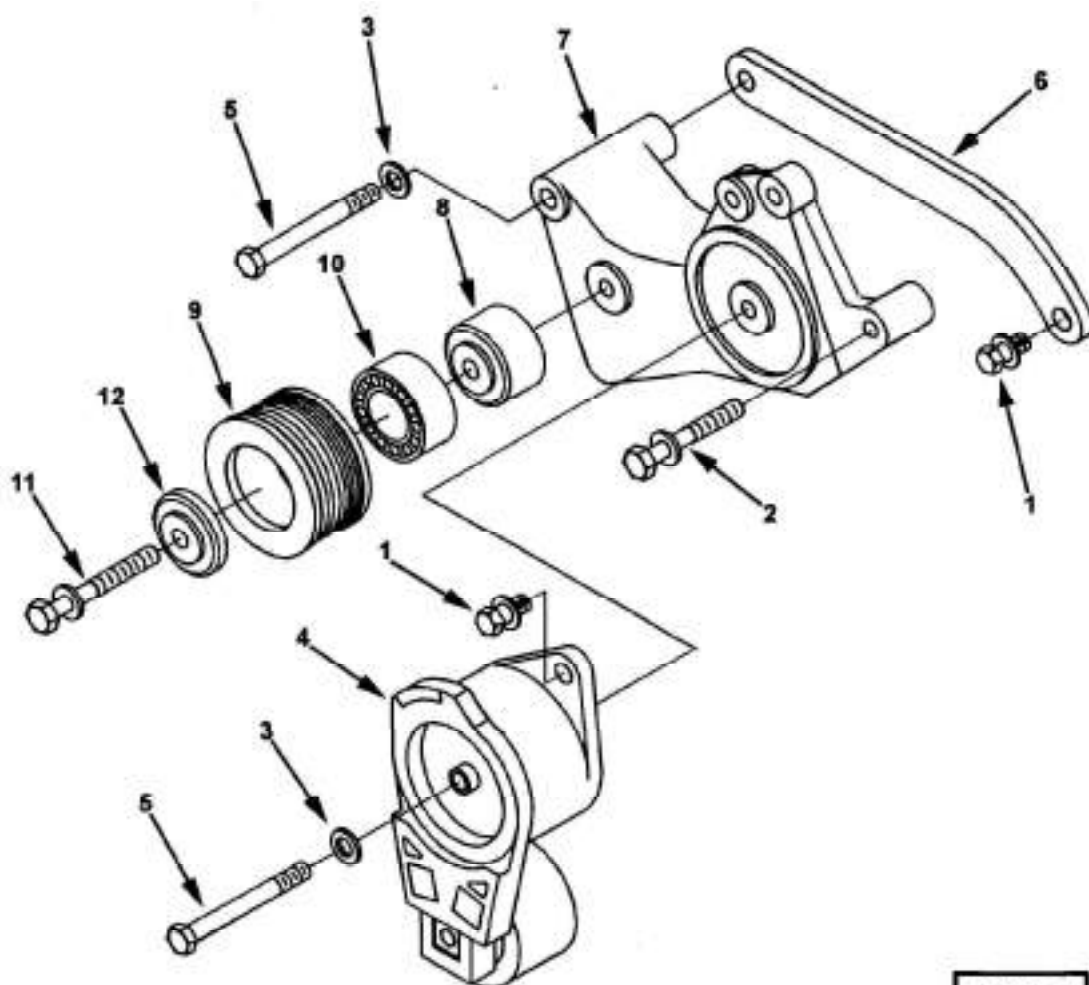

eh206gn


Ref No.	Part Number	Part Name	Req	Remarks
		ALTERNATOR MOUNTING OPTION EH2165		Alternator Mounting Alternator Quantity: One Manufacturer/Model: Delco Remy or Lescage Neville Mtg. Location: Right Side Serpentine Alternator/Fan Drive: Yes Drive Location: Crankshaft Alt. Pulley Diameter: 76.20mm (3in) Alt. Pulley Groove: Poly V 8 Rib "K" Alt. Pulley Groove Location: 140.0mm (5.51in) Belt Tensioner: Automatic Required Drive Pulley Dia: 190.00mm (7.48in) Bracket Attachment Method: 4 Inch Spool Horizontal Attachment Point: 330mm (12.99in) Vertical Attachment Point: 223mm (8.78in) Reference Point From FFOB: 102mm (4.02in) Alternator Pulley Supplied: Cummins Alternator Mtg Brkt Supplied: On Engine Belt Tensioning Mechanism Supplied: On Engine Alternator Drive Speed: 2.49 EH Alt Pulley Structure Logic: In EH Dependent Option Mounting Hardware Supplied: Cummins.
1	3818080	Screw, Captive Washer Cap	2	M10 x 1.50 x 25
2	3821847	Screw, Captive Washer Cap	2	M10 x 1.50 x 80
3	3009330	Washer, Plain	2	M10
4	3400885	Tensioner, Belt	1	
5	3081348	Screw, Hexagon Head Cap	2	M10 x 1.50 x 90
6	3400878	Brace, Alternator	1	
7	3400881	Support, Alternator	1	
	3400884	Pulley, Idler	1	
8	4060101	Cover, Idler Pulley	1	
9	4060100	Shaft, Idler	1	
10	3400883	Pulley, Idler	1	
11	3401202	Bearing, Ball	1	
12	3820710	Screw, Captive Washer Cap	1	M10 x 1.50 x 80



eh206gd

Ref No.	Part Number	Part Name	Req	Remarks
		ALTERNATOR DRIVE PULLEY OPTION EH2712		Alternator Drive Pulley Quantity: One Alternator Manufacturer/Model: Delco Remy or Leece Neville Alternator Pulley Groove: Poly V 8 Rib "K" Alternator Pulley Diameter: 78.20 Alternator Pulley Supplied: On Engine Serpentine Fan/Alternator Belt Drive: Yes Mounting Hardware Supplied: On Engine Bracket Attachment Method: 4 Inch Spool.
1	70897	Nut, Lock	1	1/2 - 20 UNF
2	3400880	Pulley, Alternator	1	
3	3895517	Washer, Plain	3	1 inch
4	4022822	Screw, Hexagon Head Cap	1	1/2 - 20 x 6 1/2 inch
5	4080467	Screw, Hexagon Head Cap	1	1/2 - 13 x 1 1/4 inch

[illegible]

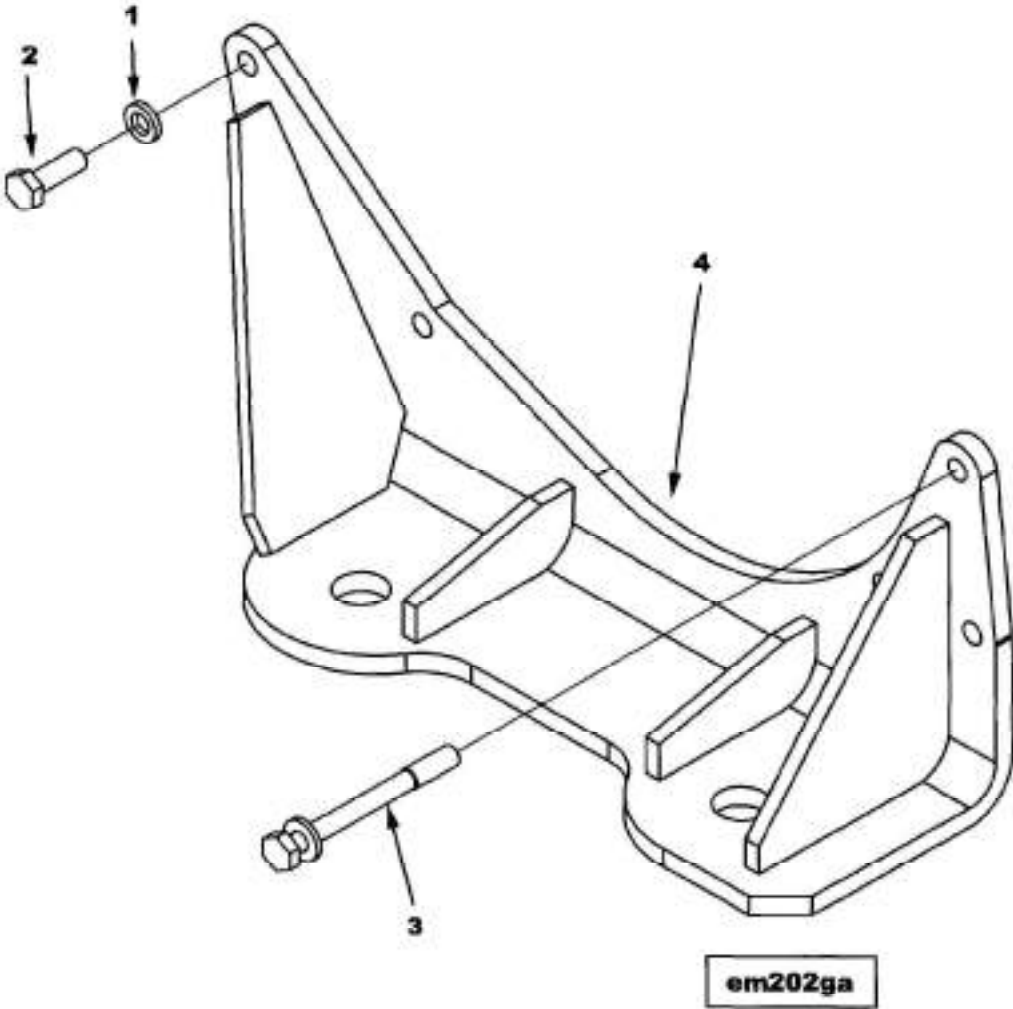


Group No. 16.03


Front Engine Support

Option No. EM2078

Ref No.	Part Number	Part Name	Req	Remarks
		FRONT ENGINE SUPPORT OPTION EM2078		Front Engine Support Support Supplier: Cummins Support Style: Two Hole Support Material: Fabricated Steel Attachment Point From FFOB: 149mm (5.87in) Attachment Point From Crank C/L: 208mm (8.11in) Support Type: Pad Engine Position: Vertical Standard.
1	203518	Washer, Plain	1	3/8 Inch.
2	3034838	Screw, Hexagon Head Cap	1	M10 X 1.50 X 30.
3	3892105	Screw, Captive Washer Cap	5	M10 x 1.50 x 100.
4	4082946	Support, Front Engine	1	

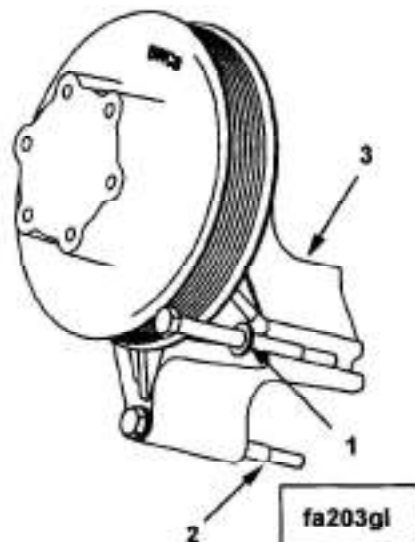


Ref No.	Part Number	Part Name	Req	Remarks
		FAN DRIVE OPTION FA2288		Fan Drive Fan Drive: Serpentine Alternator/Fan Drive Fan Hub Type: Continuous Drive Fan Center Distance: 215.9mm (8.50in) Offset 19mm (0.75 inch) toward the Fuel Pump side of the Engine centerline Fan Drive Ratio: 1.00:1 Fan Pulley Diameter: 190.0mm (7.48in) Fan Pulley Bolt Circle Dia.: 88.90mm (3.5in) Pulley Groove Location: 140.0mm (5.51in) Pulley Groove Type: Poly V 8 Rib "K" Max Fan Torque Capability: 195.552 Nm (144 lb.ft) Fan Mtg Nomenclature: 3/8-16 UNC 2B Cummins Supplied Items: Automatic Tensioner Fan Belt Horton/Kysor Fixed Fan Hub Pilot Diameter: 50.80mm (2in). M10. M10 X 1.50 X 120.
1	3009330	Washer, Plain	3	
2	3017502	Screw, Hexagon Head Cap	3	
3	3103513	Hub, Fan	1	

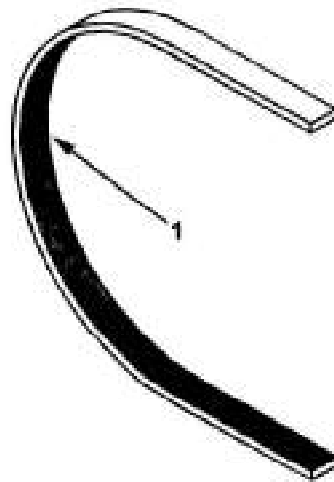

fa110gh

Ref No.	Part Number	Part Name	Req	Remarks
1	3103697	FAN DRIVE BELT OPTION FA2736 Belt, V Ribbed	1	Fan Drive Belt Fan Drive: Serpentine Alternator/Fan Drive Required Fan Pulley Dia: 190.0 Required Fan Center Distance: 8.50 Required Fan Drive Ratio: 1.00:1 Required Pulley Loc from FFOB: 140.0 Belt Groove Profile: Poly V 8 Rib "K" Required Alternator Pulley Dia: 76.20 Alternator Mtg Location: Right Side Belt Back Material: Rubber Rubber backed belt Industrial Applications only Belt Location: Mounted.

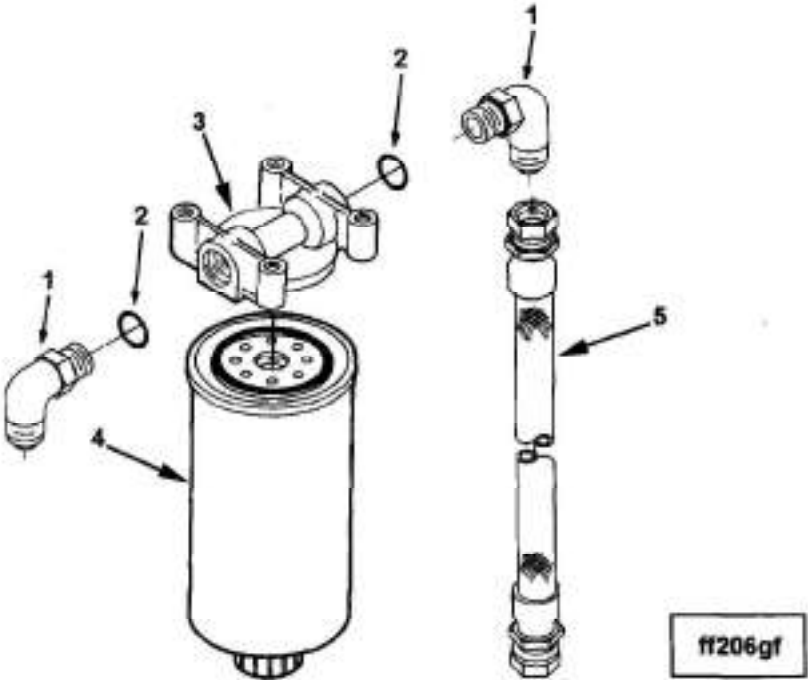


Group No. 06.04

Fuel Filter


Option No. FF2238

Ref No.	Part Number	Part Name	Req	Remarks
		FUEL FILTER OPTION FF2238		Fuel Filter Water in Fuel Sensor Included: No Fuel Filter Supplier: Cummins Fuel Pump Type: Colect Fuel Filter Location: Supplied in Kit Element Type: Single Spin-on Water Separator Provision: Yes Drain Provision: Yes Check Valve: No Filter Inlet Fitting: 90 Degree Elbow Pump Inlet Fitting: Straight Heater Element: No Unique Characteristics: 1 Element in Kit Decal: Fleetguard Remote Filter Plumbing: 22" Hose Kitted Fuel Plumbing Routing: Pressure Side Filtration Measurement (mic): 10 Filter Model: FS1000 Pump Inlet Diagnostic Provision: No
1	129859	Elbow, Male Union	2	
2	3040817	Seal, O Ring	2	
3	142764	Head, Fuel Filter	1	
4	3329289	Separator, Fuel Water	1	
5	3899752	Hose, Flexible	1	
	3329290	Decal	1	




Ref No.	Part Number	Part Name	Req	Remarks
		FUEL PUMP FITTING OPTION FF2758		
1	203850	Union, Male	1	Fuel pump inlet fitting: straight
2	3040817	Seal, O Ring	1	Diagnostic provision: No

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

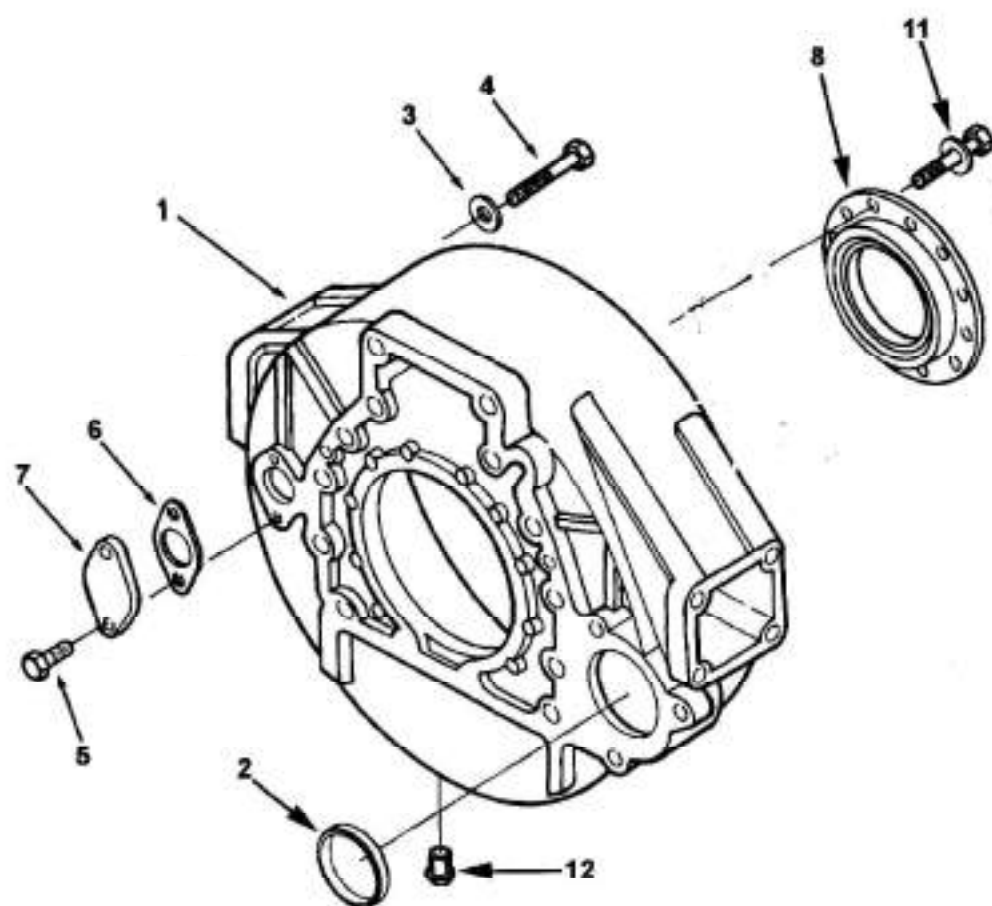


fh208gn

Ref No.	Part Number	Part Name	Req	Remarks
		FLYWHEEL HOUSING OPTION FH2221		Flywheel Housing SAE Size Or Type: 2 Flywheel Housing Material: Aluminum Engine Mount Type: High Vertical Pads Transmission Mtg Hole Nomenclature: SAE (inch) Starting Motor Mtg Screws: SAE Starter Center Distance: 243.84 MM (9.60") Starter Bore Diameter: 92.08 MM (3.62") Clutch Type Provision: Dry Sensor Mtg Hole Nomenclature: - Quad 2, 3/4 - 16 - Quad 3, 3/4 - 16 - Quad 4, 3/4 - 16 Rear Gear Drive: No Starter Loc: 3rd Quadrant Sensor Mtg Hole Count: 2 Engine Position: Vertical Standard
	4060506	Housing, Flywheel	1	
1	4059935	Housing, Flywheel	1	
2	3819822	Sleeve	1	
3	127316	Washer, Plain	12	5/8 inch
4	3022148	Screw, Hexagon Head Cap	12	M16 X 2.00 X 55.
5	3025802	Screw, Hexagon Head Cap	2	M8 x 1.25 x 20
6	3026134	Gasket, Cover Plate	1	
7	3026135	Cover, Access Hole	1	
8	(4023018)	Seal, Oil	1	
11	4063121	Screw, Captive Washer Cap	12	M8 x 1.25 x 20
12	3042004	Plug, Threaded	2	3/4 - 16 UNF
	4089542	Kit, Rear Seal Crank	1	Crankshaft (Rear)-Dry Clutch
	(4023018)	Seal, Oil	1	
	4063121	Screw, Captive Washer Cap	12	M8 x 1.25 x 20

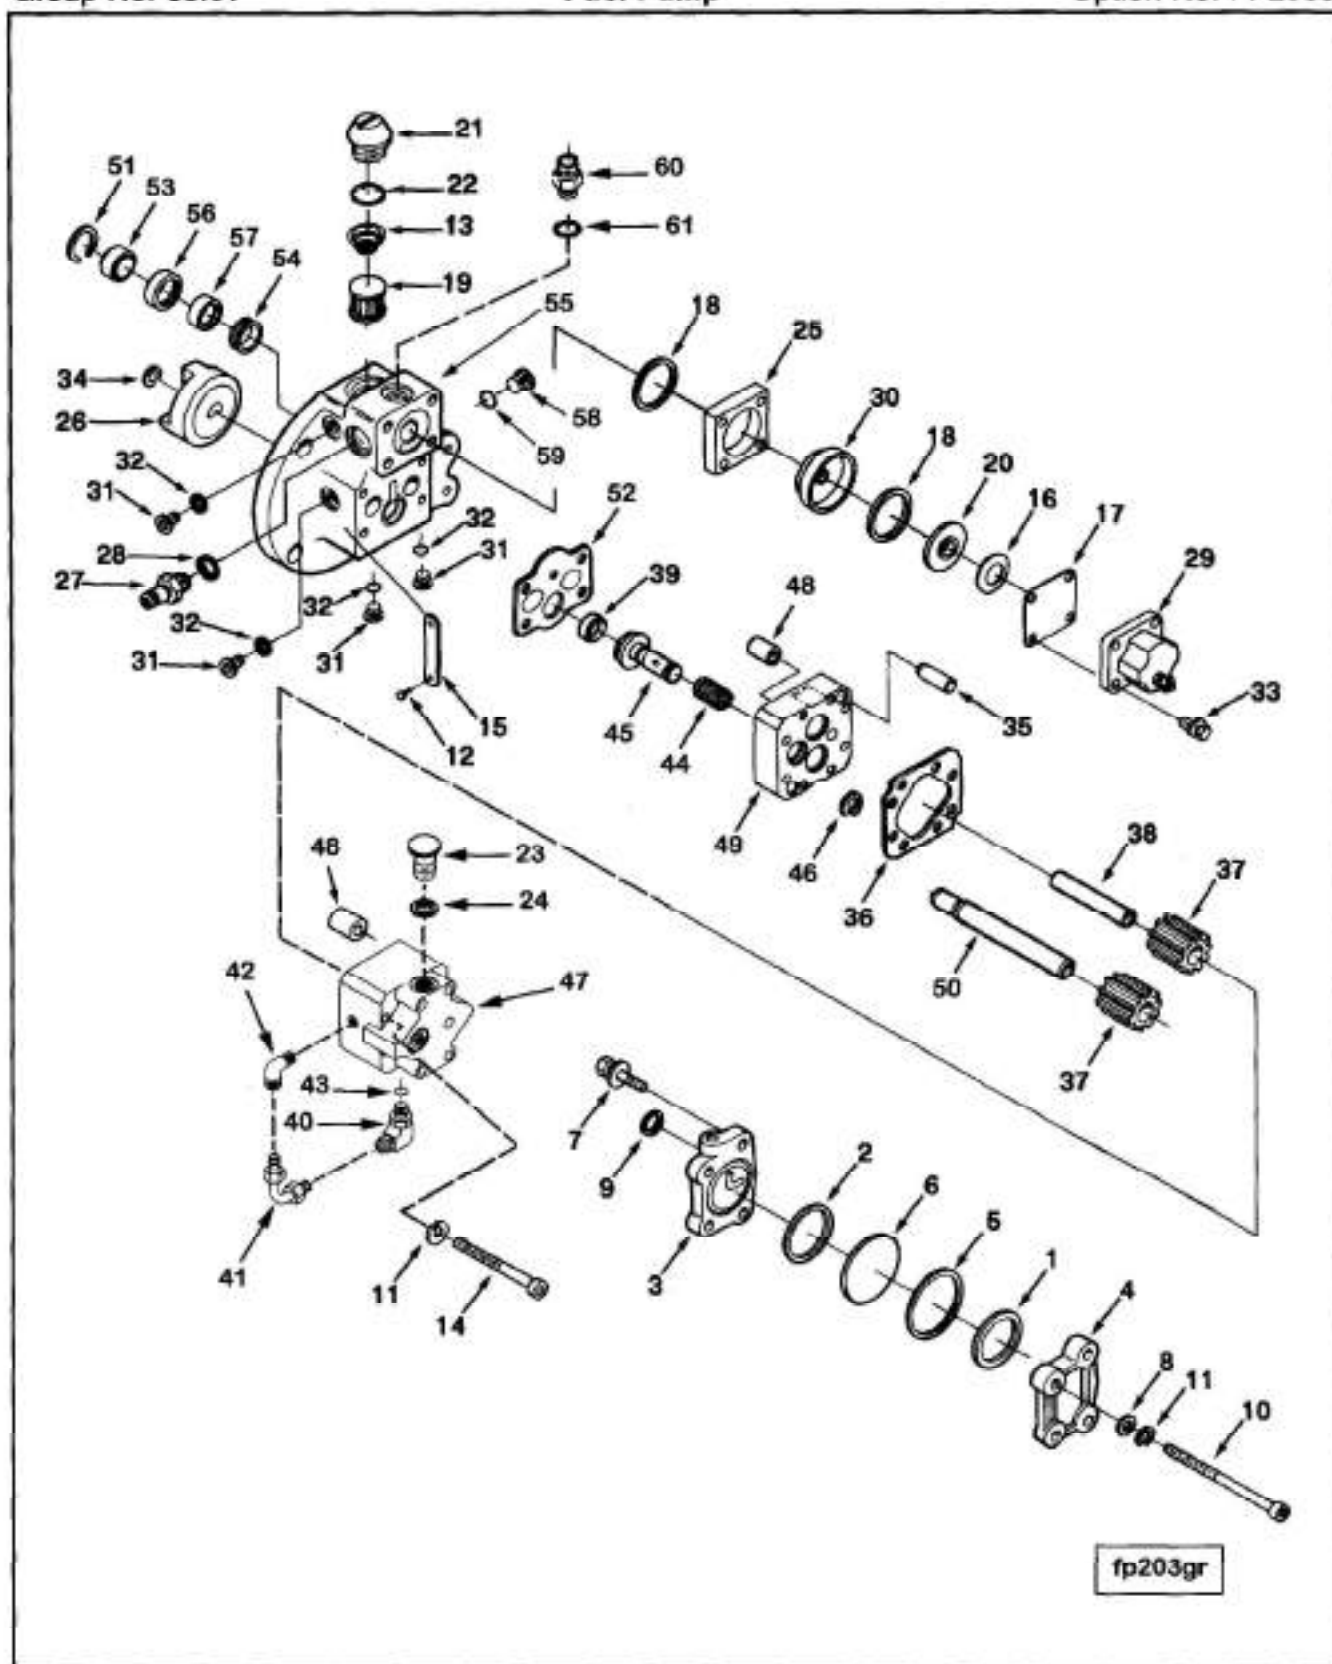

Ref No.	Part Number	Part Name	Req	Remarks
		FUEL PUMP OPTION FP2953		
				Fuel Inlet Restriction Sensor Prov: No Fuel Pump Type: Collect Fuel Filter Loc: Remote From Fuel Pump Fuel Temp Sensor Provision: Yes Fuel Shutoff Valve Volts: 12 Fuel Valve Terminal Provision: Single/Internal Ground Gear Pump By Pass Fitting Position: 90 Degrees to Rear Face of Gear Pump Includes Fuel Restriction Compuclock Fitting
	BM76340	Damper, Fuel Pump	1	
1	100099	Seal, Rectangular Ring	1	
2	139888	Seal, Rectangular Ring	1	
3	153336	Body, Fuel Pump Damper	1	
4	153338	Cover, Fuel Pump Damper	1	
5	160514	Washer, Plain	1	1 11/16 Inch.
6	202897	Diaphragm, Fuel Pump Damper	1	
7	3017051	Screw, Captive Washer Cap	2	1/4 - 20 x 1 1/8 inch
8	70704	Washer, Plain	2	1/4 inch
9	151900	Seal, Rectangular Ring	1	
10	153346	Screw, Socket Head Cap	2	1/4 - 20 X 4 inch.
11	181466	Washer, Lock	4	1/4 inch.
	3090942	Pump, Fuel	1	Recon equivalent 3090942 RX
12	S 2286	Screw, Drive	2	
13	70700	Spring, Compression	1	
14	100129	Screw, Socket Head Cap	4	1/4 - 20 x 3 inch
15	105375	Nameplate	1	
16	129768	Spring, Valve	1	
17	129839	Shield, Shutoff Valve	1	
18	129688	Seal, Rectangular Ring	2	
19	146463	Screen, Filter	1	
20	196057	Disc, Valve	1	
21	3014575	Cap, Fuel Pump Filter	1	
22	3021123	Seal, O Ring	1	
	3033742	Plug, Threaded	1	
23	(3079584)	Plug, Threaded	1	
24	3034412	Seal, O Ring	1	
25	3034451	Housing, Actuator	1	
26	3095355	Hub, Jaw Coupling	1	
	3042619	Nipple, Coupling	1	
27	(3042620)	Nipple, Coupling	1	
28	3037537	Seal, O Ring	1	
29	(3408421)	Solenoid	1	
30	3056009	Disc, Actuator	1	
	3056416	Plug, Threaded	4	5/16 - 24 UNF.
31	(3056003)	Plug, Threaded	1	
32	3056415	Seal, O Ring	1	
33	3065944	Screw, Captive Washer Cap	4	#10 - 24 X 1 inch.
34	3066768	Ring, Retaining	1	
	4010324	Pump, Gear Fuel	1	Recon equivalent 4010324 RX
11	181466	Washer, Lock	2	1/4 inch.
35	64816 A	Dowel, Pin	2	
36	110855	Gasket, Fuel Pump	1	
	3019617	Gear & Shaft	1	
37	119364	Gear, Fuel Pumping	1	

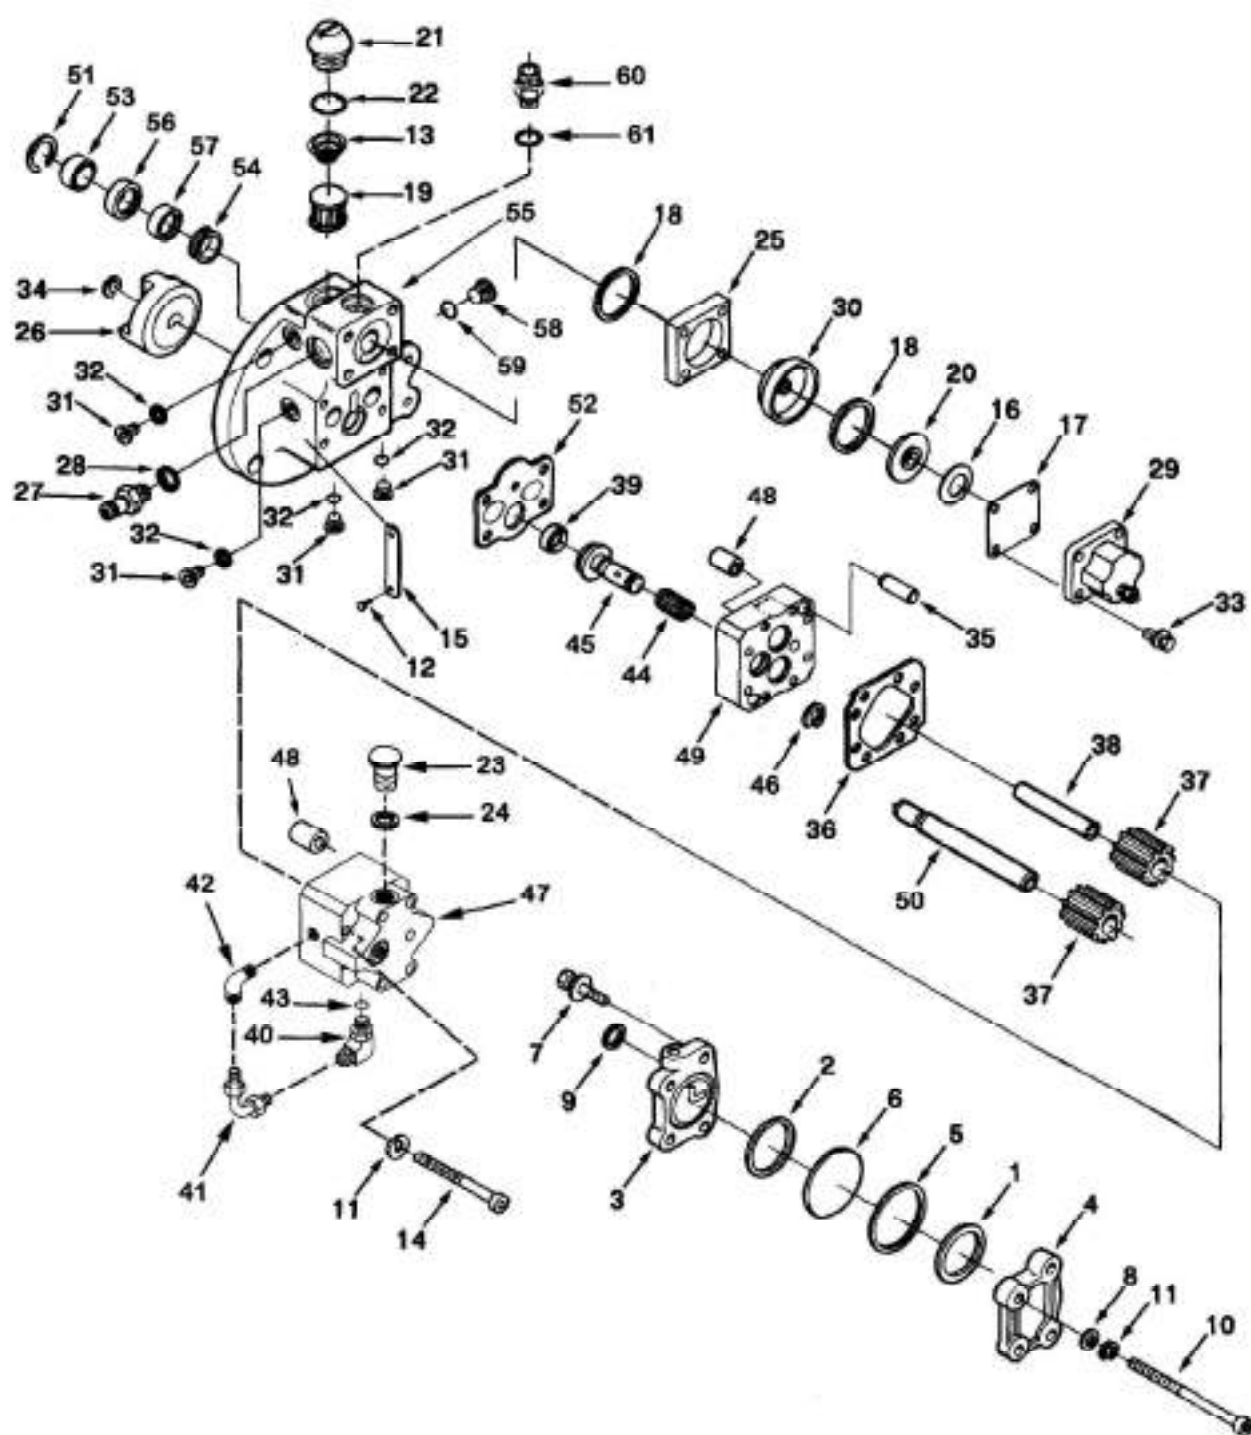


fp203gr

Group No. 05.01

Fuel Pump

Option No. FP2953


Ref No.	Part Number	Part Name	Req	Remarks
38	175865	Shaft, Fuel Pump	1	1/8 NPTF x 7/16-20 (90)
39	3033719	Dowel, Ring	1	
40	3033740	Valve, Check	1	
41	4010514	Tube, Fuel Drain	1	
42	68138	Elbow, Male Adapter	1	
43	3034412	Seal, O Ring	1	
44	4010297	Spring, Compression	1	
45	4010296	Plunger, Pres Regulator	1	
46	3085615	Ring, Retaining	1	
	4010319	Pump, Gear Fuel	1	
47	(3033714)	Housing, Fuel Pump Gear	1	9/16 - 18 UNF
48	3033724	Bushing	4	
49	4010318	Cover, Fuel Pump Gear	1	
	3095635	Gear & Shaft	1	
37	119364	Gear, Fuel Pumping	1	
50	3095356	Shaft, Fuel Pump Drive	1	
	(3090993)	Support, Fuel Pump	1	
51	128607	Ring, Retaining	1	
52	3096077	Gasket, Fuel Pump	1	
53	3074317	Spacer, Seal	1	
54	3074316	Spacer, Seal	1	9/16 - 18 UNF
55	3090996	Support, Fuel Pump	1	
	3803477	Kit, Oil Seal	1	
56	(3084713)	Seal, Oil	1	
57	(3071643)	Seal, Oil	1	
	3037536	Plug, Threaded	1	
58	(3040813)	Plug, Threaded	1	
59	3037537	Seal, O Ring	1	
	3038865	Union, Male	1	
60	(3100526)	Union, Male	1	9/16 - 18 UNF
61	3037236	Seal, O Ring	1	
	3803493	Support, Fuel Pump	1	
	128607	Ring, Retaining	1	
	3037536	Plug, Threaded	1	
	3037537	Seal, O Ring	1	
	(3040813)	Plug, Threaded	1	
	3074316	Spacer, Seal	1	
	3074317	Spacer, Seal	1	
	3090996	Support, Fuel Pump	1	
	3096077	Gasket, Fuel Pump	1	9/16 - 18 UNF
	3803477	Kit, Oil Seal	1	
	(3071643)	Seal, Oil	1	
	(3084713)	Seal, Oil	1	
	4024808	Kit, Fuel Solenoid	1	
	129886	Seal, Rectangular Ring	2	
	(3406421)	Solenoid	1	

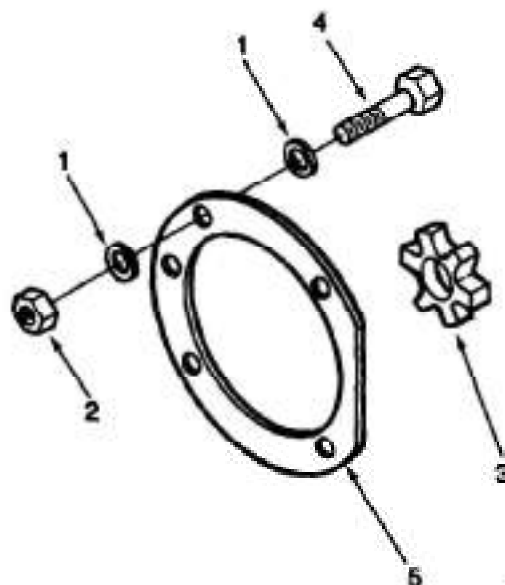


fp203gw

Ref No.	Part Number	Part Name	Req	Remarks
		FUEL PUMP COUPLING OPTION FP2957		
1	3009330	Washer, Plain	8	M10
2	3044360	Nut, Regular Hexagon	4	M10 x 1.50
3	3046200	Spider, Jaw Coupling	1	
4	3064109	Screw, Hexagon Head Cap	4	M10 x 1.50 x 45
5	3069103	Gasket, Fuel Pump	1	

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal black lines across the entire width of the page, typical of notebook or legal stationery. The background is a solid off-white color. There are no margins, text, or other markings present.

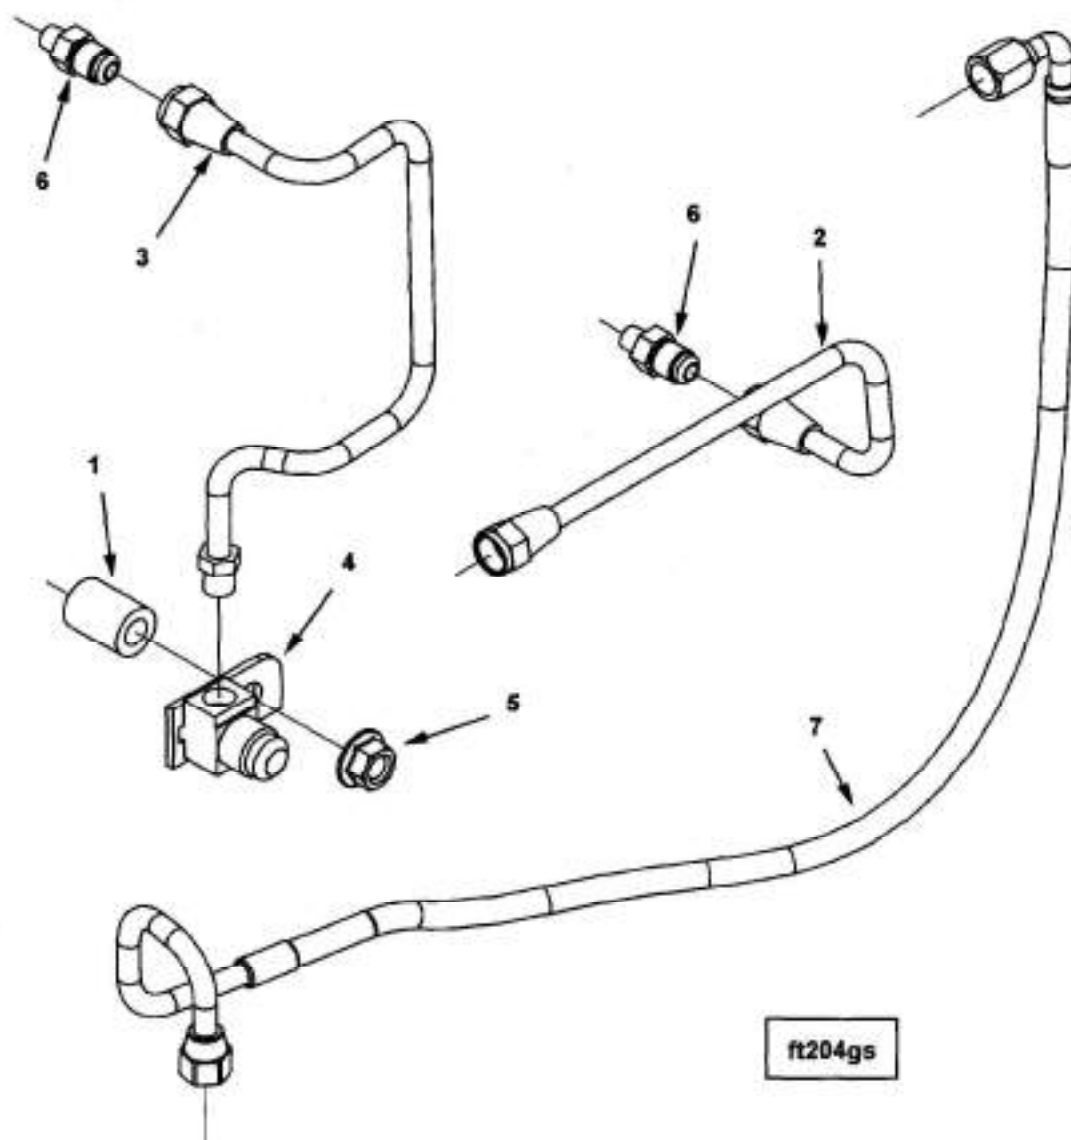


Ref No.	Part Number	Part Name	Req	Remarks
		FUEL PLUMBING OPTION FT20072		Fuel Pump Type: Select Fuel Pump Drive: Less Air Compressor Drain Position Vert From Crank C/L: 290.0mm (11.42") Drain Position From RFOB: 395.0mm (15.55") Drain Position From Eng C/L: 257.0mm (10.12") ECM Version: CM Series ECM Loc: 581.1 Vert / 53.4 horizontal Vertical distance measured from the crank centerline to top of ECM. Horizontal distance measured from front face of block to front of ECM Centinel plumbing Centinel Plumbing Provision: No
1	64708	Spacer, Mounting	1	
2	3161628	Tube, Fuel Supply	1	
3	3161630	Tube, Fuel Drain	1	
4	3401236	Elbow, Tube Connector	1	
5	3902662	Nut, Hexagon Flange	1	M10 x 1.50
6	4004361	Union, Male	2	1/8 NPTF x 1/2-20
7	4022525	Hose, Flexible	1	

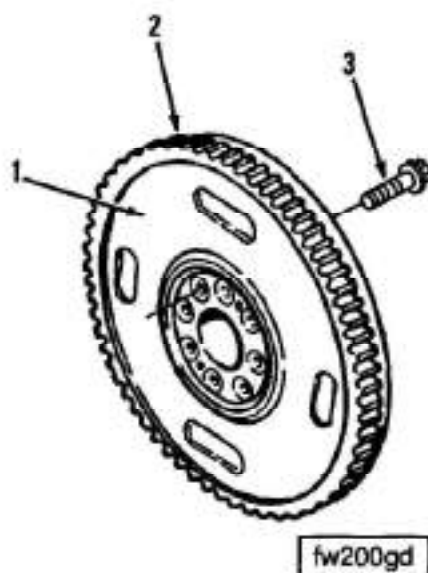

Ref No.	Part Number	Part Name	Req	Remarks
		FLYWHEEL OPTION FW2254		Type: Flywheel Intended Housing SAE: 2 Starter Center Distance: 243.84mm (9.60") Clutch Bearing Pilot Bore Dia: 72.00mm (2.83") Rear Gear Drive: No Intended Drive Hardware: Ingersol Rand Coupling
1	3029074 (3029070)	Flywheel	1	
2	3065151	Flywheel	1	
3	4071043	Gear, Flywheel Ring	1	
		Screw, Hex Flange Head Cap	8	M14 x 1.50 x 35

[illegible]

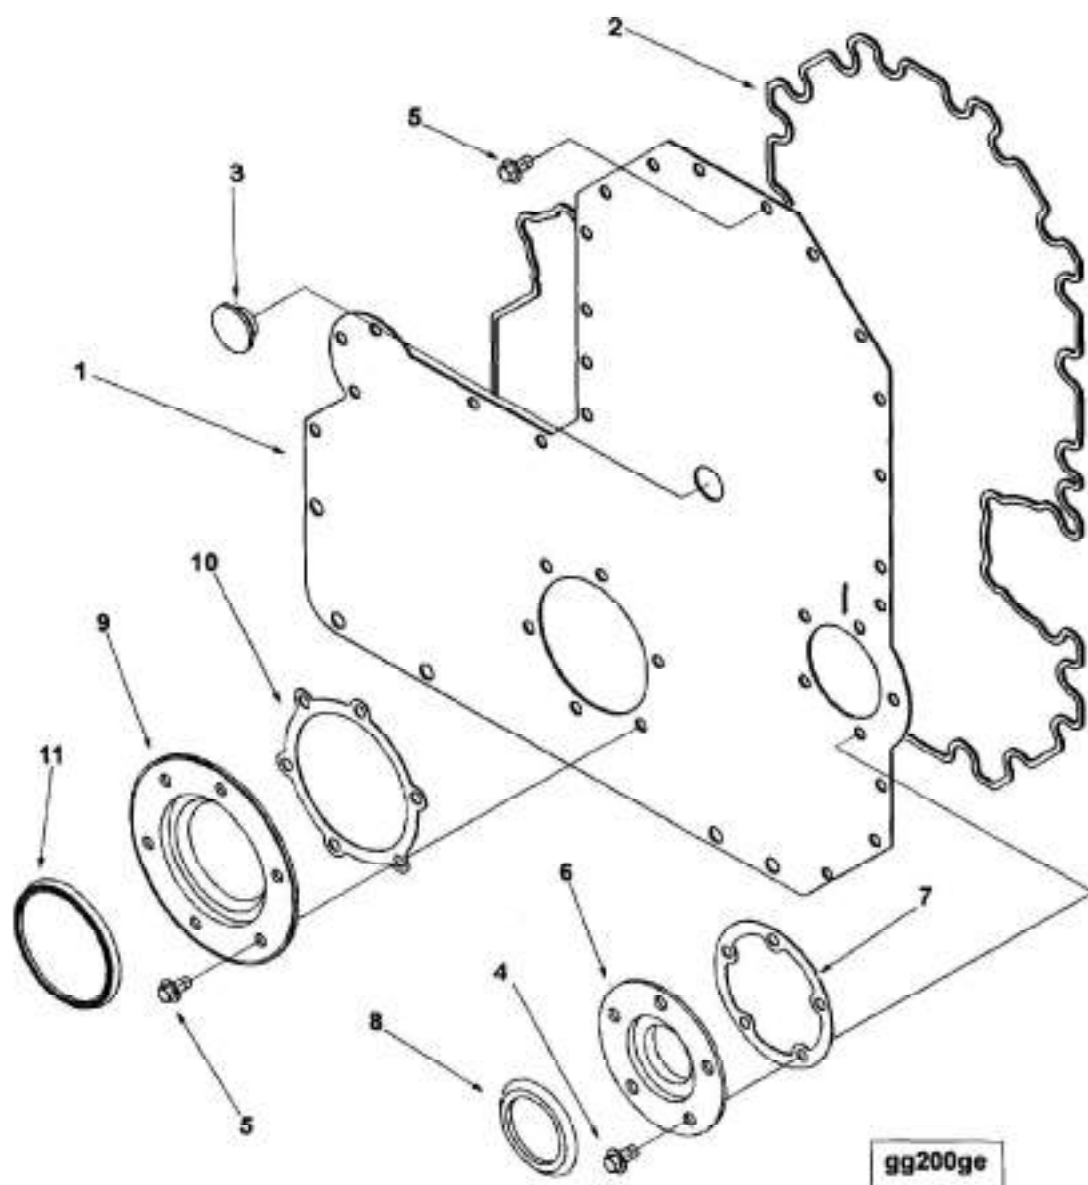


Group No. 01.06

Front Gear Cover


Option No. GG2706

Ref No.	Part Number	Part Name	Req	Remarks
		FRONT GEAR COVER OPTION GG2706		
				Water Pump Shaft Drive Provision: No No Provision For The Water Pump Shaft In The Gear Cover. Must be Used With A Short-Shaft Water Pump
	4070536	Kit, Gear Cover	1	
1	(3400811)	Cover, Gear	1	
2	(3893964)	Seal, Rectangular Strip	1	
3	4082974	Plug, Gear Cover	1	
4	4070463	Screw, Hex Flange Head Cap	5	M8 x 1.25 x 12
5	4070462	Screw, Hex Flange Head Cap	33	M8 x 1.25 x 16
	3804304	Kit, Oil Seal	1	
6	(3892794)	Seal, Oil	1	
7	3328780	Gasket, Carrier	1	
8	3896837	Seal, Dust	1	
	3804744	Kit, Oil Seal	1	
9	(3328698)	Seal, Oil	1	
10	(3328761)	Gasket, Carrier	1	
11	3895023	Seal, Dust	1	
	4025151	Kit, Strip Seal	1	
	(3893964)	Seal, Rectangular Strip	1	
	4070462	Screw, Hex Flange Head Cap	38	M8 x 1.25 x 16
	4070463	Screw, Hex Flange Head Cap	5	M8 x 1.25 x 12




ic200gf

Ref No.	Part Number	Part Name	Req	Remarks
		AIR INTAKE CONNECTION OPTION IC2012		Air Inlet Connection Location : Top Air Inlet Connection Supplier : Customer Engine Aspiration : Charged Air Cooled
1	3070101	Cover, Intake Manifold	1	
2	3070100	Gasket, Connection	1	
3	3009887	Screw, Hexagon Head Cap	4	M10 x 1.50 x 22

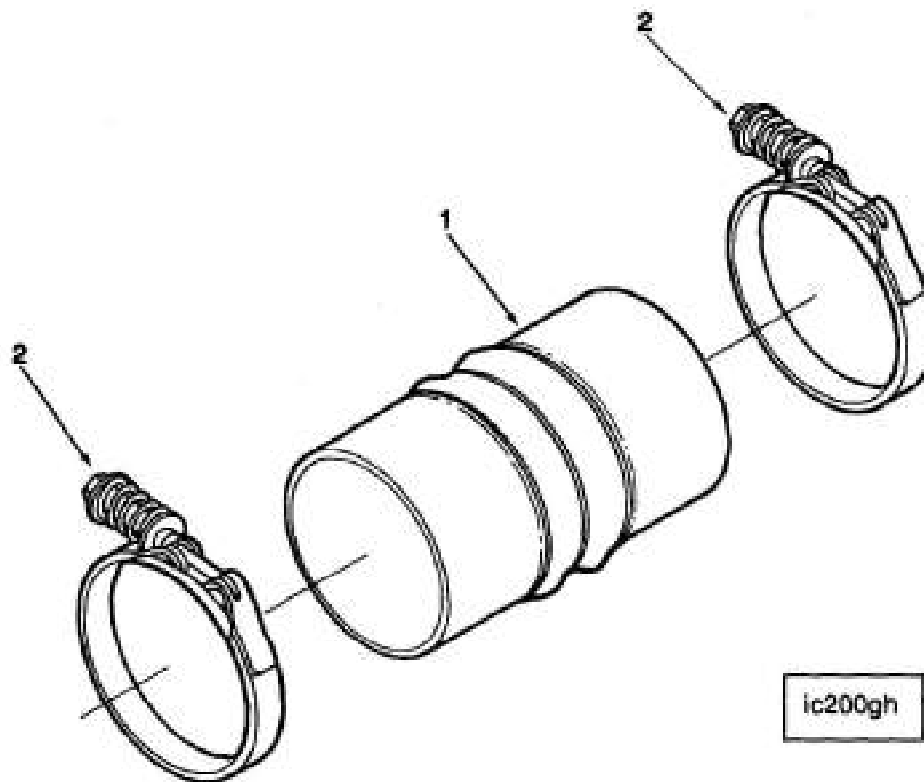


Ref No.	Part Number	Part Name	Req	Remarks
		AIR INTAKE CONNECTION OPTION IC2030		
1	3071049	Hose, Hump	4	Four 4.0 inch (102mm) silicone hoses, 7.5 inches (191mm) long with reinforcing rings. Use with 4 inch tubing to transfer air from turbo to charge air cooler and intake manifold.
2	3926704	Clamp, Spring Hose	8	

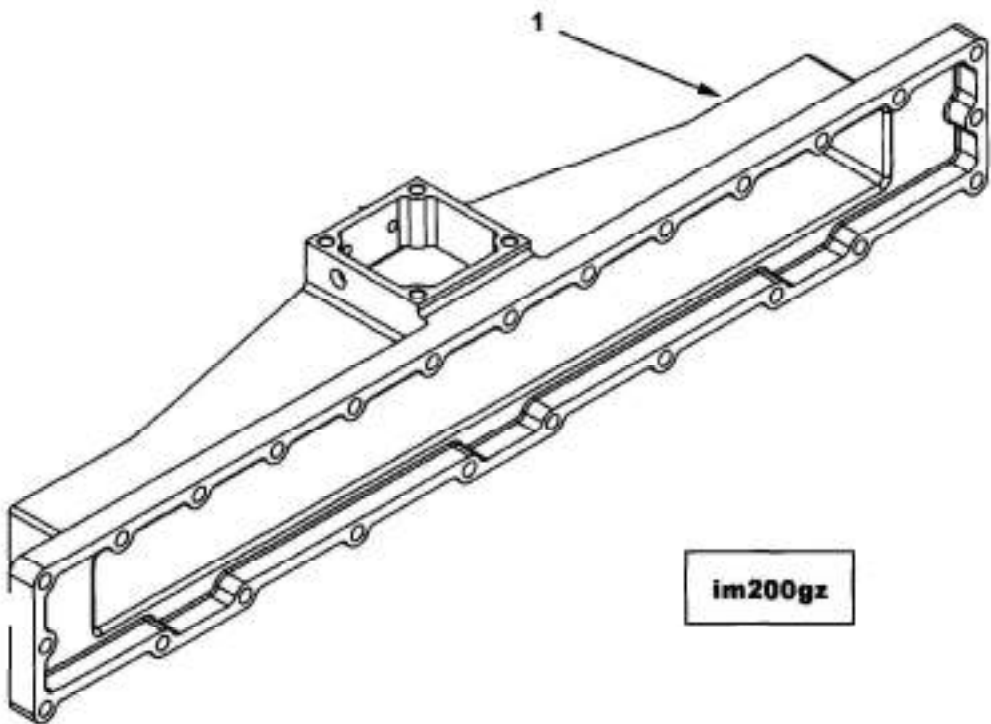

Ref No.	Part Number	Part Name	Req	Remarks
		AIR INTAKE MANIFOLD OPTION IM2001		Air Intake Manifold Int Manifold Air Inlet Location: Top Int Man Temp Sensor Mtg Loc: Throat Int Boost Sensor Mtg Loc: Front Intake Manifold Mounting Inc In IMM Depen- dent Option
1	3401348	Manifold, Air Intake	1	

[illegible]

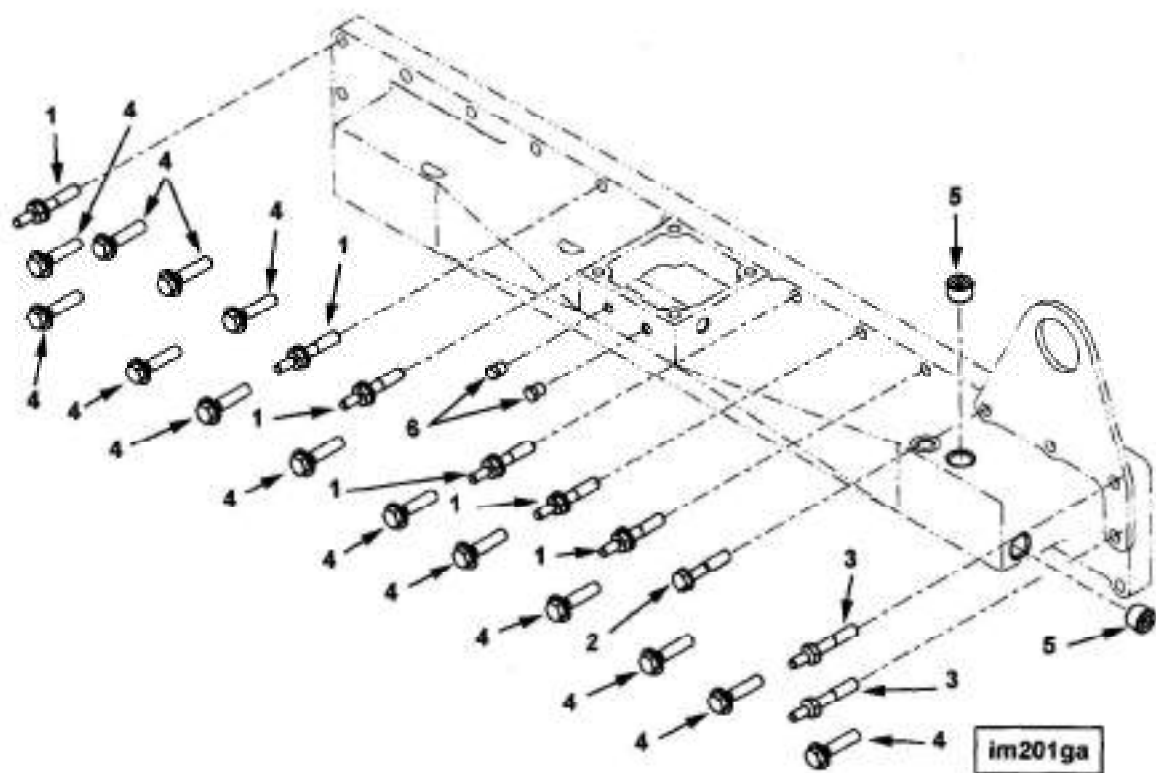


Group No. 10.01

Air Intake Manifold Mounting

Option No. IM2702

Ref No.	Part Number	Part Name	Req	Remarks
		AIR INTAKE MANIFOLD MOUNTING OPTION IM2702		Air Int Manifold Mounting Int Manifold Air Inlet Location: Top Requires "Bolt-On" Air Intake Connection Int Man Temp Sensor Mtg Loc: Throat Int Boost Sensor Mtg Loc: Front Air Heater Mtg Provision: NO Emc Location: High or Low Turbocharger Exhaust Outlet Location: Rear Out
1	3328617	Screw, Captive Washer Cap	6	
2	3620186	Screw, Captive Washer Cap	1	M10 X 1.50 X 50.
3	3663397	Screw, Hexagon Head Cap	2	
4	3692692	Screw, Captive Washer Cap	14	M10 x 1.50 x 45
5	3008468	Plug, Pipe	2	1/2 NPT
6	3031511	Plug, Pipe	2	1/8 NPT

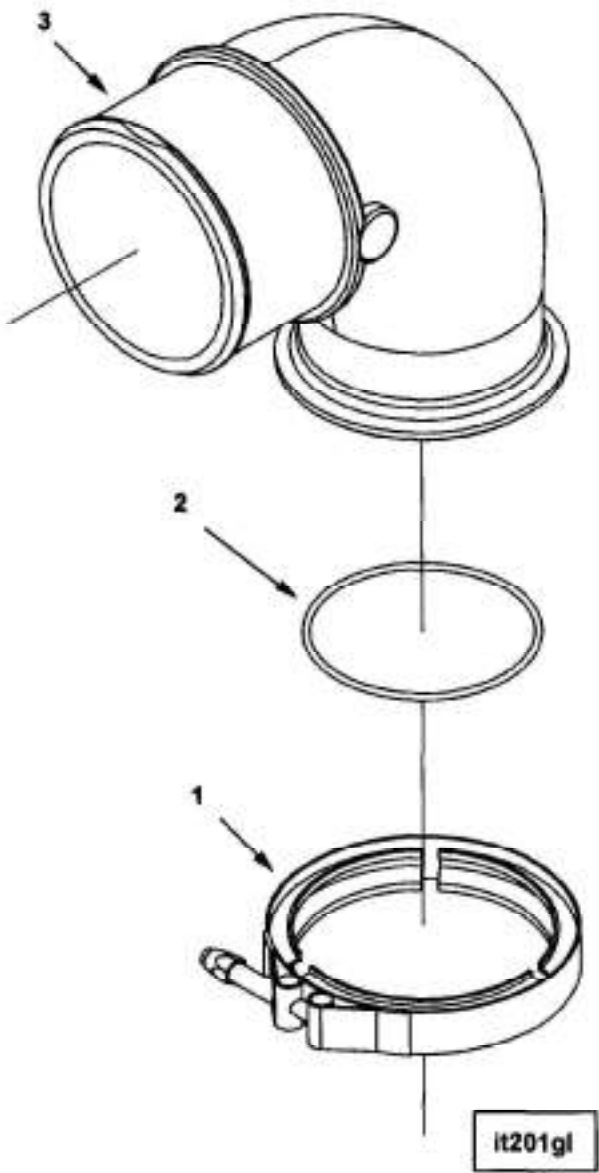


Group No. 10.01.2

Air Transfer Connection


Option No. IT2017

Ref No.	Part Number	Part Name	Req	Remarks
		AIR TRANSFER CONNECTION OPTION IT2017		Air Transfer Connection Turbo Compressor Outlet Conn Type: 90 Degree Rotatable Elbow Turbo Compressor Outlet Conn O.D.: 90.0mm (3.54in) Intake Air Pressure Compuchek Fitting Inc: No Turbo CPR Outlet Conn Supplier: Cummins Engine Aspiration Charged Air Cooled
1	3087979	Clamp, V Band	1	
2	3682177	Seal, O Ring	1	
3	3682674	Connection, Air Transfer	1	

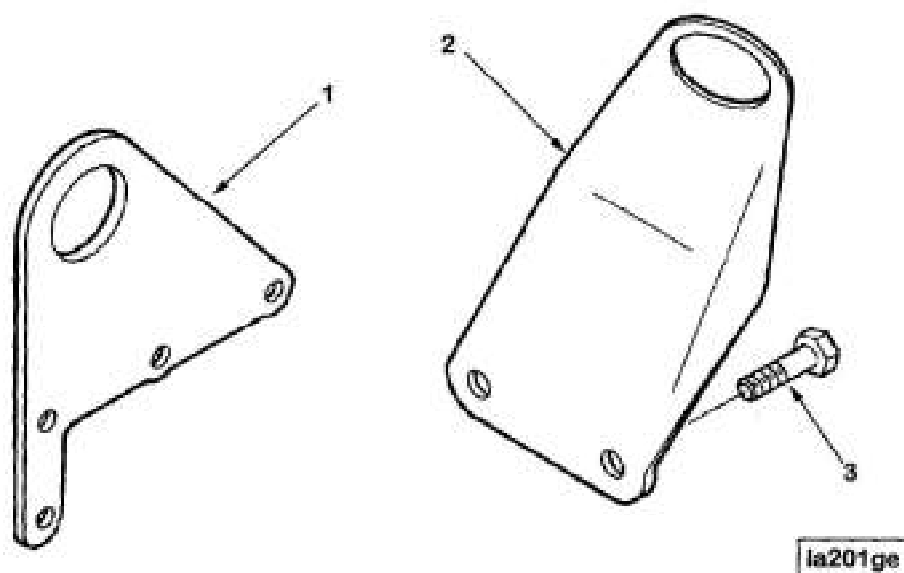

Ref No.	Part Number	Part Name	Req	Remarks
		LIFTING BRACKET OPTION LA2053		Front Lifting Brkt Loc: Front Of Air Int Manif/ Aftercooler Rear Bracket Vertical Height: 254mm (10in) Measured from C/L of top left MTG Capscrew tp C/L of lifting eye Rear Lifting Bracket Location: Rear of Cylinder Head OEM Attachment: Studs Mid to Front Manifold or Alt/Cir Rear Brkt Eye Vert Dist from Crank C/L: 707mm (27.83in) Front Brkt Eye Vert Dist from Crank C/L: 707mm (27.83in) Front Bracket MTG Bolt Hole Count: 4 Front Lifting BRKT MTG Included: In TB Dependent Option
1	3883586	Bracket, Lifting	1	
2	3886347	Bracket, Lifting	1	
3	3883834	Screw, Hexagon Head Cap	2	M12 x 1.75 x 25

This image shows a full page of white paper with horizontal black lines, typical of notebook paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

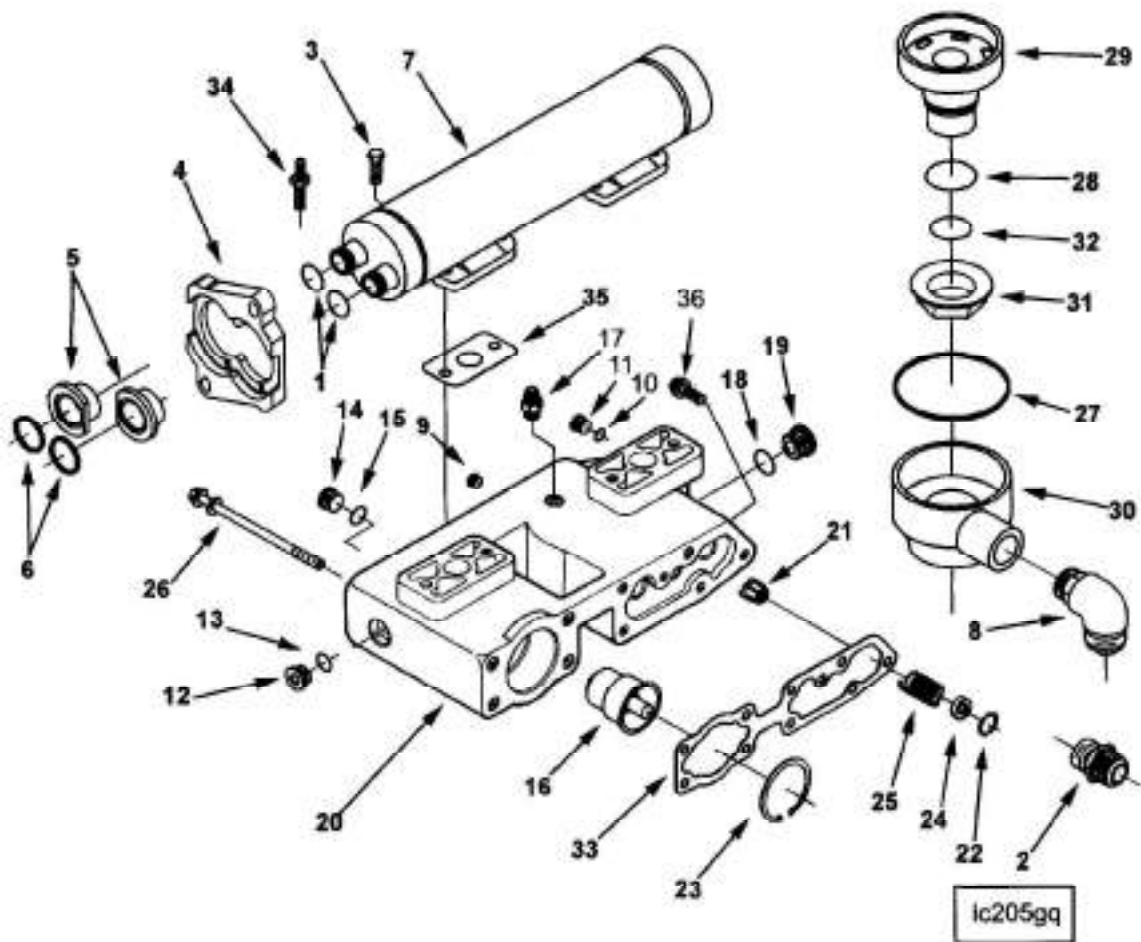


Group No. 07.05

Oil Filter Cooler Head

Option No. LC2737

Ref No.	Part Number	Part Name	Req	Remarks
		OIL FILTER COOLER HEAD OPTION LC2737		Oil Filter Loc: Remote from Filter Head Engine Brake Provision: No Oil Filter Type: Combination Full Flow/Bypass Oil Filter Plumbing: Customer Supplied Lube Oil Filter Head Thread Size: M95 x 2.5 Inlet Adapter Port(SAE 16): Elbow Thermo Opening Temp: 107.222C (225F) Oil Temp Sensor Plumbing Provision: No Lube filter head oil port has been plugged. Increased Soot Level Capability: No
1	109080	Seal, O Ring	2	
2	3032827	Union, Male	1	
	3201585	Seal, O Ring	1	
3	3034836	Screw, Hexagon Head Cap	5	M10 x 1.50 x 30
4	3102571	Retainer, Connection	1	
5	3080401	Adapter, O Ring	2	
6	3080769	Seal, Rectangular Ring	2	
7	3161781	Cooler, Oil	1	
8	3400717	Elbow, Male Union	1	
	(3102784)	Head, Lube Oil Filter	1	
9	3008466	Plug, Pipe	1	1/4 NPT
	3037536	Plug, Threaded	1	9/16 - 18 UNF
10	3037537	Seal, O Ring	1	
11	(3040813)	Plug, Threaded	1	
	3040815	Plug, Threaded	1	7/16 - 14 UNF
12	(3040816)	Plug, Threaded	1	
13	3040817	Seal, O Ring	1	
	3046202	Plug, Threaded	1	3/4 - 16 UNF
14	(3040810)	Plug, Threaded	1	
15	3046201	Seal, O Ring	1	
16	3059408	Thermostat	1	
17	3063164	Union, Male	1	
	3202101	Plug, Threaded	1	1 1/16 - 12 UNF
18	3046943	Seal, O Ring	1	
19	(3050897)	Plug, Threaded	1	
20	3102774	Head, Lube Oil Filter	1	
21	3820320	Plunger, Bypass Valve	1	
22	3820631	Ring, Retaining	1	
23	3820782	Ring, Retaining	1	
24	3882585	Plug, Expansion	1	
25	3882586	Spring, Compression	1	
26	3406888	Screw, Hex Flange Head Cap	6	M10 x 1.50 x 170
27	3406952	Seal, Rectangular Ring	1	
	3101539	Adapter, Filter Head	1	
28	3048182	Seal, O Ring	1	
29	3101540	Adapter, Filter Head	1	
30	3406944	Cover, Filter Head	1	
31	3406946	Nut, Regular Hexagon	1	
32	3406947	Seal, O Ring	1	
27	3406952	Seal, Rectangular Ring	1	
33	3820629	Gasket, Filter Head	1	
34	3883394	Screw, Hexagon Head Cap	2	M6x1.25x20 - M10x1.50x70
35	3892625	Gasket, Oil Cooler Support	2	

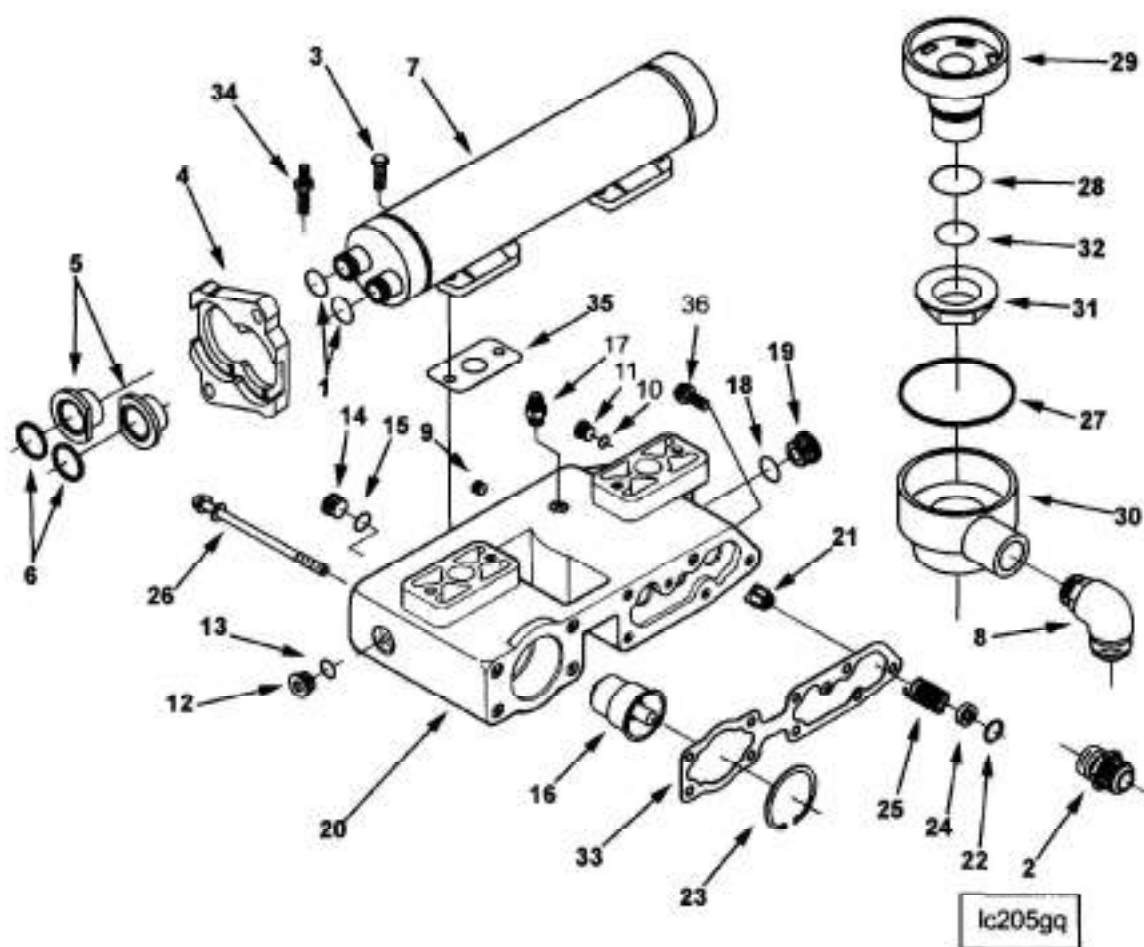


Group No. 07.05


Oil Filter Cooler Head

Option No. LC2737

Ref No.	Part Number	Part Name	Req	Remarks
36	3896724	Screw, Hex Flange Head Cap	3	M10 x 1.50 x 30

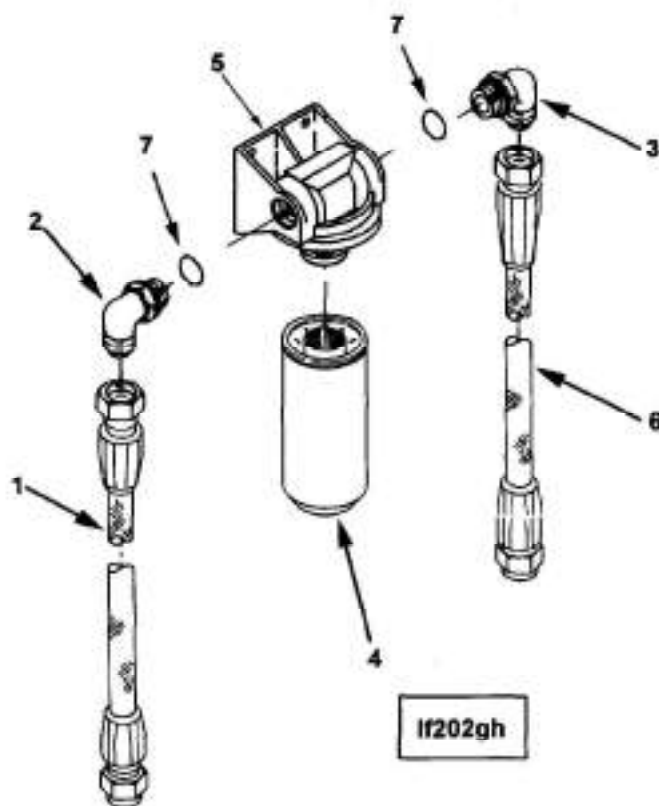

Ref No.	Part Number	Part Name	Req	Remarks
		FULL FLOW OIL FILTER OPTION LF2066		Oil Filter Loc: Remote From Engine To be used with an SAE #16 hose and/or an SAE #20 hose with a maximum length of 16 ft total. Height to be 4 ft maximum above Crank Centerline. Oil Filter Supplier: Cummins Engine Position: Vertical Standard Oil Filter Type: Combination Full Flow/Bypass Decal Provided: Fleetguard Adapter Inlet Horizontal from Crank C/L: 253.18mm (9.97in) Adapter Inlet Vertical from Crank C/L: 45.15mm (1.79in) Adapter Inlet Horizontal from RFOB: 450.85mm (17.75in) Cover Outlet Horizontal from Crank C/L: 357.95mm (14.09in) Cover Outlet Vertical from Crank C/L: 5.65mm (0.22in) Cover Outlet Horizontal from RFOB: 450.85mm (17.75in) Oil Filter Plumbing: Cummins Kitted Inlet Adapter (SAE 16): Straight Outlet Adapter (SAE 20): Elbow Filter Model: LF9001 Filter Length: 299.5mm (11.79in) Filter Removal Clearance: 38mm (1.5in) Oil Filter Thread Size: M95 x 2.5 Oil Flow Control Thrm Opening Temp (deg F): 225 Heater Hsg Compatible: Yes
1	AX16072 SS	Hose, Flexible	1	
2	3049010	Elbow, Male Union	1	
7	3201585	Seal, O Ring	1	
3	3400717	Elbow, Male Union	1	
7	3201585	Seal, O Ring	1	
4	3101869	Filter, Lubricating Oil	1	
5	3406949	Head, Lub Oil Filter	1	
6	3400715	Hose, Flexible	1	
	(3102714)	Decal	1	

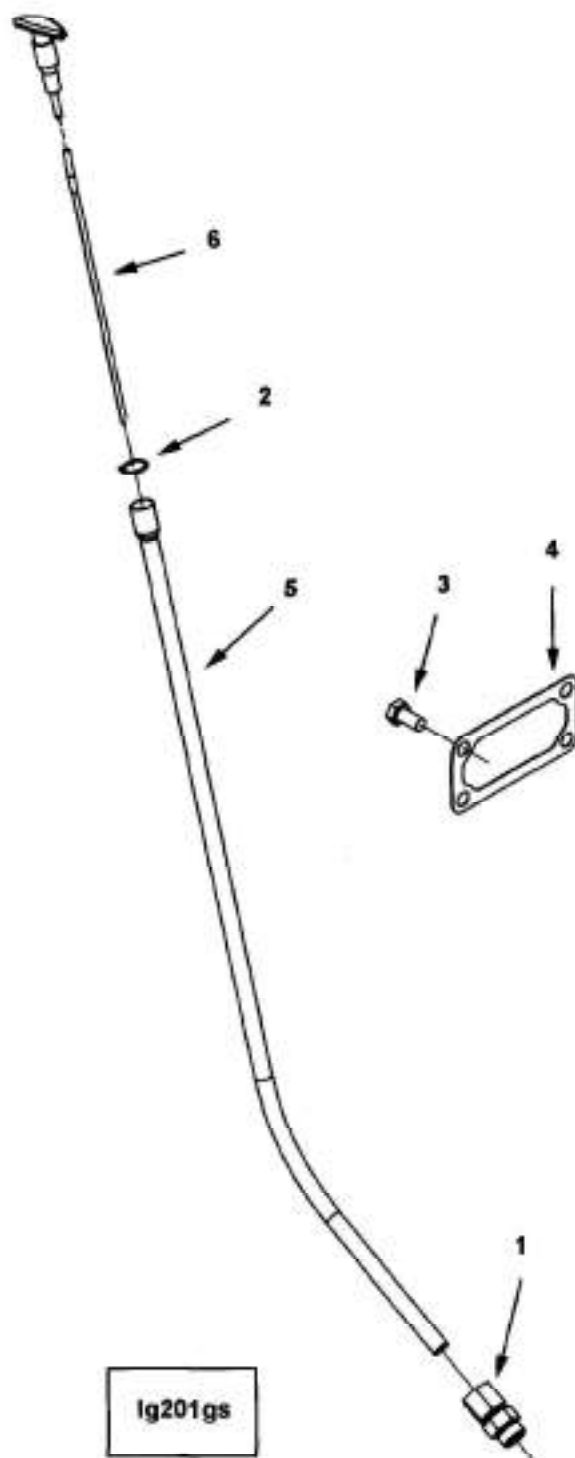


lg201gs

Group No. 07.02

Oil Level Gauge


Option No. LG2085

Ref No.	Part Number	Part Name	Req	Remarks
		OIL LEVEL GAUGE OPTION LG2085		Dipstick Supplier: Cummins Oil Gauge Tube Type: Solid Dipstick Location: Right Side Rear HHC Dipstick Tube Horiz Position: 671.4mm (26.43in) Reference Point: from FFOB Dipstick Tube Vertical Position: 623.4mm (24.54in) Gauge Tube Pos Horiz from Eng C/L: 456.3mm (17.96in) Oil Pan Material: Stamped Steel Sump Location: Rear High Oil Pan Capacity: 34.085 L (9.0 gal) Low Oil Pan Capacity: 26.495 L (7.0 gal) Power Angle (deg): 3.0 Tilt Angle (deg): 0 Unique Characteristics: Dipstick is Locking Type Dipstick Guide Tube Horiz Distance: 110.9 Customer must brace oil gauge tube
1	163759	Connector, Tube	1	
2	3030207	Retainer, Dipstick	1	
3	3036230	Screw, Hexagon Head Cap	4	M10 x 1.50 x 20
4	3883472	Gasket, Hand Hole	1	
5	4070501	Tube, Oil Gauge	1	
6	4070780	Dipstick	1	

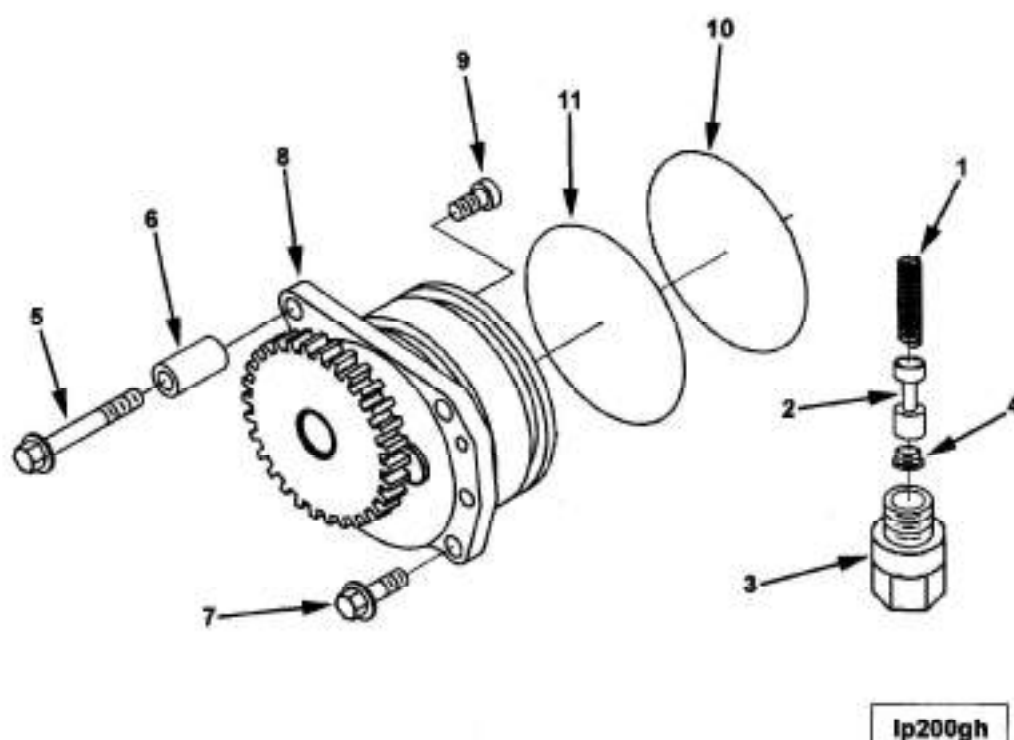

Ref No.	Part Number	Part Name	Req	Remarks
		LUBE OIL PUMP OPTION LP2711		
1	3010146	Spring, Compression	1	Suction Tube Mtg Location: Oil Pan Mounted Lube Pump Capacity: 48 GPM Max.
2	3068979	Plunger, Pres Regulator	1	
3	3069728	Sensor, Viscosity	1	
4	3821725	Plug, Retainer	1	
5	3895438	Screw, Hex Flange Head Cap	2	M8 x 1.25 x 60
6	3895439	Spacer, Mounting	2	
7	3895440	Screw, Hex Flange Head Cap	1	M8 x 1.25 x 25
8	4003950	Pump, Lubricating Oil	1	Recon equivalent 4003950 RX
9	3023525	Screw, Socket Head Cap	4	M8 x 1.25 x 20
10	3033247	Seal, O Ring	1	
11	3033248	Seal, O Ring	1	

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal black lines running across the width of the page. The lines are thin and consistent in thickness. There are no margins, text, or other markings on the paper.

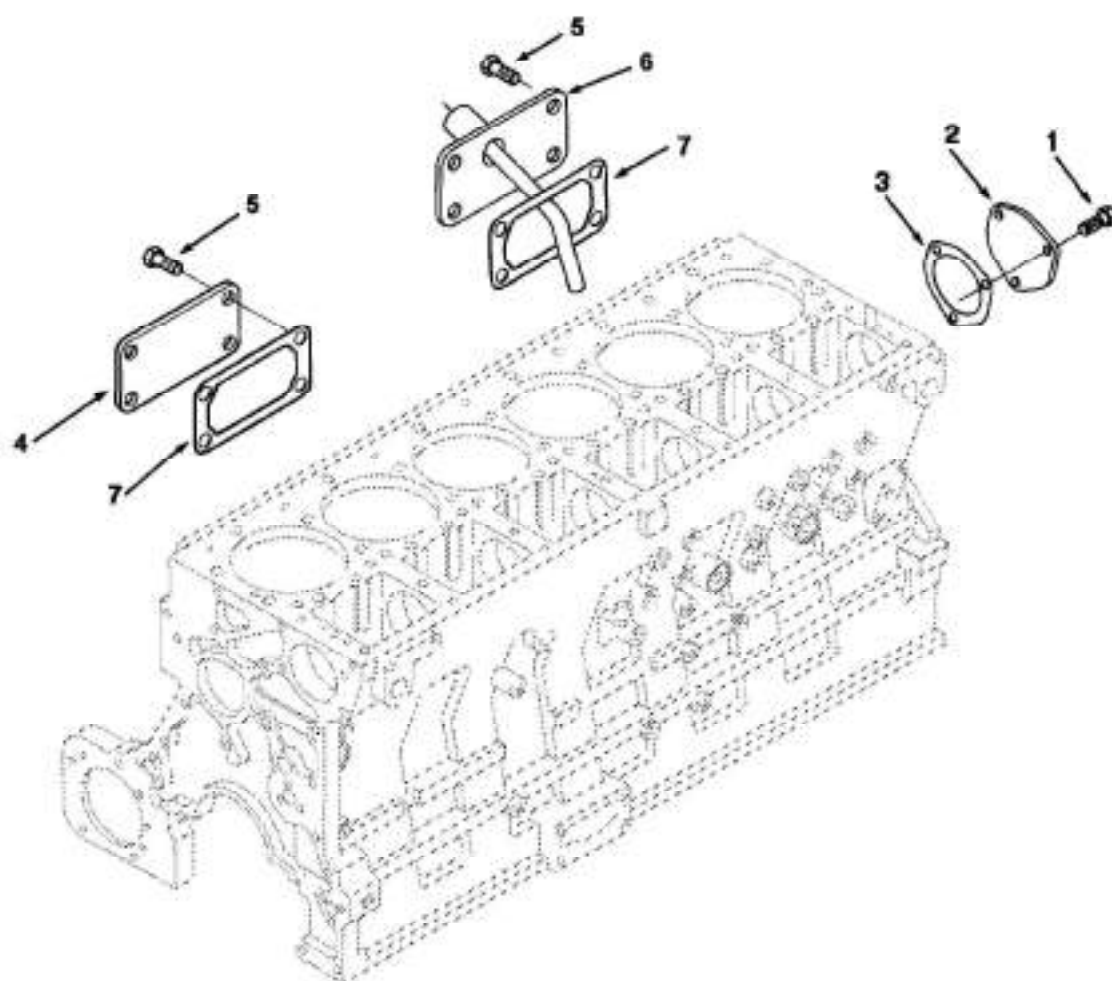


ob207gn

Group No. 07.02

Oil Filler Arrangement


Option No. OB2409

Ref No.	Part Number	Part Name	Req	Remarks
		OIL FILLER ARRANGEMENT OPTION OB2409		Oil Fill Supplier: No Provisions Dipstick Location: Right Side Rear HHC Dipstick Tube Attachment Method: 3/4-16 UNF Dipstick Guide Tube Horiz Distance: 110.9
1	3009887	Screw, Hexagon Head Cap	3	M10 x 1.50 x 22
2	3025295	Cover, Camshaft	1	
3	3025296	Gasket, Cover Plate	1	
4	3028684	Cover, Hand Hole	1	
5	3036230	Screw, Hexagon Head Cap	8	M10 x 1.50 x 20
6	3820470	Cover, Hand Hole	1	
7	3883472	Gasket, Hand Hole	2	
	(3892253)	Tag, Instruction	1	

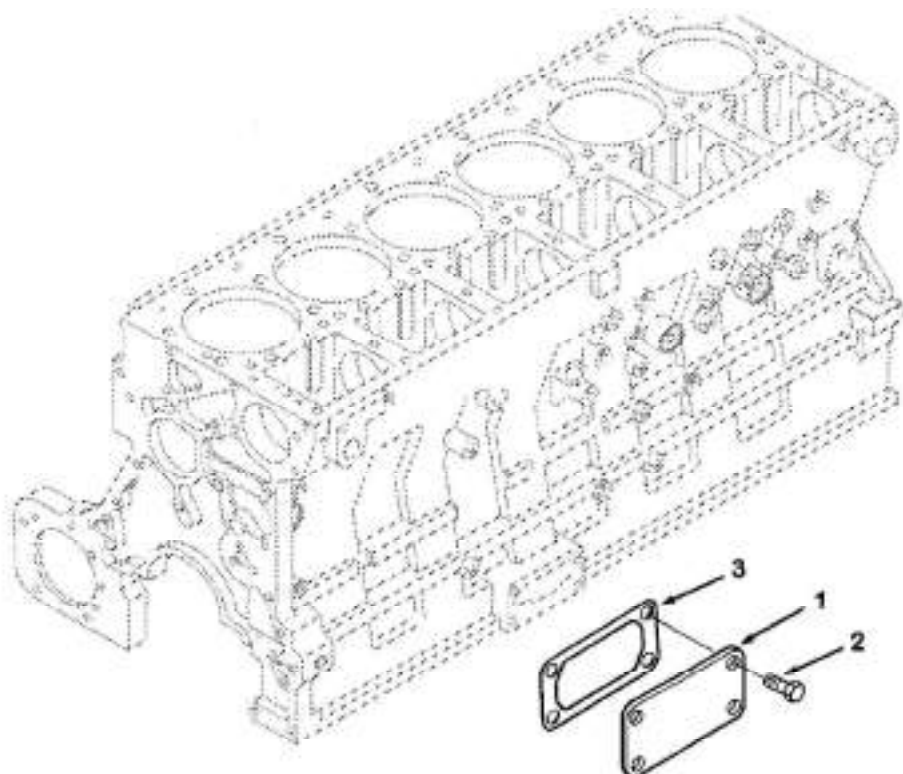

Ref No.	Part Number	Part Name	Req	Remarks
		HAND HOLE COVER OPTION OB2701		Left Side Dipstick Provision: None Left Side Oil Fill Provision: None Left Side Oil Return Provision: None CENTNEL Provision: No
1	3028684	Cover, Hand Hole	1	
2	3036230	Screw, Hexagon Head Cap	4	M10 x 1.50 x 20
3	3883472	Gasket, Hand Hole	1	

[illegible]

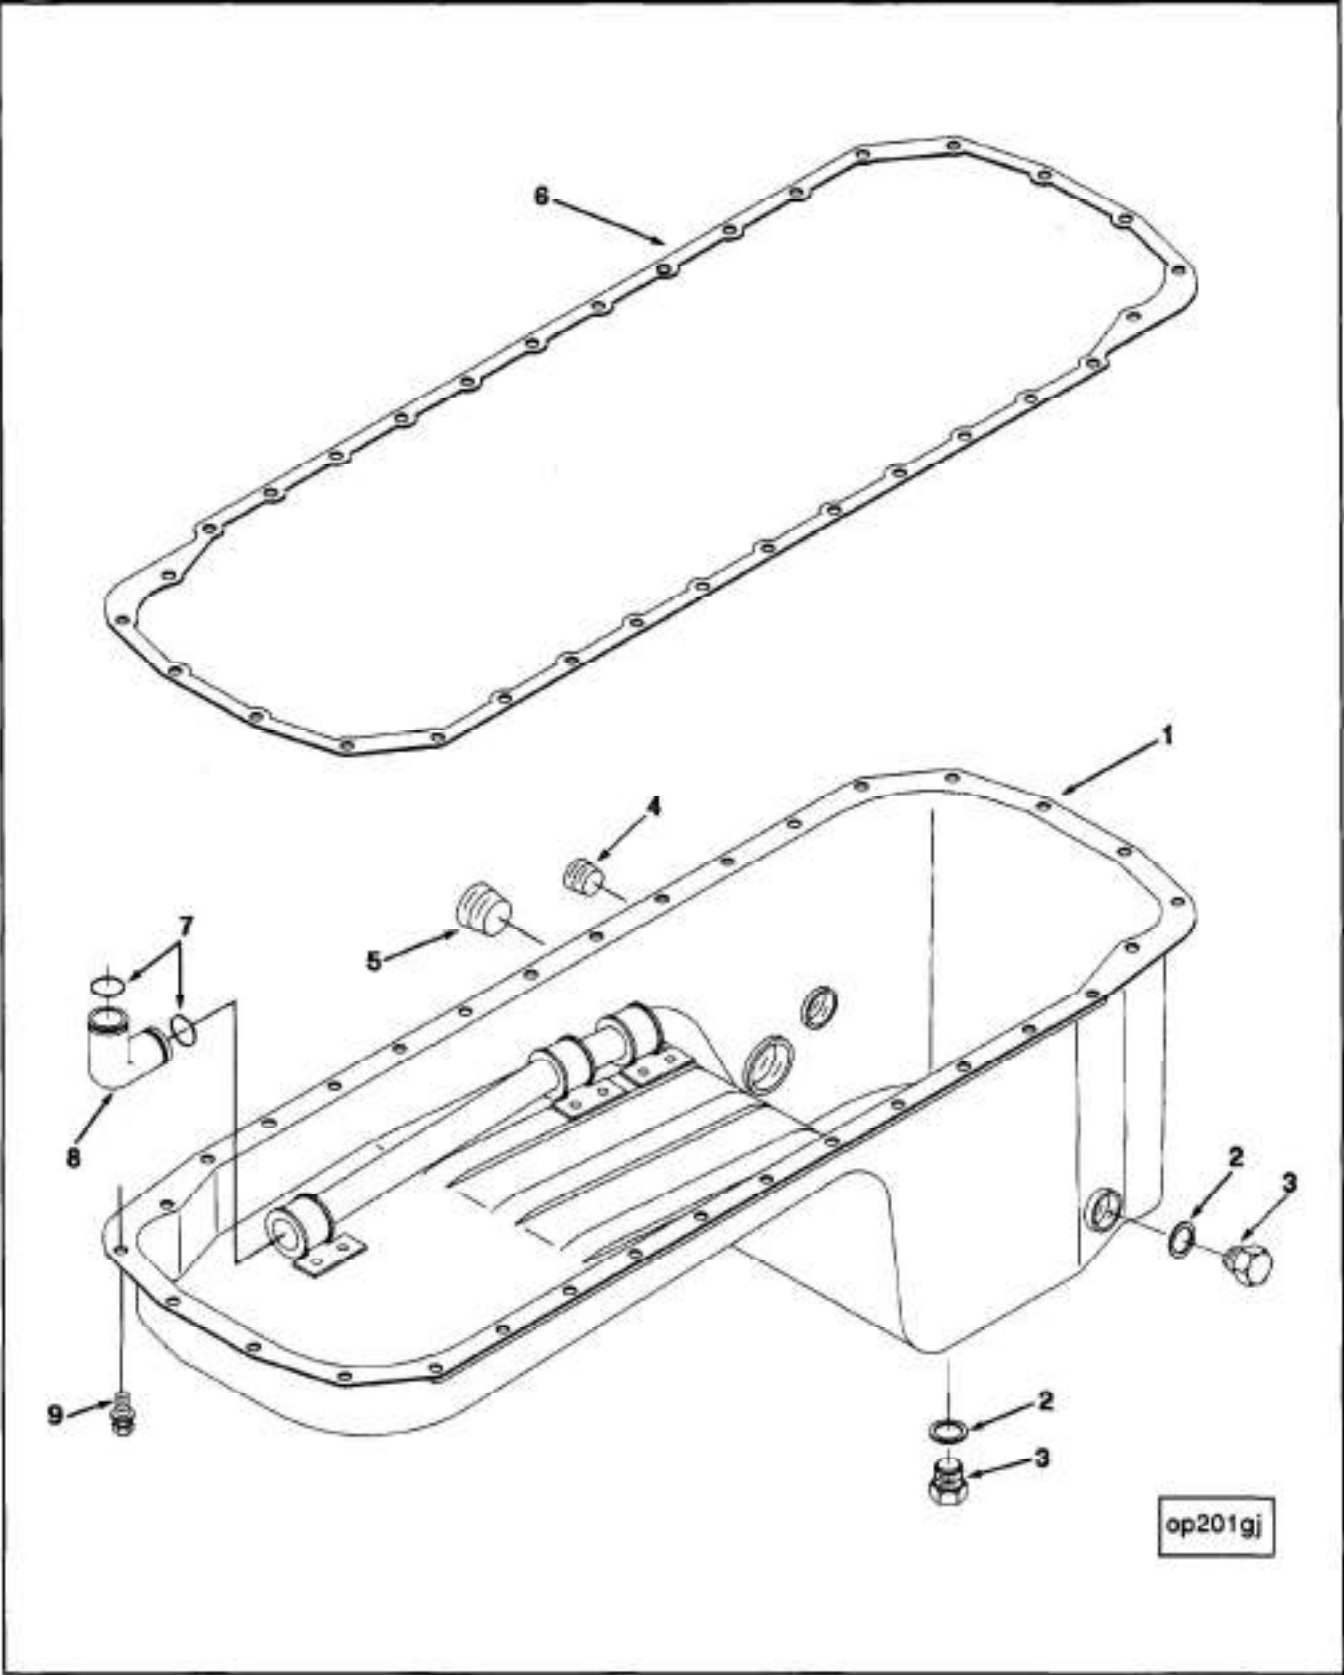


Group No. 07.01


Oil Pan

Option No. OP2048

Ref No.	Part Number	Part Name	Req	Remarks
		OIL PAN OPTION OP2048		Oil Pan Sump Location: Rear Material: Stamped Steel High Oil Pan Capacity: 34.065 l (9.0 gal) Low Oil Pan Capacity: 26.495 l (7.0 gal) Angularity Limits: 45 Degrees Front Down 40 Degrees Rear Down 35 Degrees Fuel Pump Down 45 Degrees Exhaust Down Drain Location (1 inch-18 UNS): Bottom and Side Lube Oil Suction Tube: Oil Pan Mounted Noise Panel Provision: No Oil Heater Boss (1 inch NPTF): Right Side Oil Temperature Boss (1/2 inch NPTF): Right Side Low Oil Level Sensor Boss (3/8 inch NPTF): None Rust Inhibitor Required: NO
	4905350	Pan, Oil TLA	1	
1	(4905349)	Pan, Oil	1	
2	67946	Washer, Plain	2	1 1/32 inch
3	3055069	Plug, Threaded	2	1 - 18 UNS
4	3006468	Plug, Pipe	1	1/2 NPT
5	3006470	Plug, Pipe	1	1 NPT
6	3401290	Gasket, Oil Pan	1	
7	3032787	Seal, O Ring	2	
8	3882346	Tube, Lub Oil Transfer	1	
9	3896723	Screw, Hex Flange Head Cap	32	

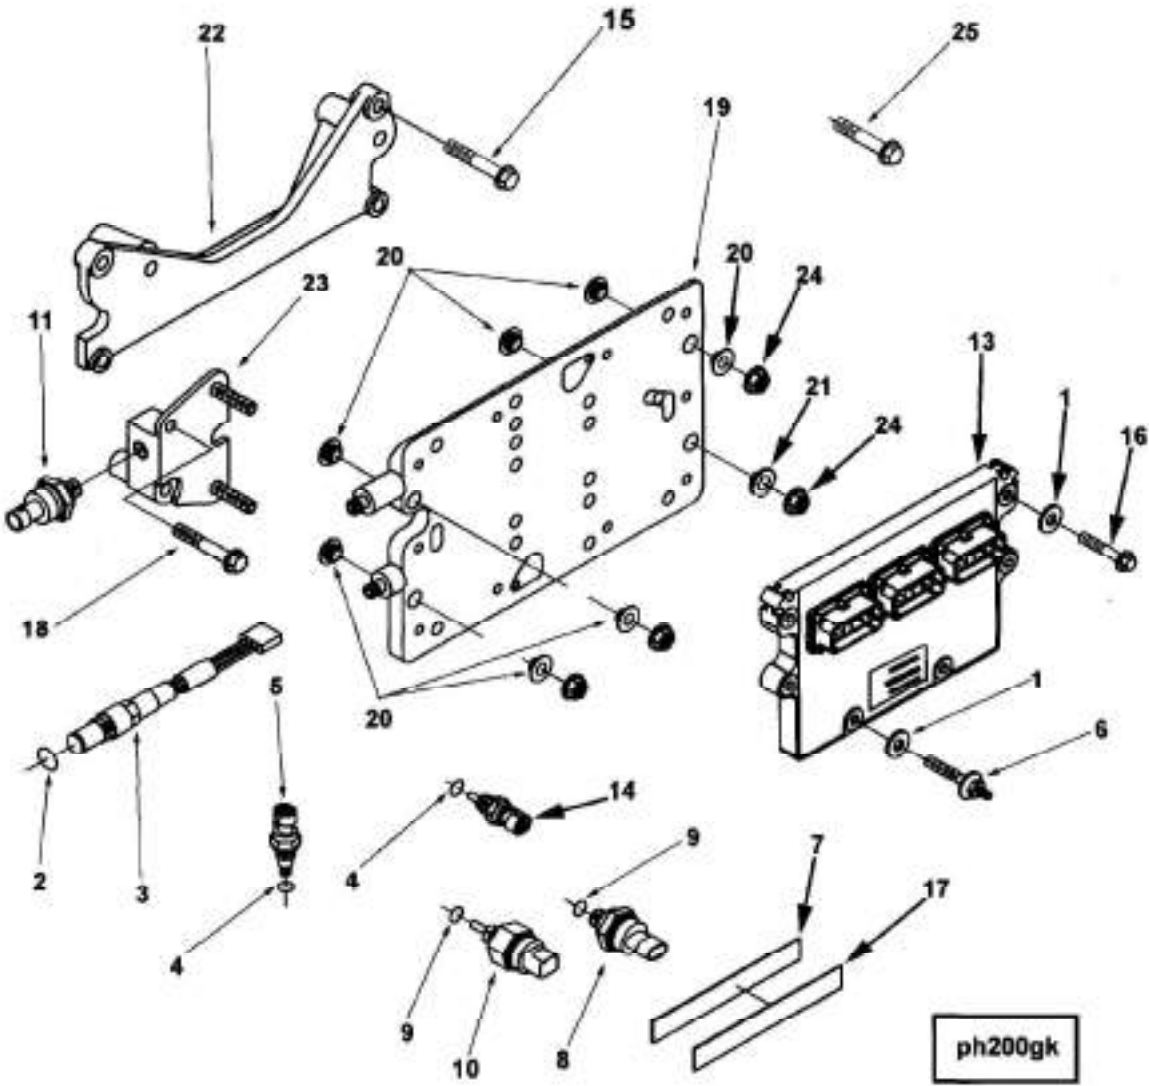


Ref No.	Part Number	Part Name	Req	Remarks
		ELECTRONIC CONTROL COOLER OPTION PH2810		Engine Control System: Select ECM Version: CM570 P2 Or CM570 A30 ECM Loc: 581.1 Vert/153.4 Horz - Vertical position is measured from the crank C/L to the top of the ECM - Horizontal Position is measured from the FFOB to the front of the ECM
1	146161	Washer, Plain	3	3/8 inch
	3408503	Sensor, Position	1	Engine Position Sensor
2	3046201	Seal, O Ring	1	
3	(3408502)	Sensor, Position	1	
	3085185	Sensor, Temperature	1	Intake Manifold Temperature
4	3037537	Seal, O Ring	1	
5	(3085198)	Sensor, Temperature	1	
6	3161896	Screw, Hexagon Head Cap	2	M8 x 1.25 x 45
7	3161911	Tape	1	
	3330141	Sensor, Pressure	1	Intake Manifold Pressure
8	(3330142)	Sensor, Pressure	1	
9	3330159	Seal, O Ring	1	
	3417189	Sensor, Pres Temperature	1	Oil Pressure & Temperature
9	3330159	Seal, O Ring	1	
10	(3417190)	Sensor, Pres Temperature	1	
11	3331044	Sensor, Pressure	1	
13	(3408501)	Module, Electronic Control	1	Recon equivalent 3408501 RX
	3065346	Sensor, Temperature	1	
4	(4921574)	Seal, O Ring	1	
14	(3096153)	Sensor, Temperature	1	Water Temperature
15	3102651	Screw, Hex Flange Head Cap	3	M10 X 1.50 X 60
16	3901445	Screw, Hex Flange Head Cap	4	M8 x 1.25 x 45
17	3161910	Dataplate	1	
18	3903112	Screw, Hex Flange Head Cap	1	M10 x 1.50 x 30
	3166309	Cooler, Electronic Control	1	
19	(3335372)	Cooler, Electronic Control	1	
20	3335561	Washer, Insulating	7	
21	3335562	Washer, Insulating	1	
22	3406811	Support, Etr Cnt Module	1	
23	4059910	Support, Heat Exchanger	1	
24	3900589	Nut, Hexagon Flange	2	M8 x 1.25
25	3925437	Screw, Hex Flange Head Cap	4	M10 x 1.50 x 40

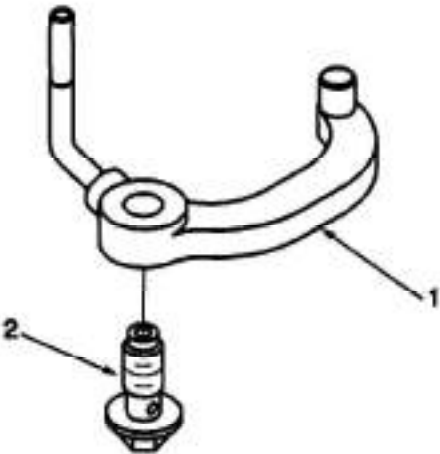

pn200gf

Ref No.	Part Number	Part Name	Req	Remarks
		PISTON COOLING NOZZLE OPTION PP8543		
1	3080708	Nozzle, Piston Cooling	6	
2	3070393	Screw, Hex Flange Head Cap	8	M10 x 1.50 x 25

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal black lines running across the width of the page, providing a guide for handwriting or typing. The background is a solid off-white color.

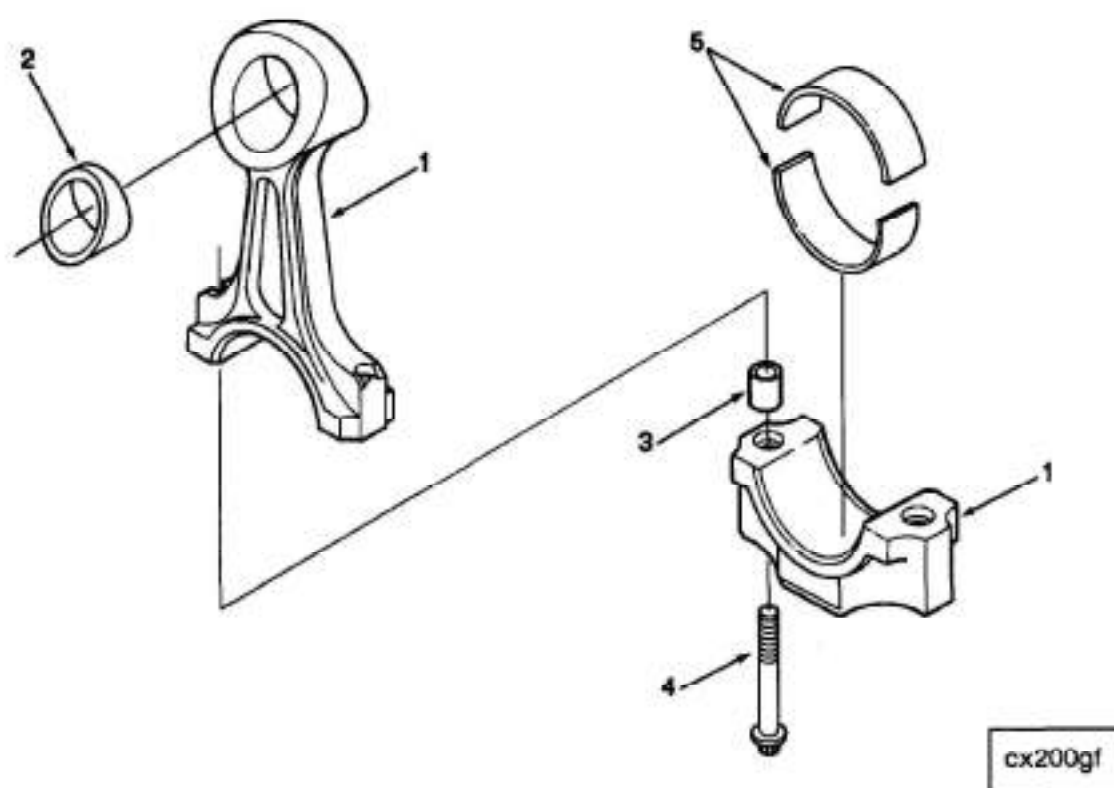


Group No. 01.04

Connecting Rod

Option No. PP8543

Ref No.	Part Number	Part Name	Req	Remarks
		CONNECTING ROD OPTION PP8543		Performance Parts Certified Model Name: QSM11 Timing Gear Code: KY CPL: 8543 Certified By: EPA,CARB,EU AFC Yes: ASA No EFC No: ETC Yes Manifold Type: Dry Engine Aspiration: Charged Air Cooled Engine Control System: Select Application: Nonroad Power Turbine: N/A Design Phase: DEI Power Rating: NA ECM Version: CM Series Centinel Provision: No Turbocharger included: No Cert Level: Tier 3,Tier 3,StgII. Recon equivalent 3899450 RX
1	3899450 (3896970)	Rod, Engine Connecting	1	
2	3896894	Rod, Engine Connecting	2	
3	3027106	Bushing	2	
4	3027108	Dowel, Ring	2	
		Screw, Connecting Rod Cap		
		CONNECTING ROD BEARING		
5	3016760	Bearing, Connecting Rod	12	Std
5	3016761	Bearing, Connecting Rod	12	0.25 MM Oversize
5	3016762	Bearing, Connecting Rod	12	0.50 MM Oversize
5	3016763	Bearing, Connecting Rod	12	0.75 MM Oversize
5	3016764	Bearing, Connecting Rod	12	1.00 MM Oversize

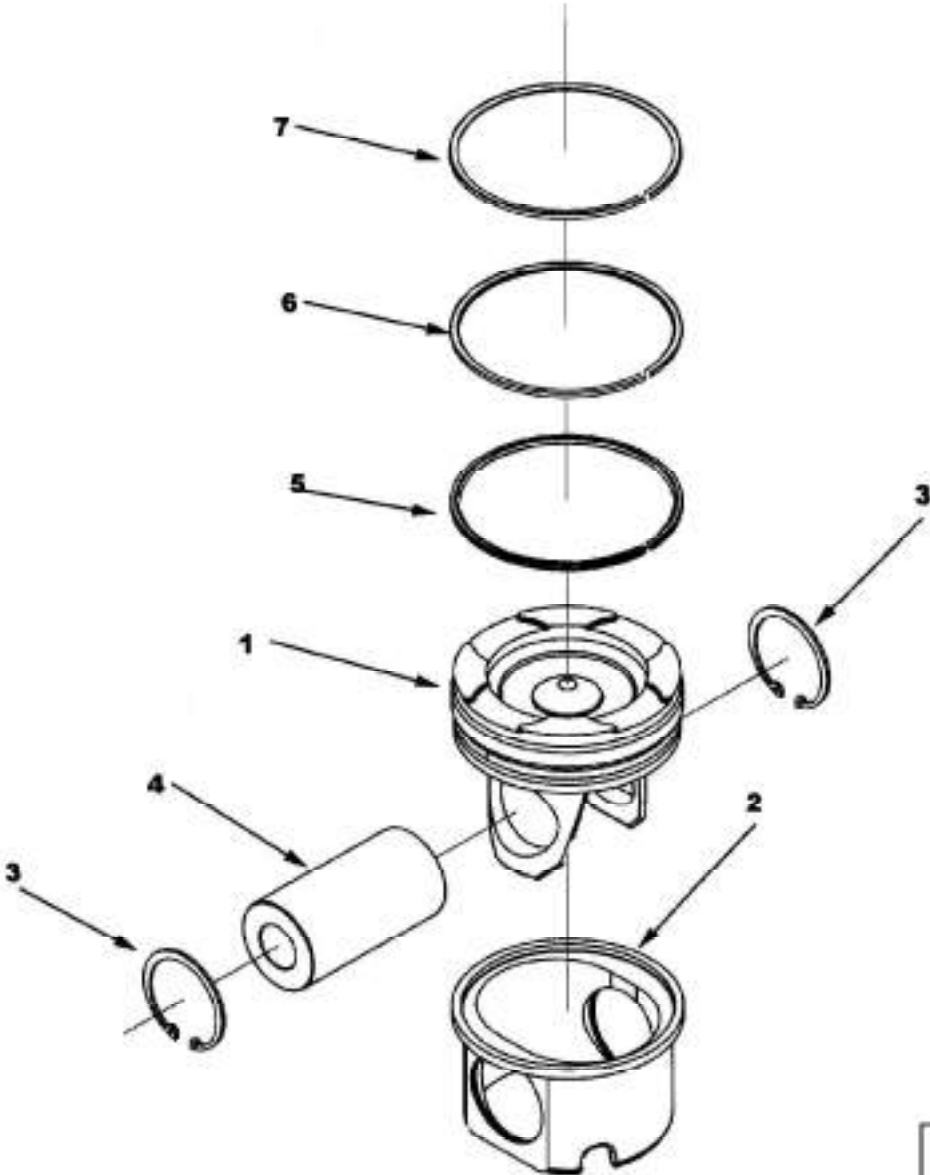


pl200ge

Group No. 01.05

Engine Piston Kit


Option No. PP8543

Ref No.	Part Number	Part Name	Req	Remarks
		ENGINE PISTON KIT		
		OPTION PP8543		Performance parts
	4089865	Kit, Engine Piston	6	
	(3103752)	Piston, Engine TLA	1	
1	(3103753)	Top, Piston	1	
2	(4070853)	Skirt, Piston	1	
3	3016852	Ring, Retaining	2	
4	4083244	Pin, Piston	1	
	3803977	Set, Piston Ring	6	
5	3102367	Ring, Oil Piston	1	Oil Ring
6	3899413	Ring, Compression Piston	1	2nd Ring
7	3893752	Ring, Compression Piston	1	Top Ring

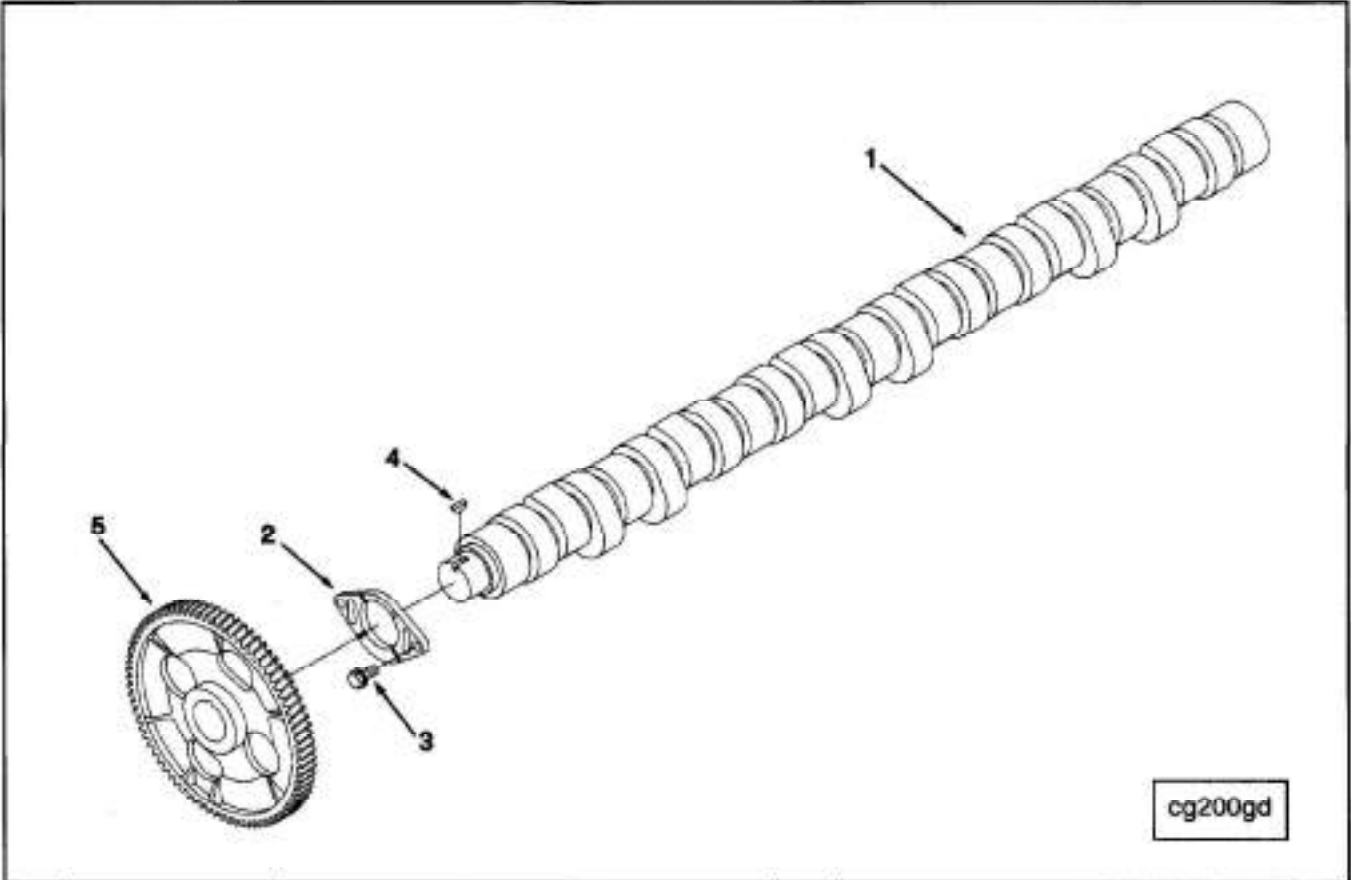

Ref No.	Part Number	Part Name	Req	Remarks
		CAMSHAFT OPTION PP8543		
1	4059893	Camshaft	1	CPL 2041
2	3896335	Support, Camshaft Thrust	1	
3	3822067	Screw, Captive Washer Cap	2	M10 x 1.50 x 25
4	3009953	Key, Plain Woodruff		
5	3401439	Gear, Camshaft	1	

[illegible]

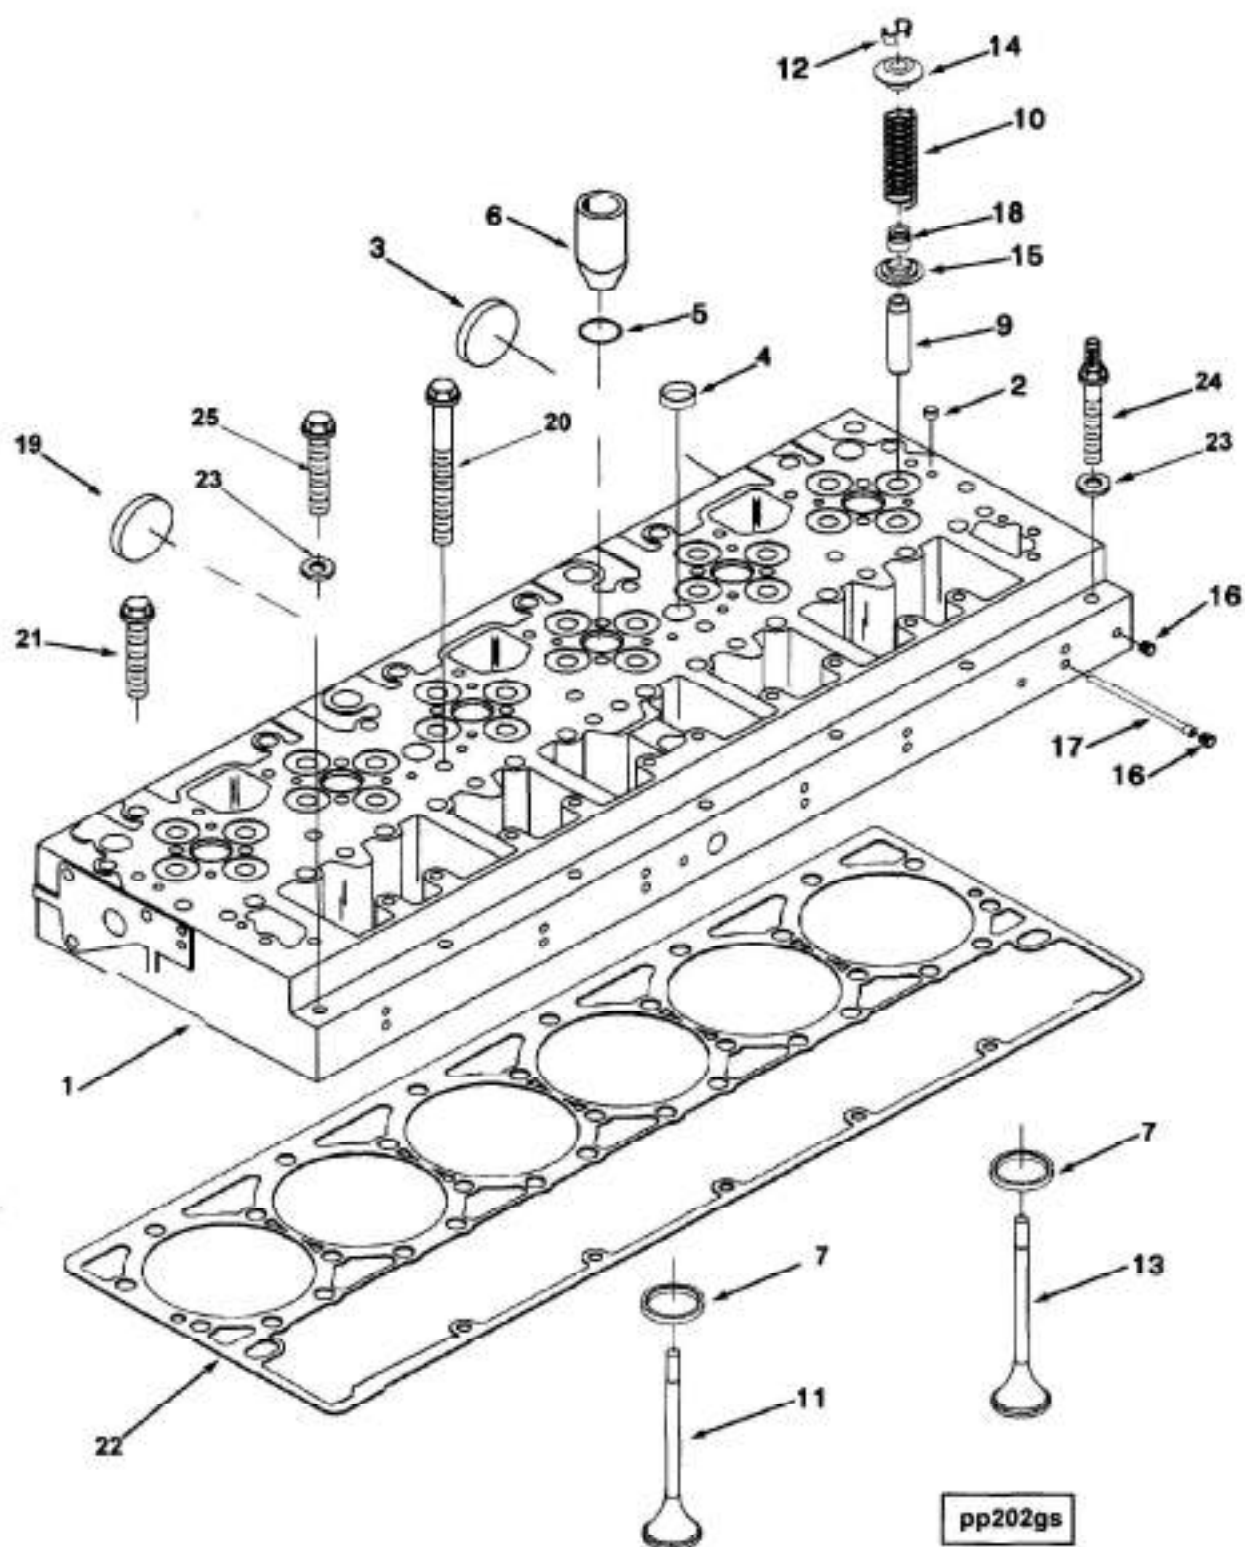


Group No. 02.01

Cylinder Head

Option No. PP8543


Ref No.	Part Number	Part Name	Req	Remarks
		CYLINDER HEAD OPTION PP8543		
	3103462	Head, Cylinder TLA	1	
1	(3103484)	Head, Cylinder	1	
2	3007632	Plug, Expansion	2	
3	206741	Plug, Expansion	2	
4	3007635	Plug, Expansion	8	
5	3035026	Seal, O Ring	6	
6	3417717	Sleeve, Injector	6	
7	3090704	Insert, Valve	24	
9	3328786	Guide, Valve Stem	24	
10	3895860	Spring, Valve	24	
	3800636	Kit, Intake Valve	12	
11	(3417778)	Valve, Intake	12	
12	3275354	Collet, Valve	24	
	3800637	Kit, Exhaust Valve	12	
13	(3417779)	Valve, Exhaust	12	
12	3275354	Collet, Valve	24	
14	3883512	Retainer, Valve Spring	24	
15	3070072	Guide, Valve Spring		
16	3008465	Plug, Pipe	16	1/8 NPT
17	3820749	Plug, Orifice	6	
18	4003966	Seal, Valve Stem	24	
19	3895479	Plug, Expansion	2	
		MISCELLANEOUS PARTS		
20	3045850	Screw, Hex Flange Head Cap	29	
21	4022907	Screw, Hex Flange Head Cap	3	M14 x 1.50 x 71
22	4022500	Gasket, Cylinder Head	1	
23	3328328	Washer, Sealing	7	
24	3328637	Screw, Hex Flange Head Cap	5	
25	3328379	Screw, Hex Flange Head Cap	2	
		VALVE STEM GUIDE		
	3417558	Guide, Valve Stem	A/R	.20 MM Oversize
		OVERSIZE VALVE SEATS		
	3028071	Insert, Valve		
	3028072	Insert, Valve		
	3028073	Insert, Valve		
	3028074	Insert, Valve		

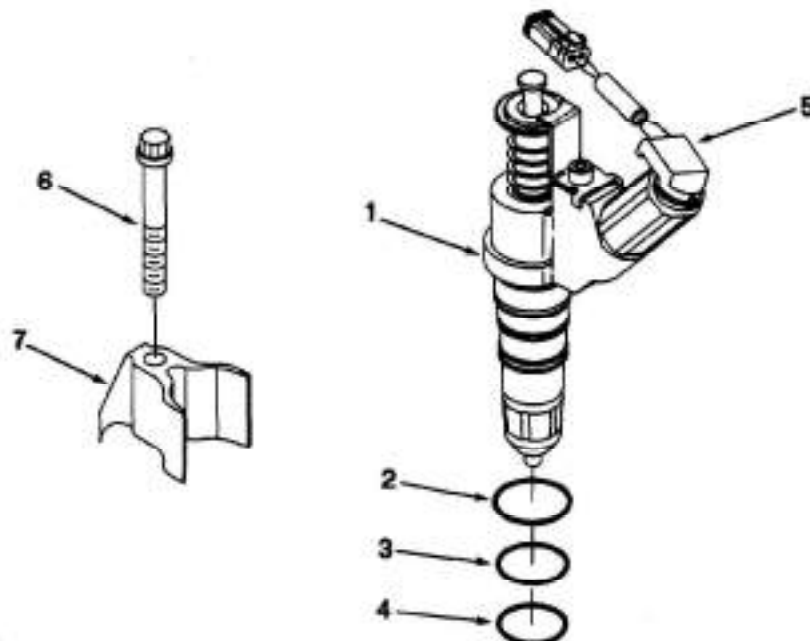

f(200g)

Ref No.	Part Number	Part Name	Req	Remarks
		INJECTORS OPTION PP8543		
1	4903084	Injector	6	
2	3070138	Seal, O Ring	1	
3	3070137	Seal, O Ring	1	
4	3070138	Seal, O Ring	1	
5	3803682	Kit, Wiring Harness	1	
6	3882793	Screw, Twelve Point Cap	6	M10 x 1.25 x 75
7	4022914	Clamp, Injector	6	

This image shows a full page of white paper with horizontal black lines, resembling notebook paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

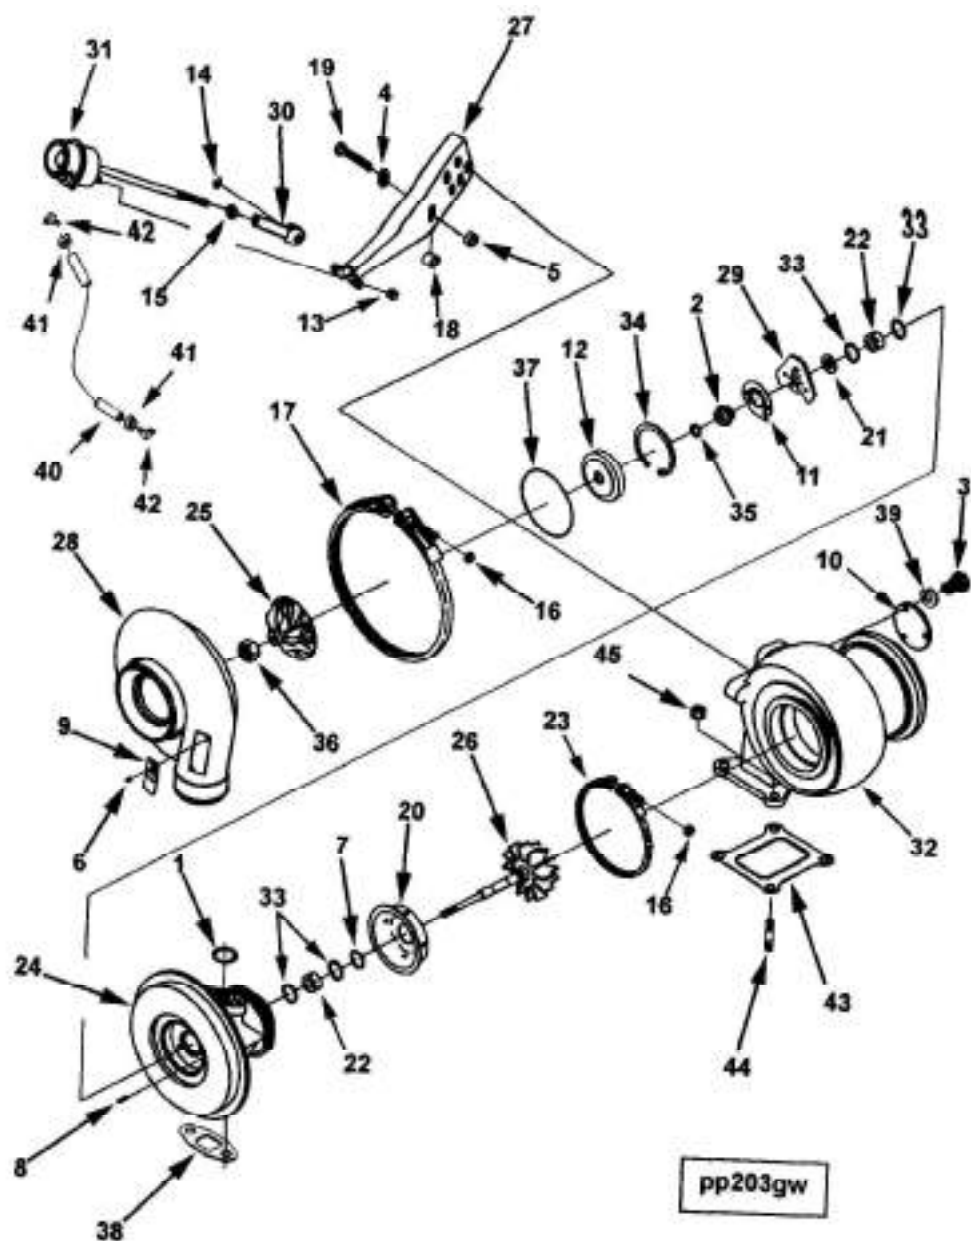

Ref No.	Part Number	Part Name	Req	Remarks
		TURBOCHARGER		
		OPTION PP20035		
				Turbocharger
				Engine Aspiration: Charged Air Cooled
				Turbo Mtg Flange Bolt Circle Diameter: 129.06mm (5.08in)
				Turbocharger Type: Wastegate
				Wastegate Rod-to-Crank Angle (Deg): 90
				Turbocharger Size/Model: 19cm squared HX55
				Closed Crankcase Ventilation Compatible: No
				CPL: 8543, 8544, 8545, 8546.
	4089858	Kit, Turbocharger	1	
	(4037625)	Turbocharger	1	
1	3037537	Seal, O Ring	1	
2	3502231	Strainer, Oil	1	
3	3759526	Screw, Hexagon Head Set	3	M6 x 1.00 x 12
4	(3504967)	Washer, Plain	3	
5	(3591206)	Spacer, Mounting	3	
6	3519163	Screw, Drive	2	
7	3521441	Seal, Split Ring	1	
8	3522597	Pin, Roll	2	
9	(3527619)	Dataplate	1	
10	3527651	Plate, Cover	1	
11	3528094	Baffle, Oil	1	
12	3528096	Plate, Oil Seal	1	
13	3528204	Nut, Lock	2	1/4 - 28 UNF.
14	3528221	Ring, Retaining	1	
15	3528414	Nut, Regular Hexagon Jam	1	
16	3529372	Nut, Regular Hexagon	2	1/4 - 28 UNF
17	3529852	Clamp, V Band	1	
18	3532195	Spacer, Mounting	3	
19	(3534292)	Screw, Hexagon Head Set	3	
20	3533038	Shield, Turbocharger Heat	1	
21	3534109	Collar, Thrust	1	
22	3534833	Bearing, Turbocharger	2	
23	3535399	Clamp, V Band	1	
24	3535575	Housing, Tur Bearing	1	
25	(4035887)	Impeller, Tur Compressor	1	
26	3535983	Shaft & Wheel	1	
27	(3591204)	Bracket, Actuator	1	
28	4036914	Housing, Compressor	1	
29	3591655	Bearing, Tur Thrust	1	
30	(3597518)	End, Adjusting Link	1	
31	(4037622)	Actuator, Turbocharger	1	
32	(3592774)	Housing, Turbine	1	
33	3709510	Ring, Retaining	4	
34	3723863	Ring, Retaining	1	
35	3758848	Seal, Split Ring	1	
36	3760250	Nut, Lock	1	M8 X 1.25.
37	3762915	Seal, O Ring	1	
38	3899343	Gasket, Turbocharger	1	
39	(3518004)	Washer, Lock	3	M6
40	3538468	Hose, Plain	1	
41	3914420	Clamp, Hose	2	10.5 - 13mm
42	3528121	Coupling, Elbow Hose	2	Hotset Part Sold Only in Kits
43	3088984	Gasket, Turbocharger	1	
44	3095796	Stud	2	
45	3818824	Nut, Hexagon Flange	4	M10 x 1.50

