



Atharva Khachane
22BBS0155
Cloud, Microservices and Applications

Q. Create an S3 bucket and upload a set of files for cloud storage. Enable public read access for the bucket and test file accessibility via public URLs. Organize the files into folders inside the bucket and verify their structure in the AWS Management Console. Document all steps with screenshots.

==>

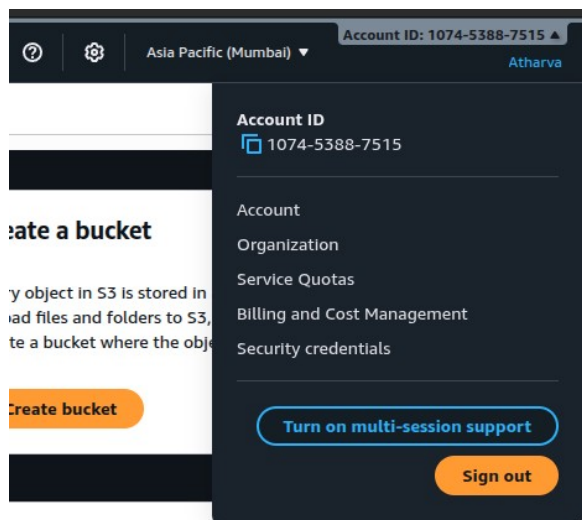

Initial S3 Dashboard

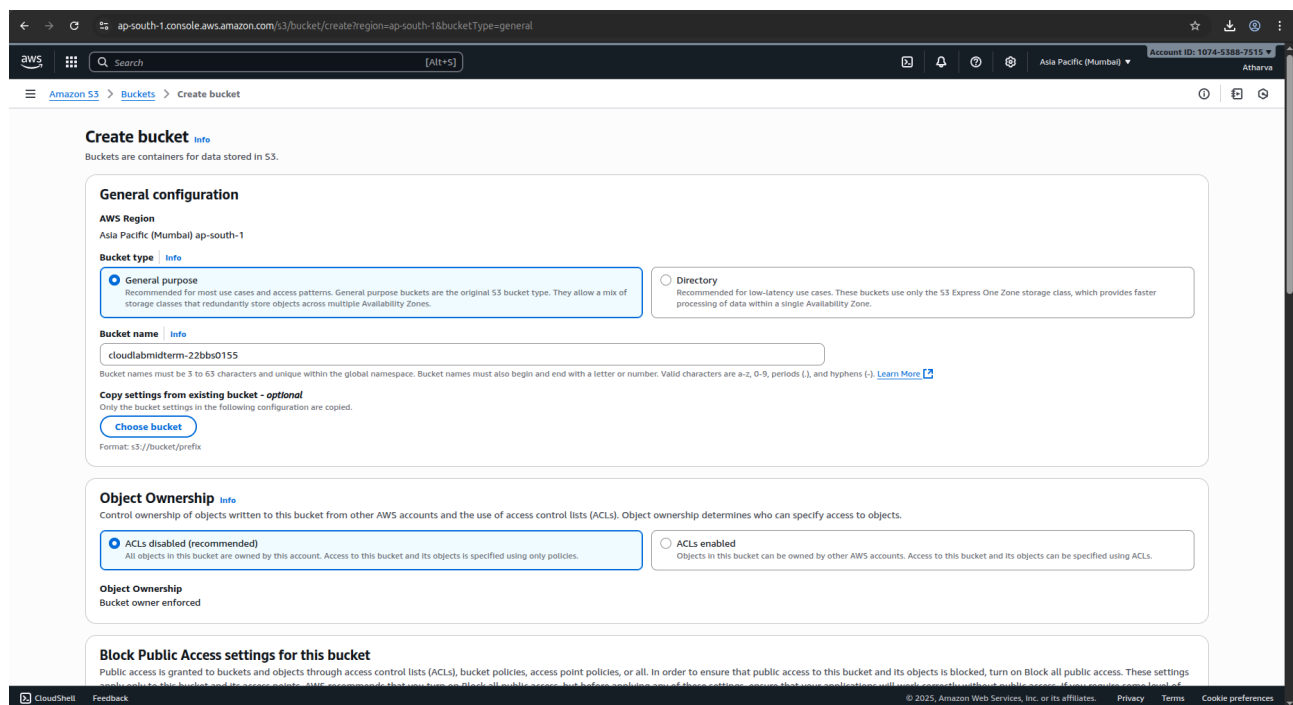

Create a new S3 Bucket

Create bucket [Info](#)

Buckets are containers for data stored in S3.

General configuration

AWS Region
Asia Pacific (Mumbai) ap-south-1

Bucket type [Info](#)

☒ **General purpose**
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.

☐ **Directory**
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name [Info](#)

cloudLabMidterm_228850155

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). [Learn More](#)

Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.

[Choose bucket](#)

Format: s3://bucket/prefix

Object Ownership [Info](#)

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

☒ **ACLs disabled (recommended)**
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.

☐ **ACLs enabled**
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

Object Ownership
Bucket owner enforced

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

Disable Block Public Access

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.

☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.

☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.

☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.

☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

☐ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

☒ **Disable**

☐ **Enable**

Tags - optional (0)
You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

Bucket Creation Successful

Successfully created bucket "cloudlabmidterm-22bbs0155"
To upload files and folders, or to configure additional bucket settings, choose [View details](#).

General purpose buckets (2) [info](#) [Copy ARN](#) [Empty](#) [Delete](#) [Create bucket](#)

Buckets are containers for data stored in S3.

Find buckets by name

Name	AWS Region	Creation date
cloudlabmidterm-22bbs0155	Asia Pacific (Mumbai) ap-south-1	September 10, 2025, 08:20:13 (UTC+05:30)
elasticbeanstalk-ap-south-1-107453887515	Asia Pacific (Mumbai) ap-south-1	September 9, 2025, 23:13:20 (UTC+05:30)

Account snapshot [info](#) [View dashboard](#)
Updated daily
Storage Lens provides visibility into storage usage and activity trends.

External access summary - new [info](#)
Updated daily
External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Upload the files and folders

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. [Learn more](#)

Drag and drop files and folders you want to upload here, or choose [Add files](#) or [Add folder](#).

Files and folders (4 total, 32.7 KB) [Remove](#) [Add files](#) [Add folder](#)

All files and folders in this table will be uploaded.

Find by name

Name	Folder	Type	Size
☐ package.json	daily_news_22BB50155/	application/json	247.0 B
☐ package-lock.json	daily_news_22BB50155/	application/json	28.3 KB
☐ app.js	daily_news_22BB50155/	text/javascript	3.3 KB
☐ index.html	-	text/html	840.0 B

Destination [info](#)
Destination
[s3://cloudlabmidterm-22bbs0155](#)

Destination details
Bucket settings that impact new objects stored in the specified destination.

Permissions
Grant public access and access to other AWS accounts.

Properties
Specify storage class, encryption settings, tags, and more.

[Cancel](#) [Upload](#)

← → ↻

ap-south-1.console.aws.amazon.com/s3/upload/cloudlabmidterm-22bbs0155?region=ap-south-1&bucketType=general

☆ ⬇️ 🔍 ⋮

Account ID: 1074-5388-7515

Atharva

aws

Search [Alt+S]

Asia Pacific (Mumbai)

☰

☰

✔️ Upload succeeded

For more information, see the Files and folders table.

✕

Upload: status

Close

ⓘ After you navigate away from this page, the following information is no longer available.

Summary

Destination

s3://cloudlabmidterm-22bbs0155

Succeeded

✔️ 4 files, 32.7 KB (100.00%)

Failed

❌ 0 files, 0 B (0%)

Files and folders

Configuration

Files and folders (4 total, 32.7 KB)

Find by name

Name	Folder	Type	Size	Status	Error
package.json	daily_news_228B50155/	application/json	247.0 B	✔️ Succeeded	-
package-lock.json	daily_news_228B50155/	application/json	28.3 KB	✔️ Succeeded	-
app.js	daily_news_228B50155/	text/javascript	3.3 KB	✔️ Succeeded	-
index.html	-	text/html	840.0 B	✔️ Succeeded	-

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. [Privacy](#) [Terms](#) [Cookie preferences](#)

Try to access index.html without any policy

← → ↻

cloudlabmidterm-22bbs0155.s3.ap-south-1.amazonaws.com/index.html

☆ ⬇️ 🔍 ⋮

This XML file does not appear to have any style information associated with it. The document tree is shown below.

<?xml>

<Code>AccessDenied</Code>



<Message>Access Denied</Message>

<RequestId>Q3RDZV1YGVRFBM4</RequestId>


<HostId>C8V/Gx1S8Tmuv+ILXVULf6sMGIHsw9uJ960Ww9E04qhBAQYAReU5Qt8jL3HjiJ0MI67auFek5n7Ct1+tiJfFu==</HostId>

</Error>

Edit Bucket Policy to grant public accessibility

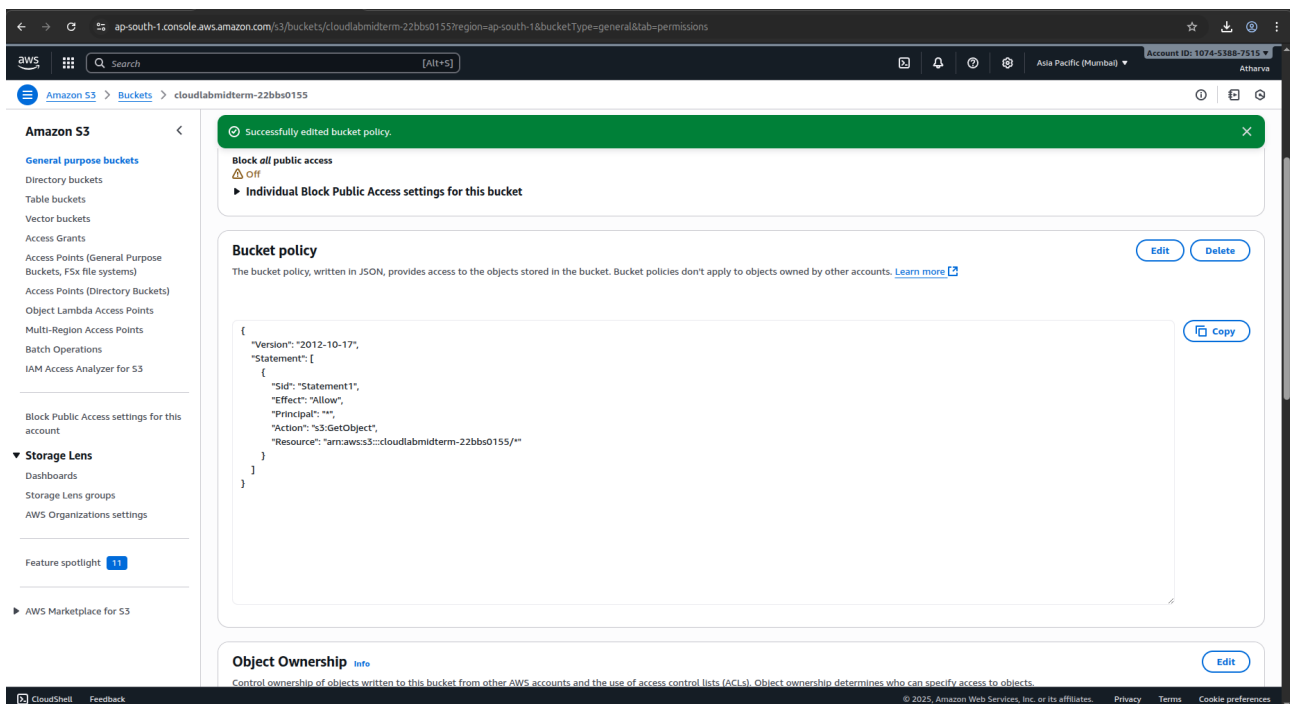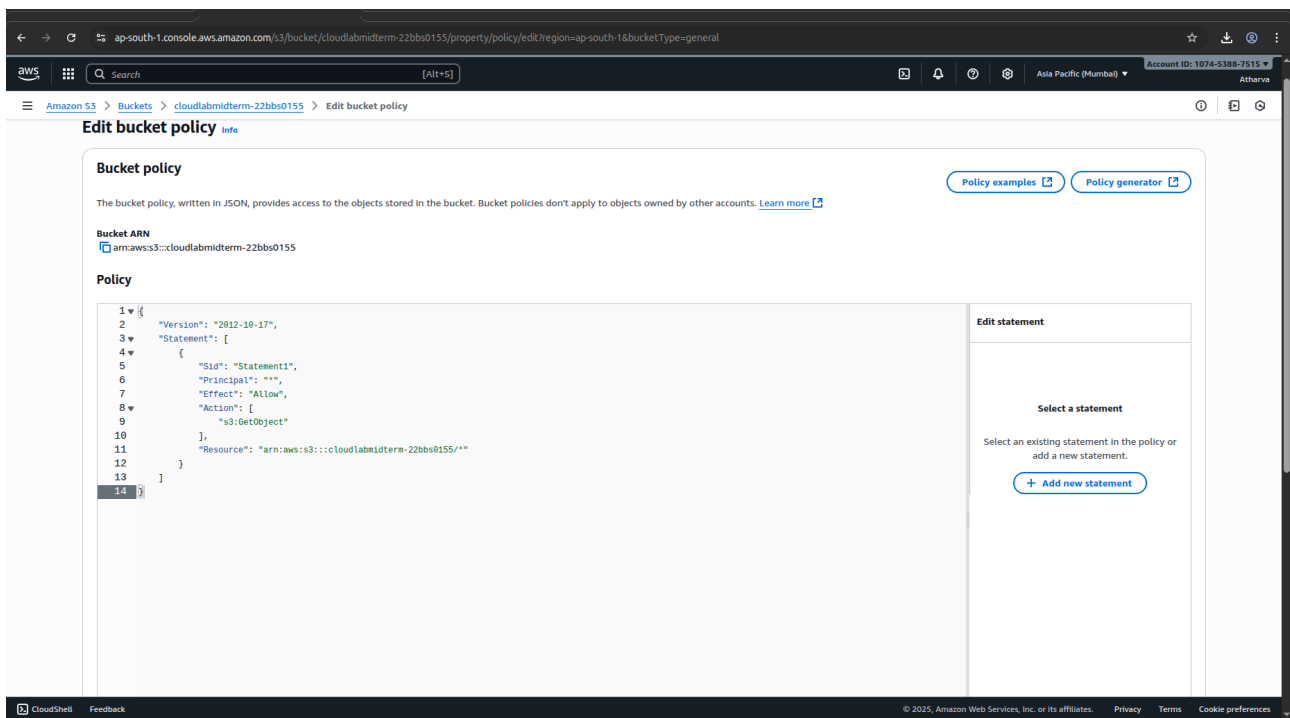


Now try to access index.html

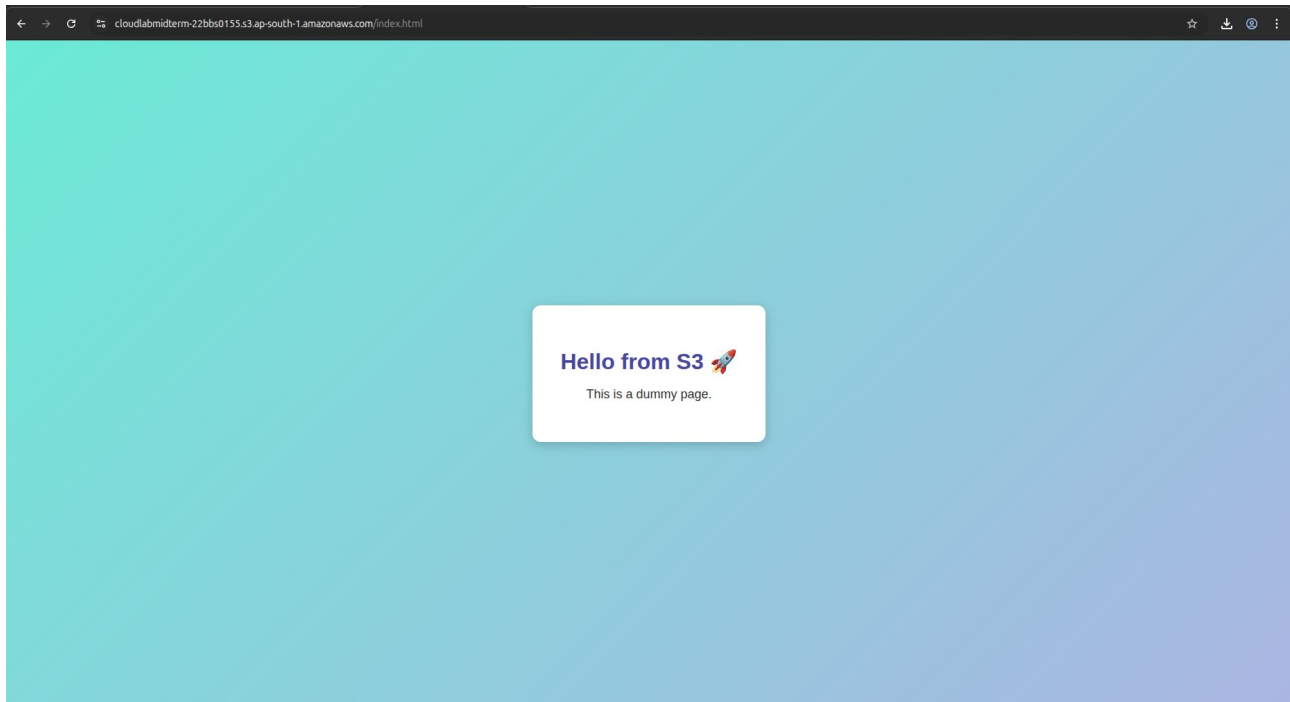

Directory Structure

```
---daily_news_22BBS0155/  
    --- app.js  
    --- package-lock.json  
    --- package.json  
---index.html
```

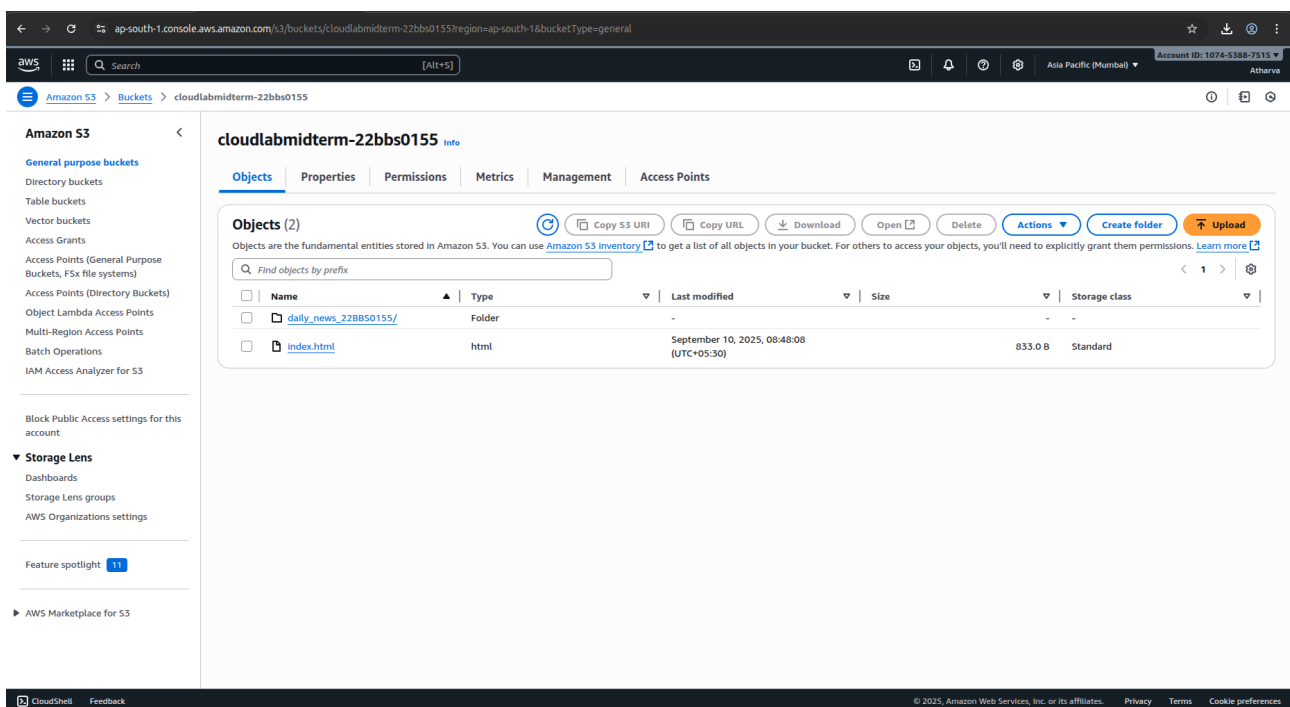

← → ↻ ap-south-1.console.aws.amazon.com/s3/buckets/cloudlabidterm-22bbs0155?region=ap-south-1&bucketType=general&prefix=daily_news_22BBS0155/&showversions=false

aws Search [Alt+S]

Account ID: 1074-5388-7515 Atharva

Amazon S3 Buckets cloudlabidterm-22bbs0155 daily_news_22BBS0155/

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Storage Lens

Dashboards

Storage Lens groups

AWS Organizations settings

Feature spotlight 11

AWS Marketplace for S3

daily_news_22BBS0155/

Copy S3 URI

Objects Properties

Objects (3)

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 Inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

Find objects by prefix

| ☐ | Name | Type | Last modified | Size | Storage class |
|--------------------------|-----------------------------------|------|--|---------|---------------|
| ☐ | app.js | js | September 10, 2025, 08:23:25 (UTC+05:30) | 3.3 KB | Standard |
| ☐ | package-lock.json | json | September 10, 2025, 08:23:25 (UTC+05:30) | 28.3 KB | Standard |
| ☐ | package.json | json | September 10, 2025, 08:23:25 (UTC+05:30) | 247.0 B | Standard |

CloudShell Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences