Roll No: 40

PRACTICAL 9

To implement Word Count problem using Pig

Apache Pig

- Apache Pig is a platform for analyzing large data sets that consists of a high-level language for expressing data analysis programs, coupled with infrastructure for evaluating these programs. The salient property of Pig programs is that their structure is amenable to substantial parallelization, which in turns enables them to handle very large data sets.
- The language used for Pig is Pig Latin. The Pig scripts get internally converted to Map Reduce jobs and get executed on data stored in HDFS.
- Apart from that, Pig can also execute its job in Apache Tez or Apache Spark.
- Pig can handle any type of data, i.e., structured, semi-structured or unstructured and stores the corresponding results into Hadoop Data File System.
- Every task which can be achieved using PIG can also be achieved using java used in MapReduce.
- ➤ Pig's language layer currently consists of a textual language called Pig Latin, which has the following key properties:
 - Ease of programming. It is trivial to achieve parallel execution of simple, "embarrassingly parallel" data analysis tasks. Complex tasks comprised of multiple interrelated data transformations are explicitly encoded as data flow sequences, making them easy to write, understand, and maintain.
 - Optimization opportunities. The way in which tasks are encoded permits the system to optimize their execution automatically, allowing the user to focus on semantics rather than efficiency.
 - **Extensibility.** Users can create their own functions to do special-purpose processing.

Roll No: 40

To implement Word Count problem using Pig


Steps:

1) Start the cloudera.




2) Open the browser. And then open Hue and login.

Roll No: 40

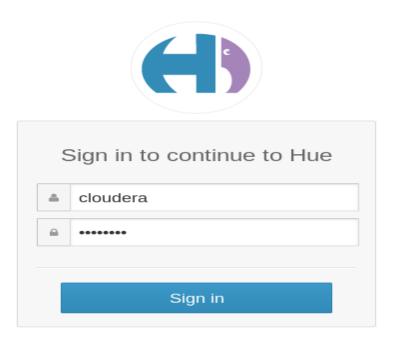


3) In Hue Go to file browser and Now open the directory /user/cloudera

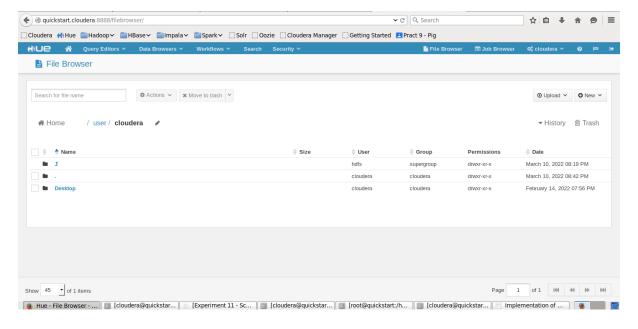


4) Now we are creating the directory as Training inside /user/cloudera

Roll No: 40

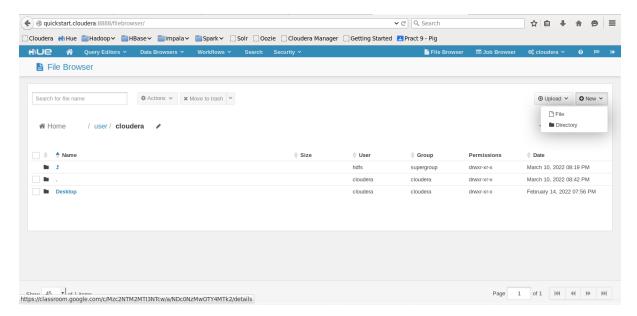


In File Browser we have New option in right corner Click on New →Directory


Give the directory name And click on Create

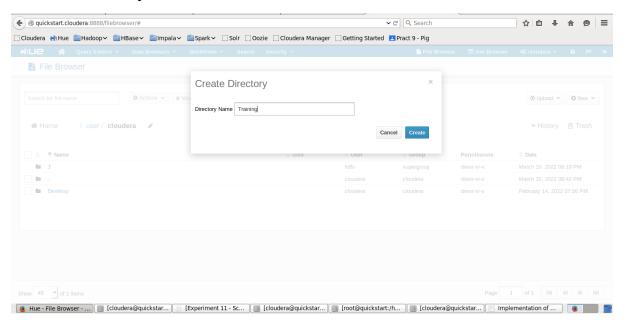

Roll No: 40

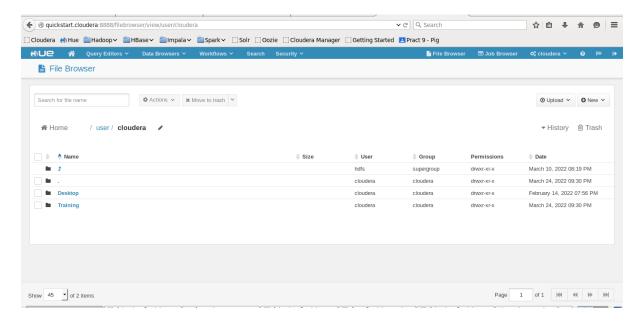


5) After creating Training directory now creating the Pig directory inside Training.

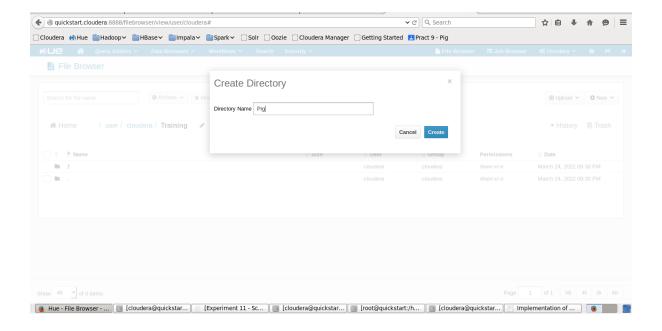


6) Pig directory has been created inside /user/cloudera/Training

Roll No: 40

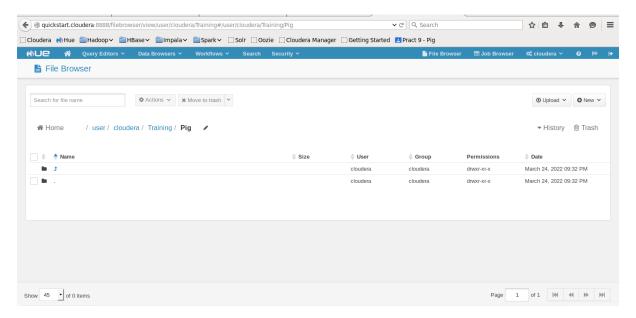


7) Creating input.txt file inside /usr/cloudera/Training/Pig directory

Again inside the Pig directory click on New and create file as'input.txt'

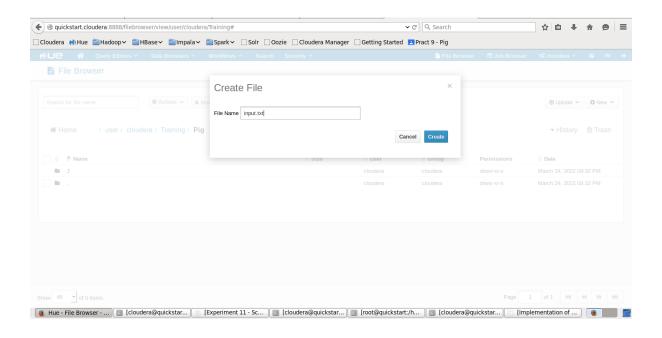


Once the file has been created click on 'input.txt' to add the content in it

Roll No: 40

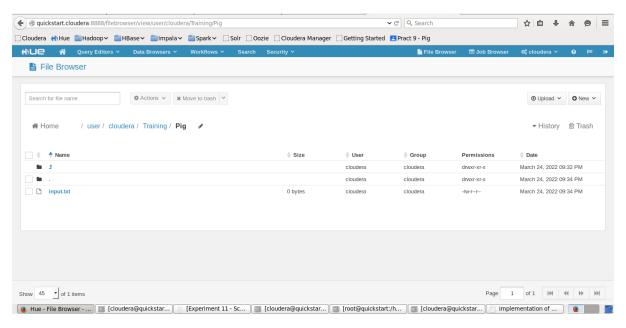


8) Adding some contents to this input.txt file.

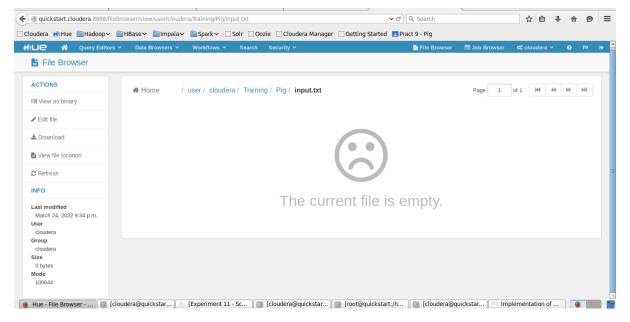

For adding content in the input file, Click on 'Edit file' option then add the content.

Save the input.txt file

Roll No: 40

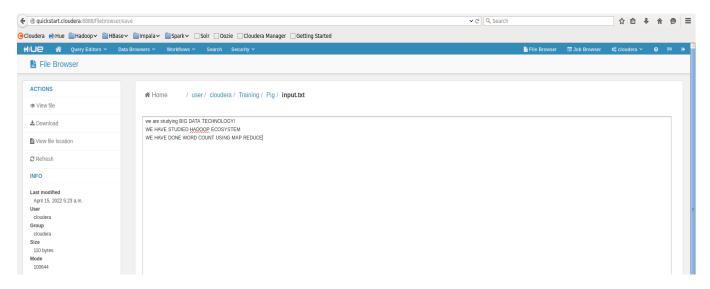

9) Now Open the terminal. And start Pig by typing pig on terminal.

Roll No: 40

```
[cloudera@guickstart ~]$ pig
log4j:WARN No appenders could be found for logger (org.apache.hadoop.util.Shell)
log4j:WARN Please initialize the log4j system properly.
log4j:WARN See http://logging.apache.org/log4j/1.2/faq.html#noconfig for more in
fo.
2022-03-24 21:27:30,534 [main] INFO org.apache.pig.Main - Apache Pig version 0.
12.0-cdh5.4.2 (rexported) compiled May 19 2015, 17:03:41
2022-03-24 21:27:30,534 [main] INFO org.apache.pig.Main - Logging error message
s to: /home/cloudera/pig 1648182450505.log
2022-03-24 21:27:30,564 [main] INFO org.apache.pig.impl.util.Utils - Default bo
otup file /home/cloudera/.pigbootup not found
2022-03-24 21:27:31,410 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
ess
2022-03-24 21:27:31,411 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:31,411 [main] INFO org.apache.pig.backend.hadoop.executionengi
ne.HExecutionEngine - Connecting to hadoop file system at: hdfs://guickstart.clo
udera:8020
2022-03-24 21:27:33,409 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
ess
2022-03-24 21:27:33,409 [main] INFO org.apache.pig.backend.hadoop.executionengi
ne.HExecutionEngine - Connecting to map-reduce job tracker at: localhost:8021
2022-03-24 21:27:33,415 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,466 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,468 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
ess
2022-03-24 21:27:33,517 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,517 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
ess
2022-03-24 21:27:33,571 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,571 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
2022-03-24 21:27:33,670 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
```

Roll No: 40

```
2022-03-24 21:27:33,755 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,761 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
2022-03-24 21:27:33,832 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,839 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
2022-03-24 21:27:33,911 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,911 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
ess
2022-03-24 21:27:33,956 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-24 21:27:33,957 [main] INFO org.apache.hadoop.conf.Configuration.deprec
ation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.addr
arunt>
```

10) Now we have to load that input file where ever it is stored. By typing the command

```
Input1 = LOAD '/usr/cloudera/Training/pig/input.txt' AS (fl:chararray);
grunt> Input1 = LOAD '/usr/cloudera/Training/pig/input.txt' AS (fl:chararray);
grunt>
```

11) Now we are dumping the data. It will do the MapReduce task. The Dump operator is used to run the Pig Latin statements and display the results on the screen. It is generally used for debugging Purpose.

DUMP input1;

```
Sparts (DMP ) purplet.

Parts (DMP ) purplet.
```

Roll No: 40

```
2022-03-24 213-153-33 1 Dakkomtrol | INFO org.asache.hadoop.aspreduce_JobSubmitter - number of splits1 |
2022-03-24 213-153-30 1 Dakkomtrol | INFO org.asache.hadoop.yarn.cluert.api.pt.yarn.cluent.pi. - signitive application applications ap
```

12) Here we are counting the words in each line for that we are using the following command

wordsInEachLine = FOREACH input1 GENERATE
flatten(TOKENIZE(f1)) as word;

```
grunt> wordsInEachLine = FOREACH Inputl GENERATE flatten(TOKENIZE(f1)) as word;
2022-03-25 22:09:29,072 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - fs.default.name is deprecated. Instead, use fs.defaultFS
2022-03-25 22:09:29,072 [main] INFO org.apache.hadoop.conf.Configuration.deprecation - mapred.job.tracker is deprecated. Instead, use mapreduce.jobtracker.address
grunt>
```

13) Again, we are dumping the data. It will do the MapReduce task. dump wordsInEachLine;

Roll No: 40

Now grouping the words present in each line. groupedWords = group wordsInEachLine by word;

```
grunt> groupedWords = group wordsInEachLine by word;
grunt>
```

And then dumping the data by the following command.

dump groupedWords;

```
Species of the groupedwords:

2022-03-12 221225,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig features used in the script: 08000 BY

2022-03-12 221225,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig features used in the script: 08000 BY

2022-03-12 221225,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig features used in the script: 08000 BY

2022-03-12 221215,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig features used in the script: 08000 BY

2022-03-12 221215,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig features used in the script: 08000 BY

2022-03-12 221215,005 [asin] 1800 org.apache.pig.tools.pigstats.ScriptState - Pig concentration threshold the pig features used in the script of the sc
```

Roll No: 40

```
Second State (Time in seconds):

Jac State (Time in seconds):

Jac
```

Now we count those words. For each group we count words in each line.

countedWords = foreach groupedWords generate group, COUNT(wordsInEachLine);

```
grunt> countedWords = foreach groupedWords generate group, COUNT(wordsInEachLine);
grunt> 
■
```

16) After every counting of words commands, we are dumping the data dump countedWords;

Now the Final Output we are getting as word count for every word.

```
grunts damp countenderords: a foreign groupedmorts generate group, CONTINUENTS. Entablished - Pig features used in the criptic GROUP BY 12:11:87,808 [asin] IMPO org. apache.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig.tools.pig
```

Roll No: 40

```
2022-03-25 22:17:42,771 [main] INFO org.apacke.pig.backend.hadoop.executionengine.mapReduceLayer.MapReduceLauncher - 180% complete
2022-03-25 22:17:42,771 [main] INFO org.apacke.pig.tools.pigstats.SimplePigStats - Script Statistics

Medooppersion PigVersion

Learned Script Statistics

Medooppersion PigVersion

Learned Script Script Statistics

Module PigVersion

Learned Script Script Script Statistics

Module PigVersion

Learned Script Script Script Script Statistics

Module PigVersion

MinMapTime AuyMapTime MedianMapTime MedianMapTime AuyMapTime MedianMapTime MedianMapTime AuyMapTime MapTime AuyMapTime MedianMapTime AuyMapTime MedianMapTime AuyMapTime MapTime AuyMapTime MedianMapTime AuyMapTime AuyMapTime MapTime AuyMapTime AuyMapTime MapTime AuyMapTime MapTime AuyMapTime MapTime AuyMapTime MapTime AuyMapTime Auy
```

```
(WE, 2)
(we,1)
(BIG, 1)
(MAP, 1)
(are, 1)
(DATA, 1)
(DONE, 1)
(HAVE, 2)
(WORD, 1)
(COUNT, 1)
(USING, 1)
(HAD00P, 1)
(REDUCE, 1)
(STUDED, 1)
(studying, 1)
(ECOSYSTEM, 1)
(TWECHNOLOGY!,1)
grunt>
```

As we can see from above image the Word "a" occurred twice, word "for, data" start with small w occurred twice, word "I" occurred once, and so on.

17) Now Exit from the grunt shell using quit command.

```
grunt> quit
[cloudera@quickstart ~]$
```