estion 1

1 yet answered

rked out of 1.00

Flag question

What would be the output of the following code?

```
int x[2][2]={ {2}, {1,3} };
int s=0;
for(int i=0; i<2; i++)
        s += x[i][i];
cout<<s;
```

Select one:

- a. 1
- b. 4
- c. 3
- d. 5

Polytechnic

الممسوحة ضوئيا بـ CamScanner

Not yet answered

Marked out of 1.00

Flag question

Find the elements of array y after execution the following code

```
int x[ 3 ] = { -2 , 1 , 4 };
    float y [ 3 ];
    int i = 0;
    y [ i ] = ++ x [ i++ ];
    y [ i ] = x [ i ] / 2;
    y [ i + 1 ] = y [ i - 1 ];
```

Select one:

- -20-2
- -10-1
- rubbish data
- -10.5-1

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

PUTER SKILLS II-3

THE OUTPUT IS :

```
#include <iostream>
using namespace std;
void sum(int a1[], int a2[]){
  int temp[2];
  temp[0]=a1[0]+a2[0];

  temp[1]=a1[1]+a2[1];
    cout<<temp[0] <<' '<<temp[1]<<' ';
   a1[0]=13 ;
}
int main(){
  int x[2] = {7,12};
  int y[2] = {6,1};
  sum(x,y);
  cout<<x[0];
  return 0; }
```

Select one:

- a. 6 13 13
- b. 13 13 13
- c. 7 13 13
- d. 13 12 13

الممسوحة ضوئيا بـ CamScanner

Not yet answered

Marked out of 1.00

Flag question

```
int f1(int m, int n);
int f2(int x, int y,int z);
void main()
{cout<<f2(8,1,3); }

int f2(int x, int y, int z)
{   if ( f1(x,y) <z)
      return  z-1;
 else
 return  z+1;  }

int f1(int m, int n)
{   return m+n; }
```

Select one:

- 3
- 2
- 4
- 8

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

PUTER SKILLS II-3

ed

1.00

ion

What is the output of the following code?

```
int x[2][2]={1,3,2,6};
 for(int i=0;i<2;i++)
 {
  for(int j=0;j<2;j++)
   cout<<--x[i][j] * 2 <<" ";

 }
```

Select one:

- 0 4 2 10
- 2 6 4 12
- None
- 1 3 2 6

لجنة الهيكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

PUTER SKILLS II-3

What is the output of the following Code

```
int x=0;
int y=0;
if (y || –x>10)
cout<<x+5;
else if(x==1)
cout<<x;
else
cout<<!x;
```

Select one:

- a. 5
- b. 2
- c. 1
- d. 0

الممسوحة ضوئيا بـ CamScanner

TER SKILLS II-3

What would be the output of the following code?

```
int x = 5, y = 4, z = 3;
( x > y > z ) ? cout<< (x += 2), cout<< x : cout<<x;
```

Select one:

- a. 55
- b. 75
- c. 5
- d. 77

لجنة الهندسة الكهربائية Polytechnic

الممسوحة ضوئيا بـ CamScanner

=12

TER SKILLS II-3

What would be the output of the following code?

```
char s1[10] = "FINAL";
char s2[10] = "42";
strcpy(s1, s2);
cout<<strlen(s1);
cout<<s1;
```

Select one:

- 5FINALA
- 10FINALA
- 242
- 342A

الممسوحة ضوئيا بـ CamScanner

15

TER SKILLS II-3

cout<<pow(floor(fabs(-2.7)),ceil(2.3));

Select one:

- 9
- 4
- 27
- 8

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

UTER SKILLS II-3

What is the output of the following code?

```
int x = 1;
    while ( x ) {
        for(int i = x-- ; i >= 1; i--)
            cout << i << x ;
        cout << "*";
    }
```

Select one:

- 1211*01*
- infinite loop
- 1111*00*
- 10*

الممسوحة ضوئيا بـ CamScanner

OMPUTER SKILLS II-3

ion 17

t answered

d out of 1.00

g question

WHAT IS THE OUTPUT

```
int x=50, n=3;
do {
cout<<""<<++n<<""\n";
++x; }
while (x<50||x>52);
```

Select one:

- "1"
- "4"
- "2"
- "3"

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

UTER SKILLS II-3

WHAT IS THE OUTPUT

```
int i=2, s=2;
while(i++<6){
s +=i-2;
cout<<s<< ' ' ;}
```

Select one:

- 3 5 8 11
- 2 4 7 11
- 3 5 8 12
- Endless Loop

Polytechnic

الممسوحة ضوئيا بـ CamScanner

...page=18

You a

PUTER SKILLS II-3

HOW MANY TIMES THE $ WILL PRITNT

```
for (int i=0;i<1;i++)
    for(int j=0;j<3;j++)
  {
      if ( j==1)
          break;
      cout<<'$';
    }
```

Select one:

- FOUR TIMES
- TWO TIMES
- ONE TIME
- THREE TIMES

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

=22

TER SKILLS II-3

What is the output of the following Code

```
int n=3;
switch(n)
{
case 1:cout <<(n = 4)<<(n == 4);break;
case 3:cout<<(n && 4)<<(n || 4);
default: cout << (!n) << " ";
}
```

Select one:

- a. 40
- b. 110
- c. 11
- d. 0

الممسوحة ضوئيا بـ CamScanner

PUTER SKILLS II-3

```
const int a = 5;
int b = ++a * a++;
cout<<b;
```

Select one:

- a. error
- b. 36
- c. 25
- d. 30

Polytechnic

الممسوحة ضوئيا بـ CamScanner

101-COMPUTER SKILLS II-3

Question 24

Not yet answered

Marked out of 1.00

Flag question

WHAT IS THE OUTPUT

```
int i=3, s=3;
while(i++<7){
s +=i-1;
cout<<s<<' ';}
```

Select one:

- a. Endless Loop
- b. 6 10 15
- c. 6 10 15 21
- d. 21

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

red

1.00

ion

```
float fun(int x, char y )
{
cout<<y;

return x;

}

void  main()

{ int m=66;
float n=7.7;
cout<<fun(n,m)/2;


}
```

Select one:

- 66 3.85
- B 3.85
- 66 3.5
- B 3.5

لجنة الميكانيك Polytechnic

الممسوحة ضوئيا بـ CamScanner

BSE0201-PROGRAMMING FOR ENGINEERS-

C++ Lab final

Question 3

Not yet answered

Marked out of 1.00

Flag question


which condition check if number n is even and positive and is less than 100 or larger than or equal 10

a. (n%2) && (n>0) || (n< 100 || n>=10)

b. (n%2) && (n>0) && (n< 100 || n>=10)

c. (n%2) && (n>0) && (100> n>=10)

d. !(n%2) && (n>0) && (n< 100 || n>=10)

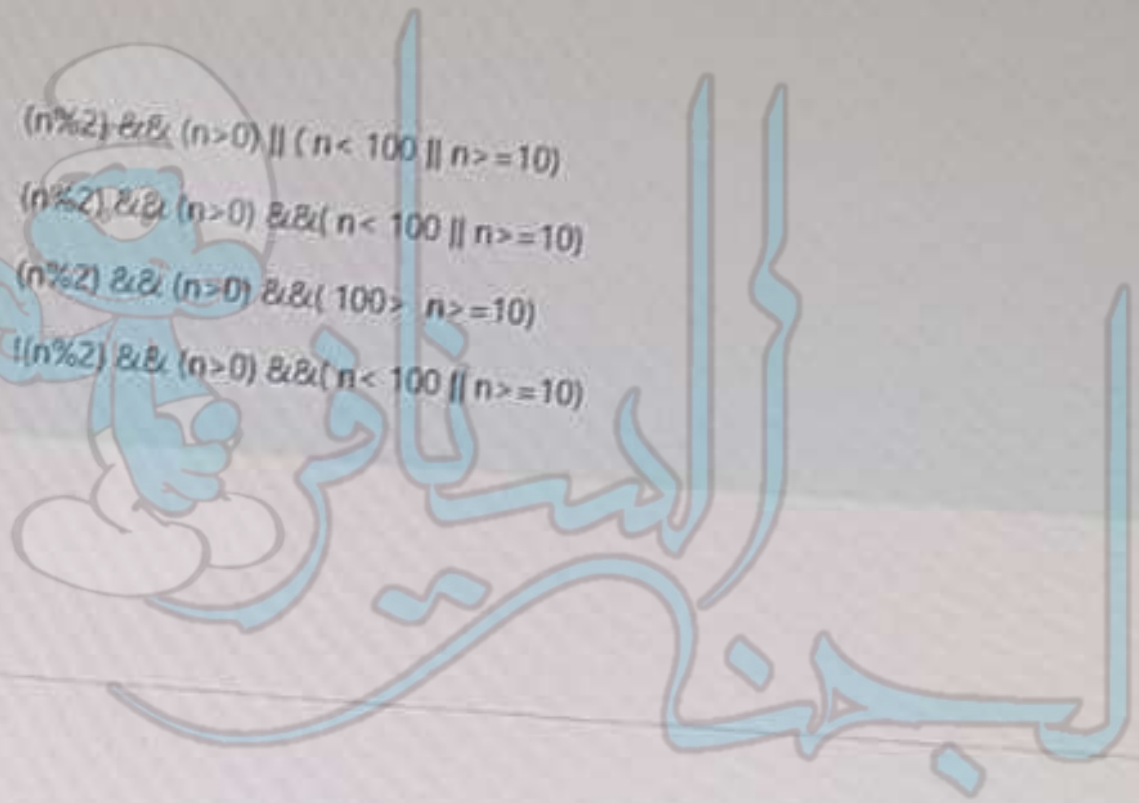

2026/2025-1-BSE0201-PROGRAMMING FOR ENGI

Question 5

Not yet answered

Marked out of 1.00

Flag question

which lines contain an error if any

```
1  const int x;
2  double y;
3  cin>>x;
4  y=+x;
5  cout>>y;
```

- a. lines 1,3 ,4 and 5
- b. lines 1,2,3,4 and 5
- c. line 1 and 5
- d. lines 1 and 3


25-1-BSE0201-PROGRAMM
Question 2
Not yet answered
Marked out of 1.00
Flag question
What is the output
int x=7, y=3;
if(x=y)
cout<<"A";
if(x>y)
cout<<"B";
else
if (x=3)
if (x!=y)
cout<<"C";
else
cout<<"D";
else
cout<<"E";
cout<<"F";
a. D
b. DF
c. CF
d. EF

Question 1

Not yet answered

Marked out of 1.00

Flag question

What is the output

```
int x=4, y=5;
if(x==y)
cout<<"F";
if(x>y)
cout<<"A";
   else
 if (x=5)
 if (x!=y)
 cout<<"B";
   else
 cout<<"C";
   else
 cout<<"D";
 cout<<"E";
```

- a. BE
- b. CE
- c. C
- d. DE

Question 2

Not yet answered

Marked out of 1.00

Flag question

what is the output

```
cout<<1.5*2/2+4%5;
```

- a. 1
- b. 1.5
- c. 5.5
- d. 5

Clear my choice

/2025-1-BSE0201-PROGRAMMING FOR ENGINEERS-3

3

out of

question

which condition check if number n is odd or negative and is larger than 100 and less than or equal 10

- a. !(n%2) ||(n<0) &&(n> 100 && n<=10)
- b. (n%2)||(n<0) ||(n> 100 && n<=10)
- c. (n%2)||(n<0) &&(n> 100 || n<=10)
- d. (n%2)||(n<0) &&(n> 100 && n<=10)

lab 25/26-1 (page 4 of 10) - Google Chrome

learning.fet.edu.jo/mod/quiz/attempt.php?attempt=5942&cmid=3074&page=3

026/2025-1-BSE0201-PROGRAMMING FOR ENGINEERS

Question **4**

Not yet answered

Marked out of 1.00

Flag question

what is the output

```
int x=6,y=1;

if(y-- || (x*=0))
cout<<y;
else
cout<<++x;
cout<<x;
```

- a. 11
- b. 00
- c. 06
- d. 16

026/2025-1-BSE0201-PROGRAMMING FOR ENGINEERS-3

Question 7

Not yet answered

Marked out of 1.00

Flag question


which lines contain contain an error if any

```
1  const int y;
2  float x;
3  cin>>y;
4  x=+y;
```

- a. lines 1 and 3
- b. lines 1,3 and 4
- c. line 1
- d. lines 1,2,3 and 4

2025-1-BSE0201-PROGRAMMING FOR

Which codes draw the following shape

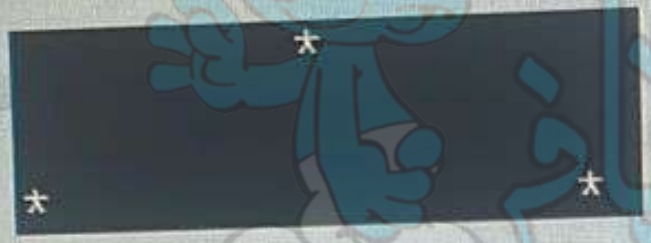

- a. cout<<"\t*\n\b*\t\t*";
- b. cout<<"\t*\n\n*\t\t*";
- c. cout<<"\t*\n\n*\t*";
- d. cout<<"\t*\n*\n*\t\t*";