خدمتكم طريق خضناه لرضى الله

2021

أسئلة سنوات فاينال

مهارات الحاسوب 2





سنافر البوليتكنك

بسم الله الرحمن الرحيم

نقدم لكم نحن أسرة فريق

(لجنة السنافر)

مجموعة أسئلة اختبارات إلكترونية تم تجميعها خلال الفصول الماضية
سائلين المولى أن يوفقنا وإياكم لكل خير

تنويه

يوجد بعض الأسئلة عليها إجابات قد تحتمل الصواب وقد تحتمل الخطأ

فإن أصبنا فما هو إلا توفيق من الله

وإن أخطأنا فمن أنفسنا

#خدمتكم_طريق_خضناه_لرضى_الله

#الإتجاه_الاسلامي

#بسواعدنا_نبنيها

#لجنة_السنافر

#هي_لله

what is the output

```
bool x=1;

int w=5,y=3,m=2;

switch((w+= y != x > m++))

{


case 0: w=2;break;

case 1: w=3;break;

default: w=4;break;

}

cout<<w;
```

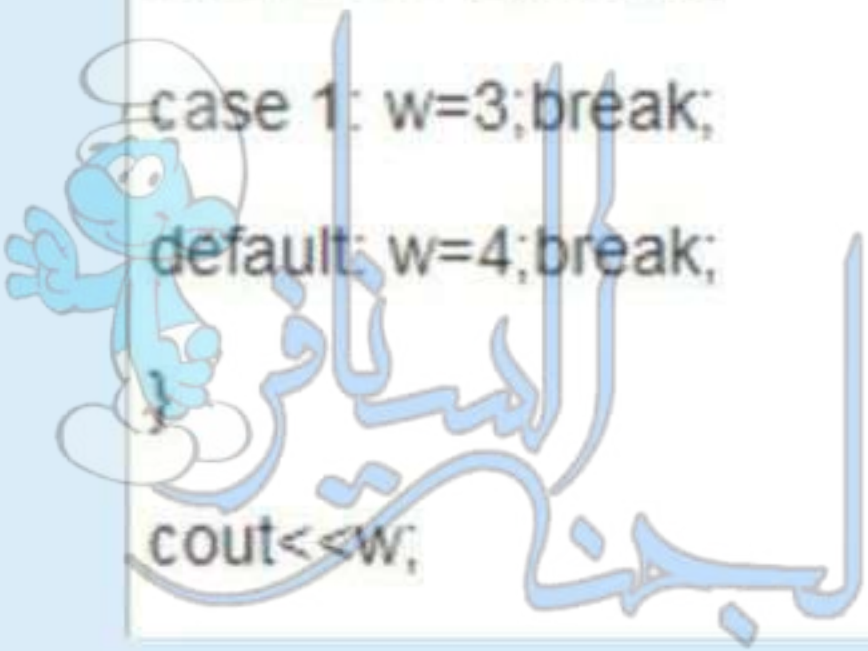

اخترأحد الخيارات

- 0
- 3
- 4
- 2

what is the output

```
bool x=1;

int w=5,y=3,m=2;

switch((w+= y != x > m++))

{

case 0: w= 10;break;

case 1: w= 50;break;

default:w= -80;break;

}

cout<<w;
```



اخترأحد الخيارات

- 10-
- 10
- 50
- 80-

Trace the following program and choose the correct output

```
int x[5]={2,4,3,0,1};

int y[5];

for(int i=0; i<=4 ; i++)

y[x[i]]=i+x[i];

for(int i=0;i<=4;i++)

cout<<y[i]<<" ";

cout<<endl;
```



Select one:

- 1 5 2 5 7
- 1 1 4 7 7
- 3 3 2 7 5
- 3 5 2 5 5

what is the output

```
int a = 4;
int fun(int x, int  &a) {
int y;
y = x - a;
return x - y; }
int main() {
cout<<a;
int a = 7, b = 9;
b = fun(a,b);
cout << a << b; }
```



Select one:

- 477
- 479
- 478
- 475

?What is the output of the following code

```
char str1[10] = "FET";
char str2[10] = "BAU";
char str3[10]="C++";
int len ;
strcpy( str3, str1);
cout << str3 ;
strcat(str3,strcat( str1, str2));
len = strlen(str3);
cout << len << endl;
```

اخترأحد الخيارات

a. FET9

b. C++9

c. BAU9

d. FET3

what is the output

```
int d=5.6;
int m(int a, int b,int d ) {
d++;
return ( a < b || d ? a : b ); }
int main() {
int i = 2;
int j = 5;
cout << m(i,j,d);
cout<<++d;
return 0; }
```



Select one:

- 25
- 36
- 26
- 27

What is the output of the following code?


```
float x = 4.7;
if ( ( x - floor ( x ) ) * 10 >= 5 )
cout << pow ( floor ( x ) , 1 / 2 ) + 5;
else
cout << pow ( ceil ( x ) , 1 / 2 ) + 2;
```

Select one:

- 4
- 7
- 6
- 3

Trace the following program and choose the correct output

```
int x[5]={1,0,2,4,3};
int y[5];
for(int i=0; i<=4 ; i++)
y[x[i]]=i+x[i];
for(int i=0;i<=4;i++)
cout<<y[i]<<" ";
cout<<endl;
```

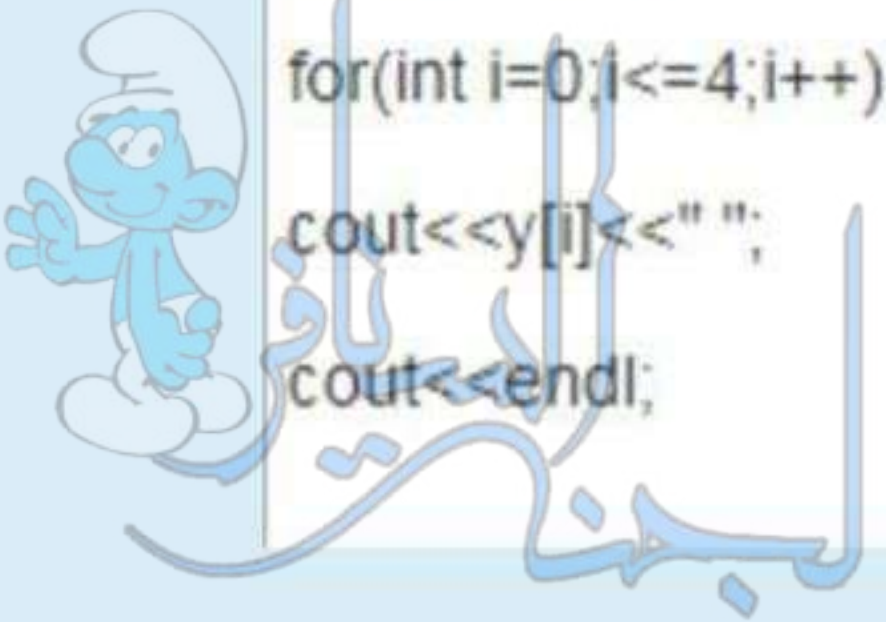

اخترأحد الخيارات

- 7 7 4 1 1
- 7 5 6 2 0
- 7 5 2 5 1
- 5 7 2 3 3

what is the output

```
; bool b = 6
; cout << 5 + 1. 0 / 2
; cout << b * 2
```



اخترأحد الخيارات

- 312
- 31
- 5.512
- 5.52

What is the output of the following code?

```
int call  (int m[],int b) {
for(int i=3;i<b;i++)
m[i]=m[i]%3;
return  m[b];}
int main(){ int x[10]={5,4,7,9,8,10,2,3,6,1};
cout<<call (x,6);
for(int i=5;i<7;i++) cout<<x[i];
    return 0;
}
```

Select one:

- 211
- 210
- 220
- 212

What would be printed by the following statements?

```
int y[3][3] = {10, 2, 83,46, 95, 6,17};
cout <<y[2][0];
```



اخترأحد الخيارات

a. 24

b. 44

c. 17

d. 0

?How many times " ok " is get printed

```
} for(int i=4; i<=7; i++)
        if(i < 5)
    ;continue
        ;break
;"cout<<"ok
{
```

اخترأحد الخيارات

- Five times
- Three times
- 0
- Four times



The output of the following code is

```
int s;

void fun(){
    s +=6;
}

int main()
{
    int res = -1;
    int i;
    for(i=0; i<2; ++i){
        fun();
        cout << s << " ";
        res +=s;
    }
    cout << res << " ";
    int s = 2;
    res +=s;
    cout << res << " ";
    return 0;
}
```

Select one:

- a. 6 12 17 23
- b. 6 12 17 19
- c. 6 12 17 29
- d. Rubbish Data

?What is the output of the following code

```
; int x [ ][ 3 ] = { { 1 , 2 , 3 } , { 0 } , { 2 , 2 } }
}for ( int i = 0 ; i < 3 ; i++ )
for ( int j = 0 ; j < 3 ; j++ )
;cout << x [ j ][ i ]
;" , " >> cout
{
```



اخترأحد الخيارات

- , 22 , 0 , 123
- , 300 , 202 , 102
- , 3 , 22 , 102
- , 220 ,000 , 123

For the following code , what is the output :

```
int change();

void main(){

cout<<change();

cout<<change();

}

int change(){

static int k=2;

k+=2;

return k ;

}
```




Select one:

- a. 24
- b. 44
- c. 46
- d. 48

The output of the following program is:

```
float add(float a, float &b){
   return (a++ + b++);
}
void main(){
   float a = 3.4, b = -1.2;
   int res = add(b, a);
   cout << a << " " << b << " " << res; }
```

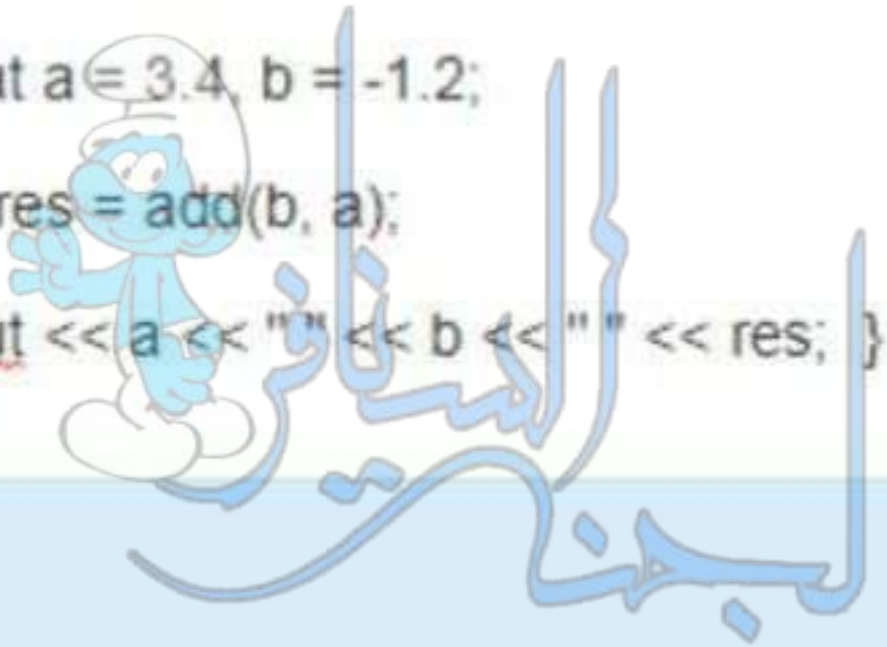

Select one:

- a. 4.4 -1.2 2
- b. 4.4 -0.2 2.2
- c. 3.4 -1.2 2
- d. 3.4 -0.2 2

Consider the following statements:

```
int num1=6, num2=7, num3=4;
double length=6.2, width=2.3, height=3.4,
volume;
```

and the following prototype:

```
double box(double, &double, double);
```

Which of the following statements are valid?

Select one:

- cout<<box(9.7,,height);
- volume=box(num1, width, height);
- volume=box(length+width, height);

Trace the following program and choose the correct output

```
int matrix[4][4] = {{1, 2, 3, 4}, {4, 5, 6, 7}, {8, 9, 10, 11}, {12,
for (int i = 0; i < 4; i++)
cout << matrix[2][i] << " ";
```

Select one:

- a. 8 9 10 11
- b. 3 6 10 2
- c. 2 5 9 13
- d. 1 2 3 4

What is the output of the following code?

```
int x [ ][ 3 ] = { { 10 , 22 , 33 } , { 0 } , { 40 , 50 } } ;
for ( int i = 0 ; i < 3 ; i++ ){
for ( int j = 0 ; j < 3 ; j++ )
cout << x [ j ][ i ];
cout << " , ";
}
```

Select one:

- 10040 , 22050, 3300 ,
- 102233 , 000 , 40500 ,
- 10040 , 2250 , 33 ,
- 102233 , 0 , 4050 ,



what is the output

```
int d=5.6;
int m(int a, int b,int d ) {
d++;
return ( a < b || d ? a : b ); }
int main() {
int i = 2;
int j = 5;
cout << m(i,j,d);
cout<<++d;
return 0; }
```



Select one:

- 26
- 27
- 25
- 36

what is the output

```
int a=6;
if ((a++ && (a+=3))
cout<< a/2.0;
cout<<a-2;
```




اخترأحد الخيارات

- 68
- 58
- 44
- 5

what is the output

```
int a = 5;
int fun(int x, int &a) {
int y;
y = x + a;
return x - y; }
int main() {
cout<<a;
int a = 6, b = 8;
b = fun(a,b);
cout << a << b; }
```

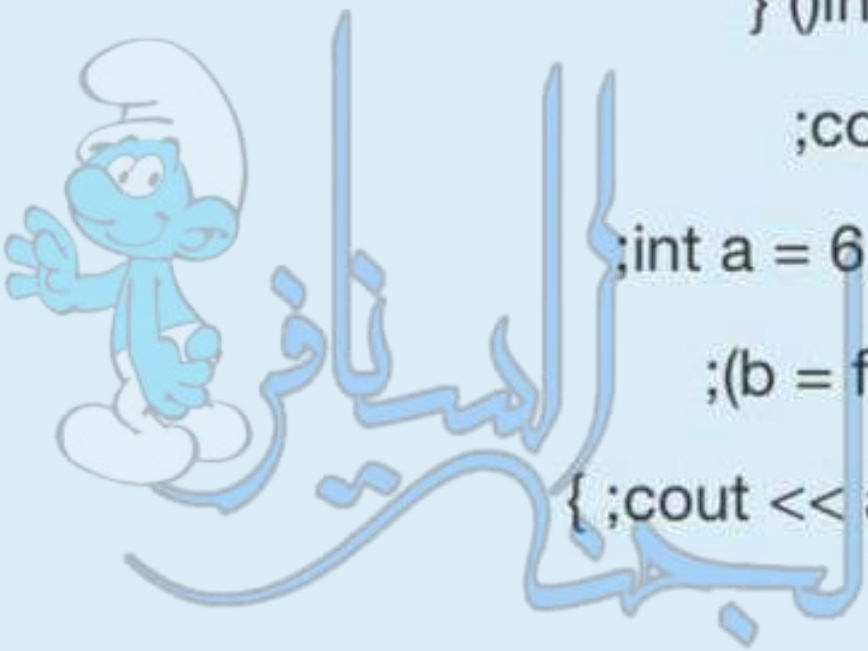

اخترأحد الخيارات

- 56-7
- 5-8-8
- 56-8
- 55-8

What is the output of the following code?

```
float x = 8.7;
if ( ( x - floor ( x ) ) * 10 >= 5 )
cout << pow ( floor ( x ) , 1 / 2 ) + 2;
else
cout << pow ( ceil ( x ) , 1 / 2 ) + 3;
```

Select one:

- 4.82
- 4
- 8
- 3

What is the output of the following code?

```
float x = 3.7;
if ( ( x - floor ( x ) ) * 10 >= 5 )
cout << pow ( floor ( x ) , 1 / 2 ) + 1;
else
cout << pow ( ceil ( x ) , 1 / 2 ) + 2;
```

Select one:

- 3
- 2.73
- 4
- 2

Consider the following statements:

```
int num1=6, num2=7, num3=4;
double length=6.2, width=2.3, height=3.4,
volume;
```

and the following prototype:

```
double box(double, &double, double);
```

Which of the following statements are valid?

Select one:

- box(length, width, height);
- volume=box(num1, length, num2);
- cout<<box(9.7,,height);

what is the output

```
int x=1,y=4;
do
while(x+1<y)
cout<<--x + y++;
while(x==y);
```

اخترأحد الخيارات

- 445
- Infinite loop
- 4
- 444



For the following code , the output will be :

```
int change();
void main(){
cout<<change();
cout<<change();
}
int change(){
static int k=6;
k-=2;
return k ;
}
```



Select one:

- a. 20
- b. 42
- c. 64
- d. 44

what is the output

```
int d=5.6;
int m(int a, int b,int d ) {
d++;
return ( a < b || d ? a : b ); }
int main() {
int i = 2;
int j = 5;
cout << m(i,j,d);
cout<<++d;
return 0; }
```



Select one:

- 36
- 25
- 27
- 26

what is the output


```
int a = 4;
int fun(int x, int  &a) {
int y;
y = x - a;
return x - y; }
int main() {
cout<<a;
int a = 7, b = 9;
b = fun(a,b);
cout << a << b; }
```

Select one:

- 479
- 478
- 477
- 475

?What is the output of the following code

```
} int call  (int m[],int b)
for(int i=3;i<b;i++)
;m[i]=m[i]%3
{;return  m[b]
;int main(){ int x[10]={5,4,7,9,8,10,2,3,6,1}
;cout<<call (x,6)
;for(int i=5;i<7;i++) cout<<x[i]
;return 0
{
```

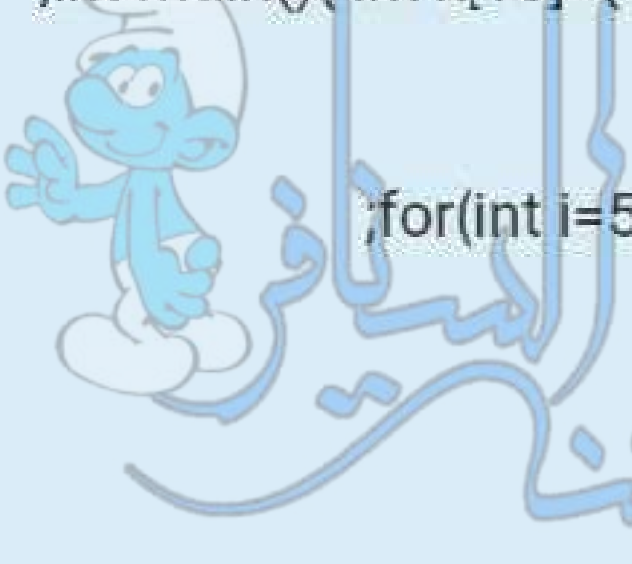

اخترأحد الخيارات

- 212
- 211
- 210
- 220

what is the output

```
int main()
{
 char  y = 'c';
if ( y == 'c' ) {
if ( y++ <= 'D' )
cout << y;  }
else
cout << ++y;
if ( y == 'd' )
cout << 'd'+1;}
```

Select one:

- e
- 99
- 100
- 101

what is the output

```
int x=12,y=2;
if (x / y != 0 && y++)
   cout << x / y << "k";
else
   cout << x * y << "z";
```

Select one:

- 4k
- 48z
- 24z
- 6k



what is the output

```
int main() {
char  y = 'd';
if ( y == 'd' ) {
if ( y++ <= 'E' )
cout << y;  }
else
cout << ++y;
if ( y == 'e' )
cout << 'e'+1; }
```

Select one:

- f
- 102
- 101
- 99

What would be the output of the following code?

```
int x = 7, y = 6, z = 5;
( x > y > z ) ? cout<< (x += 2),  cout<< x  :  cout<<x;
```

Select one:

- a. 97
- b. 77
- c. 7
- d. 99



الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int n=4;
switch(n)
{
case 1:cout <<(!n);break;
case 4:cout<<(n && 4)<<(n || 4);
default: cout << (n = 4)<<(n == 4) << " ";
}
```

Select one:

- a. 0
- b. 11
- c. 1141
- d. 40

الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;
void sum(int a1[], int a2[]){
  int temp[2];
  temp[0]=a1[0]+a2[0];

  temp[1]=a1[1]+a2[1];
    cout<<temp[0]<<''<<temp[1]<<' ';
   a1[0]=22 ;
}
int main(){
  int x[2] = {0,17};
  int y[2] = {0,1};
  sum(x,y);
  cout<<x[0];
  return 0;  }
```

الممسوحة ضوئيا بـ CamScanner

Find the elements of array y after execution the following code

```
int x[ 3 ] = { -2 , 1 , 4 };
    float y [ 3 ];
    int i = 0;
    y [ i ] = ++ x [ i++ ];
    y [ i ] = x [ i ] / 2;
    y [ i + 1 ] = y [ i - 1 ];
```

Select one:

rubbish data

- -20-2
- -10.5-1
- -10-1

الممسوحة ضوئيا بـ CamScanner

What is the output of the following code?

```
int x = 1;
    while ( x ) {
        for(int i = x-- ; i >= 1; i--)
            cout << i << x ;
        cout << "*";
    }
```



Select one:

- 1211*01*
- 1111*00*
- infinite loop
- 10*

الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int x=0;
int y=0;
if (y || --x>10)
cout<<x+5;
else if(x==1)
cout<<x;
else
cout<<!x;
```



Select one:

- a. 5
- b. 2
- c. 1
- d. 0

الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;
int b=6;
int sub1(int);
int main(){
    int b=4;
    sub1(b);}

    int sub1(int c) {
        if (b==6)
        cout<<--c;
        cout<<b++;}
```

الممسوحة ضوئيا بـ CamScanner

Select one:

○ a.

space1 is 5

space2 is x[i] % 2 == 0

space3 is x[i] = x[i]*2

space4 is x[i] = 0

○ b.

space1 is 4

space2 is x[i] % 2 = 0

space3 is x[i] = 2

space4 is x[i] = 0

○ c.

space1 is 5

space2 is x[i] % 2 == 0

space3 is x[5] = x[5] *2

space4 is x[5] = 0

○ d. None of the answers

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code

```
int x[2][2]={ {1}, {3} };
int s=0;
for(int i=0; i<2; i++)
        s += x[i][i];
cout<<s;
```

Select one:

- a. 3
- b. 1
- c. 4
- d. 0



الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
int i=2, s=2;
while(i++<6){
s +=i-2;
cout<<s<< ' ' ;}
```

Select one:

- Endless Loop
- 2 4 7 11
- 3 5 8 11
- 3 5 8 12

الممسوحة ضوئيا بـ CamScanner

```
const int a = 7;
int b = ++a * a++;
cout<<a<<b;
```

Select one:

- a. 949
- b. 964
- c. 956
- d. error

الممسوحة ضوئيا بـ CamScanner

Complete the following program to print 1 3 5 7 9

```
#include<iostream>

using namespace std;

int main(){

        for ( int i =  1 ; i < 9 ; i++  )

                        cout <<  i  << "\t";

}
```

الممسوحة ضوئيا بـ CamScanner

what is the following code do:

```
int x[3][2]={8,9,7,6,4,3};
   int sum,a=0,b=0;
   while(a<=2){
      sum=0; b=0;
   while(b<=1){
   sum+=x[a][b];
   b++;
   }
   cout<<sum<<endl;
   a++;
   }
```

Select one:

- a. print the summation for each column
- b. print the summation for the 2 dim array elements
- c. print the summation for each row

الممسوحة ضوئيا بـ CamScanner

```
int main()
{
    int num;
    cout<<"enter integer number";
```

Choose...


```
 // test if the number multiple of 3 , if yes check if it is positive or no
```

Choose...

```
    if(num>0)
    cout<<"positive *3";
```

Choose...

```
    cout<<"negative *3";
    else
    cout<<"not multiple of 3";
     return 0;
```

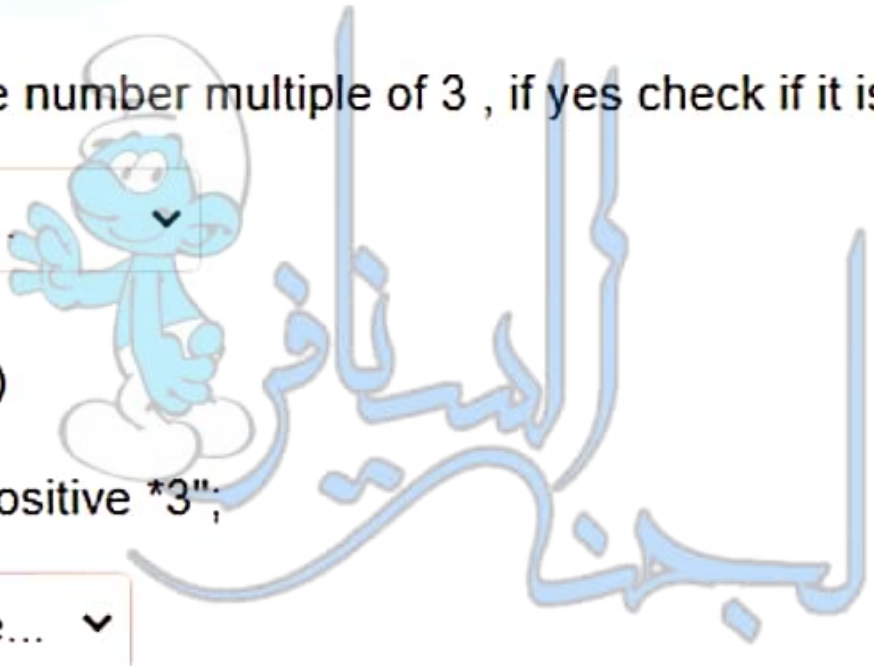

الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int n=4;
switch(n)
{
case 1:cout <<(!n);break;
case 4:cout<<(n && 4)<<(n || 4);
default: cout << (n = 4)<<(n == 4) << " ";
}
```

Select one:

- a. 0
- b. 11
- c. 1141
- d. 40

الممسوحة ضوئيا بـ CamScanner

Find the output

```
int a=3, b=4;
void main()
{
int a,c=8;
a=b++;
}
int a=11,z;
z=a + ++b + c--;
cout<<z<<endl;
{
cout<<a<<b<<c;}
```

اخترأحد الخيارات

- 24
  357
- 25
  467
- 25
  568

- 24
  7 5 11



الممسوحة ضوئيا بـ CamScanner

What would be the output of the following ?code

```
{'char s[10] = {'x', 'y', 'z', 'w', 'v','\0';
's[2] = '\0';
cout<<s;
```



اخترأحد الخيارات

- xy
- x
- xyzwv
- xy wv

الممسوحة ضوئيا بـ CamScanner

```
cout<<pow(floor(fabs(-3.7)),ceil(2.3));
```

Select one:

- 9
- 16
- 64
- 27



الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int n=3;
switch(n)
{
case 1:cout <<(n = 4)<<(n == 4);break;
case 3:cout<<(n && 4)<<(n || 4);
default: cout << (!n) << " ";
}
```


Select one:

- a. 40
- b. 110
- c. 11
- d. 0

الممسوحة ضوئيا بـ CamScanner

what are the contents of array a after executing the following code?

```
int count;
int a[3];
a[0] = 5;
for ( count = 0; count < 3; count++)
{
a[count] = 2 * count + 8;
a[count - 1] = a[count-1] - 3;
}
```

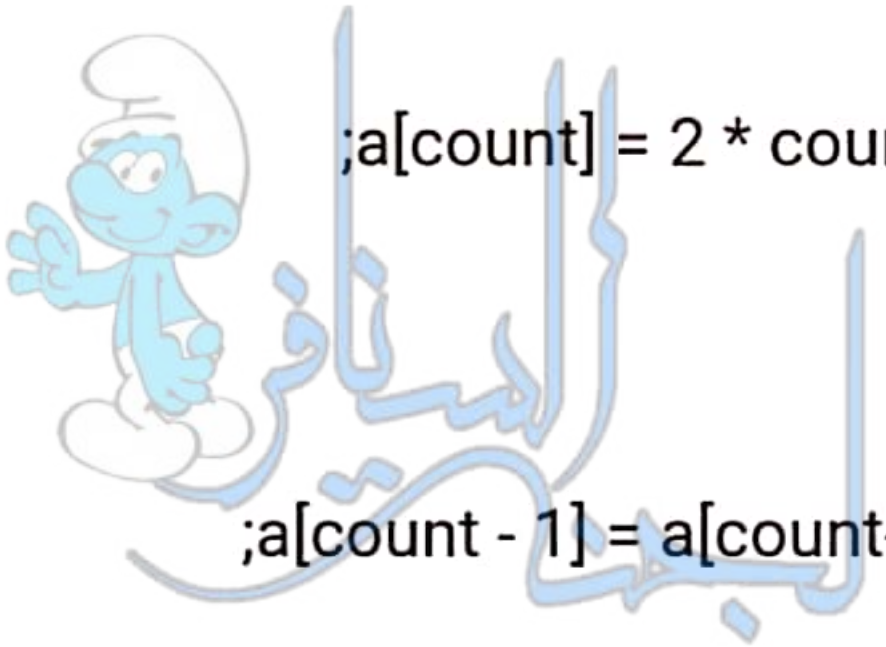

اخترأحد الخيارات

- 9 10 8
- None
- 20 6 10
- 6 10 8

الممسوحة ضوئيا بـ CamScanner

what are the contents of array a after executing the following code?

```
int count;
int a[3];
a[0] = 5;
for ( count = 0; count < 3; count++)
{
a[count] = 2 * count + 8;
a[count - 1] = a[count-1] - 3;
}
```


اخترأحد الخيارات

- 9 10 8
- None
- 20 6 10
- 6 10 8

الممسوحة ضوئيا بـ CamScanner

Find the output

```
;int  a=7, b=8
()void main
}
;int a,c=9
;++a=b
}
;int a=10,z
;--z=a + ++b + c
;cout<<z<<endl
{
{;cout<<a<<b<<c
```

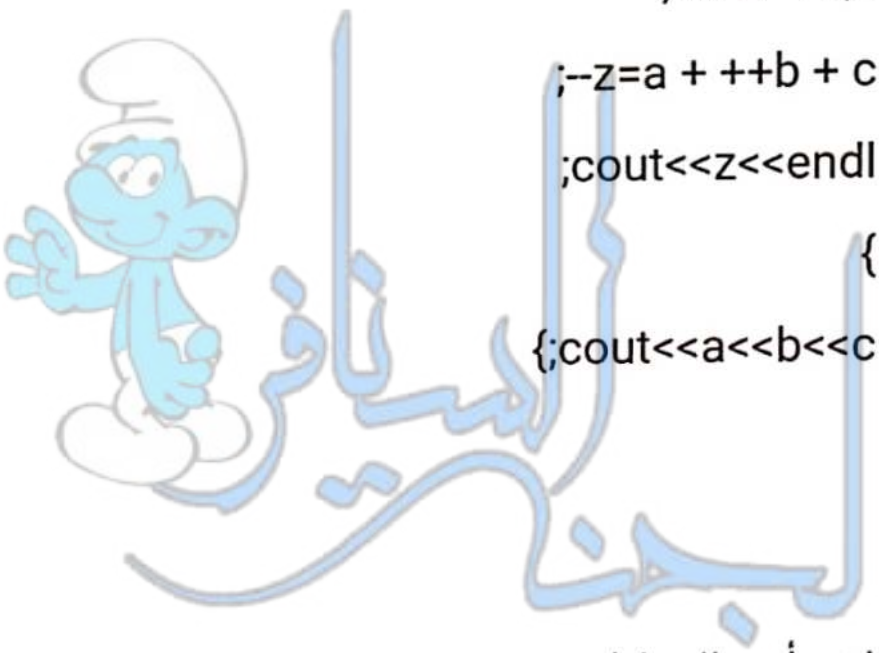

اخترأحد الخيارات

- 28
  789
- 29
  8108
- 29
  9109
- 28
  1098

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
int x[2][2]={ {1}, {2,3} };
int s=0;
for(int i=0; i<2; i++)
        s += x[i][i];
cout<<s;
```

Select one:

- a. 4
- b. 1
- c. 5
- d. 3



الممسوحة ضوئيا بـ CamScanner

What would be the output of the following ?code

```
int x = 5, y = 4, z = 3;
cout<< (x += 2), cout<< x : ? ( x > y > z )
cout<<x;
```



اخترأحد الخيارات

a. 77

b. 55

c. 5

d. 75

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
for(int i=2,j=3; i%j!=5
;i++,j+=2)
;"">>cout<<i<<j
```



اخترأحد الخيارات

- ,35,47,59
- ,23,35,47
- ,01,13,25
- ,46,58,610

الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;

void fet();
int main()
{
   fet();
   fet(); }

        void fet (){
   int y[4]={ 3,7,8,6};
   static int x=4;
   cout<<x++;
   cout<<++y[2]; }
```

output:
4959



الممسوحة ضوئيا بـ CamScanner

The output is :

```
#include <iostream>
using namespace std;
void sum(int a1[], int a2[]){
  int temp[2];
  temp[0]=a1[0]+a2[0];

  temp[1]=a1[1]+a2[1];
    cout<<temp[0] <<' '<<temp[1]<<' ';
   a1[0]=60;
}
int main(){
  int x[2] = {15,25};
  int y[2] = {1,2};
  sum(x,y);
  cout<<x[0];
  return 0;  }
```

Select one:

- a. 15 25 60
- b. 16 25 60
- c. 15 27 60
- d. 16 27 60

الممسوحة ضوئيا بـ CamScanner

```
;const int a = 7
;++int b = ++a * a
;cout<<a<<b
```



اخترأحد الخيارات

- a. 956
- b. 964
- c. 949
- d. error

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
int x = 6, y = 5, z = 4;
( x > y > z ) ? cout<< (x += 2),  cout<< x  :  cout<<x;
```

Select one:

- a. 6
- b. 66
- c. 88
- d. 86



الممسوحة ضوئيا بـ CamScanner

what are the contents of array a after executing the following code?

```
int count;

int a[3];

a[0] = 5;

for ( count = 0; count < 3; count++)

{

a[count] = 2 * count + 8;


}

a[count - 1] = a[count-1] - 3;
```

Select one:

- 8 10 6
- 8 10 9
- 10 6 20
- None

الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int n=7;
switch(n)
{
case 1:cout <<(!n);break;
case 7:cout<<(n && 0)<<(n || 4);
default: cout << (n = 7)<<(n == 4) << " ";
}
```

Select one:

- a. 0170
- b. 70
- c. 01
- d. 0

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
;int i=3, s=3
}while(i++<7)
;s +=i-1
{ ;' ' >>cout<<s
```

اخترأحد الخيارات

a. 6 10 15

b. 6 10 15 21

c. Endless Loop

d. 21



الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;
void fet();
int main()
{
    fet();
    fet(); }
    void fet (){
    int y[4]={ 2,3,5,7};
    static int x=4;
    cout<<x++;
    cout<<++y[2]; }
```

output:
4656



الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
char s[10] = {'x', 'y', 'z', 'w', 'v','\0'};
s[3] = '\0';
cout<<s;
```



Select one:

- xy
- xyz v
- xyzwv
- xyz


الممسوحة ضوئيا بـ CamScanner

What is the code that must be written in the blank to print one star?

```
for (int  i=1  ;  i<=6 ; i++){

          ----------------------

          cout<<'*';
}
```

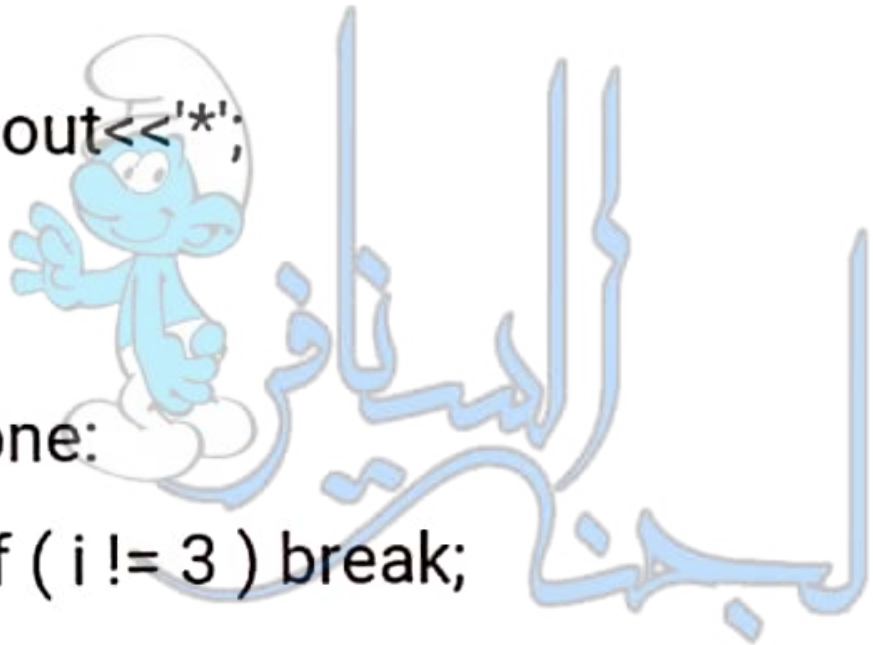

Select one:

- a. if (i != 3) break;
- b. if (i == 3) continue;
- c. if (i == 3) break;
- d. if (i != 3) continue;

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
char s1[10] = "SKILLS";
char s2[10] = "123";
strcpy(s1, s2);
cout<<strlen(s1);
cout<<s1;
```

Select one:

- 3123
- 4123L
- 10SKILLSL
- 6SKILLSL

الممسوحة ضوئيا بـ CamScanner

```
float fun(int x, char y )
{
cout<<y;


return x;

}

void  main()

{ int m=66;
float n=7.7;
cout<<fun(n,m)/2;


}
```

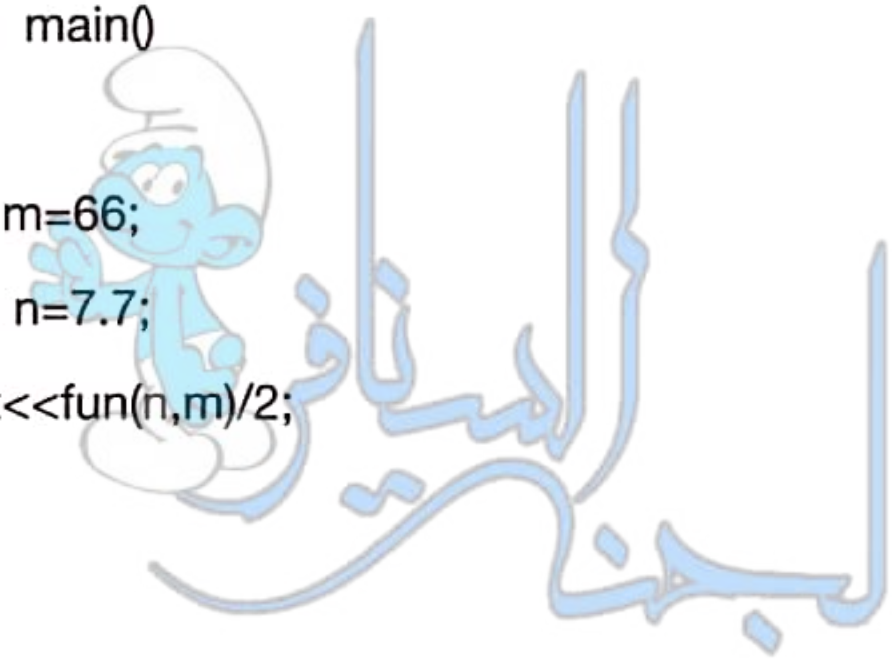

Select one:

- 66 3.5
- 66 3.85
- B 3.5
- B 3.85

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
for(int i=2,j=3; i%j!=5
;i++,j+=2)
cout<<i<<j<<";;
```

Select one:

- 23,35,47,
- 01,13,25,
- 46,58,610,
- 35,47,59,

الممسوحة ضوئيا بـ CamScanner

```
( float fun(int x, char y
}
;cout<<y

;return x

{

()void  main

;int m=66 }
;float n=7.7
;cout<<fun(n,m)/2

{
```

اخترأحد الخيارات

- B 3.5
- B 3.85
- 3.5 66
- 3.85 66

الممسوحة ضوئيا بـ CamScanner

```
cout<<pow(floor(fabs(-2.7)),ceil(2.3));
```


Select one:

- 4
- 9
- 27
- 8



الممسوحة ضوئيا بـ CamScanner

```
;int count
;int a[3]
;a[0] = 5
for ( count = 0; count < 3; count++)
}
;a[count] = 3 * count + 10
{
;a[count - 1] = a[count-1] - 2
```

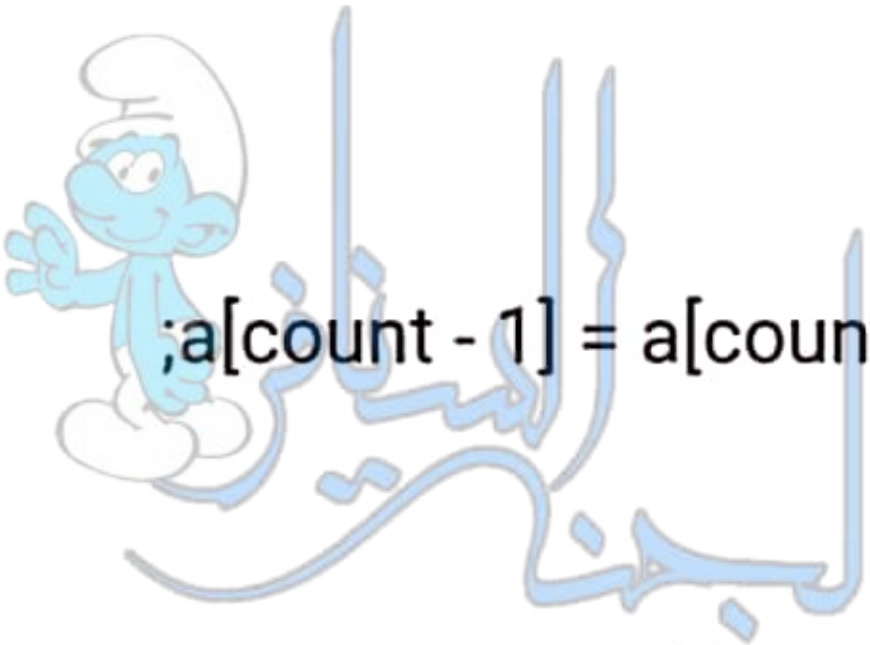

اخترأحد الخيارات

- 16 13 10
- 14 13 10
- 20 16 13
- None

الممسوحة ضوئيا بـ CamScanner

what are the contentes of array a after executing the following code?

```
int count;
int a[3];
a[0] = 5;
for ( count = 0; count < 3; count++)
{
a[count] = 5 * count + 10;

}
a[count - 1] = a[count-1] - 4;
```

Select one:

- 15 16 20
- 10 15 20
- 10 15 16
- None

الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int n=4;
switch(n)
{
case 1:cout <<(!n);break;
case 4:cout<<(n && 4)<<(n || 4);
default: cout << (n = 4)<<(n == 4) << " ";
}
```

Select one:

- a. 0
- b. 11
- c. 1141
- d. 40

الممسوحة ضوئيا بـ CamScanner

What is the output of the following code?

```
int x[2][2]={8,1,7,5};
 for(int i=0;i<2;i++)
 {
  for(int j=0;j<2;j++)
   cout<<--x[i][j] + 2 <<"  ";
  }
```

Select one:

- None
- 8 2 8 6
- 10 3 9 7
- 9 2 8 6

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
;int i=2, s=2
}while(i++<6)
;s +=i-2
{;' ' >>cout<<s
```

اخترأحد الخيارات

- 11 7 4 2
- Endless Loop
- 12 8 5 3
- 11 8 5 3



الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
int i=2, s=2;

while(i++<6){

s +=i+2;

cout<<s<<' ';}
```

Select one:

- 7 13 20 28
- 6 12 19 27
- Endless Loop
- 7 13 21 29



الممسوحة ضوئيا بـ CamScanner

Find the elements of array y after execution the following code



```
;int x[ 3 ] = { -3 , 1 , 4 }
;float y [ 3 ]
;int i = 0
;++y [ i ] = x [ i++ ]
;y [ i ] = x [ i ] / 2
;y [ i + 1 ] = y [ i - 1 ]
```

اخترأحد الخيارات

- 30-3-
- 30.5-3-
- 20-2-
- rubbish data

الممسوحة ضوئيا بـ CamScanner

Find the elements of array y after execution the following code

```
int x[ 3 ] = { -2 , 1 , 4 };
        float y [ 3 ];
        int i = 0;
        y [ i ] = x [ i++ ]++;
        y [ i ] = x [ i ] / 2;
        y [ i + 1 ] = y [ i - 1 ];
```

Select one:

- rubbish data
- -20-2
- -10-1
- -20.5-2

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
char s[10] = {'x', 'y', 'z', 'w', 'v','\0'};
s[3] = '\0';
cout<<s;
```



Select one:

- xy
- xyzwv
- xyz
- xyz v

الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;
void jor (int &a,int&b){
a=8;
b=4;}
int main(){
int m=5;
jor(--m,m);
cout<<--m<<endl;
return 0; }
```

output:

3

الممسوحة ضوئيا بـ CamScanner

What is the output of the following Code

```
int x=0;
int y=0;
if (y || --x>10)
cout<<x+5;
else if(x==1)
cout<<x;
else
cout<<!x;
```



Select one:

- a. 5
- b. 2
- c. 1
- d. 0

الممسوحة ضوئيا بـ CamScanner

THE OUTPUT IS :

```
#include <iostream>
using namespace std;
int b=6;
int sub1(int);
int main(){
   int b=4;
   sub1(b);}

   int sub1(int c) {
      if (b==6)
      cout<<--c;
      cout<<b++;}
```



Select one:

- 35
- 36
- 3
- 6

الممسوحة ضوئيا بـ CamScanner

what are the contentes of array a after executing the following code?

```
;int count
;int a[3]
;a[0] = 5
for ( count = 0; count < 3;
count++)
}
;a[count] = 5 * count + 10

{
;a[count - 1] = a[count-1] - 4
```


اخترأحد الخيارات

- 20 16 15
- None
- 20 15 10
- 16 15 10

الممسوحة ضوئيا بـ CamScanner

Find the elements of array y after execution the following code

```
int x[ 3 ] = { -3 , 1 , 4 };
    float y [ 3 ];
    int i = 0;
    y [ i ] = x [ i++ ]++;
    y [ i ] = x [ i ] / 2;
    y [ i + 1 ] = y [ i - 1 ];
```

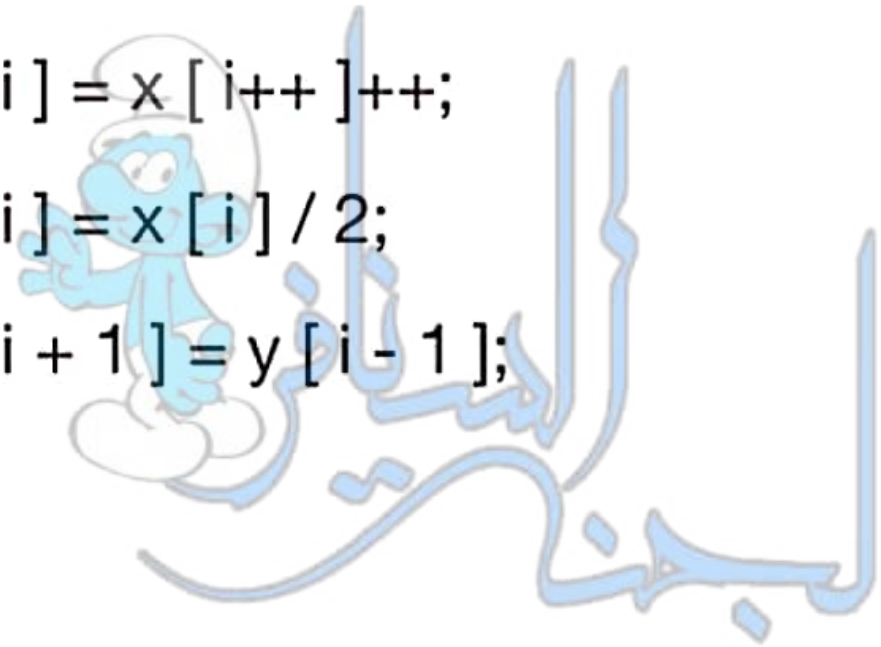

Select one:

- rubbish data
- -20-2
- -30-3
- -30.5-3

الممسوحة ضوئيا بـ CamScanner

```
int f1(int m, int n);
int f2(int x, int y,int z);
void main()
{cout<<f2(5,2,1); }

int f2(int x, int y, int z)
{   if ( f1(x,y) <z)
      return  z-1 ;
else
return  z+1;   }

int f1(int m, int n)
{   return m+n;  }
```

Select one:

- 1
- 7
- 2
- 0

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
float x=1000000;

cout<< log10(sqrt(x));
```

output:

3

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
(for(int i=3,j=5;i%j!=6;i++,j+=2
;',',>>cout<<i<<j
```




اخترأحد الخيارات

- ,46,58,610
- ,23,35,47
- ,01,13,25
- ,35,47,59

الممسوحة ضوئيا بـ CamScanner

What is the output of the following code?

```
int x[2][2]={3,2,6,4};
 for(int i=0;i<2;i++)
 {
  for(int j=0;j<2;j++)
   cout<<--x[i][j] + 3 <<"  ";
  }
```

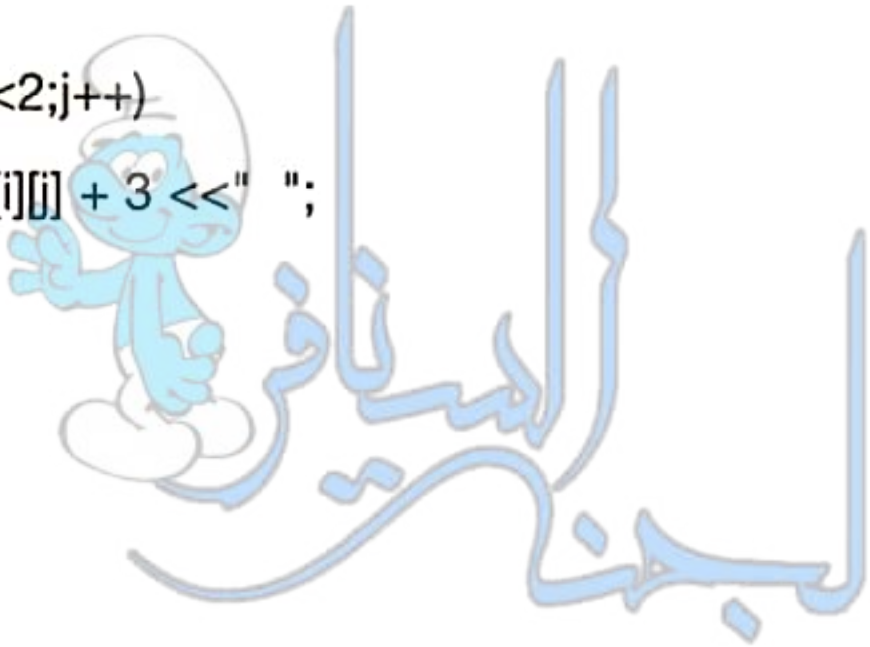

Select one:

- 4 3 7 5
- 5 4 8 6
- None
- 6 5 9 7

الممسوحة ضوئيا بـ CamScanner

The output is :

```
#include <iostream>
using namespace std;
void sum(int a1[], int a2[]){
  int temp[2];
  temp[0]=a1[0]+a2[0];

  temp[1]=a1[1]+a2[1];
    cout<<temp[0] <<' '<<temp[1]<<' ';
   a1[0]=60;
}
int main(){
  int x[2] = {15,25};
  int y[2] = {1,2};
  sum(x,y);
  cout<<x[0];
  return 0;  }
```




Select one:

- a. 15 27 60
- b. 15 25 60
- c. 16 27 60
- d. 16 25 60

الممسوحة ضوئيا بـ CamScanner

HOW MANY TIMES THE # WILL PRITNT

```
(++for (int i=0;i<1;i
(++for(int j=0;j<3;j
}
(if ( j==1
;break
;'#'>>cout
{
```

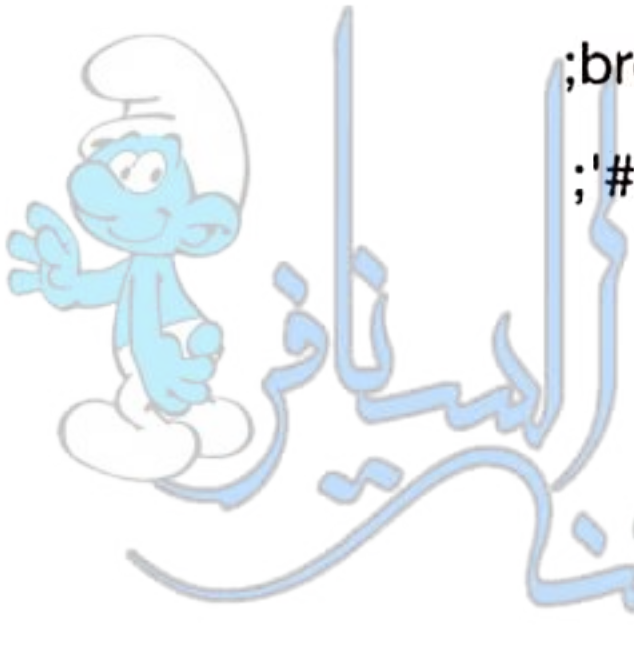

اخترأحد الخيارات

- THREE TIMES
- ONE TIME
- TWO TIMES
- FOUR TIMES

الممسوحة ضوئيا بـ CamScanner

THE OUTPUT IS :

```
#include <iostream>
using namespace std;
int b=7;
int sub1(int);
int main(){
   int b=3;
   sub1(b);}

   int sub1(int c) {
      if (b==7)
      cout<<++c;
      cout<<b--;}
```

Select one:

- 47
- 7
- 4
- 87

الممسوحة ضوئيا بـ CamScanner

```
const int a = 4;
int b = ++a * a++;
cout<<a<<b;
```

Select one:

- a. 616
- b. 625
- c. 620
- d. error



الممسوحة ضوئيا بـ CamScanner

what are the contents of array a after executing the following code?

```
int count;

int a[3];

a[0] = 5;

for ( count = 0; count < 3; count++)

{

a[count] = 2 * count + 8;


}

a[count - 1] = a[count-1] - 3;
```


Select one:

- None
- 8 10 9
- 8 10 6
- 10 6 20

الممسوحة ضوئيا بـ CamScanner

?What is the output of the following code

```
;int x = 1
} ( while ( x
(--for(int i = x-- ; i >= 1; i
; cout << i
;"*" >> cout
{
```

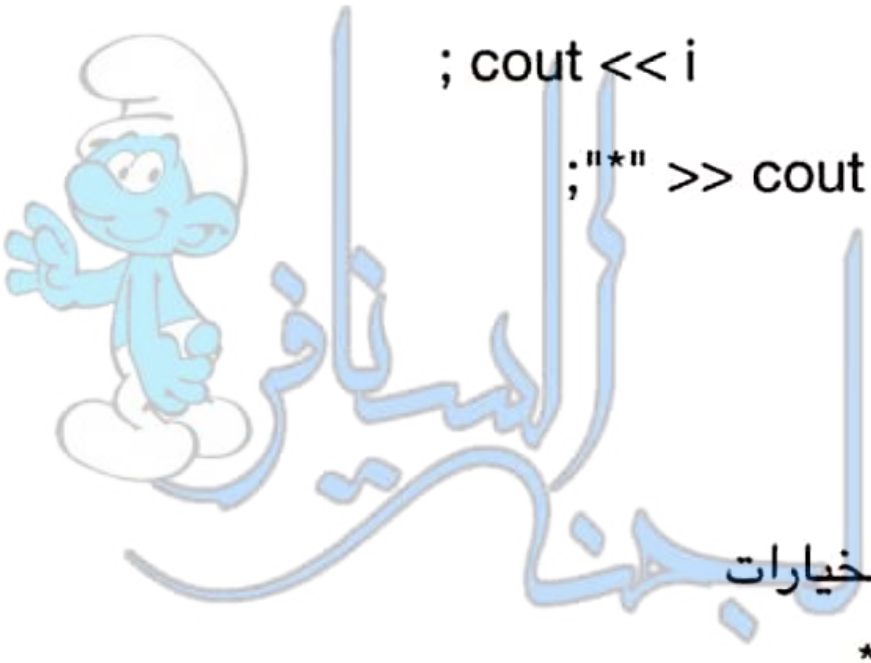


اخترأحد الخيارات

- *321
- infinite loop
- *1
- *1*1*2*1*2*3

الممسوحة ضوئيا بـ CamScanner

What is the output of the following code?

```
int x[2][2]={8,1,7,5};
 for(int i=0;i<2;i++)
 {
  for(int j=0;j<2;j++)
   cout<<--x[i][j] + 2 <<"   ";
  }
```

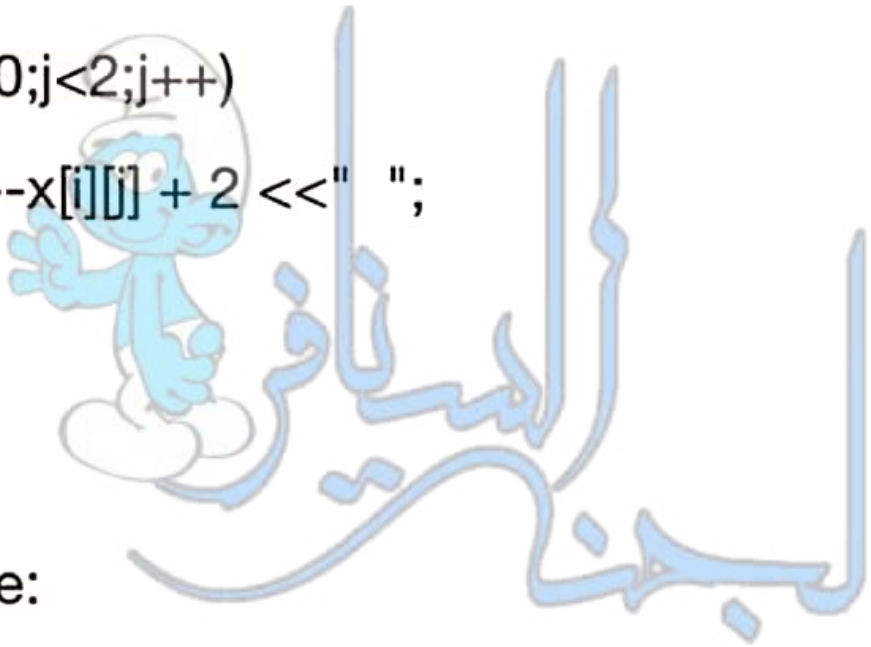

Select one:

- 8 2 8 6
- 9 2 8 6
- 10 3 9 7
- None

الممسوحة ضوئيا بـ CamScanner

Trace the following code and print the output :

```
#include <iostream>
using namespace std;
void jor(int &a,int b){
a=5.5;
b=2.7;}
int main(){
int m=4.1;
jor (--m,m);
cout<<m++<<endl;
return 0;}
```

اخترأحد الخيارات

a. 5

b. 4

c. 2

d. 6


الممسوحة ضوئيا بـ CamScanner

: THE OUTPUT I

```
#include <iostream>
using namespace std;
int b=4.5;
int sub1(int);
int main(){
    int b=5;
    sub1(b);}

    int sub1(int c) {
        if (b==4)
        cout<<++c;
        cout<<b--;}
```

output:
64

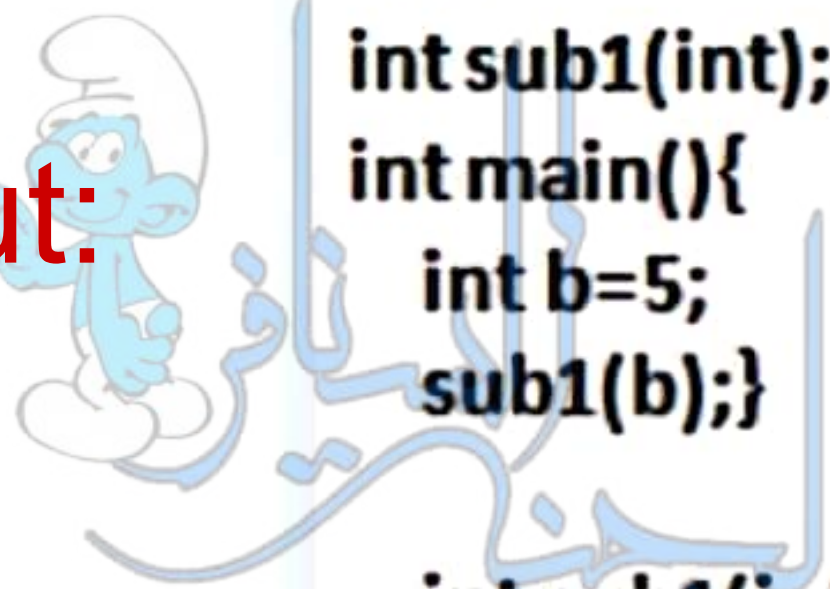

الممسوحة ضوئيا بـ CamScanner

```
#include <iostream>
using namespace std;
int b=6;
int sub1(int);
int main(){
    int b=4;
    sub1(b);}


    int sub1(int c) {
        if (b==6)
        cout<<--c;
        cout<<b++;}
```

output:
36

الممسوحة ضوئيا بـ CamScanner

:Trace the code below and find the output

```
<include <iostream#
;using namespace std
}(void  jor (int a,int b
;a=8
{;b=4
}()int main
;int m=5
;(jor( m,++m
;cout<<++m<<endl
{ ;return 0
```

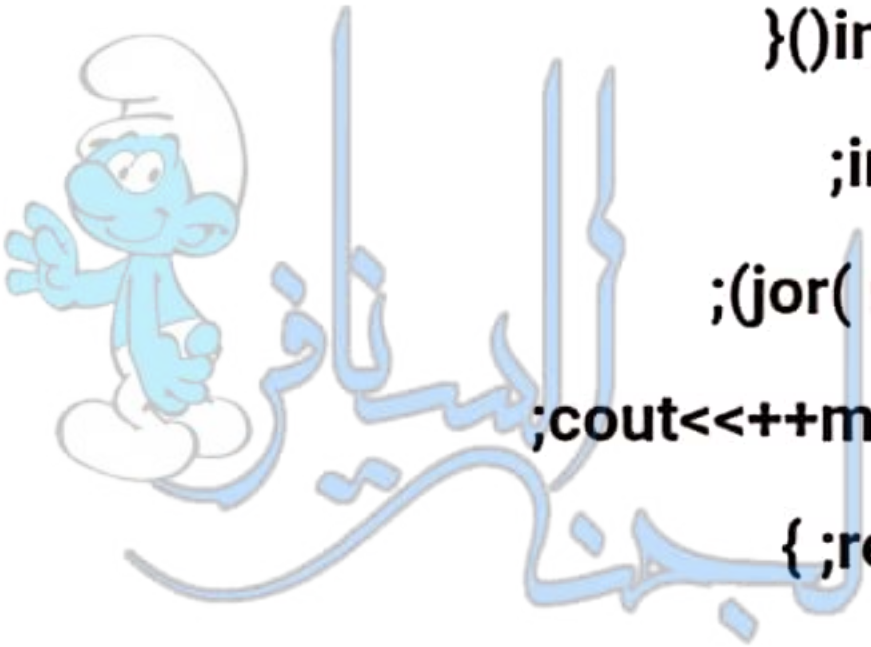

اخترأحد الخيارات

- a. 8
- b. 9
- c. 5
- d. 7

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
int x = 5, y = 4, z = 3;
( x > y > z ) ? cout<< (x += 2),  cout<< x  :
cout<<x;
```

Select one:

- a. 55
- b. 77
- c. 5
- d. 75

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
int x=50, n=3;
do {
cout<<"*"<<++n<<"*\n";
++x; }
while (x<50||x>52);
```

Select one:

- *1*
- *4*
- *2*
- *3*

الممسوحة ضوئيا بـ CamScanner

WHAT IS THE OUTPUT

```
;int i=2, s=2
}(while(i++<6
;s +=i+2
{;' ' >>cout<<s
```



اخترأحد الخيارات

- 27 19 12 6
- Endless Loop
- 28 20 13 7
- 29 21 13 7

الممسوحة ضوئيا بـ CamScanner

```
void fet();
int main()
{
    fet();
    fet(); }

    void fet (){
    int y[4]={ 0,5,1,9};
    static int x=4;
    cout<<x++;
    cout<<++y[2]; }
```

output:
4252

الممسوحة ضوئيا بـ CamScanner

THE OUTPUT IS :

```
#include <iostream>
using namespace std;
void sum(int a1[], int a2[]){
  int temp[2];
  temp[0]=a1[0]+a2[0];

  temp[1]=a1[1]+a2[1];
    cout<<temp[0] <<' '<<temp[1]<<' ';
   a1[0]=13 ;
}
int main(){
  int x[2] = {7,12};
  int y[2] = {6,1};
  sum(x,y);
  cout<<x[0];
  return 0;  }
```



Select one:

- a. 6 13 13
- b. 7 13 13
- c. 13 12 13
- d. 13 13 13

الممسوحة ضوئيا بـ CamScanner

64 : THE OUTPUT I

```
#include <iostream>
using namespace std;
int b=4.5;
int sub1(int);
int main(){
   int b=5;
   sub1(b);}

   int sub1(int c) {
      if (b==4)
      cout<<++c;
      cout<<b--;}
```

الممسوحة ضوئيا بـ CamScanner

what is the output of the following:

```
int i = 0;
int j=-1;
      if(i=0)
j++;
else
if(j++)
cout<<i+j;
cout<<i+j;
```



Select one:

- a. 11
- b. 00
- c. 0
- d. 1

الممسوحة ضوئيا بـ CamScanner

Assume we have array x with size equals to 6.

The following code will read each element from array x, if the element is even then multiply it with 4 and modify t result on array x. Otherwise replace the odd elements in array x with 0.

```
for (int i=0 ; i<..... ;i++)     // space 1
    if ( .....)                                    // space 2
        x[i] = .....;                              // space 3
    else
        x[i] = .....;                              // space 4
```

Fill the spaces with the correct answer

Select one:

- a.

  space1 is 5


  space2 is x[i] % 2 == 0

  space3 is x[i] = x[i]*2

  space4 is x[i] = 0

الممسوحة ضوئيا بـ CamScanner

Complete the following program to print

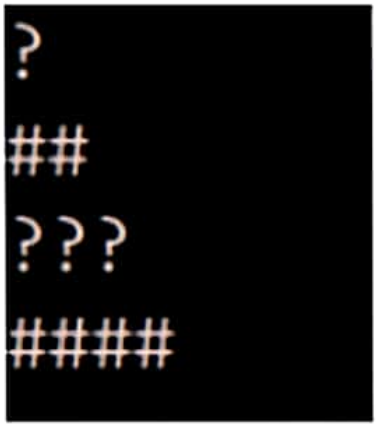

Ans

```
if(x%2 != 0)
    cout<<"?";
else
    cout<<"#";
```

```
#include<iostream>

using namespace std;

int main(){

    for ( int x = 1 ; x <= 4 ; x++ ){

            for ( int y = 1 ; y <= x ; y++ )
```

Choose...

```
            cout << endl;

        }

}
```

الممسوحة ضوئيا بـ CamScanner

?What would be the output of the following code

```
float x=100;
cout<< log10(sqrt(x));
```



اخترأحد الخيارات

a. 2

b. 10


c. 0

d. 1

الممسوحة ضوئيا بـ CamScanner

?What is the output of the following code

```
;{int x[2][2]={1,3,2,6
(++for(int i=0;i<2;i
}
(++for(int j=0;j<2;j
;"  ">> cout<<--x[i][j] * 2
{
```

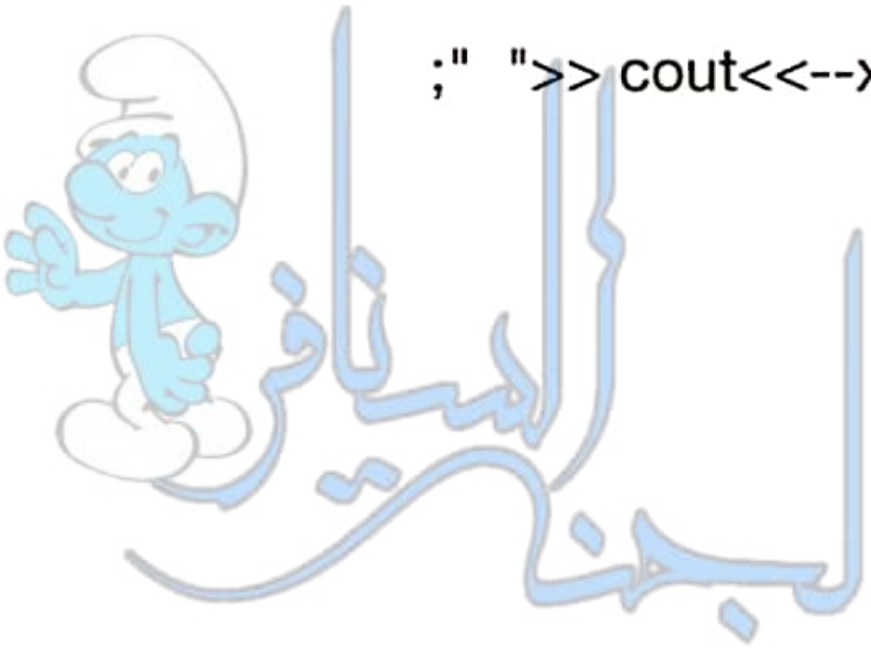

اخترأحد الخيارات

- 12 4 6 2
- 10 2 4 0
- 6 2 3 1
- None


الممسوحة ضوئيا بـ CamScanner

```
float fun(int x, char y )
                        }
                ;cout<<y
                ;return x
                        {

()void  main

                ;int m=97 }
                ;float n=9.7
        ;cout<<fun(n,m)/2

                        {
```

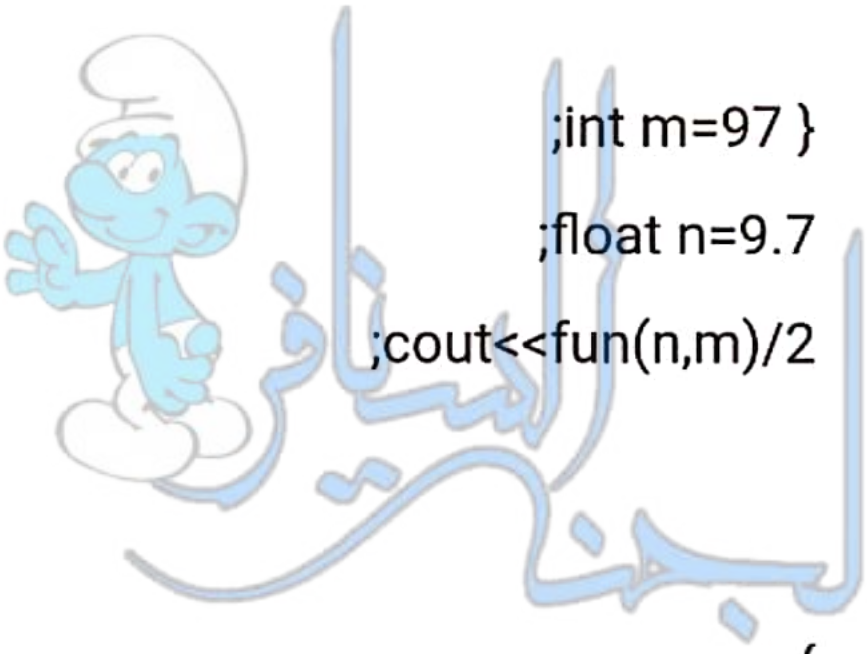

اخترأحد الخيارات

- a 4.85
- 4.5 97
- a 4.5
- 4.85 97

الممسوحة ضوئيا بـ CamScanner

What would be the output of the following code?

```
char s1[10] = "FINAL";
char s2[10] = "42";
strcpy(s1, s2);
cout<<strlen(s1);
cout<<s1;
```

Select one:

- 5FINALA
- 342A
- 242
- 10FINALA

الممسوحة ضوئيا بـ CamScanner

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
#include<iostream.h>
#include<math.h>

int Calc1(int &a, int &b, int term)
{
term = pow(1 + b , a) * a++;
return term;
}

void main(void)
{
int a1=1, b1=4;
int res,z;
z=Calc1(a1,b1,res);
cout<<a1<<" "<<b1<<" "<<z;
}
```

BARA

Select one:

- a. 2 4 10
- b. 3 4 10
- c. 2 4 5
- d. 3 4 5

what is the output

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int c=0;

int m(int a, int b,int c ){

c++;

return ( a > b && c ? a : b );

}

int main(){

int i = 0;

int j = 7;

cout << m(i, j,c );

cout<<++c;

return 0;

}
```

BARA

Select one:

- 82
- 71
- 37
- 28

what is the output

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int x=2,y=7;
do
  while(x+2<y)
      cout<<++x+y--;
while(x==y);
```

BARA

Select one:

- 10 10
- 10
- 12 9
- Infinite loop

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟ nPrint('c',5)

What will be displayed by the call nPrint('c', 5)?

```
void nPrint(char ch, int n)
{
  while (n > 0)
  {
    cout << ch;
    n--;
  }
}
```

BARA

Select one:

- a. ccccc
- b. ccc
- c. cccc
- d. invalid call

Which of the following are correct function prototypes for a function that returns the max value between two int values?

أي مما يلي هو نماذج دالة صحيحة لدالة تُرجع القيمة القصوى بين قيمتين int

Select one:

- a. int max(int a , b);
- b. int max(int num1, int num2)
- c. int max(num1, num2);
- d. int max(int num1, int num2);

BARA

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
float x = 5.7;

if ( ( x - floor ( x ) ) * 10 >= 5 )

cout << pow ( floor ( x ) , 1 / 2 ) + 6;

else

cout << pow ( ceil ( x ) , 1 / 2 ) + 7;
```

BABA

Select one:

- 5
- 8
- 7
- 8.23

Given the following four patterns,

```
Pattern A          Pattern B          Pattern C          Pattern D
1                  1 2 3 4 5 6                  1      1 2 3 4 5 6
1 2                1 2 3 4 5                  2 1        1 2 3 4 5
1 2 3              1 2 3 4                  3 2 1          1 2 3 4
1 2 3 4            1 2 3                  4 3 2 1            1 2 3
1 2 3 4 5          1 2                  5 4 3 2 1              1 2
1 2 3 4 5 6        1                  6 5 4 3 2 1                1
```

Which of the pattern is produced by the following code?

```
for (int i = 1; i <= 6; i++)
{
  for (int j = 6; j >= 1; j--)
    if (j <= i)
      cout << j;
    else
      cout << " ";

  cout << endl;
}
```

BARA

Select one:

- Pattern A
- Pattern B
- Pattern C
- Pattern D

You should fill in the blank in the following code with

املأ الفراغ في الكود التالي ب

```
#include <iostream>
using namespace std;

________ getGrade(double score)
{
  if (score >= 90.0)
    return true;
  else if (score >= 80.0)
    return true;
  else if (score >= 70.0)
    return true;
  else if (score >= 60.0)
    return true;
  else
    return false;
}

int main()
{
  cout << "Enter a score: ";
  double score;
  cin >> score;

  cout << "The grade is ";
  cout << getGrade(score) << endl;

  return 0;
}
```

BARA

Select one:

- a. bool
- b. char
- c. float
- d. int
- e. void

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, ثالثة الإخراج؟

```
int x [ ][ 3 ] = { { 1 , 2 , 3 } , { 0 } , { 2 , 2 } };

for ( int i = 0 ; i < 3 ; i++ ){

for ( int j = 0 ; j < 3 ; j++ )

cout << x [ j ][ i ];

cout << " , ";

}
```

BARA

Select one:

- 102 , 202 , 300 ,
- 123 , 000, 220 ,
- 123 , 0 , 22 ,
- 102 , 22 , 3 ,

what is the output

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int
x[5]={2,4,3,0,1};

int y[5];

for(int i=0; i<=4 ;
i++)

y[x[i]]=i+x[i];

for(int i=0;i<=
4;i++)

cout<<y[i]<<" ";

cout<<endl;
```

BARA

Select one:

- 33275
- 15257
- 35255
- 11477

what is the output

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int x=1;

if (x-- && (x+=3))

cout<< x/2.0;

cout<<x-2;
```

BARA

Select one:

- 1.5 1
- -2
- 1.5 -0.5
- 1 1

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
for ( int i=3 ; i < 6 ; i++ )
{
cout << i+1;
if ( i == 5 )
break;
cout<<i-1;
}
```

BARA

Select one:

- a. **42**
- b. **42536**
- c. **4253**
- d. **425**
- e. **425364**

What is the value of *x* that gets printed by the *main*?

ما هي قيمة x التي تتم طباعتها؟

```
void mysterious(int i, int &k) {
i = 1;
k = 20;
}
int main () {
int x = 0;
mysterious (x, x);
cout << x << endl;
return 0;
}
```

BARA

Select one:

- a. 0
- b. 1
- c. 20
- d. non of these

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, ثالثة الإخراج؟

```
char st1 [ ] = "ABCDEF";

char st2 [ 30 ] = "Skills";

st2 [ 3 ] = '\0';

strcpy ( st1 , st2 );

cout << st1 << "##" << st2 << st1 [ 4 ];
```

BARA

Select one:

- Ski##SkiE
- Sk##SkE
- Skil##SkilF
- Error

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
char d='b';
int i=1;
int s=68,w=3;
do{
i++;
if(w%s!=0)
d=s++;
cout<<d+1<<" ";
w--;
}while(i<=2);
cout<<d<<"$"<<s;
```

BARA

Select one:

- a. 69 70 E$70
- b. 68 69 D$69
- c. 68 69 E$70
- d. error

ما هو ناتج مقطع الكود هذا, ثالثة الإخراج؟

```
char x[10]="bay";
char y[]="C++  exam";
for (int i=0;x[i] !='\0'; i++)
cout<<x[i]<<"  ";
```

BARA

Select one:

- a. bayC++
- b. bayC++;
- c. b a y
- d. a y C++

التعبير الصحيح للدالة في C ++

How we can write the following formula $|\tan(x^5)|$ in c++?

Select one:

- a. abs(tan(pow(x,5))
- b. abs(tan(pow(5,x))
- c. tan(power(x,5))
- d. abs(tan(x,5))

BARA

The output of this program is:

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int s=0;
int f(int x)
{
    static int val=2;
    do{
        val*=2;
        --val;
        continue;
        val++;
    }while(x-->0);
    return val;
}
int main()
{
    int i=0;
    while(i<2)
        s+=f(i++);
    cout<<s;
}
```

BARA

Select one:

- rubbish
- 12 ✓
- 3
- 9

What is the output of the following code?

ما هو ناتج مقطع الكود هذا, شاشة الإخراج؟

```
int exam(float x)
{
        if(x)
                x++;
        else
                x--;

        return x;
}

void main()
{
        float num1=8.5, num2=7.5;
        cout<<exam(num1)<<endl;
        bool num3=exam(num2);
        cout<<num3<<endl;
```

BARA

Select one:

- a. 9
  1

How many elements are in the matrix [7][7]?

عدد العناصر في المصفوفة

Select one:

- a. 20
- b. 14
- c. 49
- d. 25

BARA