2025/2024-2-BSE0201-PROGRAMMING FOR EN

Tim

Question 1

Not yet answered

Marked out of 1.00

Flag question

The output of this code is .....

```
const int x=7;
cin>>x; //x=3
cout<<x++;
```

- a. 7
- b. -1
- c. ERROR
- d. 3

Announcements

Jump to...

Question 2

Not yet answered

Marked out of 1.00

Flag question

The output of this code is .....

```
char x;x='c';
switch(--x+2)
{default:cout<<--x;
case 'e':cout<<x+3;
case 102:cout<<x;break;
case 'g':cout<<x++;}
```

- a. b1010
- b. a100a
- c. 104e
- d. none

Time left 0:46:51

Choose the correct output for the following C++ selection operation.

```
int i =6; int j= 4; int z = 14;
    z= --i - j-- ;
    switch (++z){
        case 0: cout << ++i << j << 1 << z;          break;
        case 1: cout << i++ << j-- << 0 <<++z ; break;
        case 2: cout << ++i << j-- << 0 <<z++ ; break;
        case 3: cout<< i << ++j << 3 << z ;          break;
        default: cout<< i << ++j << 2 << z;}
```

- a. 6302
- b. 5302
- c. 6310
- d. 5432

2025/2024-2-BSE0201-PROGRAMMING FOR ENGINE

Home / My courses / 2025/2024-2-BSE0201-PROGRAMMING FOR ENGINEERS-6 / General / Mid Exam C++ SS24-25

Time left 0:

Question 4

Not yet answered

Marked out of 1.00

Flag question

The output of the following code is .....

```
char c='c';
c++;
cout<<(c--=='c');
cout <<" " << c << endl;
```

- a. 0 c
- b. 0 d
- c. 1 c
- d. c d
- e. 1 d
- f. d c

2025/2024-2-BSE0201-PROGRAMMING FOR ENG

Time

Question 5

Not yet answered


Marked out of 2.00

Flag question

Choose the correct output for the following C++ arithmetic operation.

```
int a = 7, b = 4, c = 9, z = 2 ;
z+= ++a - b-- * ++c;
cout<<a<<z<< c<< b;
```

- a. 811763
- b. 810963
- c. 81103
- d. 8-30103

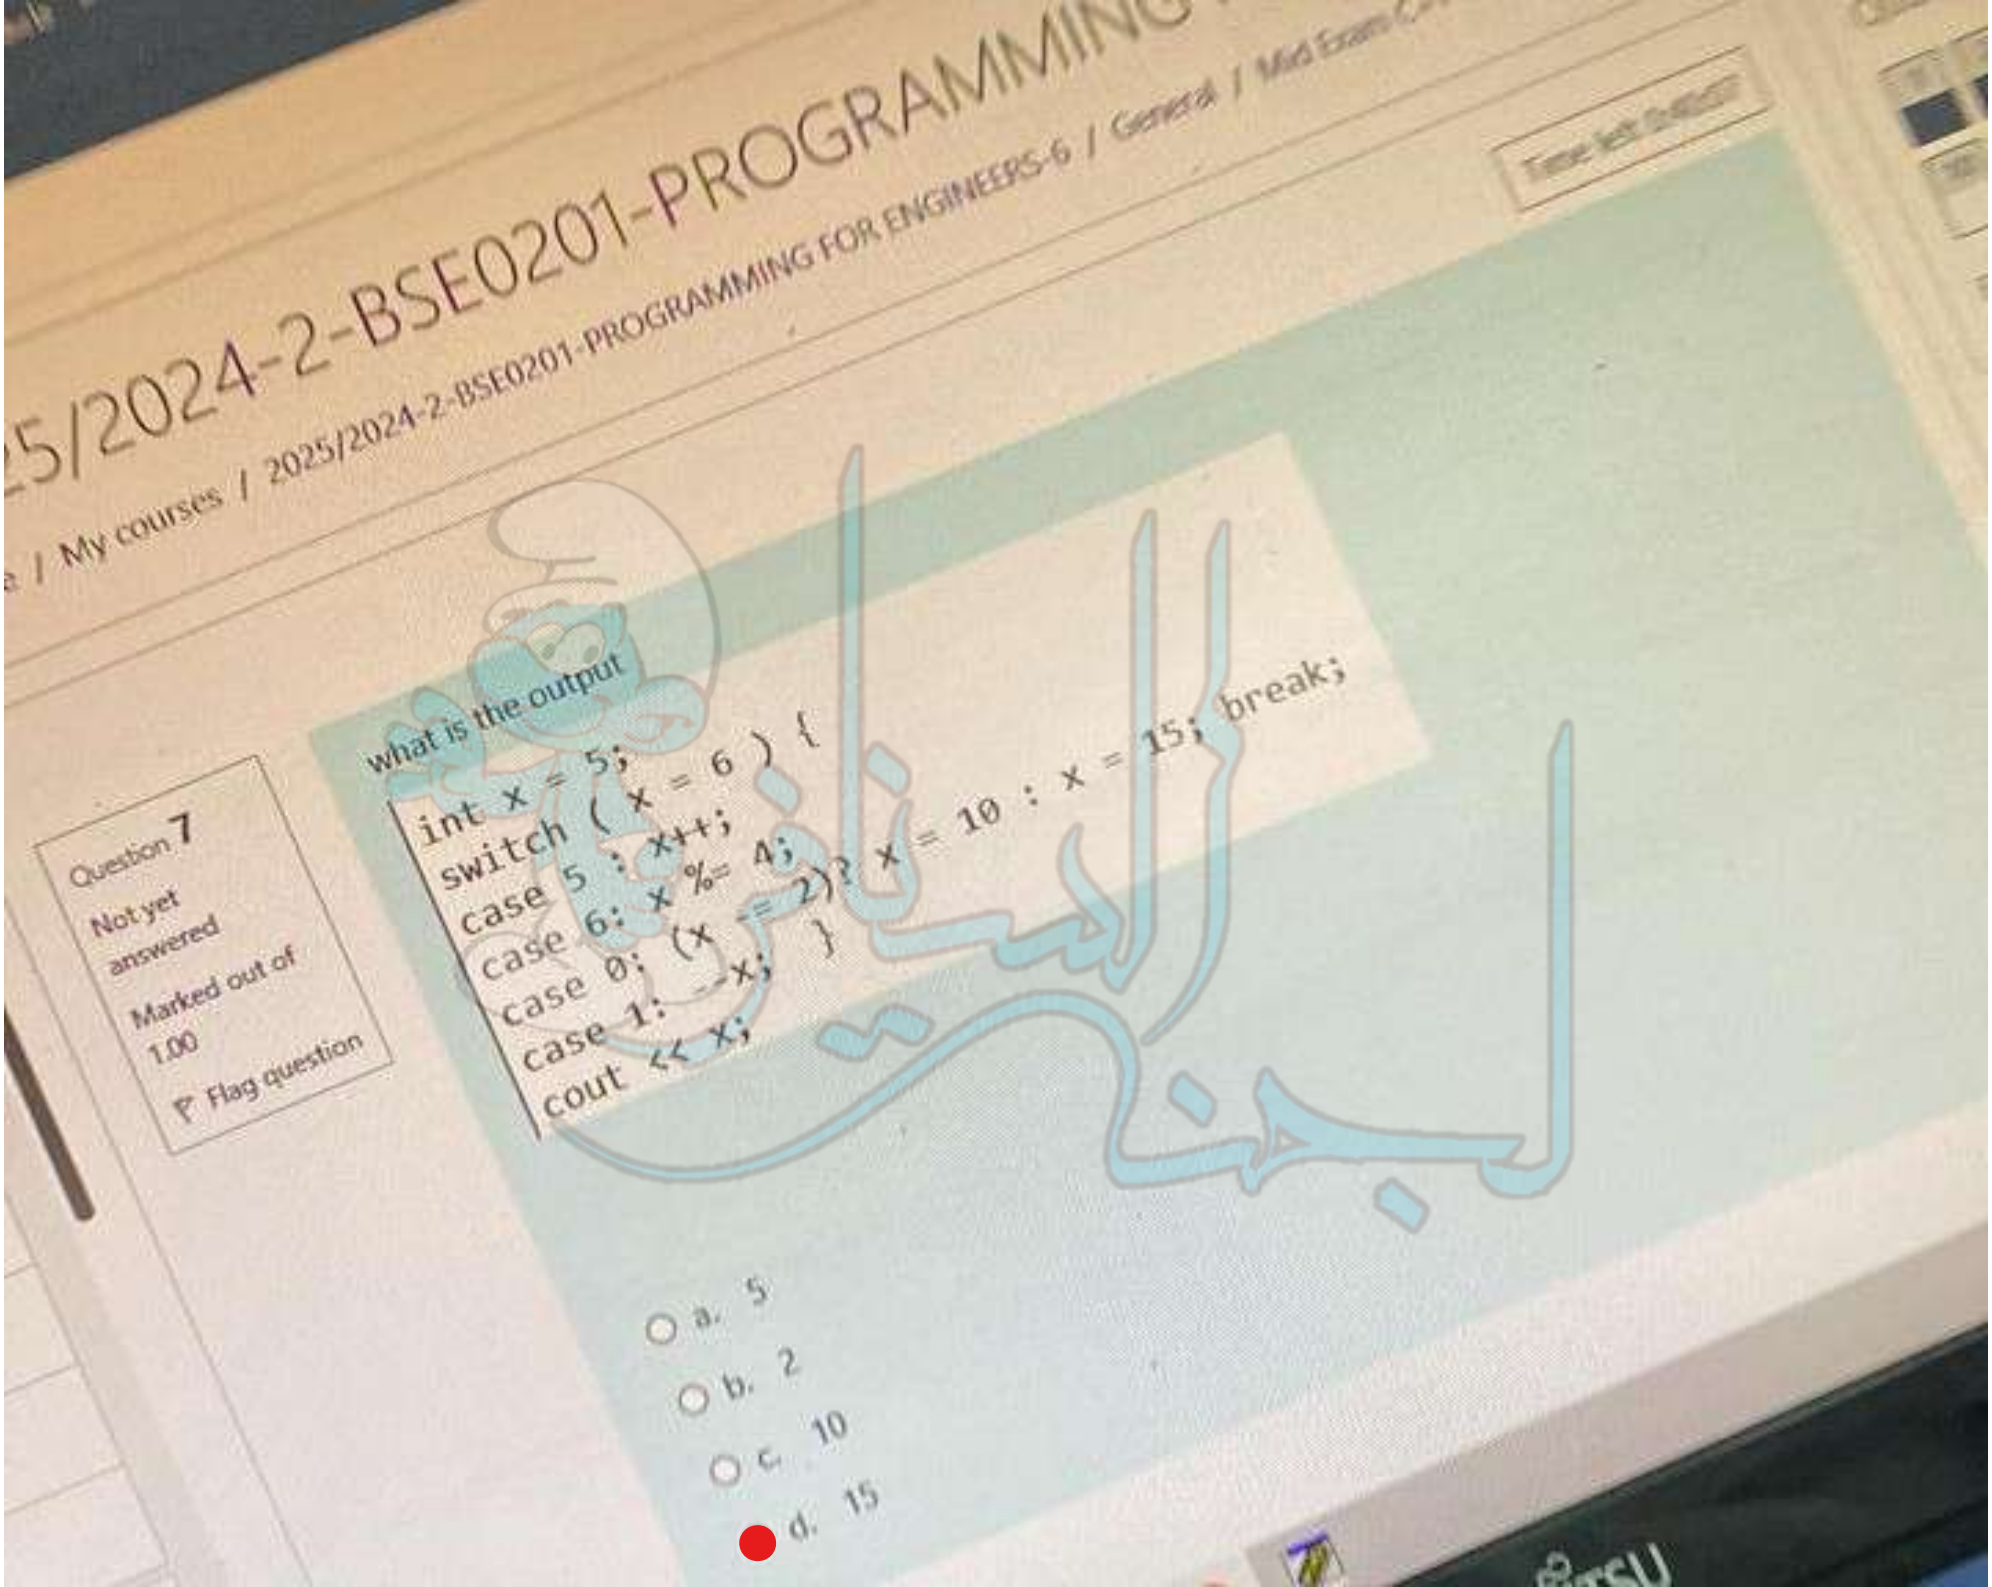
25/2024-2-BSE0201-PROGRAMMING
e / My courses / 2025/2024-2-BSE0201-PROGRAMMING FOR ENGINEERS-6 / General / Mid Exam
Question 7
Not yet answered
Marked out of 1.00
Flag question
what is the output
int x = 5;
switch (x = 6) {
case 5 : x++;
case 6: x %= 4;
case 0: (x == 2)? x = 10 : x = 15; break;
case 1: --x; }
cout << x;
a. 5
b. 2
c. 10
d. 15

2025/2024-2-BSE0201-PROGRAMMING FOR ENGINEERS-6

Home / My courses / 2025/2024-2-BSE0201-PROGRAMMING FOR ENGINEERS-6 / General / Mid Exam C++ SS24-25

Time left 0:38:02

Question 8

Not yet answered

Marked out of 1.00

Flag question

What is the output of the following code:

```
#include <iostream>
using namespace std;

int main()
{
int x=5,y=20,z=4;
if (x)
z=y/x;
cout<<x<<z;
    return 0;
}
```

- a. Error
- b. 520
- c. 54
- d. 52

025/2024-2-BSE0

me / My courses / 2025/2024-2-BSE0201-PROGRAMMING

Question 6

Not yet answered

Marked out of 1.00

Flag question

The output of the following code is .....

```
int x, y=10, res=0;
cin>>x;  //x=6
res=!(x>5)?res-=y:res+=y;
cout << res;
```

- a. -10
- b. 1
- c. 10
- d. 0

Jump to...

uncements

FUJITSU

Question 9

Not yet answered

Marked out of 1.00

Flag question

The value of **(a)** after executing the following C++ code is :

```
int a = 3.5;
double y = 7.5 ;
a = a + y;
cout << a;
```


Select one:

- a. 10.5
- b. 11.0
- c. 10
- d. 11
- e. 10.0

The output of the following code is .....

```
int x=6, y=7;
bool r=3;
r+=(x<=y)?1:-1;
cout<<--x<<--y<<r;
```

- a. 562
- b. 561
- c. 560
- d. 564
- e. 56-1
- f. 563

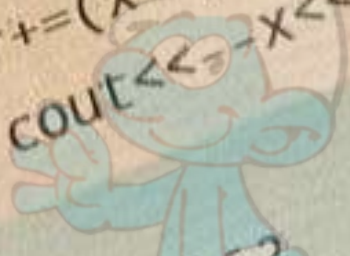

البحر الشافي

2025/2024-2-BSE0201-PROGRAMMING FOR EN

Question 12

Not yet answered

Marked out of 1.00

Flag question

The output of the following code is .....

```
int x = 5;
if (x = 0)
cout << "x is 0";
else
cout << "x is not 0";
```

- a. Runtime error
- b. Compilation error
- c. x is 0
- d. x is not 0

Question 13

Not yet answered

Marked out of 2.00

Flag question

```
int a = 10, b = 4;
while(a != b)
{
    a = a - 2;
    b = b + 1;
}
cout << a << b;
```

- a. 85
- b. 66
- c. 45
- d. 104

Question 1

Not yet answered

Marked out of 1.00

Flag question

Time left 0:18:45

What is the output?

```
int x = 0;
switch(x) {
        case 0:
        case 1:
                cout << x;
                break;
        default:
                cout << "Other";
}
```

- a. 1
- b. Other
- c. 0
- d. 01

1 2 10 11 19 20

Finish attempt

2025/2024-2-BSE0201-PROGRAMMING FOR ENGINEERS-6

Time left 0:17:09

Question 2

Not yet answered

Marked out of 1.00

Flag question

What will be the output of the following code?

```
int x = 10;
if (x > 5 && !(x < 15 && x != 10))
    cout << "A";
else
    cout << "B";
```

- a. AB
- b. B
- c. No output
- d. A

Quiz navigation

1 2 3 4 5 6
10 11 12 13 14 15
19 20

Finish attempt ...

Activate W
Go to Settings

27°C مشمس

FUJITSU

2025/2024-2-BSE0201-PROGRAMMING ENGINEERS-6

Time left 0:15:35

Question 3

Not yet answered

Marked out of 1.00

Flag question

Which of the following `if` conditions will return true only when `a` is a positive even number?

a. if (a % 2 == 0 && a>00)

b. if (a % 2 != 1 || a> 0)

c. if ((a % 2) == 1 && a> 0)

d. if (!(a % 2) && a> 0)

Quiz na

1 2

10 11

19 20

Finish atte

Next page

```
int a=9,b=3;

do

while(a/b==0)


{b++;

cout<<a++ + --b +a%b;

}


while (a%b!=0);

cout<<a++ + --b +a%b;
```

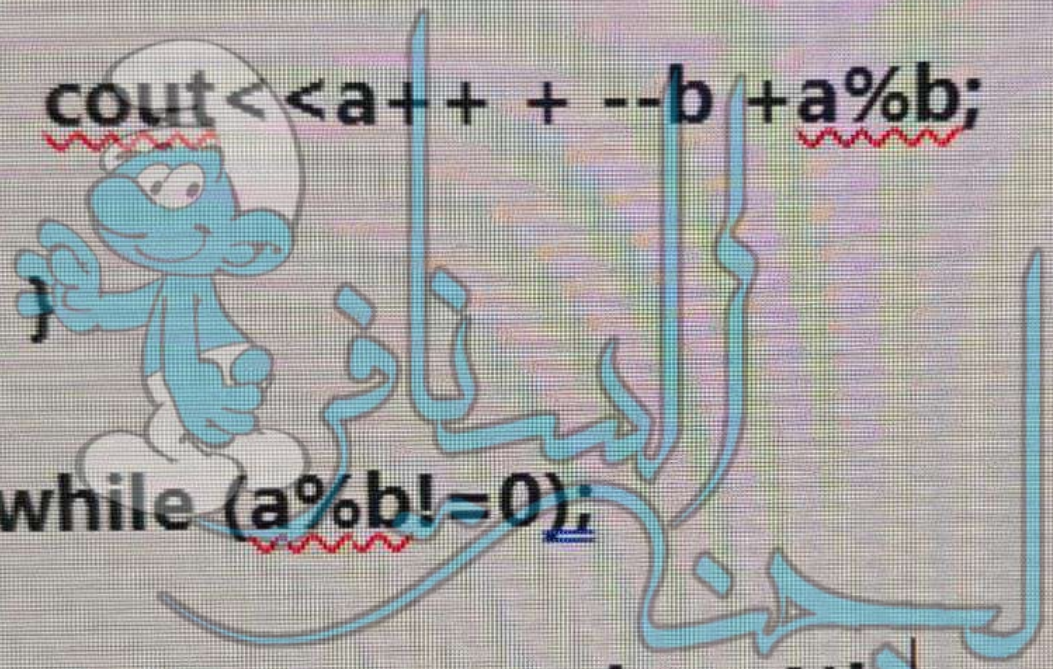

- a. 12
- b. 21
- c. 11
- d. 01


```
int x=3;
for(int i=0;i<12;i++)
{
if(i%x==0)
continue;
else if (i==10)
break;
else
cout<<i;
```

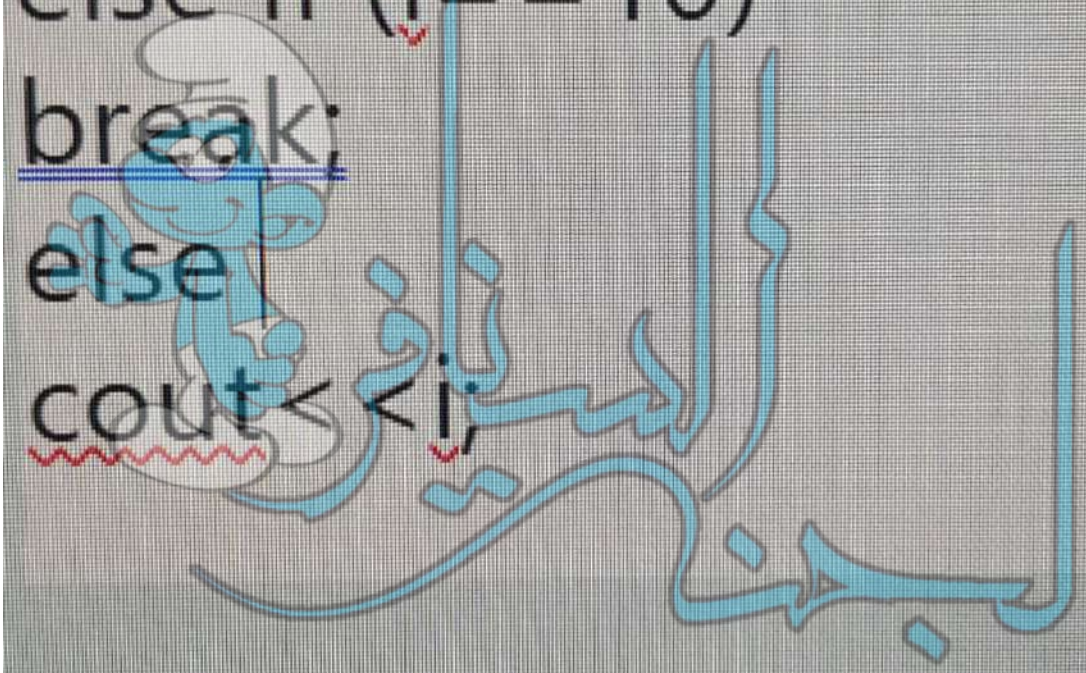

- a. 123456789101112
- b. 124578
- c. 1245781011
- d. 12345678910

Clear my choice

```
int S=0;
for(int i=0; i<8; i++)
if(i%2==0)
S=S+i;
cout<<S;
```

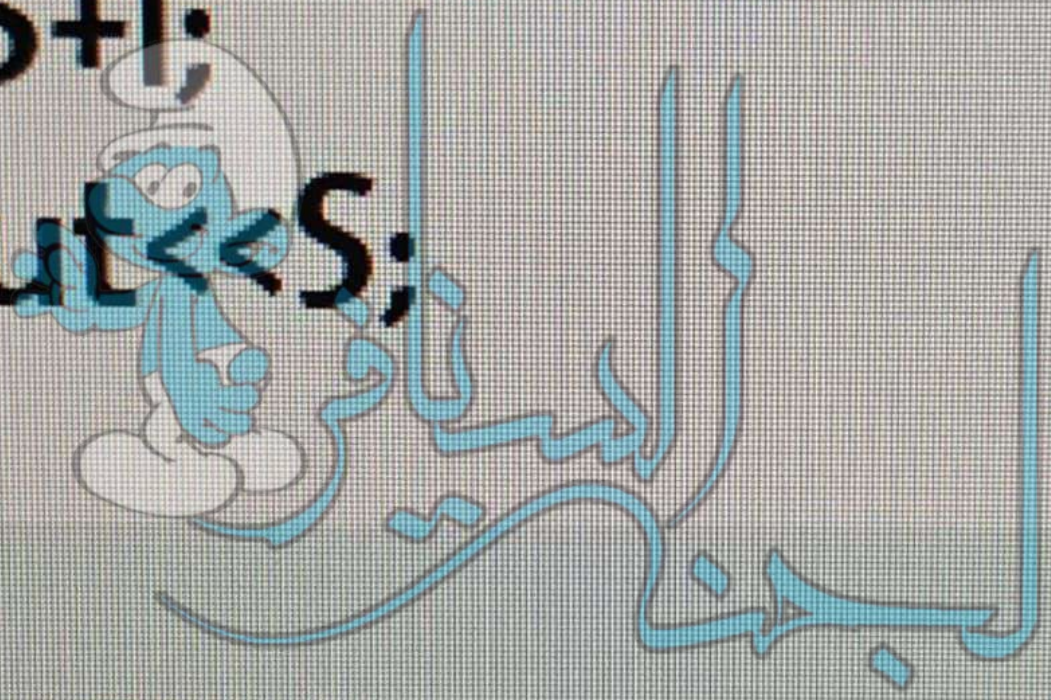


- a. 16
- b. none
- c. 12
- d. 20

```
int   i=5;
for(i=1;i>10;i++);   cout<<i<<"   ";
```

Select one:

- a. 5
- b. 1
- c. none
- d. 11

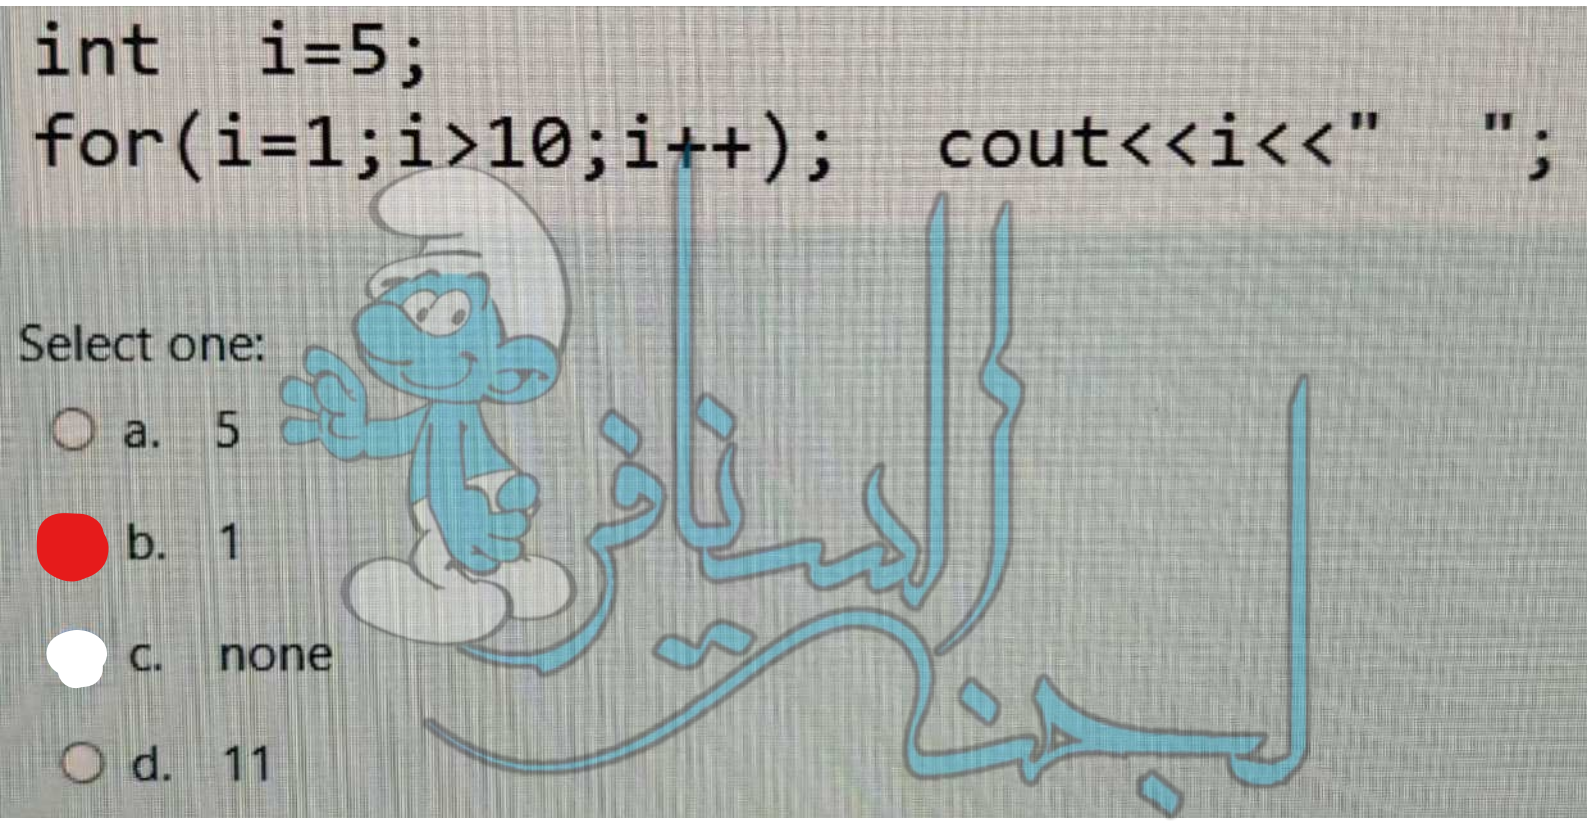


```
for (int i=1,j=0; i<3;  i++,j+=2);
cout<<i<<j;
```



elect one:

- a. 22
- b. 23
- c. 34
- d. 45
- e. error


```
int sum=0;
int item=1;
do {
item++;
sum += item;
if (sum > 4) break;
} while (item <5);
cout<<sum;
```

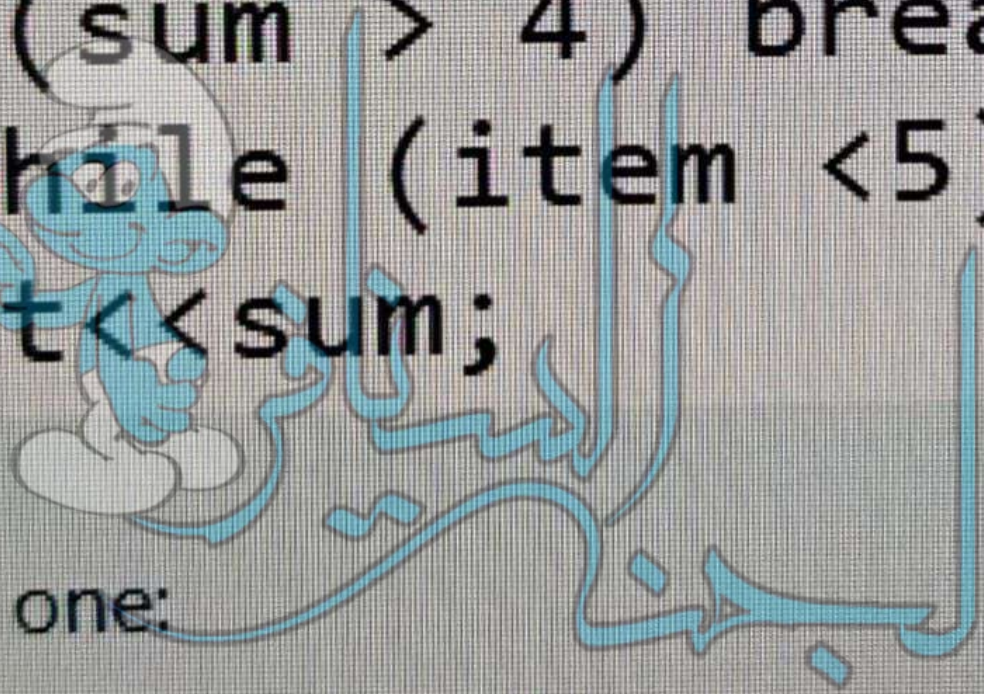

Select one:

- a. none
- b. 8
- c. 5
- d. 6
- e. 7

```
int a=12, b=2;
do
while(a/b!=0)
{
b+=5;
cout<<((b>5)? b : a+1)<<'\t';
}
while(a>b);
```

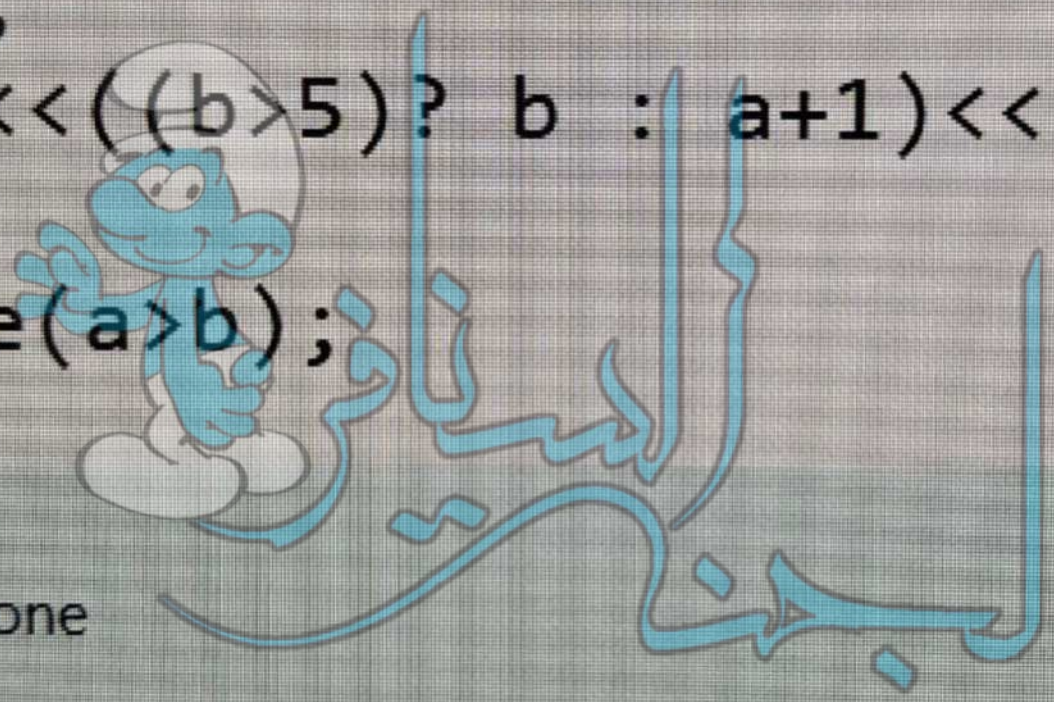


- a. none
- b. 7 12 17
- c. 7 11 18
- d. 6 11 16
- e. 8 13 18

```
int num=4, i;
bool b;
for(i=0, b=true;  i<num && b;  b=false, ++i)
cout<< "***";
cout<< "###";
cout<< i << b;
```

Select one:

- a. ***###11
- b. ***###21
- c. ***###10
- d. ***###20

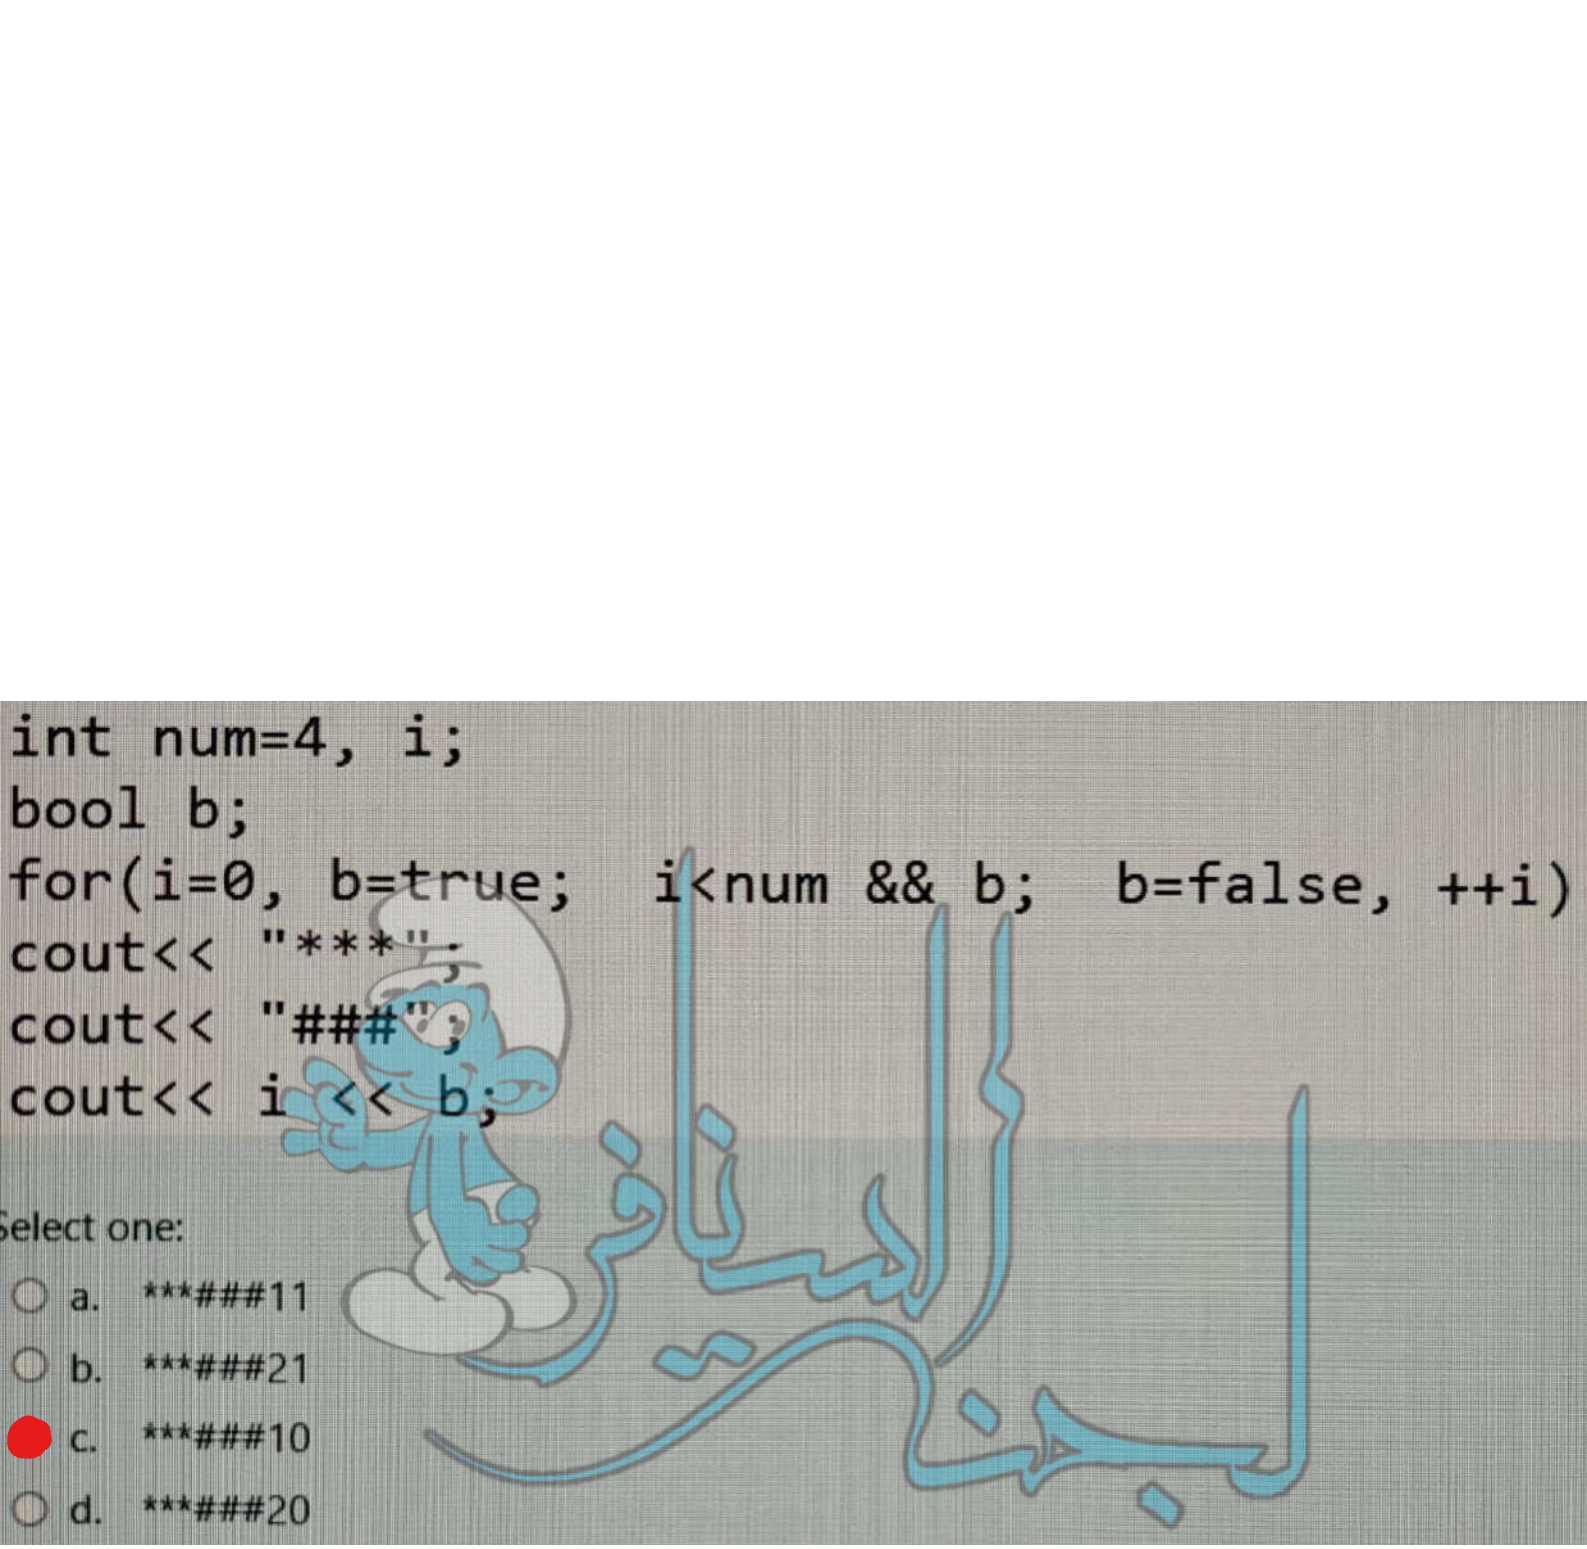

```
int i=5;

while (i<=50)

{if(i%10==0)

cout<<i;

i++;i
```




- a. none
- b. 1020304050
- c. 5101520253035404550
- d. 10203040


how many times will the following loop display "*"

```
for (int i=2,j=14;(j-i)!=0;i++,j--)
cout<<'*';
```

- a. Infinite
- b. 0 times
- c. 14 times
- d. 6 times

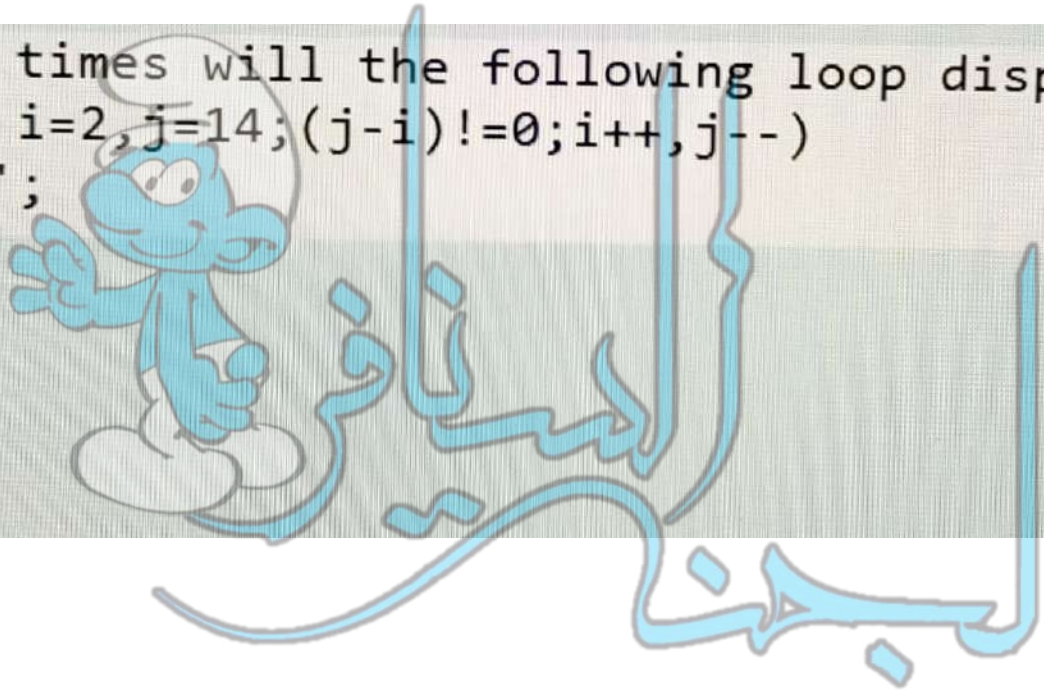

```
#include <iostream>
using namespace std;
int main()
{
   int a=6, b=2;
int z[4]={7,4};
z[3]+=2;
z[0]+=2;
z[2]=(a/b+6);
for(int i=1;i<4;i++)
cout<<z[i];
}
```

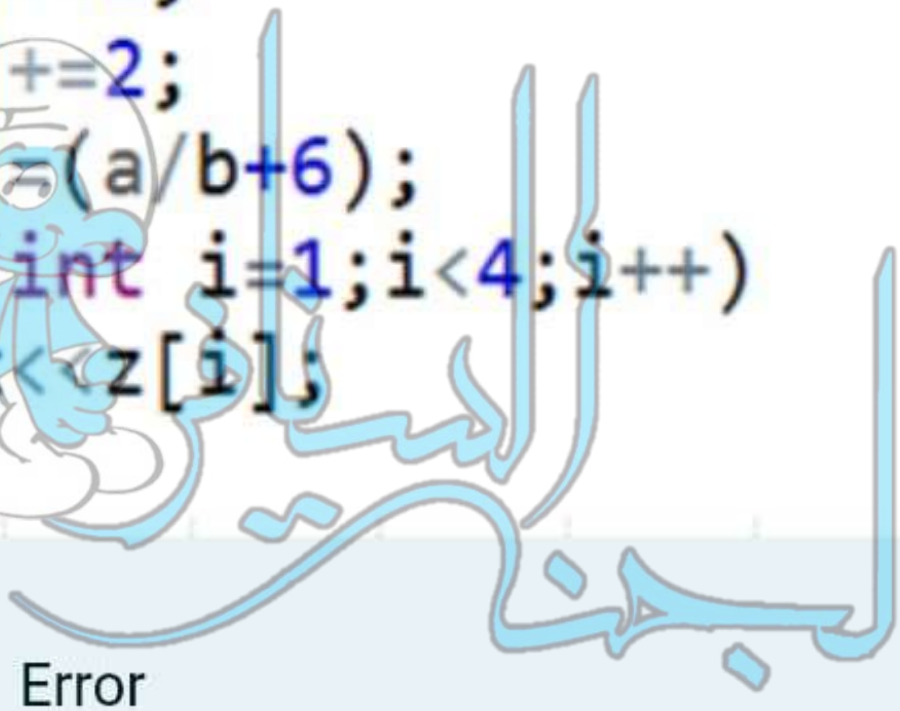


- a. Error
- b. 9492
- c. 492
- d. 482
- e. 9480

```
#include <iostream>
using namespace std;
int main()
{
    for(int x=8;x>=4; x--)
  {
    if(x%2==0)
    continue;
    cout<<x-2;
    }
}
```



- a. 65432
- b. 53
- c. None
- d. 5432
- e. 543

```
#include <iostream>
using namespace std;
int main()
{
int v[5]={8,-5,2,6};
cout<<(v[1]*v[3]--);
cout<<--v[3];
cout<<v[8%3];
}
```

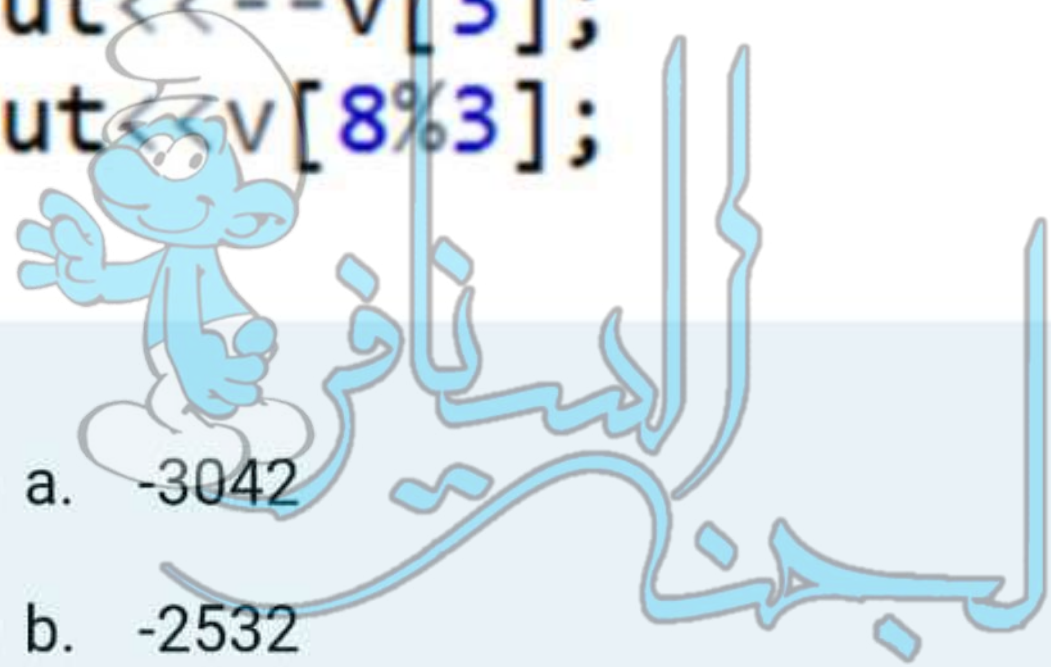


- a. -3042
- b. -2532
- c. -3677
- d. -2552
- e. -2542

```
#include <iostream>
using namespace std;
int main()
{
    int i=6,j=1;
    while(i>3)
    {
        while(j<=3)
        {
            if(j==3)
            break;
            cout<<i-j;
        j++;

        }
    cout<< --i;

    }
}
```

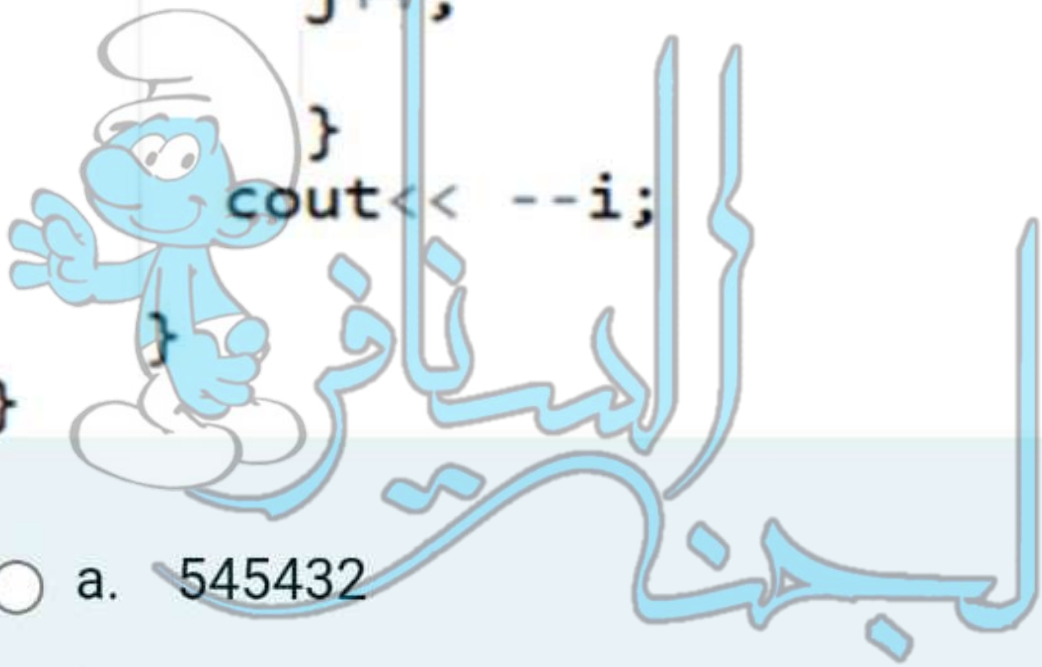

- a. 545432
- b. 54543
- c. 54654
- d. 53
- e. 531
- f. 54