

BACKWARD CHAINING

AIM

To develop a Prolog program that implements backward chaining by starting with a goal and working backward through rules to verify whether the goal can be proved from known facts.


OBJECTIVE

- To understand the concept of backward chaining in Artificial Intelligence.
- To represent knowledge using facts and rules in Prolog.
- To start with a goal and search for supporting facts.
- To execute Prolog queries and verify the conclusion.

ALGORITHM

1. Start the program.
2. Define the initial facts.
3. Define the rules required to derive conclusions.
4. Select a goal to be proved.
5. Check whether the goal is directly available as a fact.
6. If not, find a rule whose conclusion matches the goal.
7. Check the conditions of that rule recursively.
8. If all conditions are satisfied, prove the goal.
9. Display the result.
10. Stop.

FLOWCHART

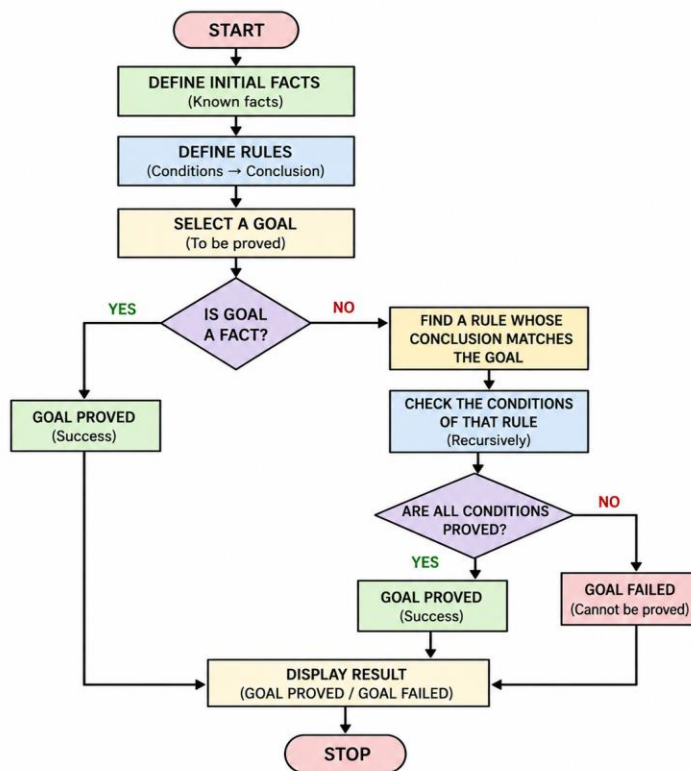

CODE

```
fact(fever).
```

```
fact(cough).
```

```
rule(flu, [fever, cough]).
```

```
rule(serious_flu, [flu]).
```

```
prove(Goal) :-
```

```
    fact(Goal).
```

```
prove(Goal) :-
```

```
    rule(Goal, Conditions),
```

```
    prove_all(Conditions).
```

```
prove_all([]).
```

```
prove_all([H|T]) :-
```

```
    prove(H),
```

```
    prove_all(T).
```

```
start(Goal) :-
```

```
    prove(Goal),
```

```
    write('Goal proved: '),
```

```
    write(Goal),
```

```
    nl.
```

```
start(Goal) :-
```

```
    \+ prove(Goal),
```

```
    write('Goal cannot be proved: '),
```


```
    write(Goal),
```

```
    nl.
```

QUERY

```
?- fact(fever).
```

OUTPUT

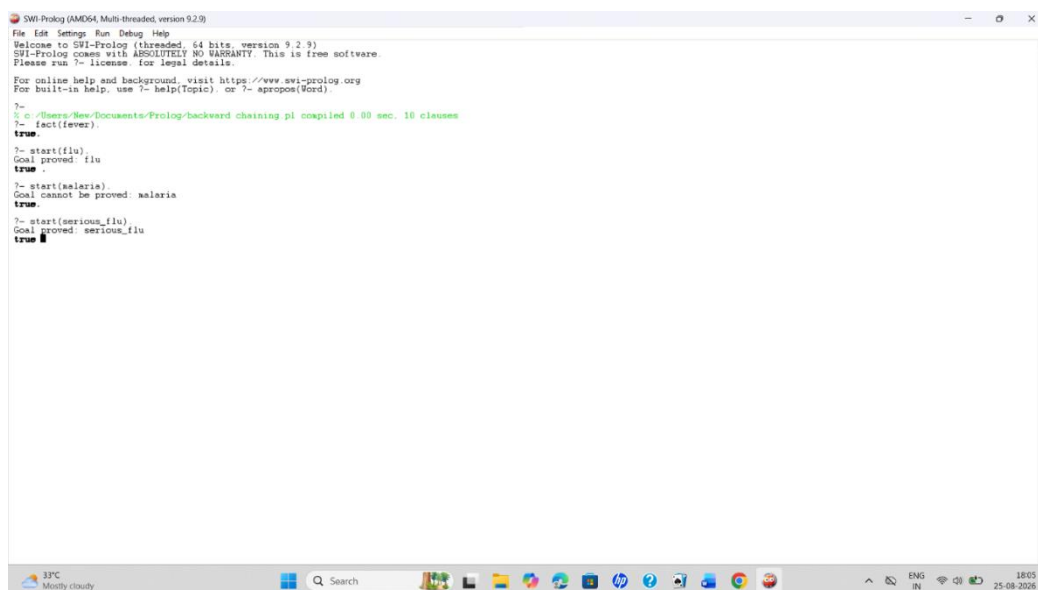

```
SWI-Prolog (AMD64 Multi-threaded version 9.2.9)
File Edit Settings Run Debug Help
Welcome to SWI-Prolog (threaded, 64 bits, version 9.2.9)
SWI-Prolog comes with ABSOLUTELY NO WARRANTY. This is free software.
Please run ?- license. for legal details.

For online help and background, visit https://www.swi-prolog.org
For built-in help, use ?- help(Topic), or ?- apropos(Word).

?-
?- c:/Users/len/Documents/Prolog/backward_chaining.pl compiled 6.00 sec, 10 clauses
?- fact(fever).
true.
?- start(flu).
Goal proved: flu
true.
?- start(salaria).
Goal cannot be proved: salaria
true.
?- start(serious_flu).
Goal proved: serious_flu
true
```

RESULT

Thus, the backward chaining program was successfully implemented in Prolog. The program starts with a goal and works backward through the available rules and facts to determine whether the goal can be proved.