



elasticsearch  
for developer

Bulk API

book\_03.txt

# การจัดการข้อมูล

- Retrieve multiple documents
- Bulk API
- Dealing with conflict

# Retrieve multiple documents

**GET /store/book/\_mget**

```
{  
  "docs": [  
    {  
      "_id": 1,  
      "_source": [ "title","views"]  
    },  
    {  
      "_id": 2,  
      "_source": "title"  
    }  
  ]  
}
```

# Retrieve multiple documents

## ผลการทำงาน

```
{
  "docs": [
    {
      "_index": "store",
      "_type": "book",
      "_id": "1",
      "_version": 16,
      "found": true,
      "_source": {
        "title": "partial update",
        "views": 4
      }
    },
    {
      "_index": "store",
      "_type": "book",
      "_id": "2",
      "_version": 5,
      "found": true,
      "_source": {
        "title": "Clean Code: A Handbook of Agile Software Craftsmanship"
      }
    }
  ]
}
```

# Retrieve multiple documents

**GET /store/book/\_mget**


```
{  
  "ids": [1,2]  
}
```

# Cheaper with Bulk

- create -> สร้าง document ถ้าไม่มี
- index -> สร้าง document หรือ replace
- update -> partial update
- delete -> ลบ

# Cheaper with Bulk

All request in one step

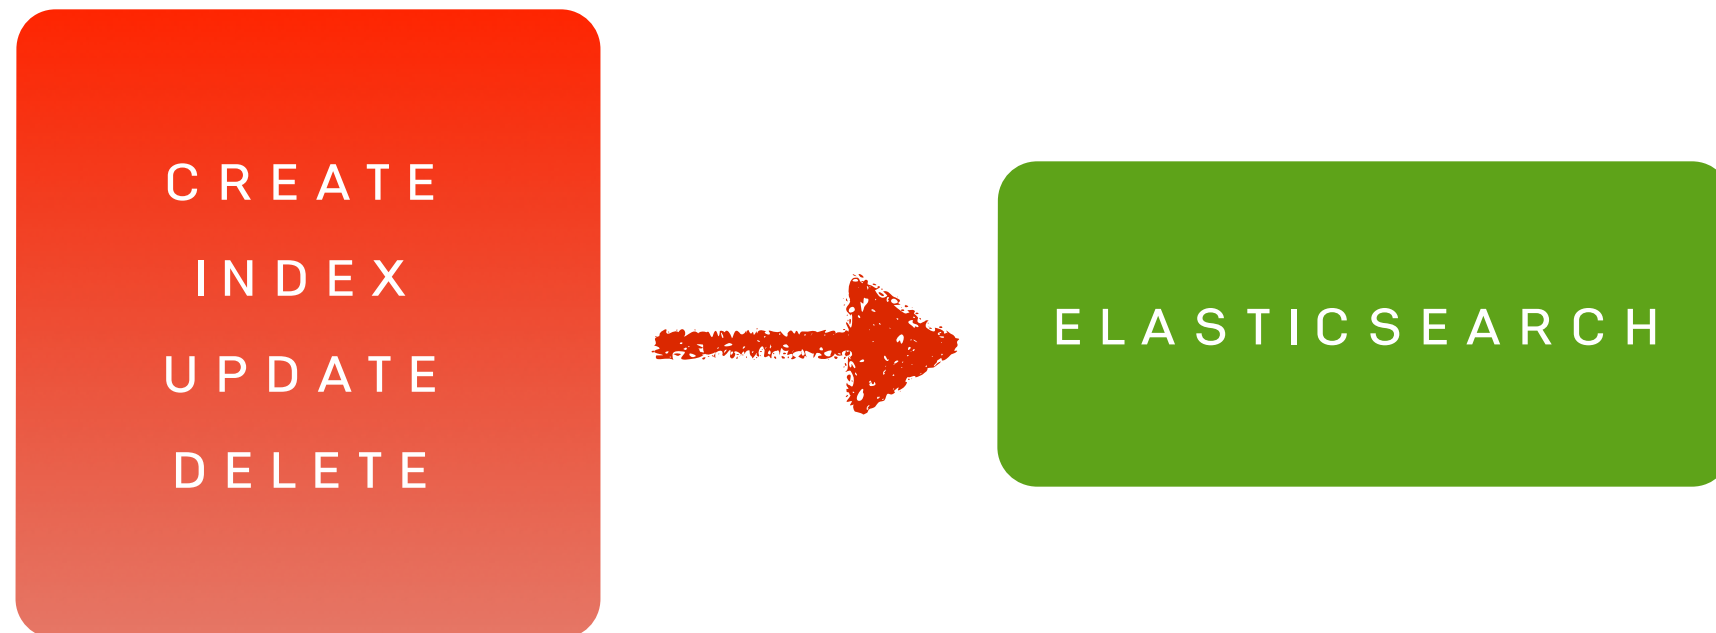

# Create document

## POST /\_bulk

```
{"create":{"_index":"store","_type":"book","_id":"1001"}}  
{"title":"new book 1000", "description":"my new book"}
```



# Auto ID

## POST /\_bulk

```
{"index":{"_index":"store","_type":"book"}}  
{"title":"new book xxx", "description":"my new book  
with auto id"}
```

# Put it all together

## POST /\_bulk

```
{ "delete": { "_index": "store", "_type": "book", "_id": "1001" }}  
{ "create": { "_index": "store", "_type": "book", "_id": "1001" }}  
{ "title": "My new book" }  
{ "index": { "_index": "store", "_type": "book" }}  
{ "title": "My second book" }  
{ "update": { "_index": "store", "_type": "book", "_id": "1001",  
"_retry_on_conflict" : 3} }  
{ "doc" : {"title" : "My updated book"} }
```

# Put it all together

**POST** /store/book/\_bulk

```
{ "delete": { "_id": "1001" } }
```

```
{ "create": { "_id": "1001" } }
```

```
{ "title": "My new book" }
```

```
{ "index": { } }
```

```
{ "title": "My second book" }
```

```
{ "update": { "_id": "1001", "_retry_on_conflict" : 3 } }
```

```
{ "doc" : { "title" : "My updated book" } }
```

# Put it all together

Result success :: errors=false

```
{
  "took": 3,
  "errors": false,
  "items": [
    {
      "delete": {
        "_index": "store",
        "_type": "book",
        "_id": "1001",
        "_version": 26,
        "status": 200,
        "found": true
      }
    },
  ]
}
```


# Put it all together

Result failure :: errors=true

```
{
  "took": 3,
  "errors": true,
  "items": [
    {
      "create": {
        "_index": "store",
        "_type": "book",
        "_id": "1001",
        "status": 409,
        "error": "DocumentAlreadyExistsException[[store][3]
[book][1001]: document already exists]"
      }
    }
  ],
}
```

# No transaction in bulk

Not Atomic

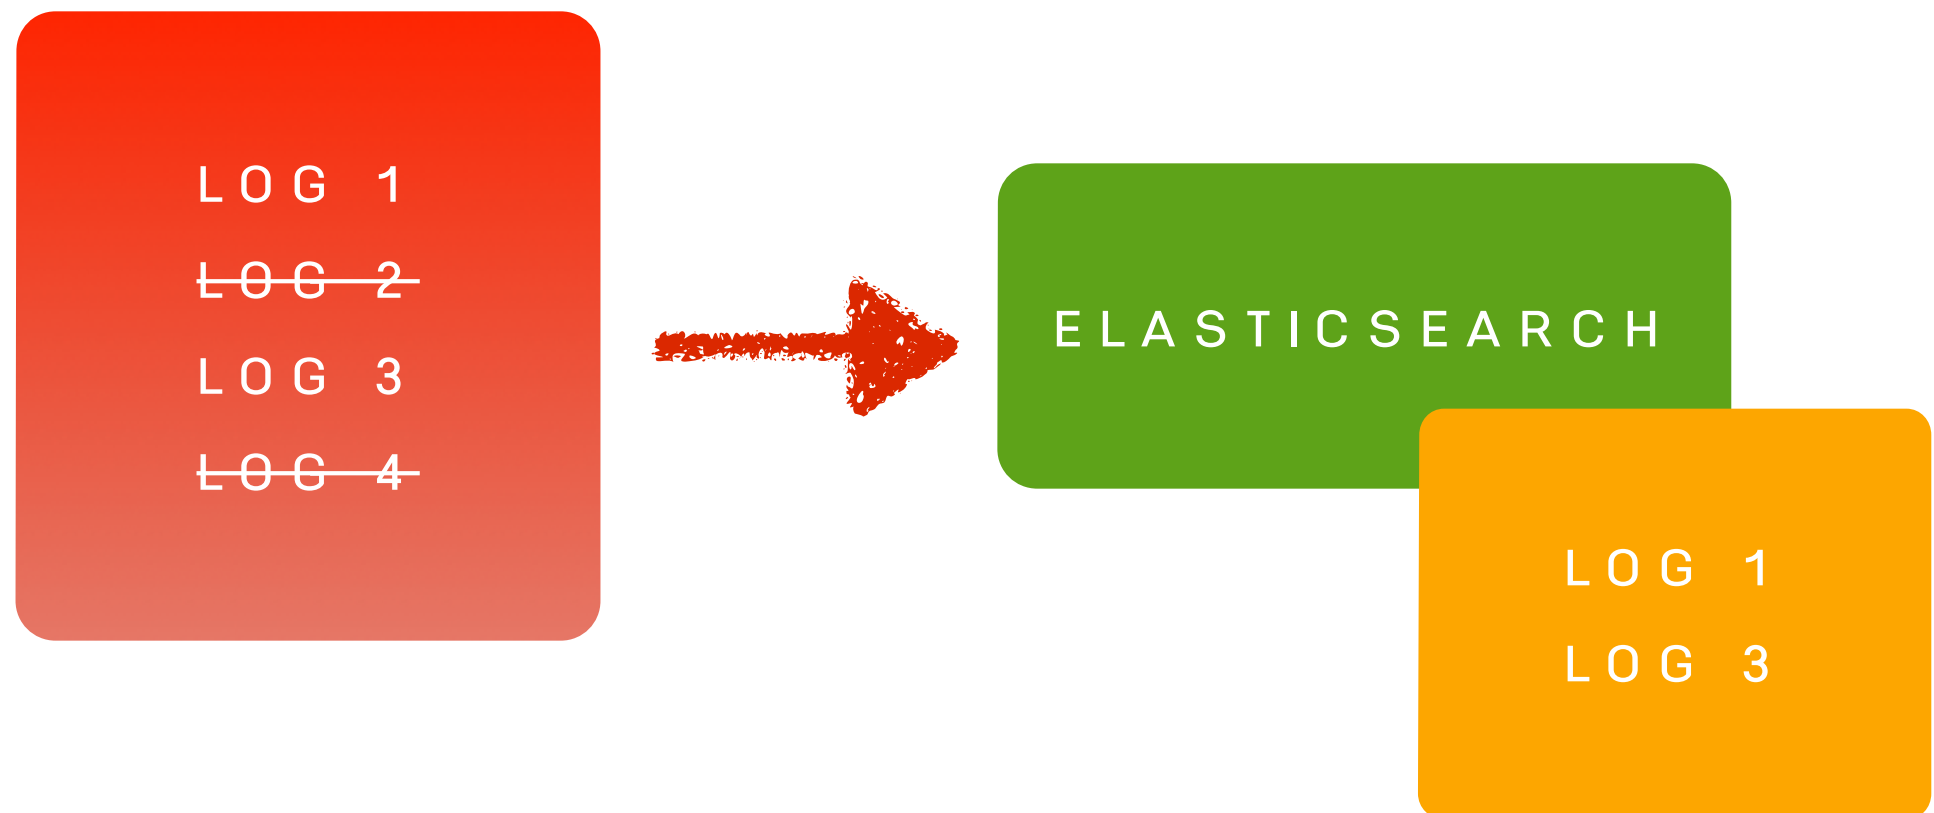

# Add logs with bulk api

## POST /store/log/\_bulk

```
{ "create": { "_id": "1" }}
{ "code":"200", "message":"success" }
{ "update": { "_id": "2", "_retry_on_conflict" : 3}}
{ "doc" : {"code" : "404", "message" : "not found"}}
{ "create": { "_id": "3" }}
{ "code":"200", "message":"success" }
{ "update": { "_id": "4", "_retry_on_conflict" : 3}}
{ "doc" : {"code" : "404", "message" : "not found"}}
```

# Result

```
{
  "took": 5,
  "errors": true,
  "items": [
    {
      "create": {
        "_index": "store",
        "_type": "log",
        "_id": "1",
        "_version": 1,
        "status": 201
      }
    },
    {
      "update": {
        "_index": "store",
        "_type": "log",
        "_id": "2",
        "status": 404,
        "error": "DocumentMissingException[[store][-1] [log][2]: document
missing]"
      }
    }
  ],
}
```




# Result

```
{
  "create": {
    "_index": "store",
    "_type": "log",
    "_id": "3",
    "_version": 1,
    "status": 201
  },
  "update": {
    "_index": "store",
    "_type": "log",
    "_id": "4",
    "status": 404,
    "error": "DocumentMissingException[[store][-1] [log][4]: document
missing]"
  }
}
```

# How big of data in bulk ?

????

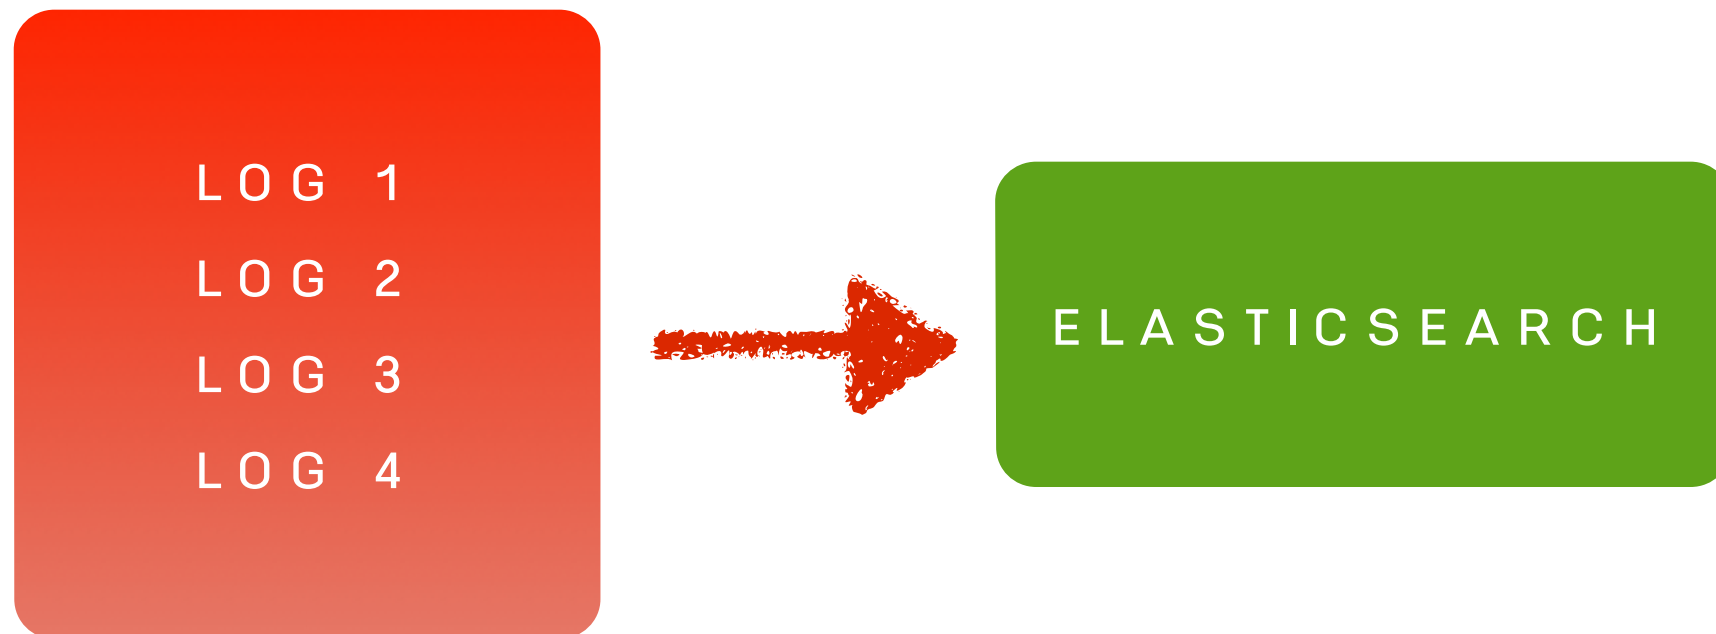

# How big of data in bulk ?

ตรงปรับให้เหมาะสมแต่ละ use case



# How big of data in bulk ?

5-15 MB คือ คำแนะนำ

