
Data and Network Security

Jordan Pyott

2021-05-06 17:02

Contents

Course Information	3
Assessment	4
Lectures	5
Lecture One - Course Introduction	5
Lecture Two - Course Overview	7
Lecture Three - Number Theory and Finite Fields	10
Lecture Four - CrypTool	13
Lecture Five - Classic Encryption	13
Lecture Six - Classic Encryption: Block ciphers	16
Lecture Seven: Block ciphers continued	21
Lecture Eight: Block cipher's Modes of Operation	24
Lecture Nine: Stream ciphers and Randomization	27

Course Information

Lecturers Details

- Lecturer: Dr. Clementine Gritti
 - Office: Erskine 304
 - Email: clementine.gritti@canterbury.ac.nz
- Tutor: Ryan Beaumont
 - Email: rbe72@uclive.ac.nz

Weekly Lab Times

- Tuesday, 16:00–18:00, Jack Erskine 136 Lab 4.
- Wednesday, 14:00–16:00, Jack Erskine 136 Lab 1.
- Friday, 16:00–18:00, Jack Erskine 136 Lab 4.

Other Information

- Labs and Quiz's will be available on learn
- Textbooks
 - Cryptography and network security : principles and practice, William Stallings, 5th edition
 - * This course is inspired from this book as the bulk of the course is founded in cryptography.
 - * The exam will only be on content in the slides not from the book
 - Computer security : principles and practice, William Stallings and Lawrie Brown, 3rd edition

2.1 Term 1 Plan

Week starting date	Course week	Monday lecture	Thursday lecture	Lab
19/07/2021	1	L1: Course introduction	L2: Course overview	no lab
26/07/2021	2	L3: Discrete mathematics	L4: CrypTool (at home)	Lab 1: Introduction
02/08/2021	3	L5: Classical encryption part 1	L6: Classical encryption part 2	Lab 2: Discrete maths exercises
09/08/2021	4	L7: Block ciphers	L8: Block cipher modes	Lab 3: CrypTool part 1
16/08/2021	5	L9: Stream ciphers	L10: Number theory	Lab 4: CrypTool part 2
23/08/2021	6	L11: Hash functions and MACs	no lecture	Lab 5: Number theory exercises

2.2 Term 2 Plan

Week starting date	Course week	Monday lecture	Thursday lecture	Lab
13/09/2021	7	L12: Public key crypto part 1	L13: Public key crypto part 2	Lab 6: Hash functions and MACs exercises
20/09/2021	8	L14: Digital signatures	L15: PKI and certificates	Lab 7: CrypTool part 3
27/09/2021	9	L16: Key establishment	L17: TLS part 1	Lab 8: PKI and certificates
04/10/2021	10	L18: TLS part 2	L19: IPSec and VPN	Lab 9: Digital signatures and key establishment exercises
11/10/2021	11	L20: Email security	L21: Malware and attacks	Lab 10: TLS
18/10/2021	12	L22: Recap lecture	no lecture	Lab 11: IPSec and email security exercises

Figure 1: Timetable**Assessment****1. Labs (10%) - attendance and participation:**

- Labs are done individually but you are encouraged to discuss and share with your peers (you are allowed to see each other during labs).
- Attending one lab each week over the semester automatically gives you full mark: – The tutor will assess your attendance.
- If you cannot attend one lab session, then a report (along with a justification of student absence) will be required and assessed:
 - The report needs to be submitted by one week after the missed session.
 - Example: if you miss Tuesday lab on Week X then you are asked to submit a report by Tuesday of Week X+1.
 - The report needs to be sent to *both* the lecturer and the tutor.

2. Weekly quizzes (20%):

- They can be found and done on LEARN.
- 9 quizzes in total.
- Each quiz contains 10 questions. Each question contains 4 choices such that only one choice is correct.

- 2 attempts per quiz, such that the highest grade is taken into account.
 - A quiz is given on Friday of Week X, and should be done before Friday of Week X+1 (except for the one released just before the break):
3. Assignment (20%):
- *Deadline*: 17 September 2021.
 - Small exercises on what has been covered so far.
 - The assignment will be released on LEARN on 20 August 2021.
 - Your report should be uploaded to LEARN.
4. Final exam (50%)
- 3-hours duration
 - 25 multiple-choice questions
 - 5 open questions, such that if additional information is needed to solve the problem then it will be provided.
 - Covers all content from all lectures study *definitions, mechanisms, processes*
 - Not expected to remember the code of each standard (e.g. RFC1234)

Lectures

Lecture One - Course Introduction

- All materials will be found on learn, including lectures, labs, quizzes and assignments.
- Course outline available
- Labs must be done in person or a report *will not get full marks if do not attend*
- Labs start next week
- Weekly quizzes go over two lectures each *multi-choice*
- Midterm and final will all be entirely open questions

Why do we need cyber security

- Privacy
- Security
- Risk management

Famous recent attacks

- Dark hotel attack
 - Targeted phishing attacks using spy-ware

- Infiltrating guests computers through WIFI networks at hotels
 - Loss of confidentiality
- POODLE attack
 - man in the middle exploit
 - Communications can be decrypted and exploited
- EncroChat
 - A communications network and service provider
 - Infiltrated by police in 2020
- WannaCry
 - Loss of availability
 - stolen government hacking tools
 - Worm encrypting files on computers hard drive
 - * Was a form of ransom-ware
- Botnet
 - Botnet attacking IoT devices with default admin credentials
 - DDos
 - Loss of availability

Because of these attacks, some users have lost confidence in the service provided not storing/selling data.

Course Focus

- Cryptography as a foundation for information security
- Applications of cryptography
- History of cryptography
- Modern cryptography
 - Block ciphers, stream ciphers
 - public key crypto
 - Hashing and MAC
- Some mathematics
 - Modular arithmetic
 - Number theory
 - Elliptic curves

- Using all of the cryptography
 - Public key infrastructure
 - Secure email
 - TLS (HTTPS)

Lecture Two - Course Overview

What is cyber security?

Definition from the NIST computer security handbook:

- The protection afforded to an automated information system in order to attain the applicable objectives of preserving the integrity, availability and confidentiality of information system resources.
 - Some literature might differentiate between *computer security* and *cyber security*

Definitions

- A threat
 - Represents a potential security harm to an asset
- An attack
 - is a threat that is carried out
- The threat agent
 - carrying out the attack is referred to as an attacker
- A countermeasure
 - Any means taken to deal with an attack
- A residual level of risk to the assets
 - represented by vulnerabilities possibly exploited by threat agents
- **Assets**
 - Computer systems and other data processing, storage and data communication devices
 - OS, system utilities and applications
 - Files and databases and further data
 - Local and wide area network links
- **Vulnerabilities**

- A computer system can be:
 - * Leaky
 - meaning gives access to information through the network, violates confidentiality
 - * Corrupted
 - meaning that it does the wrong thing, violates integrity principle
 - * Unavailable
 - meaning that it becomes impossible or impractical to use, violates availability
- Passive attacks
 - Interception
 - Traffic analysis
 - * Spoofing, finding information and observing traffic
- Active attacks
 - Altering information and system resources
 - May be hard to prevent but easy to detect
 - Masquerade
 - * the attacker claims to be someone else *authorized*
 - Falsification (Man in middle)
 - * the attacker changes messages during transmission
 - Misappropriation (DDOS)
 - * the attacker prevents legitimate users from accessing resources
- Inside attacks
 - initiated by an entity INSIDE the security perimeter
 - authorization to access system resources but use of them in a malicious way
 - Exposure
 - * the attacker intentionally releases sensitive information to an outsider.
 - Falsification
 - * the attacker alters or replaces valid data or introduces false data into a file or database.
- Outside attacks
 - initiated from OUTSIDE the perimeter, by an unauthorised or illegitimate user of the system
 - Obstruction
 - * the attacker disables communication links or alters communication control information.

- Intrusion
 - * the attacker gains unauthorised access to sensitive data by overcoming the access control protections.

Security functional requirements

- Information security management requires to:
 1. Identify threats
 2. Classify all threats according to likelihood and severity
 3. Apply security controls based on cost benefit analysis
- Countermeasures to vulnerabilities and threats comprise:
 1. Computer security technical measures
 - access control, authentication and system protection
 2. Management measures
 - awareness and training
 3. Both
 - configuration management

Defining Information Security

Definition from the NIST computer security handbook:

- The term security is used in the sense of minimizing the vulnerabilities of assets and resources. An asset is anything of value. A vulnerability is any weakness that could be exploited to violate a system or the information it contains. A threat is a potential violation of security.

The CIA Triad

- Confidentiality
 - Preventing unauthorised disclosure of information
- Integrity
 - Preventing modification or destruction of information
- Availability
 - ensuring resources are accessible when required

Information Security Definitions

- Security Service
 - a processing or communication service to give a specific kind of protection to system resources.
 - Types of security services [Lecture Two - Slide 20/27]:
 - * Peer entity authentication
 - * Data origin authentication
 - * Access control
 - * Data confidentiality
 - * Traffic flow confidentiality
 - * Data integrity
 - * Non-repudiation
 - * Availability
- Security Mechanism
 - a method of implementing one or more security services.
 - Types of security mechanisms
 - * Encipherment
 - * Digital signature
 - * Access control
 - access control lists, password or tokens which may be used to indicate access rights
 - * Data integrity
 - * Authentication exchange
 - * Traffic padding
 - * Routing control
 - * Notarization

Risk Management

A key tool in information security management:

1. Identify threats
2. Classify all treats according to likelihood and severity
3. Apply security controls based on cost benefit analysis

Lecture Three - Number Theory and Finite Fields

Factorisation

The set of all integers is denoted by $\mathbb{Z} = \dots, -3, -2, -1, 0, 1, 2, 3, \dots$, given $a, b \in \mathbb{Z}$, a divides b if there exists $k \in \mathbb{Z}$ s.t. $ak = b$.

- This means that a is a factor of b
- $a|b$

We use p to denote a prime, an integer $p \geq 1$ is a *prime* if its divisors are $(1, p)$.

- Testing a prime number p by trial numbers up to the square root of p = There are more efficient ways to check for primality *later in the course*

Properties of factorisation and useful formulae:

- If $a|b$ and $a|c$, then $a|bc$
- If p is prime and $p|ab$ then either $p|a$ or $p|b$
- **Division algorithm**
 - given $a, b \in \mathbb{Z}$, s.t. $a > b$, then there exists $q, r \in \mathbb{Z}$ s.t. $a = bq + r$
 - $a = bq + r$ and $0 \leq r < b$, we can use this to show $r < \frac{a}{2}$.
- **Greatest common divisor (GCD)**
 - $\gcd(a, b) = d$ if $d|a$ and $d|b$
 - if $c|a$ and $c|b$ then $c|d$
 - a and b are *relatively prime* / *co-prime* when $\gcd(a, b) = 1$
- **Euclidean Algorithm**
 - Find $d = \gcd(a, b)$

$$a = bq + r_1 \quad \text{for } 0 < r_1 < b$$

$$b = r_1q_1 + r_2 \quad \text{for } 0 < r_2 < r_1$$

$$r_1 = r_2q_2 + r_3 \quad \text{for } 0 < r_3 < r_2$$

...

$$f * k - 3 = r * k - 2q * k - 1 + r * k - 1 \quad \text{for } 0 < f * k - 1 < f * k - 2$$

$$f * k - 2 = r * k - 1q * k + r * k \quad \text{for } 0 < f * k < f * k - 1$$

$$f * k - 1 = r * kq * k + 1 + r * k + 1 \quad \text{with } r * k + 1 = 0$$

- Hence $d = r_k = \gcd(a, b)$
- **Back Substitution - Extending Euclidean Algorithm**

- Finding x, y in $ax + ay = d = r_k$
- This is essentially reversing the Euclidean algorithm

- **Modular Arithmetic:**

- Given $a \equiv b \pmod{n}$ and $c \equiv d \pmod{n}$, then the following conditions hold:

- $a + b \equiv c + d \pmod{n}$
- $ac \equiv bd \pmod{n}$
- $ka \equiv kb \pmod{n}$

- **Groups**

- A group \mathbb{G} is a set with *binary operation* and:
 - * Closure: $a \cdot b \in \mathbb{G}$ for $a, b \in \mathbb{G}$
 - * Identity: there is an element 1 , s.t. $a \cdot 1 = 1 \cdot a = a$ for $a \in \mathbb{G}$
 - * Inverse: there is an element b s.t. $a \cdot b = 1$ for $a \in \mathbb{G}$
 - * Associativity: $(a \cdot b) \cdot c = a \cdot (b \cdot c)$ for $a, b, c \in \mathbb{G}$
 - * Commutativity: $a \cdot b = b \cdot a$ for $a, b \in \mathbb{G}$
- If this condition holds, the group is said to be *abelian*.

- **Cyclic Groups**

- the order $|\mathbb{G}|$ of a group \mathbb{G} is the number of elements in \mathbb{G}
- g^k denote the repeated application of $g \in \mathbb{G}$, using the group operation
- The order $|g|$ of $g \in \mathbb{G}$ is the smallest integer k s.t. $g^k = 1$
- g is a generator of \mathbb{G}
- A group is said to be *cyclic* if it has a generator

- **Finding inverse**

- Use extended Euclidean algorithm if GCD is 1.

- **Fields**

- A field \mathbb{F} is a set with binary operations:
- \mathbb{F} is an *abelian group* under the operation $+$ with identity element of 0.

- **Finite Fields**

- Setting up secure communications requires fields with a finite number of elements.
- Notation is $GF(p) = \mathbb{Z}_p$
- Addition modulo 2: XOR LOGIC

Lecture Four - CrypTool

What is cryptool?

- Open source program that focuses on the free e-learning software, illustrating cryptographic concepts.
- We will be using CrypTool 2
- Video to go back and watch

Lecture Five - Classic Encryption

Goals:

- Study historical ciphers
- Establish basic notation and terminology
- Introduce basic cryptographic operations
- Explore typical attacks and adversary capabilities

Terminology:

- Cryptography: The study of designing crypto-systems, key components are:
 - Confidentiality: A key is needed to *read* the message
 - Authentication: A key is needed to *write* the message
- Cryptanalysis: The study of breaking crypto-systems
- Stenography: The study of concealing information
- Crypto-system
 - A set of plain-texts
 - A set of cipher-texts
 - A set of keys
 - A function called *encryption* which transforms plain text to cipher text
 - An inverse function called *decryption*, which reverses the encrypted message to plain-text
- Symmetric and Asymmetric Cryptography
 - Symmetric key cipher:
 - * Encryption and decryption keys are known to the sender and receiver
 - * Secure channel for transmission of the keys
 - Asymmetric key cipher
 - * Each participant has a public key and a private key
 - * Possibly working for both encryption of messages and the creation of digital signatures

Symmetric Encryption Notation for Symmetric Encryption Algorithms:

- Encryption function: E
- Decryption function: D
- Message or plain-text: M
- Cipher-text: C
- Shared secret key: K

Encryption is denoted as $C = E(M, K)$

Decryption is denoted as $M = D(C, K)$

Methods to break Symmetric encryption:

An adversary has access to many methods to break a cryptosystem, however such methods depend on some conditions and known knowledge, such as:

- What are the resources available to the adversary?
 - Examples: *computational capability, inputs/outputs, knowledge of the crypto-system*
- What does the adversary want?
 - Do we want to know the secret key, distinguish two messages, **what are we trying to achieve?**

Exhaustive Key Search:

This is a brute force attack, that checks all combinations of possible keys, note there is no way to prevent such an attack, our best option is just to raise complexity to where it is to combinationally difficult to compute, however this does not stop people from getting lucky when breaking your system.

- We may be able to break the system without exhaustive search.
- We may be able to break the system without finding the key.

Attack classifications:

These are ordered from the least powerful to the most dangerous information an attacker could have.

1. Cipher-text Only Attack - the attacker only has access to intercepted encrypted messages
2. Known Plain-text Attack - The attacker knows some of the plain text
3. Chosen Plain-text Attack - The attacker can obtain the cypher-text from some plain-text that has been selected
4. Chosen Cipher-text Attack - The attacker can obtain the plain-text from some cipher-text that it has selected

Which of these should be prevented?

- A crypto-system is seen as very insecure if it can be practically attacked using only intercepted cypher texts
- A crypto-system should be secure against chosen plain-text and chosen cipher-text attacks (*this is the modern standard*)
- History shows that chosen cipher-text attacks are practical to set up for an attacker

Kerchhoffs' Principle: We assume an attacker has complete knowledge of the cipher, the only item that is unknown about the crypto-system is the private key.

- Using a secret, non-standard algorithm can cause severe problems
 - This would be an example of *security through obscurity* (note this is a bad habit)

Statistical Attacks:

- Depends on using the redundancy of the alphabet
- Information from distribution of letters
- Recognising patterns to guess information about the crypto-system

Basic cipher operations:

Historical ciphers combine two basic operations:

- Transposition: Characters on the plain-text are mixed up with each other
 - Permutating characters in a fixed period d and a permutation f
 - Plain-text is seen as a matrix of rows of length d
 - Key is (d, f)
 - Each block of d characters is re-ordered using permutation f
 - Complexity is $d!$
 - We will go through how to do this by hand and a formulation of how to automate this process using Crypt Tool
- Substitution: Characters are replaced by a different character (or set of characters)
 - Each character in the plain-text alphabet replaced by a character in the cipher-text alphabet, following a cypher-text table.
 - *Caesar cipher* is a simple example of a substitution cipher
 - * Functions for encryption $C_i = (M_i + j) \bmod n$
 - * Functions for decryption $M_i = (C_i + j) \bmod n$
 - * To break this we can do a frequency analysis in order to find common characters (*example, use ' ' as most common letter*)

Lecture Six - Classic Encryption: Block ciphers

Defining Polyalphabetic Substitution

- Using multiple mappings from plaintext to ciphertext
- The effect with multiple alphabets is to smooth frequency distribution
 - Direct frequency analysis should no longer be effective
- Typical polyalphabetic ciphers are periodic substitution ciphers based on period d
- Given d ciphertext alphabets C_0, C_1, \dots, C_{d-1} let $f_i : A \rightarrow C_i$ be a mapping from the plaintext alphabet A to the i_{th} ciphertext alphabet $C_i \forall 0 \leq i \leq d - 1$
- Encryption Process:
 - Plaintext: $M = M_0 \dots M_{d-1} M_d \dots M_{2d-1} M_{2d} \dots$
 - is encrypted to:
 - * $E(K, M) = f_0((M_0)) \dots f_{d-1}(M_{d-1}) f_0(M_d) \dots f_{d-1}(M_{2d-1}) f_0(M_{2d}) \dots$
 - Special case with $d = 1$: the cipher is monoalphabetic (simple substitution cipher)
- Key generation:
 - Select a block d
 - Generate d random simple substitution table
- Encryption:
 - Encrypting the character by using the substitution table number j such that $i \equiv j(mod d)$
- Decryption
 - Using the same substitution table as in encryption in order to reverse the simple substitution

Let $d = 3$, thus there are 3 ciphertext alphabets.

Pltxt char.	ABC	DEF	GHI	JKL	MNO
C_1	UWY	SX▽	TVZ	CEI	AFG
C_2	QLM	PJO	RKN	▽XS	YUW
C_3	MLQ	RNQ	GFA	ZVT	YWU
Pltxt char.	PQR	STU	VWX	YZ▽	
C_1	BDH	KNR	JOP	LMQ	
C_2	ZVT	FGA	HDB	EIC	
C_3	POJ	HDB	IEC	▽XS	

If the plaintext is IT▽IS▽A▽BEAUTIFUL▽DAY then the ciphertext is ZGSZFSUCLXQBNNKRSSSQ▽.

Figure 2: Polyalphabetic example

Vigenere Cipher

- Popular form of periodic substitution ciphers based on *shifted* alphabets
- The key K is a sequence of characters

$$K = K_0 K_1 \dots K_{d-1}$$

Message M	AT∇T	HE∇T	IME∇
Key K	LOCK	LOCK	LOCK
$E(K, M)$	LGBC	SSBC	T∇GJ

- ▶ Numbering the alphabet:
 $A = 0, B = 1, \dots, Z = 25, \nabla = 26$.
- ▶ In particular, $L = 11, O = 14, C = 2, K = 10$:
 - ▶ the 1st character of each 4-character group is shifted by 11,
 - ▶ the 2nd character is shifted by 14,
 - ▶ the 3rd character is shifted by 2,
 - ▶ the 4th character is shifted by 10.
- ▶ Shifting is computed modulo 27 (the alphabet “wraps around”).

Figure 3: Vigenere example

Crypto-analysis:

- Identify the period length
 - Kasiski method
 - Cryptool uses autocorrelation to estimate the period
- Attack separately d substitution tables
 - Each substitution is just a shift
 - * If there is sufficient ciphertext then it is trivial

Autocorrelation method

- Method used to find the period length d of any periodic polyalphabetic cipher
- Given ciphertext C , computing the correlation between C and its shift C_i for all values of i , of the period
- Seeing peaks in the value will help to find i

Hill Cipher

- The americal mathematition Lester S. Hill published his cipher in 1929

- *Polygram cipher*
 - Simple substitution cipher on an extended alphabet consisting of multiple characters
 - Example: Diagram substitution in which the alphabet consists of all pairs of characters
- Major weakness: its linearity, hence known plaintext attacks are easy
- Let $d = 2$ so encryption takes diagrams as input and output blocks
- Each plaintext pair is written as a column vector, letters are encoded as numbers

Performing a linear transformation on d plaintext characters to get d ciphertext characters:

- Encryption involves multiplying a $d \times d$ matrix K by the block of plaintext M .
 - $C = KM$
 - tutorial: 27:00
- Decryption involves multiplying the matrix K^{-1} by the block of ciphertext C
 - $M = K^{-1}C$

$$d = 2, K = \begin{pmatrix} 4 & 6 \\ 1 & 7 \end{pmatrix}, K^{-1} = \begin{pmatrix} 4 & 12 \\ 11 & 10 \end{pmatrix}$$

$$\text{One can check that } KK^{-1} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}$$

$$\text{Plaintext: } M = (\text{EG}) = \begin{pmatrix} 4 \\ 6 \end{pmatrix}$$

$$\text{Encryption: } C = KM = \begin{pmatrix} 4 & 6 \\ 1 & 7 \end{pmatrix} \begin{pmatrix} 4 \\ 6 \end{pmatrix} = \begin{pmatrix} 25 \\ 19 \end{pmatrix} = (\text{ZT})$$

$$\text{Decryption: } M = K^{-1}C = \begin{pmatrix} 4 & 12 \\ 11 & 10 \end{pmatrix} \begin{pmatrix} 25 \\ 19 \end{pmatrix} = \begin{pmatrix} 4 \\ 6 \end{pmatrix} = (\text{EG})$$

Figure 4: encryption example

Crypto analysis:

- Known plaintext attacks possible given d
- Given blocks m_i and C_i for $0 \leq i \leq d - 1$
- example: 29:00

Block Cipher

- Block ciphers are the main bulk encryption algorithm in commercial applications
- AES and legacy cipher DES are widely used
- Symmetric key ciphers where each block is encrypted with the same key
- A block is a set of plaintext symbols of a fixed size
- length of plaintext and ciphertext is the same

Product cipher:

- Cryptosystem where encryption is formed by applying several sub-encryption functions
- Most block ciphers are a composition of simple functions

Iterated cipher:

Most modern block ciphers are special product ciphers


- encryption is divided into r smaller rounds
- sub-encryption functions are all same function, called a *round function*
- key K_i is derived from overall master key K
- tutorial: 38:40
- Decrypt by taking the inverse

Types of iterated ciphers:

- Substitution-Permutation network
 - Block length n must allow each block to be split into m sub-blocks
 - we have two operations:
 - * Substitution: $\Pi_S : 0, 1' \rightarrow 0, 1'$
 - * Permutation: $\Pi_P : 1, \dots, n \rightarrow 1, \dots, n$
 - * tutorial: 45:00

Feistel Cipher:

- Round function swaps two blocks and forms a new right hand half
- Can be mapped to a network where two halves plaintext travels through
- tutorial: 50:00

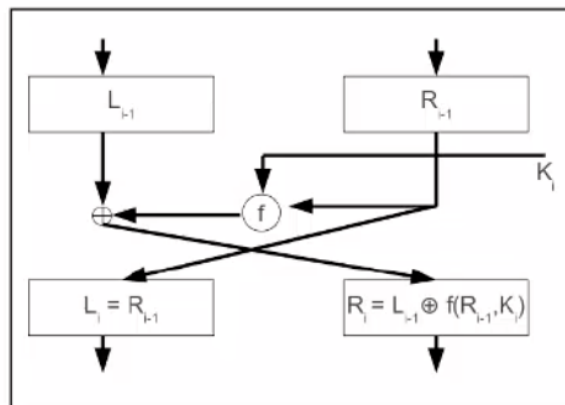

1. Split plaintext block $P = W_0$ into 2 halves (L_0, R_0)
2. For each round, perform:
 - ▶ $L_i = R_{i-1}$
 - ▶ $R_i = L_{i-1} \oplus f(R_{i-1}, K_i)$
3. Output ciphertext block $C = W_r = (L_r, R_r)$

Figure 5: Feistel graphic

Differential Crypto-analysis

- Chosen plaintext attack
- Based on the idea that the difference between two input plaintext can be correlated to the difference between the output text

Linear Crypto-analysis

- Known plaintext attack
- Theoretically used to break DES

Lecture Seven: Block ciphers continued

- Encryption and decryption definitions are public property
- Security resides in the difficulty of decryption without the key
- Encryption steps: 08:00

Row No.	Column No.															
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
0	14	4	13	1	2	15	11	8	3	10	6	12	5	9	0	7
1	0	15	7	4	14	2	13	1	10	6	12	11	9	5	3	8
2	4	1	14	8	13	6	2	11	15	12	9	7	3	10	5	0
3	15	12	8	2	4	9	1	7	5	11	3	14	10	0	6	13

- ▶ Let input block W be $x_1x_2x_3x_4x_5x_6$
- ▶ Digits x_1 and x_6 define row number between 0 and 3
- ▶ Digits x_2, x_3, x_4, x_5 define column number between 0 and 15
- ▶ **Example:** $W = 100101$
 - ▶ $x_1 = 1$ and $x_6 = 1$, thus 11, that is 3
 - ▶ $x_2 = 0, x_3 = 0, x_4 = 1, x_5 = 0$, thus 0010, that is 2

Figure 6: S-box Example

Key schedule

- Each of the 16 rounds involves 48 bits of the 56-bit key
- Each 48-bit subkey is defined by a series of permutations

Breaking DES

- Testing all possible 2^k keys in order to find the key K
- Key identified by using small number of cipher-text blocks or by looking for low entropy in decrypted plain-text
- 2^{56} DES keys to test
- Short DES key size was criticised from the start
 - Realistically brute force is a good method to break a 56-bit key
 - In 2017 we could find the keys in < 25 seconds
- To deal with the lack of security they created a double encryption
 - Having two keys K_1, K_2 be two block cipher keys

MITM attack

Let (P, C) be a single plaintext-ciphertext pair:

1. For each key K store $C' = E(P, K)$ in memory

2. Check if $D(C, K') = C'$ for any key k'
3. Check if any key values in 2. work for other (P, C) pairs

we need to store plain-text, single encryption keys and decryption key

We can just add more layers of encryption to get even better security (triple encryption), this will protect against MITM attacks, it is just too expensive and time restricted to be feasible

this is only used in legacy code now, other block ciphers are better

AES, Advanced Encryption Standard

- Designed in an open competition due to DES being bad
- Process over several years with much public debate
- 128-bit data block (fixed)
- Can have any sized master key (128, 192, 256)
- Byte-based design
- uses a state matrix
- Information on AES: 33:00

16-byte data block size:

a_{00}	a_{01}	a_{02}	a_{03}
a_{10}	a_{11}	a_{12}	a_{13}
a_{20}	a_{21}	a_{22}	a_{23}
a_{30}	a_{31}	a_{32}	a_{33}

Mixture of finite field operations in $GF(2^8)$ and bit string operations.

Figure 7: State matrix AES

Data block size:

- ▶ DES: 64 bits
- ▶ AES: 128 bits

Key size:

- ▶ DES: 56 bits
- ▶ AES: 128, 192 or 256 bits

Design structure:

- ▶ Both are iterated ciphers
- ▶ DES has a Feistel structure while AES is SPN
- ▶ DES is bit-based and AES is byte-based
- ▶ AES is substantially faster in both hardware and software

Figure 8: AES vs DES

- Block ciphers are the workhorses of secure communication
- AES is the current choice, Triple DES is still used
- Block ciphers are used as building blocks for confidentiality and authentication

Lecture Eight: Block cipher's Modes of Operation**Why different modes?**

Designed to provide confidentiality for data OR authentication for data OR both

Different modes have:

- Different efficiency properties
- Different communication properties

Problem with randomised encryption:

- The same plaintext block is encrypted to the same ciphertext block
- Prevention:
 - By using an initialisation vector which propagates through the entire ciphertext (IV)
 - IV may require to be either unique or random

- Features impacting on efficiency:
 - Parallel processing
 - * Multiple plaintext blocks are encrypted in parallel
 - * Multiple ciphertext blocks are decrypted in parallel
 - Error propagation
 - * Bit errors can be an issue
- Padding:
 - Requiring the plaintext to complete of complete blocks
 - NIST suggests a padding method
 - Padding bits removed unabiguously if usage of this padding method is known
 - * Remove all trailing 0 bits after the last 1 bit
 - * Remove the single 1 bit
- Notations:
 - Plaintext message P
 - t – th plaintext block P_t
 - Ciphertext C t – th ciphertext block C_t
 - Key K
 - initialisation vector IV

Confidentiality Modes

- ECB Mode encryption
 - Basic mode of a block cipher
 - Encryption: $C_t = E(P_t, K)$
 - Decryption: $P_t = E(C_t, K)$
 - Padding required
 - Not randomised
 - No IV
 - Allows for parallel encryption and decryption
- CBC Mode Encryption
 - Encryption: $C_t = E(P_t \oplus C_{t-1})$ s.t $P_0 = IV$
 - Decryption: $P_t = E(C_t \oplus C_{t-1})$ s.t $C_0 = IV$
 - Randomised
 - Padding required

- IV must be random
- Parallel decryption allowed
- Common choice for channel protection in TLS
- CTR Mode:
 - Synchronous stream cipher mode
 - A counter and a nonce are used initialised using a randomly selected value N
 - Encryption: $C_t = O_t \oplus P_t$
 - Plaintext block P_t is XOR'd with O_t
 - Decryption: $P_t = O_t \oplus C_t$
 - Don't require padding
 - randomised
 - error propagation: occurs in specific bits of current block

Authentication Modes

NOTE: I got bored of typing here, should probably go back over this content

- ▶ Providing sender authentication to the message:
 - ▶ Only Alice and Bob CAN produce T from M .
 - ▶ If $T' = T$ then Bob concludes that the message received M' was sent by Alice and has not been modified in transit (either intentionally or accidentally).
 - ▶ If $T' \neq T$ then Bob concludes that (M', T) was not sent by Alice.
- ▶ **Basic security property: Unforgeability**
 - ▶ Infeasible to produce M and T s.t. $T = \text{MAC}(M, K)$ without knowledge of K

Figure 9: MAC Properties

- Using a block cipher to create a MAC providing message integrity, not confidentiality
- IV must be fixed and public, can be set to all 0's
- P is the message

- $T = CBC - MAC(P, K)$
 - Unforgeable as long as the message length is fixed
-
- ▶ NIST standard allows any number of bit $Tlen$ to be chosen for tag T :
 - ▶ Recommendation of 64 bits to avoid guessing attacks.
 - ▶ Standard recommends MAC tag T to be of length at least $\log_2(lim/R)$ with:
 - ▶ lim is a limit on how many invalid messages are detected before K is changed.
 - ▶ R is the acceptable probability (risk) that a false message is accepted.

Figure 10: CMAC

Lecture Nine: Stream ciphers and Randomization

Randomness

- Defining randomness is difficult
- We want any specific string of bits to be as random as any other string
- Generators of random strings are used
- Using a TRNG to provide a seed for a PRNG

True Random number generator (TRNG)

- The entropy source includes:
 - A physical noise source
 - A digitalization process
 - Post-processing stages
- The output of the entropy source is any requested number of bits
- Periodic health test to ensure continuing reliable operation


- Intel introduces TRNG to Ivy Bridge processors in 2012

Pseudo random Number generator (PRNG)

- Each generator takes a seed as input
- It outputs a bit string before its state

These random number generators are made using a set of functions *outlined in lecture slides*

CTR_DRBG

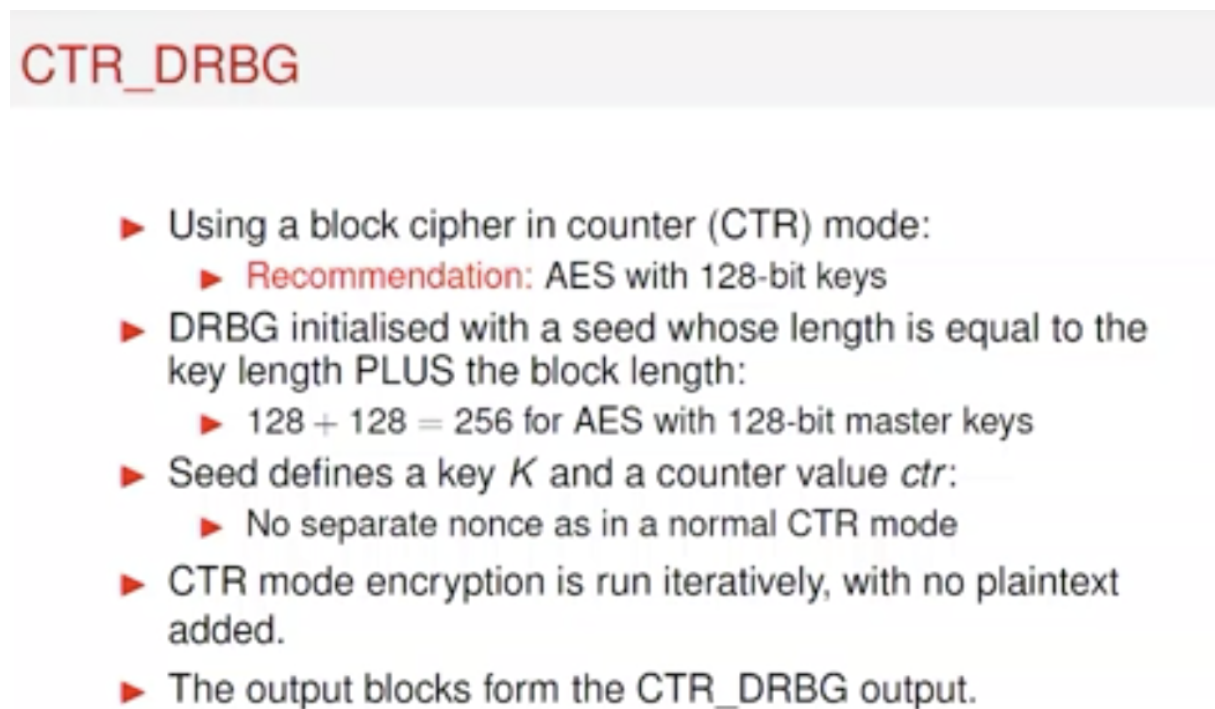

CTR_DRBG

- ▶ Using a block cipher in counter (CTR) mode:
 - ▶ **Recommendation:** AES with 128-bit keys
- ▶ DRBG initialised with a seed whose length is equal to the key length PLUS the block length:
 - ▶ $128 + 128 = 256$ for AES with 128-bit master keys
- ▶ Seed defines a key K and a counter value ctr :
 - ▶ No separate nonce as in a normal CTR mode
- ▶ CTR mode encryption is run iteratively, with no plaintext added.
- ▶ The output blocks form the CTR_DRBG output.

Figure 11: Example Implementation: CTR_DRBG

Update function:

- Each request DRBG generates up to 2^{19} bits
- From the function generate
- Updating provides backtracking resistance
- Restriction: up to 2^{48} seed bits
- Each re-seed provides forward prediction and backtracking resistance

Dual_EC_DRBG

- ▶ From an older standard (Dec. 2012).
- ▶ Based on elliptic curve discrete logarithm problem:
 - ▶ But no security proof exists
 - ▶ And many flaws:
<https://blog.cryptographyengineering.com/2013/09/18/the-many-flaws-of-dualecdrbg/>
- ▶ Much slower than other DRBGs in the standard.
- ▶ Press (Reuters) reported a secret 10 million dollar deal between NSA and RSA Security company to use Dual_EC_DRBG as the default PRNG in its software suite (Dec. 2013).

Figure 12: Dual_EC_DRBG

Stream Ciphers

- Characterised by the generation of a keystream using a short key and an initialisation value IV
- Synchronous stream ciphers
 - The keystream is generated independently of the plaintext
 - Both sender and receiver need to generate the same keystream and sync its usage
 - Vigenere cipher seen as a periodic synchronous stream cipher where each shift is defined by a key letter
 - CTR mode of operation for a block cipher is one method of generating a keystream
- Binary synchronous stream ciphers
 - Encryption: $C(t) = p(t) \oplus s(t)$
 - Decryption: $P(t) = C(t) \oplus s(t)$

One time pad

- Key is random sequence of characters, all of them are independently generated
- Each char in the key is used once

- Relies on perfect secrecy
- Is the only unbreakable cipher
- Practical usage is possible for pre-assigned communications between fixed parties
- How to deal with key management of completely random keys

Perfect Secrecy

Shannon's definition:



- ▶ Message set $\{M_1, \dots, M_k\}$.
- ▶ Ciphertext set $\{C_1, \dots, C_l\}$.
- ▶ $\Pr(M_i|C_j)$ is the probability that M_i is encrypted given that C_j is observed.
- ▶ In most cases, the messages M_i are NOT be equally likely.
- ▶ For all messages M_i and ciphertexts C_i :

$$\Pr(M_i|C_j) = \Pr(M_i)$$

Figure 13: Perfect Secrecy

Visual Cryptography

- Application of one time pad: visual splits an image into two shares
- Decryption works by overlaying the two shared images
- Many generalisations are possible
- Each pixel is shared in a random way, similar to splitting a bit in the one time pad

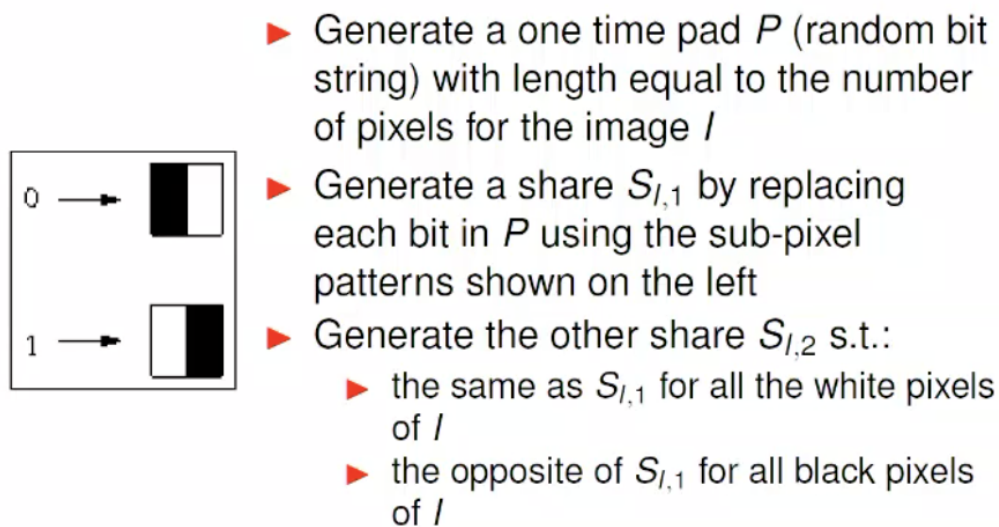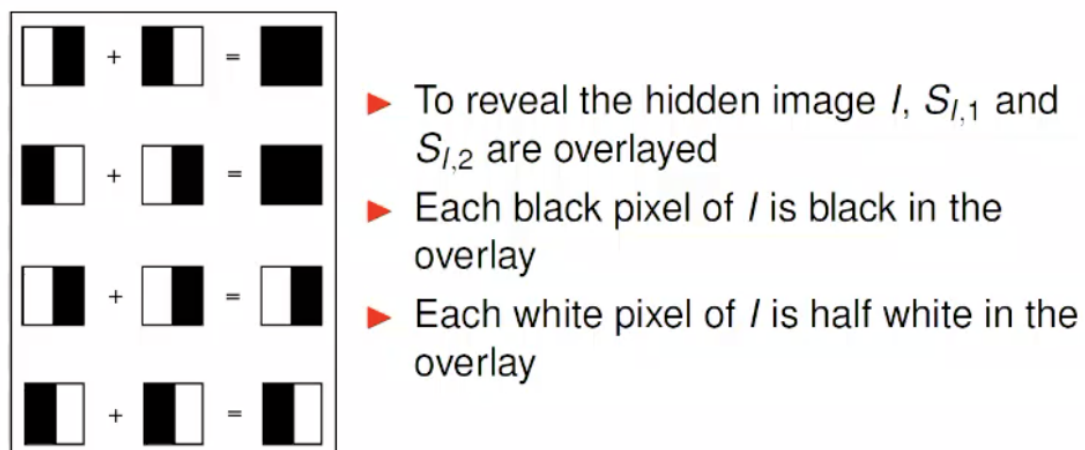**Figure 14:** Visual Encryption**Figure 15:** Visual Decryption