

Advanced CSS

A.F.M. Mahbubur Rahman

Asst. Professor

Dept. of Computer Science & Engineering

Email : m.r.kushal@gmail.com

Contact : 01911064969


Styling Links

- Links can be styled with any CSS property (e.g. color, font-family, background, etc.).
- Special for links are that they can be styled differently depending on what state they are in.
- The four links states are:
 - **a:link** - a normal, unvisited link
 - **a:visited** - a link the user has visited
 - **a:hover** - a link when the user mouses over it
 - **a:active** - a link the moment it is clicked

[Example](#)

Creating Navigation

- [Home](#)
- [About](#)
- [Archives](#)
- [Writing](#)
- [Speaking](#)
- [Contact](#)



[Example](#)

CSS Tables

- For table, following properties can be adjusted
 - **Table Borders**
 - **Collapse Borders**
 - **Table Width and Height**
 - **Table Text Alignment**
 - **Table Padding**
 - **Table Color**

Table Borders

- To specify table borders in CSS, we use the **border** property.
- The example below specifies a black border for **table**, **th**, and **td** elements:

```
<!DOCTYPE html>
<html>
<head>
<style>
table
{
border-collapse:collapse;
}
table, td, th
{
border:1px solid black;
}
</style>
</head>

<body>
```

Firstname	Lastname
Peter	Griffin
Lois	Griffin

Note: If a !DOCTYPE is not specified, the border-collapse property can produce unexpected results in IE8 and earlier versions.

Collapse Borders

- The border-collapse property sets whether the table borders are collapsed into a single border or separated:

```
<!DOCTYPE html>
<html>
<head>
<style>
table
{
border-collapse: separate;
}
table, td, th
{
border: 1px solid black;
}
</style>
</head>
```

Firstname	Lastname
Peter	Griffin
Lois	Griffin

Note: If a !DOCTYPE is not specified, the border-collapse property can produce unexpected results in IE8 and earlier versions.

Table Width and Height

- Width and height of a table is defined by the width and height properties.

```
<!DOCTYPE html>
```

```
<html>
```

```
<head>
```

```
<style>
```

```
table,td,th
```

```
{  
  border:1px solid black;  
}
```

```
table
```

```
{  
width:100%;  
}
```

```
th  
{  
height:100px;  
}
```

```
</style>
```

```
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

Table Text Alignment

- The text in a table is aligned with the
 - **text-align** and
 - **vertical-align** properties.

```
<!DOCTYPE html>
<html>
<head>
<style>
table,td,th
{
border:1px solid black;
width:400px;
}
td
{
height:50px;
text-align:right;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

Table Text Alignment

- The text in a table is aligned with the
 - text-align and
 - **vertical-align** properties.

```
<!DOCTYPE html>
<html>
<head>
<style>
table,td,th
{
border:1px solid black;
width:400px;
}
td
{
height:50px;
text-align:right;
vertical-align:top;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

Table Text Alignment

- The text in a table is aligned with the
 - text-align and
 - **vertical-align** properties.

```
<!DOCTYPE html>
<html>
<head>
<style>
table,td,th
{
border:1px solid black;
width:400px;
}
td
{
height:50px;
text-align:right;
vertical-align:bottom;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

Table Color

- The example below specifies the color of the **borders**, and the **text** and **background** color of **th** elements:

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th
{
border:1px solid green;

}
th
{
background-color:green;
color:white;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

Table Padding

- To control the space between the border and content in a table, we use the **padding** property on **td** and **th** elements:

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th
{
border:1px solid black;
}
td
{
padding:20px;
}
</style>
</head>

<body>
<table>
<tr>
<th>Firstname</th>
<th>Lastname</th>
<th>Savings</th>
</tr>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

CSS Display-Block and Inline Elements

- A block element is an element that takes up the full width available, and has a line break before and after it.
 - Examples of block elements:
 - `<h1>`
 - `<p>`
 - `<div>`
- An inline element only takes up as much width as necessary, and does not force line breaks.
 - Examples of inline elements:
 - `<span>`
 - `<a>`

- Changing an inline element to a block element, or vice versa, can be useful for making the page look a specific way, and still follow web standards.

- [HTML](#)
- [CSS](#)
- [JavaScript](#)
- [XML](#)



[HTML](#) [CSS](#) [JavaScript](#) [XML](#)

```
<!DOCTYPE html>
<html>
<head>
<style>
    li{display:inline;}
</style>
</head>
<body>

<p>Display this link list as a horizontal
menu:</p>

<ul>
<li><a href="/html/default.asp"
target="_blank">HTML</a></li>
<li><a href="/css/default.asp"
target="_blank">CSS</a></li>
<li><a href="/js/default.asp"
target="_blank">JavaScript</a></li>
<li><a href="/xml/default.asp"
target="_blank">XML</a></li>
</ul>
..
..
```

```

<!DOCTYPE html>
<html>
<head>
<style>

</style>
</head>
<body>

<p>

  this is a paragraph with <a href="/html
/default.asp">Link</a> and some text</p>

</body>
</html>

```

this is a paragraph with [Link](#) and some text

```

<!DOCTYPE html>
<html>
<head>
<style>
  a{display:block;}
</style>
</head>
<body>

<p>

  this is a paragraph with <a href="/html
/default.asp">Link</a> and some text</p>

</body>
</html>

```

this is a paragraph with
[Link](#)
and some text

CSS Positioning


- The CSS positioning properties allow you to position an element.
- Elements can be positioned using the top, bottom, left, and right properties. However, these properties will not work unless the position property is set first. They also work differently depending on the positioning method.

- There are four different positioning methods.
- **Static Positioning**
 - HTML elements are positioned static by default. A static positioned element is always positioned according to the normal flow of the page.
 - Static positioned elements are not affected by the top, bottom, left, and right properties.
- **Fixed Positioning**
 - An element with fixed position is positioned relative to the browser window.
- **Relative Positioning**
 - A relative positioned element is positioned relative to its normal position.
- **Absolute Positioning**
 - An absolute position element is positioned relative to the first parent element that has a position other than static. If no such element is found, the containing block is <html>

[Example](#)

CSS Float

- With CSS float, an element can be pushed to the left or right, allowing other elements to wrap around it.
- Float is very often used for images, but it is also useful when working with layouts.

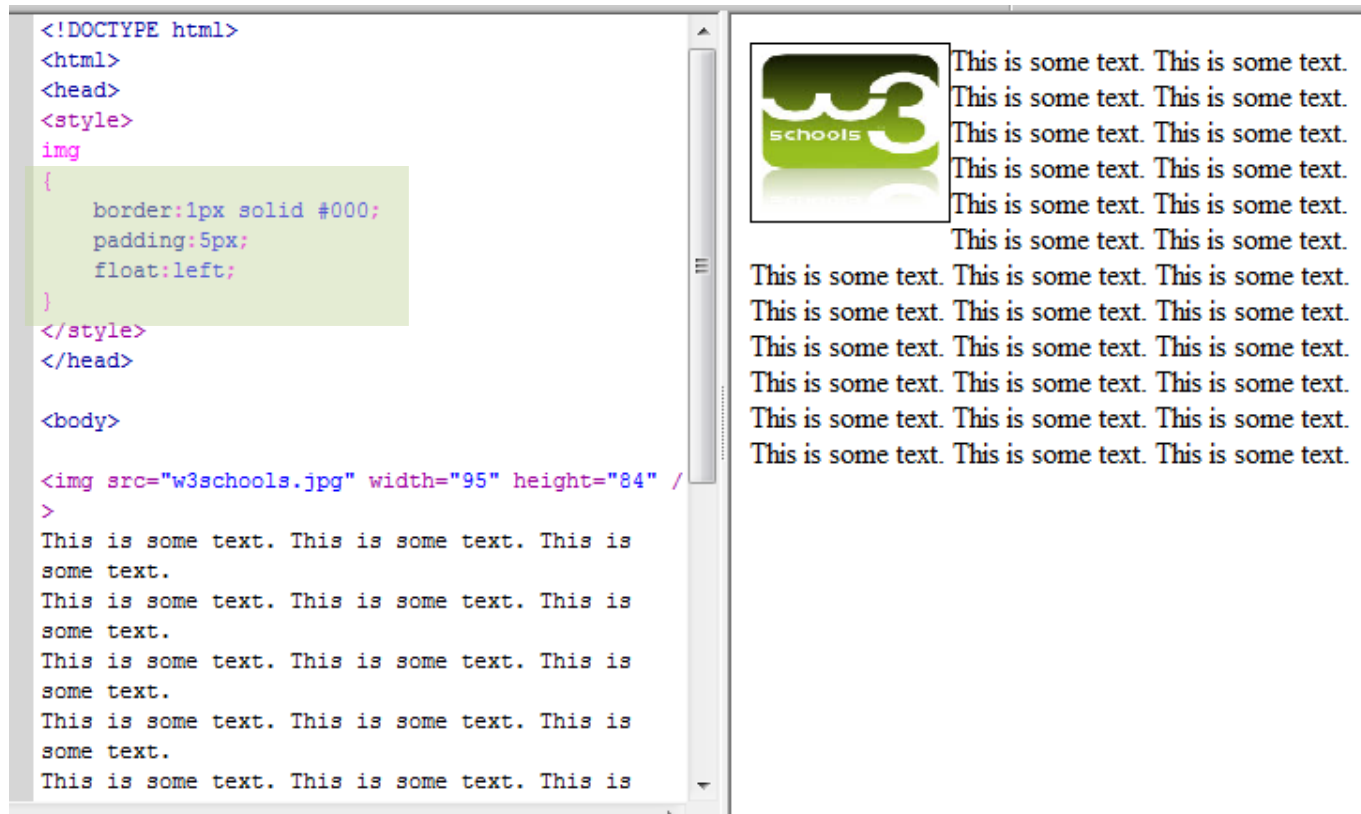

Page Building

Firefox CSS Image Gallery x Untitled Document

file:///C:/Users/Kushal/Desktop/Raj IT/CSS class/project/test.html

Stumble! All I like it! Share List Info Likes Connections Tools



Link one
Link two
Link three
Link four

Instructions

Be aware that the CSS for these layouts is heavily commented. If you do most of your work in Design view, have a peek at the code to get tips on working with the CSS for the fixed layouts. You can remove these comments before you launch your site. To learn more about the techniques used in these CSS Layouts, read this article at Adobe's Developer Center - http://www.adobe.com/go/adc_css_layouts.

Clearing Method

Because all the columns are floated, this layout uses a clear:both declaration in the .footer rule. This clearing technique forces the .container to understand where the columns end in order to show any borders or background colors you place on the .container. If your design requires you to remove the .footer from the .container, you'll need to use a different clearing method. The most reliable will be to add a `<br class="clearfloat" />` or `<div class="clearfloat"></div>` after your final floated column (but before the .container closes). This will have the same clearing effect.

Logo Replacement

An image placeholder was used in this layout in the .header where you'll likely want to place a logo. It is recommended that you remove the placeholder and replace it with your own linked logo.

Be aware that if you use the Property inspector to navigate to your logo image using the SRC field (instead of removing and replacing the placeholder), you should remove the inline background and display properties. These inline styles are only used to make the logo placeholder show up in browsers for demonstration purposes.

To remove the inline styles, make sure your CSS Styles panel is set to Current. Select the image, and in the Properties pane of the CSS Styles panel, right click and delete the display and background properties. (Of course, you can always go directly into the code and delete the inline styles from the image or placeholder there.)

Backgrounds

By nature, the background color on any div will only show for the length of the content. This means if you're using a background color or border to create the look of a side column, it won't extend all the way to the footer but will stop when the content ends. If the .content div will always contain more content, you can place a border on the .content div to divide it from the column.

This .footer contains the declaration position:relative; to give Internet Explorer 6 hasLayout for the .footer and cause it to clear correctly. If you're not required to support IE6, you may remove it.

ABP x No Proxy 8:49 PM 10/11/2012



Header(960 px)

Nav

Sidebar
(180px)

Content (780px)

footer

The End