

Introduction to CSS

A.F.M. Mahbubur Rahman

Lecturer

Dept. of Computer Science & Engineering

Email : m.r.kushal@gmail.com

Contact : 01911064969

CSS Basic


What is CSS?

- ❑ **CSS** stands for **Cascading Style Sheets**
- ❑ CSS defines **how to display** HTML elements on webpage
- ❑ CSS was added to HTML 4.0
- ❑ It was intended to allow developers to separate content from design
- ❑ Style sheets allow web pages to be optimized for more than one type of devices such as PDAs and cell phones or for printing

Advantage Of using CSS

❑ Easy to maintain

- a single CSS file can be used to control the appearance of multiple HTML documents.
- Changing the appearance of an entire site can be done by editing only the CSS file

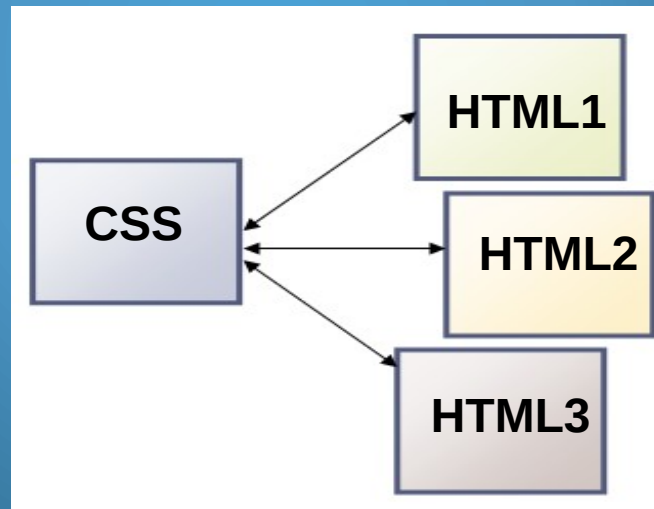

Advantage Of using CSS

❑ **Faster page loading**

- removal of all presentation from HTML documents reduces the file sizes of web page and results in faster page loading

❑ **Reduces Bandwidth Consumption**

- A style sheet will usually be stored in the browser cache, and can therefore be used on multiple pages without being reloaded, reducing data transfer over a network.


Advantage Of using CSS ...

□ Website Accessibility

- Using CSS web pages can be styled specifically for different media, including **browsers, printers, handheld devices** without changing the content or document structure in any way. This makes websites more accessible.



Same website in multiple devices

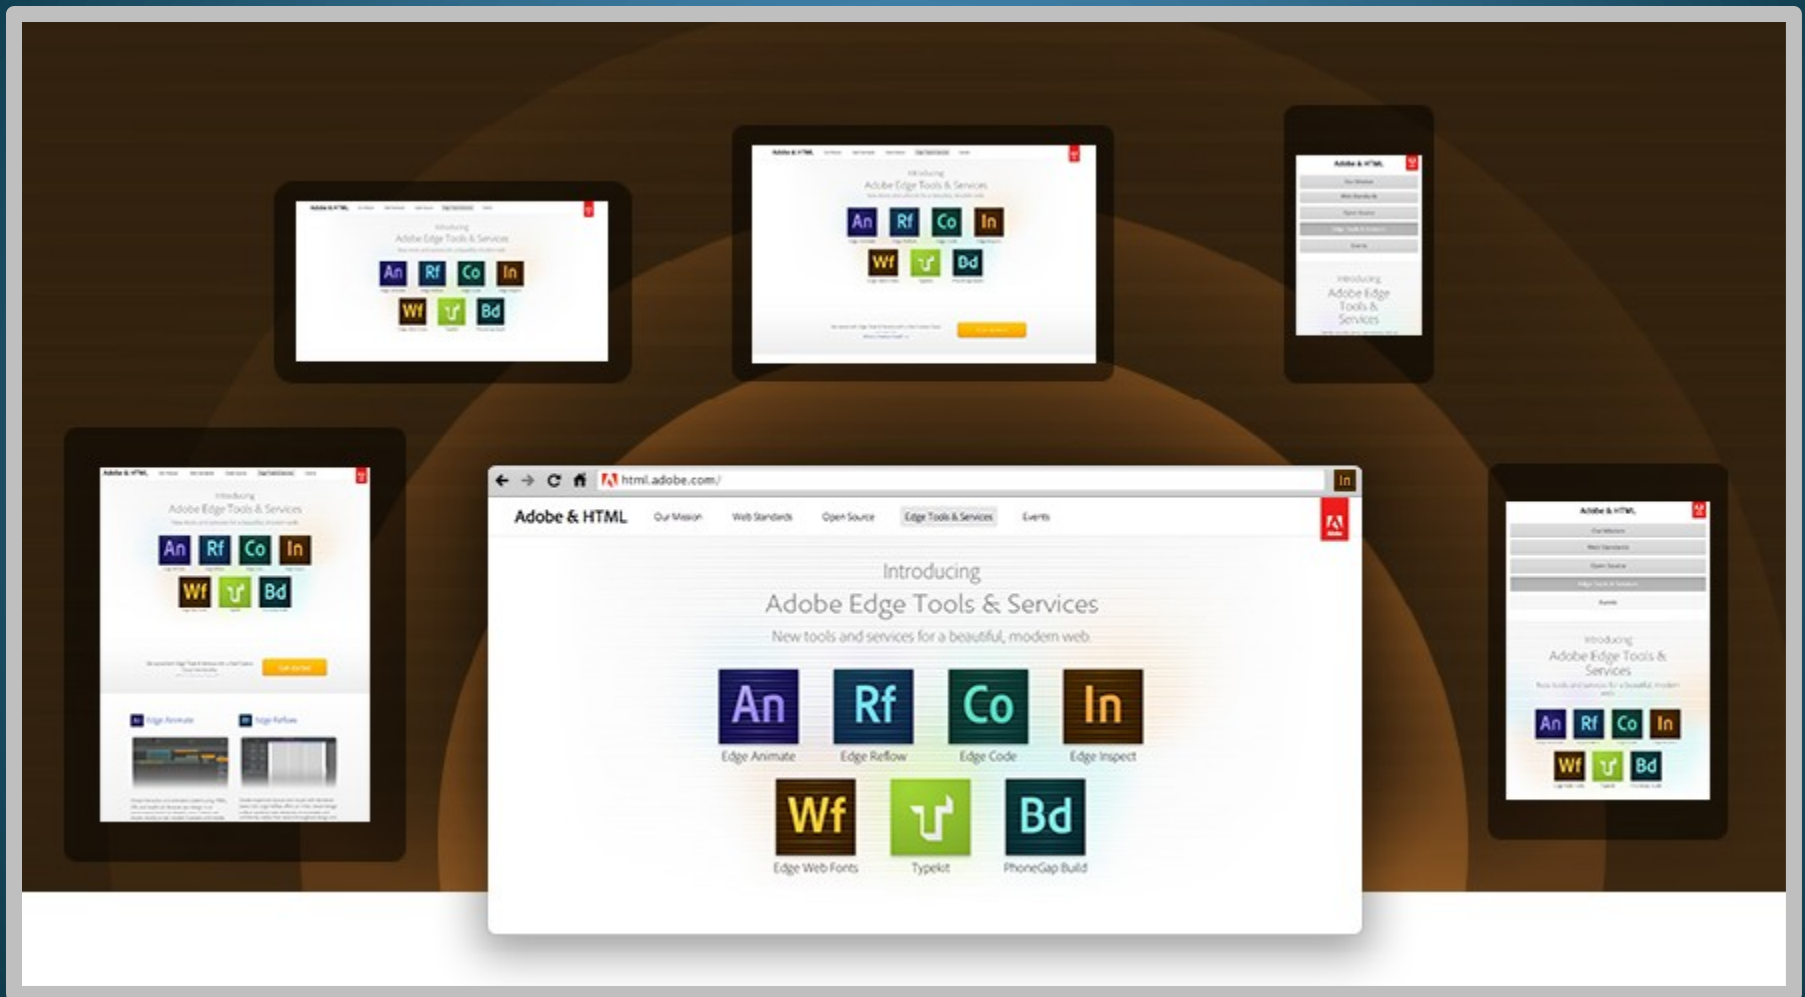

Advantage Of using CSS ...

❑ CSS makes website SEO friendly

- CSS makes HTML code more clean and it results in better search engine ranking of the web site.

TITLE

Using Yahoo Pipes to Translate a Twitter search into any language

Re-enable rich text editor »

```
<div>This weekend I was playing around with <a href="http://pipes.yahoo.com/pipes/">Yahoo Pipes</a> and create the
following pipe:</div>
<div></div>
<div>
<blockquote class="gmail_quote" style="margin-top: 0px; margin-right: 0px; margin-bottom: 0px; margin-left: 0.8ex;
border-left-width: 1px; border-left-color: #cccccc; border-left-style: solid; padding-left: 1ex;"><strong><a
href="http://pipes.yahoo.com/pipes/pipe.info?id=422e045a34b7bfd9eacb2d152ef126af">Translate a Twitter search into any
language</a></strong></blockquote>
<blockquote class="gmail_quote" style="margin-top: 0px; margin-right: 0px; margin-bottom: 0px; margin-left: 0.8ex;
border-left-width: 1px; border-left-color: #cccccc; border-left-style: solid; padding-left: 1ex;"><br /></blockquote>
<blockquote class="gmail_quote" style="margin-top: 0px; margin-right: 0px; margin-bottom: 0px; margin-left: 0.8ex;
border-left-width: 1px; border-left-color: #cccccc; border-left-style: solid; padding-left: 1ex;">This pipe accepts a
search parameter and a desired language. The Twitter search results are then sent to Google Translate for translation
into the desired language. The source language is auto-detected, by Google Translate, for each Tweet.</blockquote>
</div>
<div></div>
<div></div>
<p></p>
<div></div>
<div>I found a lot of language translation pipes, but all of these pipes requires you to select the source AND target
language. &nbsp;&nbsp;&nbsp;This is useless when it comes to Twitter (the lanugage will vary per Tweet). &nbsp;&nbsp;&nbsp;Google Translate
does an incredible job of auto-sensing the language. &nbsp;&nbsp;&nbsp;I'm making use of this to create the desired
functionality.</div>
```

A dirty HTML Page


```

<div class="fp_pro_display">

    <div id="repProduct_ct100_Catbox" class="fp_pro_box_main">
        <div class="fp_pro_box">
            
            <div class="img_center">
                <a href="/[REDACTED]/Christian-Dior-L-or-De-Vie-La-Creme-1-7oz-For-Women-2298.aspx">
                    
                </a>
            </div>
            <h2 style="height: 40px; vertical-align: top; clear: left;">
                <a href="/[REDACTED]/Christian-Dior-L-or-De-Vie-La-Creme-1-7oz-For-Women-2298.aspx"
                    title="CHRISTIAN DIOR by Christian Dior">
                        CHRISTIAN DIOR by Christian Dior L'Or De Vie La Creme--/1.7OZ
                </a>
            </h2>
            <p>
                <a href="/[REDACTED]/Christian-Dior-L-or-De-Vie-La-Creme-1-7oz-For-Women-2298.aspx"><img src='/Cl:
                    title='Buy Now' alt='Buy Now' /></a>
                    $427.50
                </p>
                
            </div>
        </div>

        <div id="repProduct_ct101_Catbox" class="fp_pro_box_main">
            <div class="fp_pro_box">
                
                <div class="img_center">
                    <a href="/[REDACTED]/Sisley-All-Day-All-Year-1-7oz-For-Women-4493.aspx">
                        
                    </a>
                </div>
                <h2 style="height: 40px; vertical-align: top; clear: left;">
                    <a href="/[REDACTED]/Sisley-All-Day-All-Year-1-7oz-For-Women-4493.aspx"
                        title="Sisley by Sisley">
                            Sisley by Sisley Sisley All Day All Year--/1.7OZ
                    </a>
                </h2>
                <p>
                    <a href="/[REDACTED]/Sisley-All-Day-All-Year-1-7oz-For-Women-4493.aspx"><img src='/Client/images/t
                        title='Buy Now' alt='Buy Now' /></a>
                        $364.80
                    </p>
                    
                </div>
            </div>

```


CSS Syntax

A CSS rule has two main parts:

- ❑ A selector
 - ✓ normally the HTML element you want to style
- ❑ One or more declarations
 - ✓ consists of a **property** and a **value**
 - ✓ property is the style attribute you want to change
 - ✓ CSS declarations always ends with a semicolon, and declaration groups are surrounded by curly brackets

CSS Syntax (Cont.)

- An Example

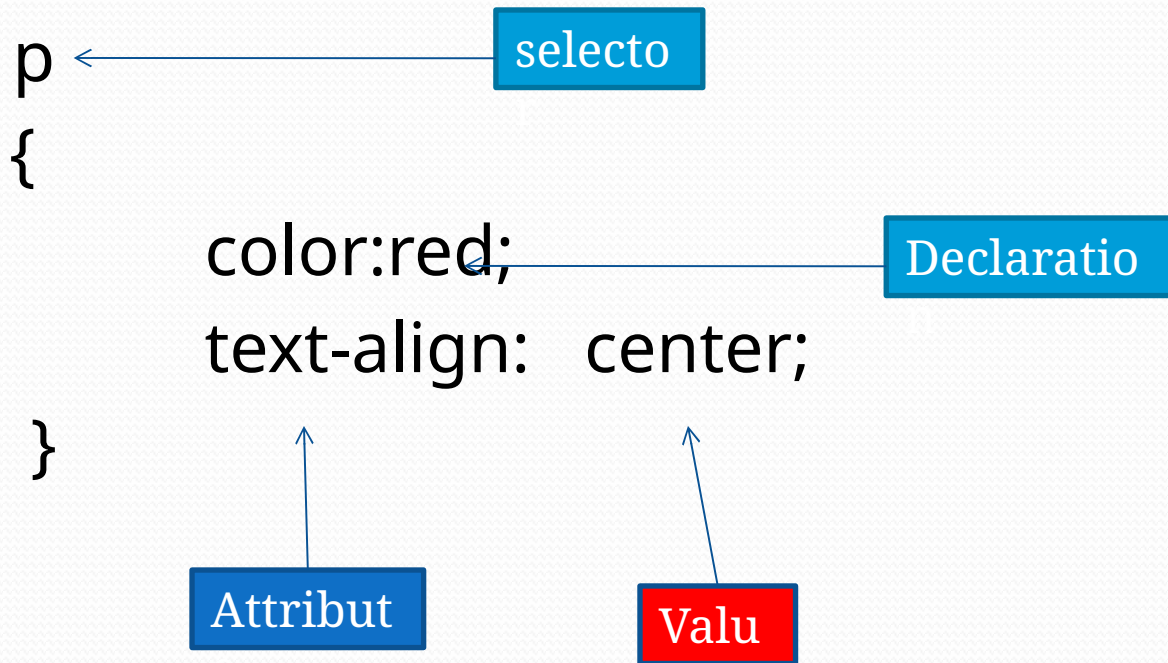

CSS Selector

- ☐ **Element Selector**
- ☐ **Id Selector**
- ☐ **Class Selector**

The Element Selector

The Element selector is used to specify a style for an HTML elements like <p>, <h1>, , <div> etc.

```
p {  
    font-family: Arial;  
    font-size: 14pt;  
}
```

```
h1 {  
    color: black;  
    border: 5px solid black;  
}
```

The Element Selector

The Element selector is used to specify a style for HTML elements like **<body>**, **<p>**, **<h1>**, ****, **<div>**, **** etc.

Edit and Click Me >>

```
<html>
<head>
<style type="text/css">
  h1
  {
    text-align:left;
    border: 5px solid black;
  }

  p
  {
    color:red;
    text-align:center;
    font-size:18px;
  }
</style>
</head>

<body>
<h1>Hello World!</h1>
<p>This paragraph is styled with CSS.</p>
</body>
</html>
```

Your Result:

Hello World!

This paragraph is styled with CSS.

The Id Selector

- The id selector is used to specify a style for a **single, unique** element.
- The **id** selector uses the id attribute of the HTML element
- and is defined with a "#" followed by a unique Id name (e.g. #left_menu)

The Id Selector (Example)

The style rule below will be applied to the element with id="para1":

```
<html>
<head>
<style type="text/css">
  #para1
  {
    text-align:center;
    color:red;
  }
</style>
</head>

<body>
<p id="para1">Hello World!</p>

<p>This paragraph is not affected
by the style.</p>
</body>
</html>
```

Hello World!

This paragraph is not affected by the style.

The class Selector

- used to specify a style for a group of elements.
- This allows you to set a particular style for any HTML elements with the same class
- The class selector uses the HTML class attribute, and is defined with a "." followed by a class name (i.e : **.text**)

Example

In the example below, all HTML elements with class="center" will be center-aligned

Edit and Click Me >>

Your Result:

```
<html>
<head>
<style type="text/css">
  .center
  {
    text-align:center;
  }
</style>
</head>

<body>
  <h1 class="center">Center-aligned heading</h1>
  <p class="center">Center-aligned paragraph.</p>
</body>
</html>
```


Center-aligned heading

Center-aligned paragraph.

Selector Grouping

- In style sheets there are often elements with the same style. To minimize the code, we can group selectors.

```
h1 { color:green; }  
h2 { color:green; }  
p  { color:green; }
```



```
h1 , h2, p  
{  
  color:green;  
}
```

CSS Comments

A CSS comment begins with "/*", and ends with "*/", like this:

```
/*This is a comment*/
```

```
p
{
  text-align:center;
  /*This is another comment*/
  color:black;
  font-family:arial;
}
```

Including CSS in web page

- External style sheet
- Embedded style sheet
- Inline style

External style sheet

- An **external style** sheet is ideal when the style is applied to many pages
- Usually A file with **.css** extension contains style
- The <link> tag is used inside the head section to include external style sheet in a web page

```
<head>  
  <link rel="stylesheet" type="text/css" href="mystyle.css" />  
</head>
```

Embedded Style Sheet


- An embedded style sheet should be used when a single document has a unique style.
- internal styles are defined in the head section of an HTML page, by using the <style> tag, like this:

```
<html>
  <head>
    <style>
      hr {color:sienna;}
      p {margin-left:20px;}
      body {background-image:url("images/back40.gif");}
    </style>
  </head>

  <body>
    ...
  </body>
</html>
```

Inline Styles

To use inline styles you use the style attribute in the relevant tag. The style attribute can contain any CSS property. The example shows how to change the color and the left margin of a paragraph:



```
<p style="color:#ff00ff; margin-left:20px"> This is a paragraph. </p>
```

A Problem

```
p { color:red; font-size:40px; }
```

In External style sheet

```
p { color:green; font-size:30px; }
```

In embedded style sheet

```
p { color:blue; }
```


inline style

```
<html>
<head>
<style type="text/css">
  p { color:red; }
</style>
</head>

<body>
  <p style="color:blue">What will be my color?</p>
</body>
</html>
```


Cascading Rule

- All the styles will "cascade" into a new "virtual" style sheet by the following rules
 - Browser default (lowest Priority)
 - External style sheet
 - Embedded style sheet
 - Inline style (Highest Priority)
- So, an **inline style** (inside an HTML element) **has the highest priority**, which means that it will override a style defined inside the <head> tag, or in an external style sheet, or in a browser (a default value).

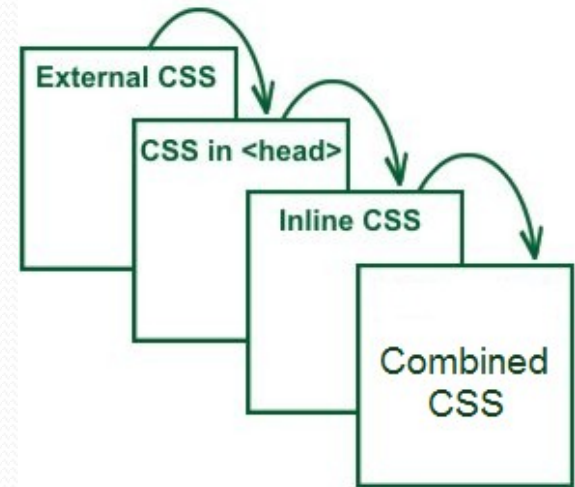



So the text color of
the
paragraph will be.... ?

Blue and
font size
=30px

CSS Background



CSS background properties are used to define the background effects of an element.

Common CSS properties used for background effects:

- background-color
- background-image
- background-repeat

Background Color

The background-color property specifies the background color of an element.

The background color can be specified by:

- Name - a color name, like **"red"**
- RGB - an RGB value, like **"rgb(255,0,0)"**
- Hex - a hex value, like **"#ff0000"**

Background Color (Example)

```
<html>
<head>
<style type="text/css">
  h1 { background-color:blue; }
  p  { background-color:#ff0000; }
  div { background-color:rgb(0,255,255); }
</style>
</head>

<body>
<h1>CSS background-color example!</h1>

<div>
  This is a text inside a div element.
  <p>This paragraph has it's own background
  color.</p>
  We are still in the div element.
</div>

</body>
</html>
```

**CSS background-color
example!**

This is a text inside a div element.

This paragraph has it's own background color.

We are still in the div element.

Background Image

The **background-image** property specifies an image to use as the background of an element.

```
<html>
<head>
<style type="text/css">
  body
  {
    background-image:url('bgdesert.jpg');
  }
</style>
</head>

<body>
<h1>Hello World!</h1>
<p>This page has background image.</p>
</body>

</html>
```



background-repeat

The **background-repeat** property sets if/how a background image will be repeated

Value	Description
repeat	The background image will be repeated both vertically and horizontally . This is default
repeat-x	The background image will be repeated only horizontally
repeat-y	The background image will be repeated only vertically
no-repeat	The background-image will not be repeated

background-repeat Example (no-repeat)

Edit and Click Me >>

Your Result:

```
<html>
<head>
<style type="text/css">
body
{
  background-image:url('paper.gif');
  background-repeat:no-repeat;
}
</style>
</head>

<body>
<p>
background image is not repeated </p>
</body>
</html>
```

background image is not repeated

background-repeat Example (repeat-x)

```
<html>
<head>
<style type="text/css">
body
{
  background-image:url('paper.gif');
  background-repeat:repeat-x;
}
</style>
</head>

<body>
<p>
background image is repeated
horizontally </p>
</body>
</html>
```

background image is repeated horizontally



background-repeat Example (repeat-y)

```
<html>
<head>
<style type="text/css">
body
{
  background-image:url('paper.gif');
  background-repeat:repeat-y;
}
</style>
</head>

<body>
<p>
background image is repeated
vertically</p>
</body>
</html>
```


background image is repeated vertically

background-repeat Example (repeat)

```
<html>
<head>
<style type="text/css">
body
{
  background-image:url('paper.gif');
  background-repeat:repeat;
}
</style>
</head>

<body>
<p>
background image is repeated in both
direction </p>
</body>
</html>
```

background image is repeated in both
direction

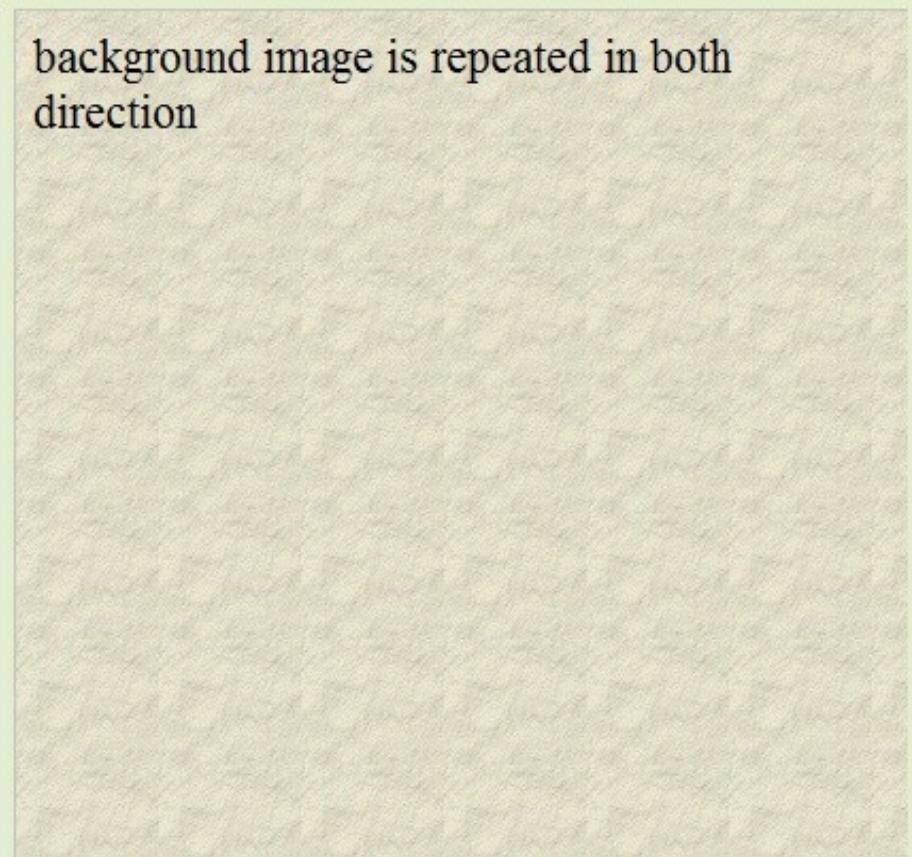

CSS Text

Common CSS text properties are

- **Text Color**
- **Text Alignment**
- **Text Transformation**
- **Text Indentation**

Text color

- The **color** property is used to change text color in CSS
- Syntax-
`color: color_value;`
- With CSS, a color is most often specified by:
 - a HEX value - like "#ff0000"
 - an RGB value - like "rgb(255,0,0)"
 - a color name - like "red"

Text Color

The **color** property is used to set the color of the text.

```
<html>
<head>
<style type="text/css">
  body {color:red;}
  h1 {color:#00ff00;}
  p.ex {color:rgb(0,0,255);}
</style>
</head>

<body>
<h1>This is heading 1</h1>
<p>This is an ordinary paragraph.
Notice that this text is red.</p>

<p class="ex">This is a paragraph
with class="ex". This text is
blue.</p>
</body>
</html>
```

This is heading 1

This is an ordinary paragraph. Notice that this text is red.

This is a paragraph with class="ex". This text is blue.

Text alignment

- The **text-align** property is used to set the horizontal alignment of a text.
- Text can be **centered**, or **aligned** to the **left** or **right**, or **justified**.

Value	Description
left	Text is left aligned
center	Text is center aligned
right	Text is right aligned
justify	Text is justified

Text Alignment

The text-align property is used to set the horizontal alignment of a text. Text can be **centered**, or aligned to the **left** or **right**, or **justified**.

```
<html>
<head>
<style type="text/css">
  h1      {text-align:center;}
  p.right {text-align:right;}
  p.left  {text-align:left;}
  p.main  {text-align:justify;}
</style>
</head>

<body>
<h1>CSS text-align Example</h1>
<p class="left">left aligned text</p>
<p class="right">right aligned text</p>

<p class="main"> This is a justified
text This is a justified text This is a
justified text This is a justified text
This is a justified text</p>
</body>

</html>
```

CSS text-align Example

left aligned text

right aligned text

This is a justified text This is a justified text
This is a justified text This is a justified text
This is a justified text

Text Transformation

The text-transform property is used to specify **uppercase** and **lowercase** letters in a text.

```
<html>
<head>
<style type="text/css">
  .uppercase {text-transform:uppercase;}
  .lowercase {text-transform:lowercase;}
  .capitalize{text-transform:capitalize;}
</style>
</head>

<body>
<p class="uppercase">This is some
text.</p>
<p class="lowercase">This is some
text.</p>
<p class="capitalize">This is some
text.</p>
</body>
</html>
```

THIS IS SOME TEXT.

this is some text.

This Is Some Text.

Text Decoration

The **text-decoration** property is used to set or remove decorations from text.

```
<!DOCTYPE html>
<html>
  <head>
    <style>
      h1 {text-decoration:underline;}
      h2 {text-decoration:line-through;}
      h3 {text-decoration:underline;}
      h4 {text-decoration:blink;}
    </style>
  </head>

  <body>
    <h1>This is heading 1</h1>
    <h2>This is heading 2</h2>
    <h3>This is heading 3</h3>
    <h4>This is heading 4</h4>

    <p><b>Note:</b> The "blink" value is
    not supported in IE, Chrome, or Safari.
    </p>
  </body>
```

This is heading 1

~~This is heading 2~~

This is heading 3

This is heading 4

Note: The "blink" value is not supported in IE, Chrome, or Safari.

Text Indentation

The **text-indent** property is used to specify the indentation of the first line of a text.

```
<html>
<head>
<style type="text/css">
  p {text-indent:50px;}
</style>
</head>
<body>

<p>In my younger and more vulnerable
years my father gave me some advice
that I've been turning over in my
mind ever since. 'Whenever you feel
like criticizing anyone,' he told
me, just remember that all the
people in this world haven't had the
advantages that you've had.'</p>

</body>
</html>
```

In my younger and more vulnerable years my father gave me some advice that I've been turning over in my mind ever since. 'Whenever you feel like criticizing anyone,' he told me, just remember that all the people in this world haven't had the advantages that you've had.'

CSS Font



Common CSS font properties are

- **Font Family**
- **Font Size**
- **Font-style**
- **Font-weight**

Font Family

The font family of a text is set with the **font-family** property.

The font-family property should hold several font names as a "fallback" system. If the browser does not support the first font, it tries the next font

```
<html>
<head>
<style type="text/css">
  p.serif{font-family:"Times New Roman",Times,serif;}
  p.sansserif{font-family:Arial,Helvetica,sans-serif;}
</style>
</head>

<body>
<h1>CSS font-family</h1>
<p class="serif">This is a paragraph, shown in the
Times New Roman font.</p>
<p class="sansserif">This is a paragraph, shown in the
Arial font.</p>

</body>
</html>
```

CSS font-family

This is a paragraph, shown in the Times New Roman font.

This is a paragraph, shown in the Arial font.

Font Size

The font-size property sets the size of the text. The font-size value can be an **absolute** (px), or **relative** size(em or %).

```
<style>
  body {font-size:100%;}
  h1 {font-size:2em;}
  h2 {font-size:1.5em;}
  h3 {font-size:1.2em;}
  p {font-size:12px;}
</style>
</head>
<body>

<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<h3>This is heading 3</h3>
<p>This is a paragraph.</p>
<p>Specifying the font-size in percent
and em displays the same size in all
browsers, and allows all browsers to
resize the text!</p>

</body>
```

This is heading 1

This is heading 2

This is heading 3

This is a paragraph.

Specifying the font-size in percent and em displays the same size in all browsers, and allows all browsers to resize the text!

Font Style

The **font-style** property is mostly used to specify italic text.

This property has three values:

normal - The text is shown normally

italic - The text is shown in italics

oblique - The text is "leaning" (oblique is very similar to italic, but less supported)

```
<!DOCTYPE html>
<html>
<head>
<style>
  p.normal {font-style:normal;}
  p.italic {font-style:italic;}
  p.oblique {font-style:oblique;}
</style>
</head>

<body>
<p class="normal">This is a
paragraph, normal.</p>
<p class="italic">This is a
paragraph, italic.</p>
<p class="oblique">This is a
paragraph, oblique.</p>
</body>
```

This is a paragraph, normal.

This is a paragraph, italic.

This is a paragraph, oblique.

Font Weight

The **font-weight** property sets how thick or thin characters in text should be displayed.

Property Values

Value	Description
normal	Defines normal characters. This is default
bold	Defines thick characters
bolder	Defines thicker characters
lighter	Defines lighter characters
100 200 300 400 500 600 700 800 900	Defines from thin to thick characters. 400 is the same as normal, and 700 is the same as bold

Font Weight

The **font-weight** property sets how thick or thin characters in text should be displayed.

```
<!DOCTYPE html>
<html>
<head>
<style>
  p.normal {font-weight:normal;}
  p.light {font-weight:lighter;}
  p.thick {font-weight:bold;}
  p.thicker {font-weight:900;}
</style>
</head>

<body>
<p class="normal">This is a paragraph.</p>
<p class="light">This is a paragraph.</p>
<p class="thick">This is a paragraph.</p>
<p class="thicker">This is a paragraph.</p>
</body>

</html>
```

This is a paragraph.

This is a paragraph.

This is a paragraph.

This is a paragraph.

CSS Box Model

CSS Box Model

- All HTML elements can be considered as boxes
- The CSS box model consists of:
 - **Margins**
 - **Borders**
 - **Padding** and
 - the actual **content**.

CSS Box Model



Margin - Clears an area around the border. The margin does not have a background color, and it is completely transparent

Border - A border that lies around the padding and content. The border is affected by the background color of the box

Padding - Clears an area around the content. The padding is affected by the background color of the box

Content - The content of the box, where text and images appear

CSS Border

Common CSS Border properties are

- **Border Style**
- **Border Width**
- **Border Color**

Border Style

The **border-style** property specifies what kind of border to display

none: Defines no border

dotted: Defines a dotted border

dashed: Defines a dashed border

solid: Defines a solid border

double: Defines two borders. The width of the two borders are the same as the border-width value

groove: Defines a 3D grooved border. The effect depends on the border-color value

ridge: Defines a 3D ridged border. The effect depends on the border-color value

inset: Defines a 3D inset border. The effect depends on the border-color value

outset: Defines a 3D outset border. The effect depends on the border-color value

Border Width

The **border-width** property is used to set the width of the border. The width is set in **pixels**, or by using one of the three pre-defined values: **thin**, **medium**, or **thick**.

```
<html>
<head>
<style type="text/css">
p { border-style:solid; }

p.one    {    border-width:5px;   }
p.two    {    border-width:medium; }
p.three  {    border-width:1px;   }
</style>
</head>

<body>
<p class="one">Some text.</p>
<p class="two">Some text.</p>
<p class="three">Some text.</p>
</body>

</html>
```

Some text.

Some text.

Some text.

Border Color

The **border-color** property is used to set the color of the border. The color can be set by **name** (like "red"), **RGB** (like "rgb(255,0,0)") or **Hex** (like "#ff0000")

```
<html>
<head>
<style type="text/css">
  p{ border-style:solid; }

  p.one{ border-color:red; }
  p.two{ border-color:#0000ff; }
</style>
</head>

<body>
<p class="one">A solid red
border</p>
<p class="two">A solid blue
border</p>

</body>
</html>
```

A solid red border

A solid blue border

CSS Margin

Margin

The margin clears an area around an element (outside the border). The margin does not have a background color, and is completely transparent.

The **top**, **right**, **bottom**, and **left** margin can be changed independently

```
<html>
<head>
<style type="text/css">
p{ background-color:yellow; }
p.margin
{
  margin-top:100px;
  margin-bottom:100px;
  margin-right:50px;
  margin-left:50px;
}
</style>
</head>

<body>
<p>This is a paragraph with no
specified margins.</p>
<p class="margin">This is a paragraph
with specified margins.</p>
</body>
```

This is a paragraph with no specified margins.

This is a paragraph with specified margins.

CSS Padding

Padding

The padding clears an area around the content (inside the border) of an element.

The **top**, **right**, **bottom**, and **left** padding can be changed independently using separate properties

```
<html>
<head>
<style type="text/css">
p{ background-color:yellow; }
p.padding
{
padding-top:30px;
padding-bottom:60px;
padding-right:50px;
padding-left:50px;
}
</style>
</head>

<body>
<p>This is a paragraph with no
specified padding.</p>
<p class="padding">This is a
paragraph with specified paddings.</p>
</body>
```

This is a paragraph with no specified padding.

This is a paragraph with specified paddings.

CSS List Properties

The CSS list properties allow us to

- ❑ Set different list item markers for ordered lists
- ❑ Set different list item markers for unordered lists
- ❑ Set an image as the list item marker

Different List Item Markers

The type of list item marker is specified with the **list-style-type** property

Edit and Click Me >>

Your Result:

```
<html>
<head>
<style type="text/css">
  ul.a {list-style-type:circle;}
  ul.b {list-style-type:square;}

  ol.c {list-style-type:upper-roman;}
  ol.d {list-style-type:lower-alpha;}
</style>
</head>

<body>
<p>Example of unordered lists:</p>

<ul class="a">
  <li>Coffee</li>
  <li>Tea</li>
</ul>

<ul class="b">
  <li>Coffee</li>
  <li>Tea</li>
</ul>
```

Example of unordered lists:

- Coffee
- Tea
- Coffee
- Tea

Example of ordered lists:

- I. Coffee
- II. Tea
- a. Coffee
- b. Tea

Different List Item Markers

Possible **list-style-type** property Values for unordered list

Value	Description
none	No marker
disc	Default. The marker is a filled circle
circle	The marker is a circle
square	The marker is a square

Different List Item Markers

Possible **list-style-type** property Values for ordered list

Value	Description
armenian	The marker is traditional Armenian numbering
decimal	The marker is a number
decimal-leading-zero	The marker is a number padded by initial zeros (01, 02, 03, etc.)
georgian	The marker is traditional Georgian numbering (an, ban, gan, etc.)
lower-alpha	The marker is lower-alpha (a, b, c, d, e, etc.)
lower-greek	The marker is lower-greek (alpha, beta, gamma, etc.)
lower-latin	The marker is lower-latin (a, b, c, d, e, etc.)
lower-roman	The marker is lower-roman (i, ii, iii, iv, v, etc.)
upper-alpha	The marker is upper-alpha (A, B, C, D, E, etc.)
upper-latin	The marker is upper-latin (A, B, C, D, E, etc.)
upper-roman	The marker is upper-roman (I, II, III, IV, V, etc.)

An Image as The List Item Marker

To specify an image as the list item marker, use the **list-style-image** property.

```
<html>
<head>
<style type="text/css">
ul
{
  list-style-image:url('sqpurple.gif');
}
</style>
</head>

<body>
<ul>
<li>Coffee</li>
<li>Tea</li>
<li>Coca Cola</li>
</ul>
</body>
</html>
```

- Coffee
- Tea
- Coca Cola

Measurement Units

Unit	Description
%	percentage
in	inch
cm	centimeter
mm	millimeter
em	1em is equal to the current font size. 2em means 2 times the size of the current font.
ex	one ex is the x-height of a font (x-height is usually about half the font-size)
pt	point (1 pt is the same as 1/72 inch)
pc	pica (1 pc is the same as 12 points)
px	pixels (a dot on the computer screen)

Q & A

