

# TikZ 几何作图

2025 年 2 月 18 日



# 目录

第 1 章 基本作图命令	1
1.1 坐标轴 Axes	1
1.2 坐标变换 Coordinates Transformations	1
1.3 仿射组合 Affine Combination	2
1.4 中点 Midpoint	3
1.5 平移 Translate	5
1.6 对称点 Reflect	6
1.7 投影 Project	7
1.8 反演 Inverse	8
1.9 旋转 Revolve	9
1.10 构造角 Angle	12
1.11 角平分线 Angle Bisector	13
1.12 等边三角形 Equilateral Triangle	15
1.13 旋转 $90^\circ$ Erect	16
1.14 截取 Intercept	17
1.15 直线与直线的交点 Line-Line Intersection	19
1.16 垂直平分线/中垂线 Perpendicular Bisector	20
1.17 垂线 Perpendicular Line	24
1.18 平行线 Parallel Line	26
1.19 延长线 Extend	28
1.20 圆 Circle	29
1.21 直线与圆的切点 Tangent Point	30
1.22 外位似中心 External Homothetic Center	32

1.23 内位似中心 Internal Homothetic Center . . . . .	33
1.24 根轴 Radical Axis . . . . .	35
1.25 Partway Modifiers and Distance Modifiers . . . . .	38
<b>第 2 章 三角形的中心</b>	<b>39</b>
2.1 重心 Centroid . . . . .	39
2.2 垂心 Orthocenter . . . . .	40
2.3 外心 Circumcenter . . . . .	42
2.4 内心 Incenter . . . . .	43
2.5 旁心 Excenter . . . . .	45
2.6 九点圆圆心 Nine-Point Center . . . . .	47
<b>第 3 章 圆锥曲线 Conics</b>	<b>49</b>
3.1 椭圆 Ellipse . . . . .	49
3.1.1 已知半长轴长 $a$ 和半短轴长 $b$ 绘图 . . . . .	49
3.1.2 由两焦点和一点确定椭圆 . . . . .	51
3.2 椭圆弧 Arc . . . . .	53
3.3 抛物线 Parabola . . . . .	55
3.3.1 已知方程系数 $a$ , $b$ 和 $c$ 绘图 . . . . .	55
3.3.2 由焦点和顶点确定抛物线 . . . . .	57
3.4 双曲线 Hyperbola 与渐近线 Asymptote . . . . .	59
3.4.1 已知半实轴长 $a$ 和半虚轴长 $b$ 绘图 . . . . .	59
3.4.2 由两焦点和一点确定双曲线 . . . . .	66
<b>附录 A 两直线的交点</b>	<b>69</b>
<b>附录 B 通径 Latus Rectum</b>	<b>73</b>
B.1 椭圆的通径与焦准距 . . . . .	73
B.2 抛物线的通径与焦准距 . . . . .	73
B.3 双曲线的通径与焦准距 . . . . .	74
<b>附录 C 源代码</b>	<b>75</b>





# 第 1 章 基本作图命令

这里的命令都是通过 `/tikz/insert path[1]` 在当前路径上插入新的路径, 或者通过 `def` 组合一些 `tikz` 命令.

## 1.1 坐标轴 Axes

### 调用方式

```
\axes (xmin:xmain,ymin:ymax);
```

### 参数说明

`xmin,xmax`  $x$  范围

`ymin,ymax`  $y$  范围

### 示例

见[1.2](#).

## 1.2 坐标变换 Coordinates Transformations

### 调用方式

```
transform={angle:(xshift,yshift)}
```

### 参数说明


绕原点旋转 `angle`, 然后水平方向和竖直方向分别平移 `xshift` 和 `yshift`

### 示例

```

\begin{tikzpicture}
  % \draw[help lines] (-5,-5) grid (5,5);
  % \draw[-latex] (-5.5,0) -- (5.5,0) node[below] {$x$};
  % \draw[-latex] (0,-5.5) -- (0,5.5) node[left] {$y$};
  % \draw (0,0) node[below left] {$O$};
  \axes (-2:4, -2:4);
  \draw[thick,red] (-1,-1) rectangle (1,1);
  \draw[thick,purple,transform={45:(1,2)}] (-1,-1)
    ↪ rectangle (1,1);
\end{tikzpicture}

```

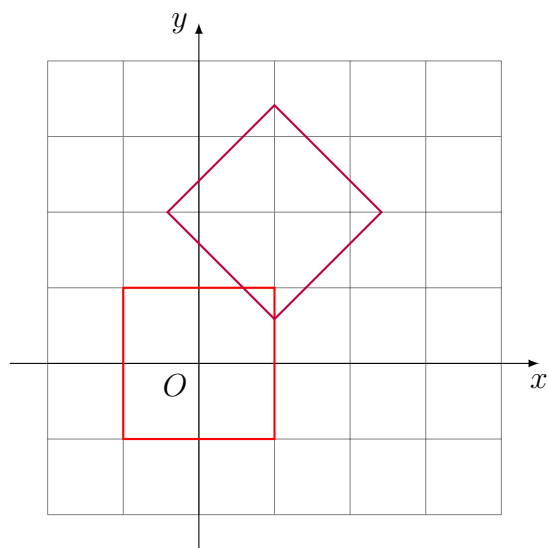

### 1.3 仿射组合 Affine Combination

调用方式

```
affine={A,B,k}
```

参数说明




A, B 两点坐标

k 系数

返回点 A, B 的仿射组合:  $A + k \cdot (B - A)$ .

示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (5,5);
  \coordinate (A) at (2,2);
  \coordinate (B) at (4,3);
  \coordinate [affine={A,B,-1}] (C);
  \coordinate [affine={A,B,.5}] (D);
  \draw[thick, -latex] (A) -- (B);
  \foreach \p/\placement in {A/left,B/right,
    C/above,D/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```

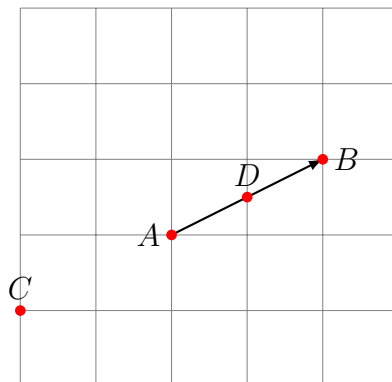

## 1.4 中点 Midpoint

调用方式

```
midpoint={A,B}
```


### 参数说明

A, B 两点坐标

返回点 A, B 的中点坐标.

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (5,5);
  \coordinate (A) at (2,2);
  \coordinate (B) at (4,3);
  \coordinate [midpoint={A,B}] (C);
  \draw[thick] (A) -- (B);
  \foreach \p/\placement in {A/left,B/right,
    C/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```

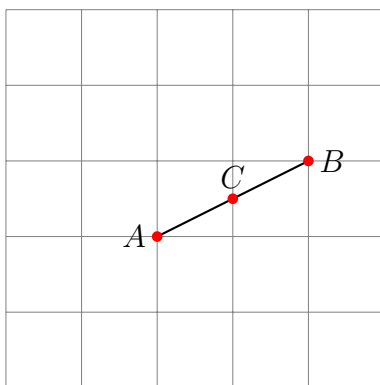

## 1.5 平移 Translate

### 调用方式

```
translate={A,B,C}
```


### 参数说明

A,B,C 三点坐标

返回 C 按向量 AB 移动所得的坐标:  $C + (B - A)$ .

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,1);
  \coordinate (C) at (1,2);
  \coordinate [translate={A,B,C}] (D);
  \draw[thick, -latex] (A) -- (B);
  \foreach \p/\placement in
    ↪ {A/left,B/right,C/above,D/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```

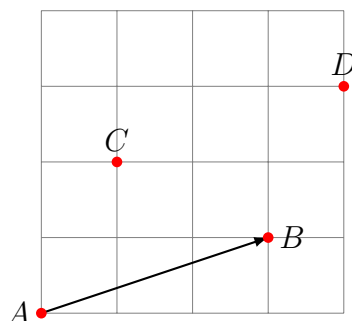

## 1.6 对称点 Reflect

### 调用方式

```
reflect={A,B,C}
```


### 参数说明

A,B,C 三点坐标

返回  $C$  关于直线  $AB$  的对称点的坐标 (设  $D$  为  $C$  在  $AB$  的投影):  $C + 2(D - C)$ .

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,1);
  \coordinate (B) at (3,2);
  \coordinate (C) at (1,3);
  \coordinate [reflect={A,B,C}] (D);
  \draw[thick] (A) -- (B);
  \foreach \p/\placement in
    ↪ {A/left,B/right,C/above,D/below}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```



## 1.7 投影 Project

### 调用方式

```
project={A,B,C}
```

### 参数说明


A,B,C 三点坐标

返回 C 在直线 AB 的投影的坐标.

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,1);
  \coordinate (B) at (3,2);
  \coordinate (C) at (1,3);
  \coordinate [project={A,B,C}] (D);
  \draw[thick] (A) -- (B);
  \foreach \p/\placement in
    ↪ {A/left,B/right,C/above,D/below}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
```

```
}
\end{tikzpicture}
```



## 1.8 反演 Inverse

### 调用方式

```
inverse={O,A,P}
```

### 参数说明

O 圆心

A 圆上一点

P 平面上任一点

返回  $P$  关于圆  $(O, A)$  的反演点.

### 示例


```
\begin{tikzpicture}
  \draw[help lines] (-2,-2) grid (2,2);
  \coordinate (O) at (0,0);
  \coordinate (A) at +(0:2); % 圆上一点, 相对坐标
  \coordinate (P) at (2,2);
  \coordinate[inverse={O,A,P}] (Q);
```

```

\draw[thick,circle={O,A}];
\draw[thick] (O) -- (P);

\foreach \p/\placement in {O/below,A/below right,
P/above left,Q/above left}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```



## 1.9 旋转 Revolve

### 调用方式

```
revolve={A,B}
```

### 参数说明

A,B 两点坐标

注 为了避免覆盖 tikz 的 rotate, 这里将旋转命令为 revolve.


返回  $B$  绕  $A$  旋转的点.

还需要指定 `revolve/angle` (default: 0) 和 `revolve/angle scale`(default: 1) 两个选项, 可以通过下面的方式来指定 `/revolve/angle`:

1. 直接指定角度: `revolve/angle=60`
2. 位置向量与  $x$  轴夹角: `revolve/angle={P1}`
3. 两位置向量的夹角: `revolve/angle={P1,P2}`
4. 由三点定义的角 ( $P_1$  为顶点,  $P_2$  为起点,  $P_3$  为终点): `revolve/angle={P1,P2,P3}`
5. 两向量的夹角 (逆时针方向): `revolve/angle={P1,P2,P3,P4}`

示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,0);
  \coordinate [revolve/angle=60, revolve={A,B}] (C);
  \draw[thick] (A) -- (B) (A) -- (C);
  \foreach \p/\placement in {A/left,B/right,C/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```






```

\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (2,0);
  \coordinate (C) at (2,2);
  \coordinate (D) at (3,0);
  \coordinate (E) at (4,0);
  \coordinate [revolve/angle={A,B,C},revolve={D,E}] (F);
  \draw[thick] (A) -- (B) (A) -- (C);
  \foreach \p/\placement in {
    A/below left,B/below right,C/above,
    D/below left,E/below right,F/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}

```

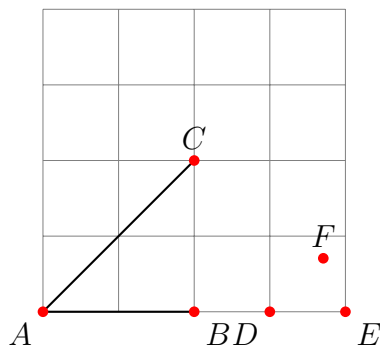

```


\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,0);
  \coordinate (C) at (1,1);

```

```

\coordinate [revolve/angle={C},
    revolve/scale=2,
    revolve={A,B}] (D);
\draw[thick] (A) -- (B) (A) -- (D);
\foreach \p/\placement in {A/left,B/right,
    C/above right,D/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```



## 1.10 构造角 Angle

可以由 `revolve` 来构造一个角.

**示例**

```


\begin{tikzpicture}[scale=1]
    \draw[help lines] (0,0) grid (5,5);
    \coordinate (A) at (0,0);
    \coordinate (B) at (3,1);
    \coordinate (C) at (1,3);
    \coordinate (D) at (2,2);
    \coordinate (E) at (5,3);

```

```

\coordinate [revolve/angle={A,B,C},
    revolve/scale=1,
    revolve={D,E}] (F);
\draw[thick] (A) -- (B) (A) -- (C);
\draw[thick, purple] (D) -- (E) (D) -- (F);
\foreach \p/\placement in {A/below,B/below,C/above,
    D/left,E/right,F/above}{
    \fill[red] (\p) circle (2pt);
    \node[\placement] at (\p) {\p};
}
\end{tikzpicture}

```

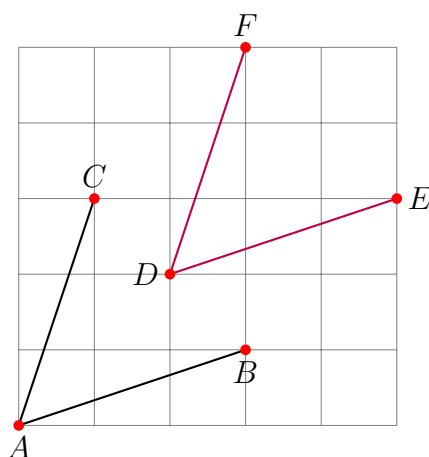

## 1.11 角平分线 Angle Bisector

### 调用方式

```
angle bisector={A,B,C}
```

### 参数说明


$A, B, C$  三点坐标,  $A$  为顶点 (apex),  $B$  为起点,  $C$  为终点

返回  $\angle BAC$  角平分线上的一点. 实际上, 该操作等价于:

```
revolve/angle={A,B,C}, revolve/scale=.5, revolve={A,B}
```

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (1,1);
  \coordinate (B) at (3,1);
  \coordinate (C) at (1,3);
  \coordinate [angle bisector={A,B,C}] (D);
  \draw[thick] (A) -- (B) (A) -- (C);
  \draw[thick, purple] (A) -- (D);
  \foreach \p/\placement in {A/left,B/right,C/above,
    D/above right}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```



## 1.12 等边三角形 Equilateral Triangle

### 调用方式

```
equilateral={A,B}
```

### 参数说明


A,B 两点坐标

返回以  $AB$  为边长的等边三角形的第 3 点 (位于向量  $AB$  的左侧). 实际上, 该操作等价于:

```
revolve/angle=60, revolve={A,B}
```

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (1,2);
  \coordinate (B) at (3,2);
  \coordinate [equilateral={A,B}] (C);
  \coordinate [equilateral={B,A}] (C');
  \draw[thick] (A) -- (B) -- (C) -- cycle
              (A) -- (B) -- (C') -- cycle;
  \foreach \p/\placement in
    ↪ {A/left,B/right,C/above,C'/below}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```



### 1.13 旋转 $90^\circ$ Erect

#### 调用方式

```
erect={A,B}
```

#### 参数说明

A,B 两点坐标

返回 B 绕 A 旋转  $90^\circ$  的坐标. 实际上, 该操作等价于:

```
revolve/angle=90, revolve={A,B}
```


#### 示例

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,0);
  \coordinate [erect={A,B}] (C);
  \draw[thick] (A) -- (B) (A) -- (C);
```

```

\foreach \p/\placement in {A/left,B/right,C/above
↪ left}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {\p};
}
\end{tikzpicture}

```



## 1.14 截取 Intercept

### 调用方式

```
intercept={A,B}
```

### 参数说明

A,B 两点坐标

在直线 AB 截取指定长度线段, A 为新线段的起点, AB 是方向.

需要指定 intercept/length (default: 1cm) 和 intercept/scale(default: 1) 两个选项. 其中 intercept/length 有两种形式:


1. 直接指定长度: intercept/length=2cm
2. 指定线段长度: intercept/length={P1,P2}

### 示例

```

\begin{tikzpicture}
  \draw[help lines] (-2,-2) grid (2,2);
  \coordinate (A) at (0,0);
  \coordinate (B) at (2,0);
  \coordinate (C) at (1,1);
  \coordinate[intercept/length={A,B},
    intercept/scale=-1, intercept={A,C}] (D);
  \foreach \p/\placement in
    ↪ {A/above,B/above,C/above,D/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}

```



```

\begin{tikzpicture}
  \draw[help lines] (-2,-2) grid (2,2);
  \coordinate (A) at (0,0);
  \coordinate (B) at (2,0);
  \coordinate (C) at (1,1);
  \coordinate[intercept/length=1.5cm,
    intercept/scale=-1,
    intercept={A,C}] (D);


```



```

\foreach \p/\placement in
  ↪ {A/above,B/above,C/above,D/above}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}

```



## 1.15 直线与直线的交点 Line-Line Intersection

### 调用方式

```
intersect={A,B,C,D}
```

### 参数说明

A,B,C,D 四点坐标

返回 AB 与 CD 的交点 (可以是延长线相交点).

### 示例

```


\begin{tikzpicture}
  \draw[help lines] (-4,-4) grid[step=1] (4,4);
  \draw[-latex] (-4.5,0) -- (4.5,0) node[below] {$x$};
  \draw[-latex] (0,-4.5) -- (0,4.5) node[left] {$y$};

```

```

\coordinate (A) at (-4,-1.5);
\coordinate (B) at (1,3.5);
\coordinate (C) at (-1,3.5);
\coordinate (D) at (1,-2.5);
\coordinate [intersect={A,B,C,D}] (E);
\draw[thick] (A) -- (B) (C) -- (D);
\foreach \p/\placement in {A/left,B/right,
C/above left,D/below right,E/left}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

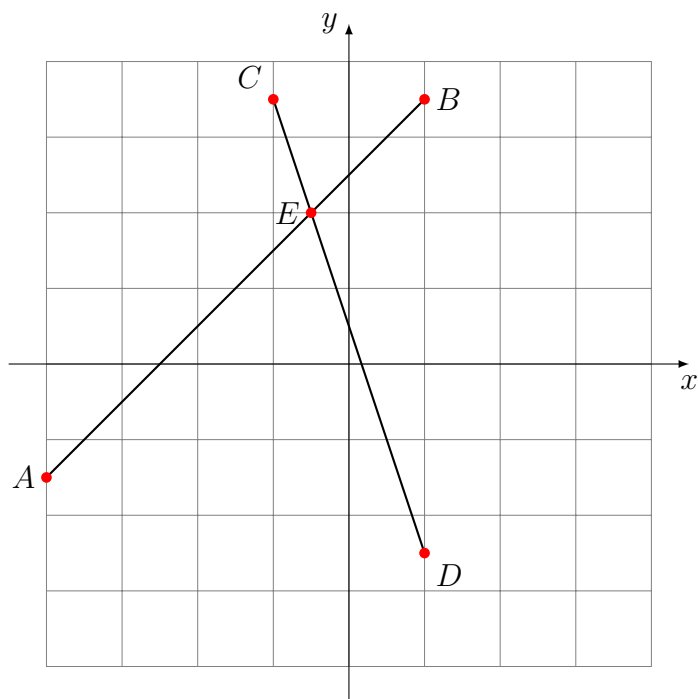

## 1.16 垂直平分线/中垂线 Perpendicular Bisector

调用方式

```
perpendicular bisector={A,B}
```

### 参数说明


**A,B** 两点坐标

构造  $AB$  的中垂线, 默认起点为  $.5(A+B) + (B-A) \cdot i$ , 终点为  $.5(A+B) - (B-A) \cdot i$ . 可以对起始点进行调整, 见??.

### 示例


使用默认参数:

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,1);
  \coordinate (B) at (3,2);
  \draw[thick] (A) -- (B);
  \draw[thick,purple,perpendicular bisector={A,B}];
  \foreach \p/\placement in {A/left,B/right}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```

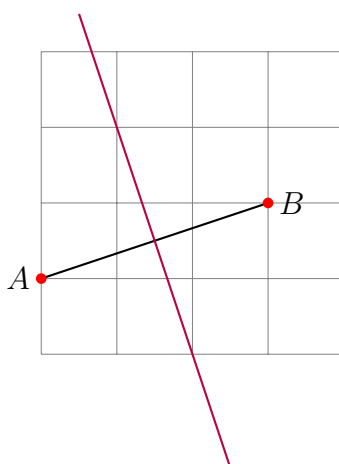

指定两端的长度:

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,1);
  \coordinate (B) at (3,2);
  \draw[thick] (A) -- (B);
  \draw[thick, purple,
    start modifier=.5cm, end modifier=2.5cm,
    perpendicular bisector={A,B}];
  \foreach \p/\placement in {A/left,B/right}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```




指定系数:

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,1);
  \coordinate (B) at (3,2);
  \draw[thick] (A) -- (B);
  \draw[thick,purple,
```

```

start modifier=.25,end modifier=.75,
perpendicular bisector={A,B}];
\foreach \p/\placement in {A/left,B/right}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```




可以是负数, 这样就在相反方向:

```

\begin{tikzpicture}
\draw[help lines] (0,0) grid (4,4);
\coordinate (A) at (0,1);
\coordinate (B) at (3,2);
\draw[thick] (A) -- (B);
\draw[thick,purple,
start modifier=-.25,end modifier=0.75,
perpendicular bisector={A,B}];
\foreach \p/\placement in {A/left,B/right}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

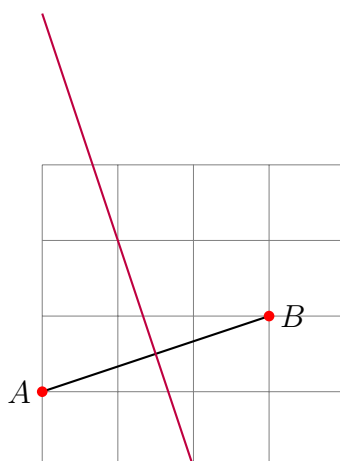

### 1.17 垂线 Perpendicular Line

#### 调用方式

```
perpendicular={A,B,C}
```

#### 参数说明

A,B,C 三点坐标

构造过 C 垂直于 AB 的直线 (设垂足为 D), 默认起点为  $D + (B - A) \cdot \mathbf{i}$ , 终点为  $D - (B - A) \cdot \mathbf{i}$ . 可以对起始点进行调整, 见??.

#### 示例


过直线外一点的垂线:

```
\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,1);
  \coordinate (C) at (2,2);
  \draw[thick] (A) -- (B);
  \path[draw, thick, purple, perpendicular={A,B,C}];
```

```

\foreach \p/\placement in {A/left,B/right,C/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {\p};
}
\end{tikzpicture}

```

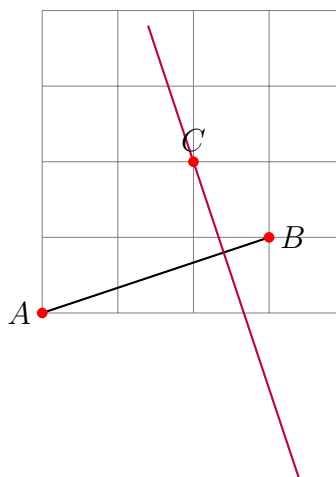

过直线上一点的垂线:

```


\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,1);
  \coordinate (C) at ($(A)!1/3!(B)$);
  \draw[thick] (A) -- (B);
  \path[draw, thick, purple,
    start modifier=.5, end modifier=.75,
    perpendicular={A,B,C}];
  \foreach \p/\placement in {A/left,B/right,C/above}
    \draw (\p) node[\placement] {\p};
  \foreach \p/\placement in {A/left,B/right,C/above}
    \fill[red] (\p) circle (2pt);
\end{tikzpicture}

```

```

\draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

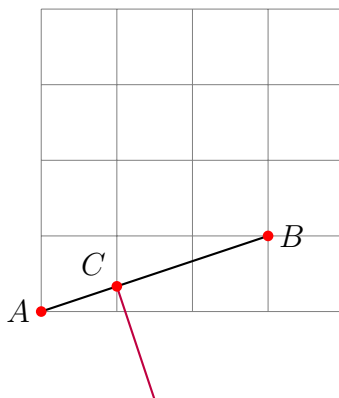

### 1.18 平行线 Parallel Line

#### 调用方式

```
parallel={A,B,C}
```

#### 参数说明

过一点  $C$  作直线  $AB$  平行线, (如果  $C$  在  $AB$  上, 则重合).

首先将点  $C$  按向量  $AB$  平移至  $D$ . 可以对起始点进行调整, 见??.

#### 示例

指定起始点距离  $C$  的位置, 方向是  $CD$ , 负值代表相反方向:

```

\begin{tikzpicture}
\draw[help lines] (0,0) grid (4,4);
\coordinate (A) at (0,0);
\coordinate (B) at (3,1);


```



```

\coordinate (C) at (1,2);
\draw[thick] (A) -- (B);
\path[draw, thick, purple, parallel={A,B,C}];
\foreach \p/\placement in {A/left,B/right,C/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```



指定系数:

```


\begin{tikzpicture}
\draw[help lines] (0,0) grid (4,4);
\coordinate (A) at (0,0);
\coordinate (B) at (3,1);
\coordinate (C) at (1,2);
\draw[thick] (A) -- (B);
\path[draw, thick, purple,
  start modifier=-.5, end modifier=.5,
  parallel={A,B,C}];
\foreach \p/\placement in {A/left,B/right,C/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

```

}
\end{tikzpicture}

```



### 1.19 延长线 Extend

#### 调用方式

```
extend={A,B}
```

#### 参数说明

作线段  $AB$  延长线, 可以对起始点进行调整, 见??. 实际上, 该操作等价于:

```
parallel={A,B,A}
```

#### 示例

```


\begin{tikzpicture}
  \draw[help lines] (0,0) grid (4,4);
  \coordinate (A) at (0,0);
  \coordinate (B) at (3,1);
  \path[draw, thick, purple,

```

```

start modifier=-.5, end modifier=1.25,
extend={A,B}];
\foreach \p/\placement in {A/left,B/right}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

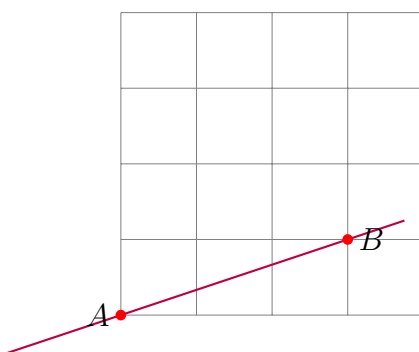

## 1.20 圆 Circle

### 调用方式

```
circle={O,A}
```

### 参数说明

O 圆心

A 圆上一点


构造圆心为 O, 经过 A 的圆.

### 示例

```

\begin{tikzpicture}
  \draw[help lines] (-2,-2) grid (2,2);
  \coordinate (O) at (0,0);
  \coordinate (A) at +(0:2); % 圆上一点, 相对坐标
  \draw[thick,circle={O,A}];
  \foreach \p in {O,A}
    \fill[red] (\p) circle (2pt);
  \draw (O) node[below] {$O$};
  \draw (A) node[below right] {$A$};
\end{tikzpicture}

```



## 1.21 直线与圆的切点 Tangent Point

### 调用方式

```
tangent point={O,A,P}
```


### 参数说明

- O** : 圆心坐标
- A** : 为圆上任意一点
- P** : 圆外一点坐标

过圆 ( $O$  为圆心,  $A$  为圆上任意一点) 外一点  $P$  作切线, 求得一个切点 (在向量  $OP$  的左边), 另外一点可以通过对称 (`reflect={0,P,T1}`) 求得.

示例

```
\begin{tikzpicture}
  \coordinate (O) at (0,0);
  \coordinate (A) at +(0:2); % 圆上一点, 相对坐标
  \coordinate (P) at (3,4);
  \coordinate[tangent point={O,A,P}] (T1);
  \coordinate[reflect={O,P,T1}] (T2);
  \draw[thick, circle={O,A}];
  \draw[thick, purple] (P) -- (T1) (P) -- (T2);
  \foreach \p in {O,P,T1,T2}
    \fill[red] (\p) circle (2pt);
  \draw (O) node[below] {$O$};
  \draw (P) node[right] {$P$};
  \draw (T1) node[above] {$T_1$};
  \draw (T2) node[right] {$T_2$};
\end{tikzpicture}
```

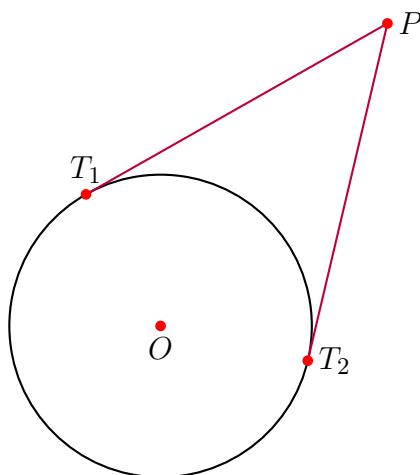

## 1.22 外位似中心 External Homothetic Center

### 调用方式

```
external center={O1,A1,O2,A2}
```

### 参数说明

求圆 1 ( $O_1$  为圆心,  $A_1$  为圆上任意一点) 和圆 2 ( $O_2$  为圆心,  $A_2$  为圆上任意一点) 的外位似中心 (external homothetic center)[2].

### 示例


作外公切线: 先求位似中心, 可以求得两圆的外公切线.

```
\begin{tikzpicture}
  \tikzmath {
    \a = 30;
    \b = \a;
    \r1 = 1;
    \r2 = 2;
  }
  \coordinate (O1) at (0,0);
  \coordinate (A1) at ($ (O1)+(\a:\r1) $);
  \coordinate (O2) at (4,0);
  \coordinate (A2) at ($ (O2)+(\b:\r2) $);
  \coordinate[external center={O1,A1,O2,A2}] (P);
  \coordinate[tangent point={O1,A1,P}] (B);
  \coordinate[tangent point={O2,A2,P}] (C);
  \coordinate[reflect={O1,O2,B}] (D);
  \coordinate[reflect={O1,O2,C}] (E);
  \draw[thick,circle={O1,A1}];
  \draw[thick,circle={O2,A2}];
  \draw[thick,purple] (P) -- (C) (P) -- (E);
```

```

\foreach \p in {A1,A2,B,C,D,E,O1,O2,P}
  \fill[red] (\p) circle (2pt);
\draw (O1) node[below] {$O_1$};
\draw (O2) node[below] {$O_2$};
\draw (P) node[below] {$P$};
\end{tikzpicture}

```

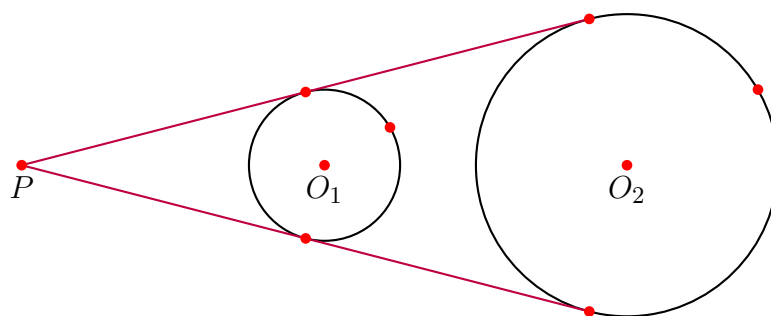

### 1.23 内位似中心 Internal Homothetic Center

#### 调用方式

```
internal center={O1,A1,O2,A2}
```

#### 参数说明

求圆 1 ( $O_1$  为圆心,  $A_1$  为圆上任意一点) 和圆 2 ( $O_2$  为圆心,  $A_2$  为圆上任意一点) 的内位似中心 (internal homothetic center)[2].

#### 示例

作内公切线: 先求位似中心, 可以求得两圆的内公切线.

```


\begin{tikzpicture}
  \tikzmath {
    \a = 150;

```

```

    \b = \a - 180;
    \r1 = 1;
    \r2 = 2;
}
\coordinate (O1) at (0,0);
\coordinate (A1) at ($ (O1) + (\a:\r1)$);
\coordinate (O2) at (4,0);
\coordinate (A2) at ($ (O2) + (\b:\r2)$);
\coordinate[internal center={O1,A1,O2,A2}] (P);
\coordinate[tangent point={O1,A1,P}] (B);
\coordinate[tangent point={O2,A2,P}] (C);
\coordinate[reflect={O1,O2,B}] (D);
\coordinate[reflect={O1,O2,C}] (E);
\draw[thick,circle={O1,A1}];
\draw[thick,circle={O2,A2}];
\draw[thick,purple] (P) -- (B) (P) -- (C) (P) -- (D)
↪ (P) -- (E);
\foreach \p in {A1,A2,B,C,D,E,O1,O2,P}
    \fill[red] (\p) circle (2pt);
\draw (O1) node[below] {$O_1$};
\draw (O2) node[below] {$O_2$};
\draw (P) node[below] {$P$};
\end{tikzpicture}

```

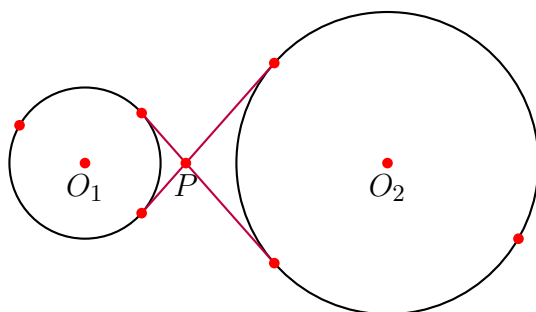



## 1.24 根轴 Radical Axis

### 调用方式

```
radical axis={O1,A1,O2,A2}
```


### 参数说明

构造两圆的根轴, 设与  $O_1O_2$  的交点为  $P$ , 则默认起点为  $P + (O_2 - O_1) \cdot i$ , 终点为  $P - (O_2 - O_1) \cdot i$ . 可以对起始点进行调整, 见??.

### 示例


两圆相交:

```
\begin{tikzpicture}
  \tikzmath {
    \a = 30;
    \b = \a;
    \r1 = 1.5;
    \r2 = 2;
  }
  \coordinate (O1) at (0,0);
  \coordinate (A1) at ($(O1)+(\a:\r1)$);
  \coordinate (O2) at (2,0);
  \coordinate (A2) at ($(O2)+(\b:\r2)$);
  \draw[thick,purple,radical axis={O1,A1,O2,A2}];
  \draw[thick,circle={O1,A1}];
  \draw[thick,circle={O2,A2}];
  \foreach \p in {A1,A2,O1,O2}
    \fill[red] (\p) circle (2pt);
\end{tikzpicture}
```

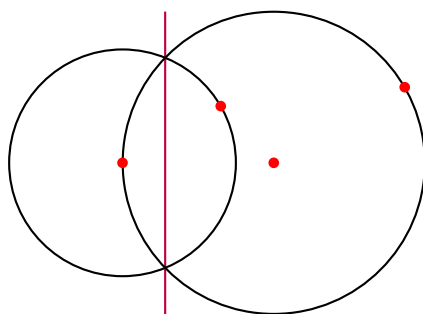


两圆外切:

```
\begin{tikzpicture}
  \tikzmath {
    \a = 30;
    \b = \a;
    \r1 = 2;
    \r2 = 1;
  }
  \coordinate (O1) at (0,0);
  \coordinate (A1) at ($ (O1) + (\a:\r1) $);
  \coordinate (O2) at (3,0);
  \coordinate (A2) at ($ (O2) + (\b:\r2) $);
  \draw[thick,purple,radical axis={O1,A1,O2,A2}];
  \draw[thick,circle={O1,A1}];
  \draw[thick,circle={O2,A2}];
  \foreach \p in {A1,A2,O1,O2}
    \fill[red] (\p) circle (2pt);
\end{tikzpicture}
```

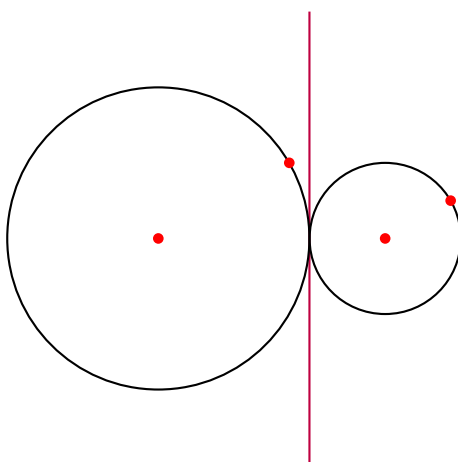

两圆外离:

```
\begin{tikzpicture}
  \tikzmath {
    \a = 30;
    \b = \a;
    \r1 = 1.5;
    \r2 = 1;
  }
  \coordinate (O1) at (0,0);
  \coordinate (A1) at ($ (O1) + (\a:\r1) $);
  \coordinate (O2) at (3,0);
  \coordinate (A2) at ($ (O2) + (\b:\r2) $);
  \coordinate[radical axis={O1,A1,O2,A2}] (P);
  \draw[thick,purple,radical axis={O1,A1,O2,A2}];
  \draw[thick,circle={O1,A1}];
  \draw[thick,circle={O2,A2}];
  \foreach \p in {A1,A2,O1,O2}
    \fill[red] (\p) circle (2pt);
\end{tikzpicture}
```

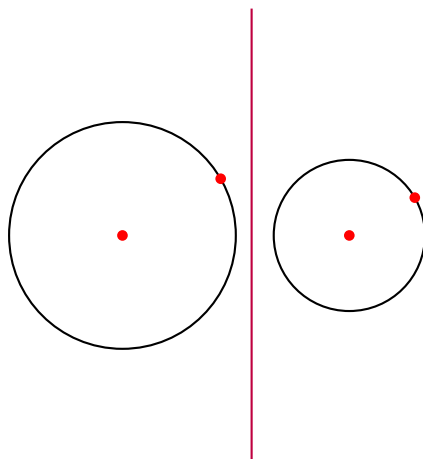

## 1.25 Partway Modifiers and Distance Modifiers

`perpendicular bisector`, `perpendicular`, `parallel`, `radical axis` 等线段图形可以对起始点进行调整, 调整参数如下 [3]:

**start modifier** (default: 0), 长度或系数, 如: 1cm 或 .75

**end modifier** (default: 1), 长度或系数, 如: 1cm 或 .75

## 第 2 章 三角形的中心

### 2.1 重心 Centroid

#### 调用方式

```
centroid={A,B,C}
```

#### 参数说明

$A, B, C$  三角形的顶点


#### 示例

```
\begin{tikzpicture}
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \coordinate (D) at ($ (B)!0.5!(C) $);
  \coordinate (E) at ($ (C)!0.5!(A) $);
  \coordinate (F) at ($ (A)!0.5!(B) $);
  \path[centroid={A,B,C}] coordinate (G);
  \fill (G) [red] circle (2pt);
  \draw (G) node[below] {$G$};
  \draw[thick] (A) -- (B) -- (C) -- cycle;
  \draw[purple] (A) -- (D) (B) -- (E) (C) -- (F);
  \draw (A) node[left] {$A$};
```

```

\draw (B) node[right] {$B$};
\draw (C) node[above] {$C$};
\draw (A) -- (B) node[near start,sloped] {$|$}$
  \rightarrow node[near end,sloped] {$|$}$;
\draw (B) -- (C) node[near start,sloped] {$|||$}$
  \rightarrow node[near end,sloped] {$|||$}$;
\draw (C) -- (A) node[near start,sloped] {$|||$}$
  \rightarrow node[near end,sloped] {$|||$}$;
\end{tikzpicture}

```

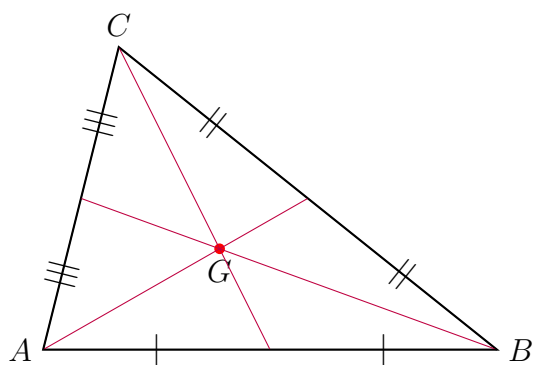

## 2.2 垂心 Orthocenter

### 调用方式

```
orthocenter={A,B,C}
```

### 参数说明


$A, B, C$  三角形的顶点

### 示例

```

\begin{tikzpicture}
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \path[orthocenter={A,B,C}] coordinate (H);
  \fill (H) [red] circle (2pt);
  \draw (H) node[below] {$H$};
  \draw[thick] (A) -- (B) -- (C) -- cycle;
  \coordinate (D) at ($(B)!(A)!(C)$);
  \coordinate (E) at ($(A)!(B)!(C)$);
  \coordinate (F) at ($(B)!(C)!(A)$);
  \draw[purple] (A) -- (D) (B) -- (E) (C) -- (F);
  \draw (A) node[left] {$A$};
  \draw (B) node[right] {$B$};
  \draw (C) node[above] {$C$};
  \pic [draw,red,angle radius=6pt] {right
    ↪ angle=H--D--C};
  \pic [draw,red,angle radius=6pt] {right
    ↪ angle=H--E--A};
  \pic [draw,red,angle radius=6pt] {right
    ↪ angle=H--F--B};
\end{tikzpicture}

```

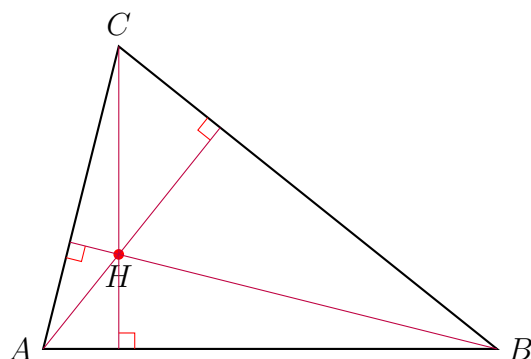

## 2.3 外心 Circumcenter

### 调用方式

```
circumcenter={A,B,C}
```

### 参数说明

$A, B, C$  三角形的顶点

### 示例


```
\begin{tikzpicture}
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \path[circumcenter={A,B,C}] coordinate (O);
  \fill (O) [red] circle (2pt);
  \draw (O) node[below] {$O$};
  \node[draw,red] at (O) [circle through=(A)] {};
  \draw[thick] (A) -- (B) -- (C) -- cycle;
  \draw[purple] (A) -- (O) (B) -- (O) (C) -- (O);
  \draw (A) node[left] {$A$};
  \draw (B) node[right] {$B$};
  \draw (C) node[above] {$C$};
  \coordinate (D) at ($(B)!(O)!(C)$);
  \coordinate (E) at ($(C)!(O)!(A)$);
  \coordinate (F) at ($(A)!(O)!(B)$);
  \draw[red] (O) -- (D) (O) -- (E) (O) -- (F);
  \draw (A) -- (B) node[near start,sloped] {$|$}
  \rightarrow node[near end,sloped] {$|$};
```



```

\draw (B) -- (C) node[near start,sloped] {$||$}
  \rightarrow node[near end,sloped] {$||$};
\draw (C) -- (A) node[near start,sloped] {$|||}$
  \rightarrow node[near end,sloped] {$|||}$;
\pic [draw,red,angle radius=6pt] {right
  \rightarrow angle=0--D--C};
\pic [draw,red,angle radius=6pt] {right
  \rightarrow angle=0--E--A};
\pic [draw,red,angle radius=6pt] {right
  \rightarrow angle=0--F--B};
\end{tikzpicture}

```

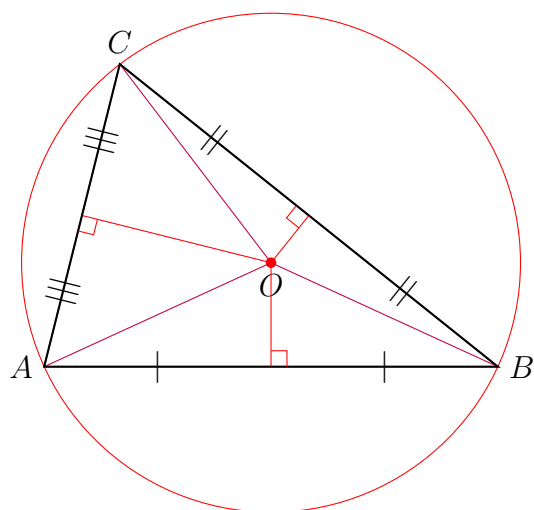

## 2.4 内心 Incenter

### 调用方式


```
incenter={A,B,C}
```

### 参数说明

$A, B, C$  三角形的顶点

示例

```
\begin{tikzpicture}
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \path[incenter={A,B,C}] coordinate (I);
  \fill (I) [red] circle (2pt);
  \draw (I) node[below]  $\{I\}$ ;
  \node[draw,red] at (I) [circle
    ↪ through=($ (B)!(I)!(C) $)] {};
  \draw[thick] (A) -- (B) -- (C) -- cycle;
  \draw (A) node[left]  $\{A\}$ ;
  \draw (B) node[right]  $\{B\}$ ;
  \draw (C) node[above]  $\{C\}$ ;
  \draw (A) -- (I) (B) -- (I) (C) -- (I);
  \pic [draw,angle radius=12pt] {angle=I--A--C};
  \pic [draw,angle radius=15pt] {angle=B--A--I};
  \pic [draw,double,angle radius=12pt] {angle=A--C--I};
  \pic [draw,double,angle radius=15pt] {angle=I--C--B};
  \pic [draw,pic text=.,angle radius=12pt,
    angle eccentricity=1.2] {angle=C--B--I};
  \pic [draw,pic text=.,angle radius=15pt,
    angle eccentricity=1.2] {angle=I--B--A};
\end{tikzpicture}
```

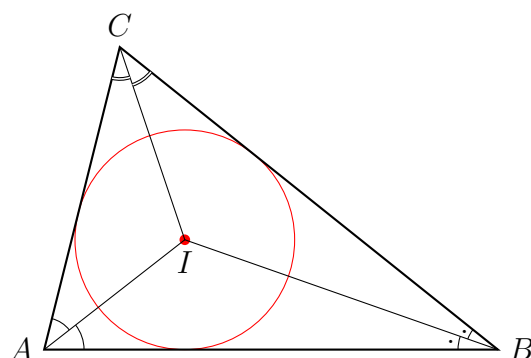

## 2.5 旁心 Excenter

### 调用方式

```
excenter={A,B,C}
```

### 参数说明

$A, B, C$  三角形的顶点, 返回与  $A$  相对的旁心, 调换顶点顺序就可以得到 3 个旁心.


### 示例

```
\begin{tikzpicture}[scale=.5]
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \path[incenter={A,B,C}] coordinate (I);
  \path[excenter={A,B,C}] coordinate (JA);
  \path[excenter={B,A,C}] coordinate (JB);
  \path[excenter={C,A,B}] coordinate (JC);
  \foreach \point in {I,JA,JB,JC}
    \fill (\point) [red] circle (2pt);
\end{tikzpicture}
```

```

\node[draw,red] at (I) [circle
  ↪ through=($ (B)! (I)! (C)$)] {};
\node[draw,red] at (JA) [circle
  ↪ through=($ (B)! (JA)! (C)$)] {};
\node[draw,red] at (JB) [circle
  ↪ through=($ (B)! (JB)! (C)$)] {};
\node[draw,red] at (JC) [circle
  ↪ through=($ (B)! (JC)! (C)$)] {};
\draw[thick] (A) -- (B) -- (C) -- cycle;
\draw (A) node[left] {$A$};
\draw (B) node[right] {$B$};
\draw (C) node[above] {$C$};
\draw[purple] ($ (A)!-1! (B)$) -- ($ (A)!2! (B)$);
\draw[purple] ($ (B)!-1! (C)$) -- ($ (B)!2! (C)$);
\draw[purple] ($ (C)!-1! (A)$) -- ($ (C)!2! (A)$);
\draw (I) node[right] {$I$};
\draw (JA) node[right] {$J\_A$};
\draw (JB) node[right] {$J\_B$};
\draw (JC) node[right] {$J\_C$};
\end{tikzpicture}

```

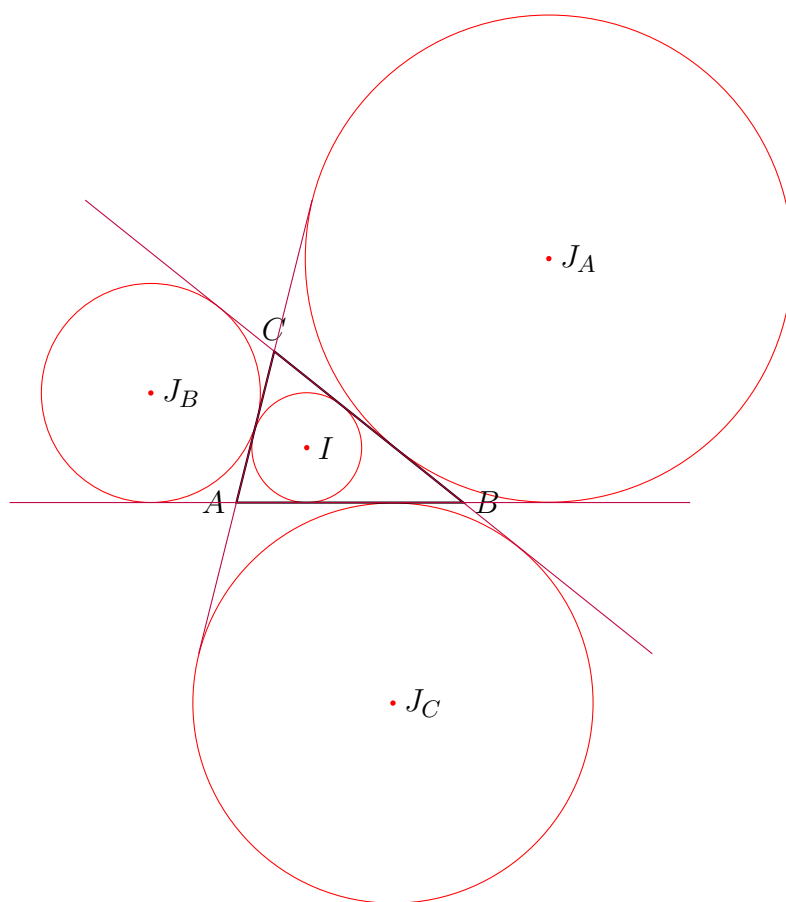

## 2.6 九点圆圆心 Nine-Point Center

### 调用方式

```
nine-point center={A,B,C}
```

### 参数说明


$A, B, C$  三角形的顶点

### 示例

```

\begin{tikzpicture}
  \coordinate (A) at (-2,0);
  \coordinate (B) at (4,0);
  \coordinate (C) at (-1,4);
  \path[orthocenter={A,B,C}] coordinate (H);
  \path[circumcenter={A,B,C}] coordinate (O);
  \path[centroid={A,B,C}] coordinate (G);
  \path[incenter={A,B,C}] coordinate (I);
  \path[nine-point center={A,B,C}] coordinate (N);
  \draw[thick] (A) -- (B) -- (C) -- cycle;
  \draw[thick,purple] (H) -- (O) -- (G);
  \foreach \p/\placement in {A/left,B/right,C/above,
    H/below,O/below,G/below,I/above,N/below}{
    \fill (\p) [red] circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}

```

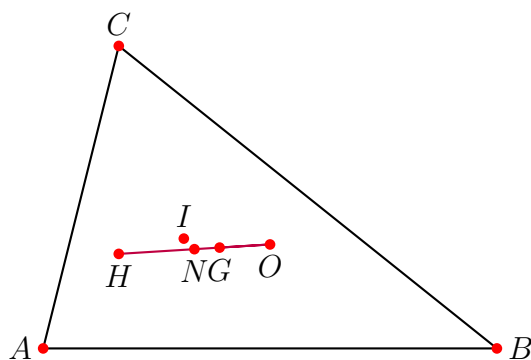

## 第 3 章 圆锥曲线 Conics

尽管 tikz 内置的 `ellipse` 和 `parabola` 绘制椭圆和抛物线, 这里定义了 `\jellipse` 和 `\jparabola`.

### 3.1 椭圆 Ellipse

#### 3.1.1 已知半长轴长 $a$ 和半短轴长 $b$ 绘图

##### 调用方式

```
\jellipse [options] (a,b)
```

##### 参数说明

$a, b$  半长轴长 (semi-major axis) 和半短轴长 (semi-minor axis), 默认单位为 cm, 可指定单位, 如 (4cm, 3cm)

返回中心为原点的椭圆曲线:  $\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$ .

注 当指定椭圆曲线 (ellipse) 的 `domain` (default: `domain=-180:180`) 时, `domain` 是下列参数方程中  $t$  的取值范围:

$$\begin{cases} x = a \cos t, \\ y = b \sin t \end{cases}$$


##### 示例

使用 tikz 内置曲线:

```

\begin{tikzpicture}
  \axes (-5:5,-5:5);
  \draw[thick,purple] (0,0) ellipse (4cm and 3cm);
  \draw[thick,teal] (0,0) ellipse [x radius=3cm,y
    ↪ radius=4cm];
\end{tikzpicture}

```

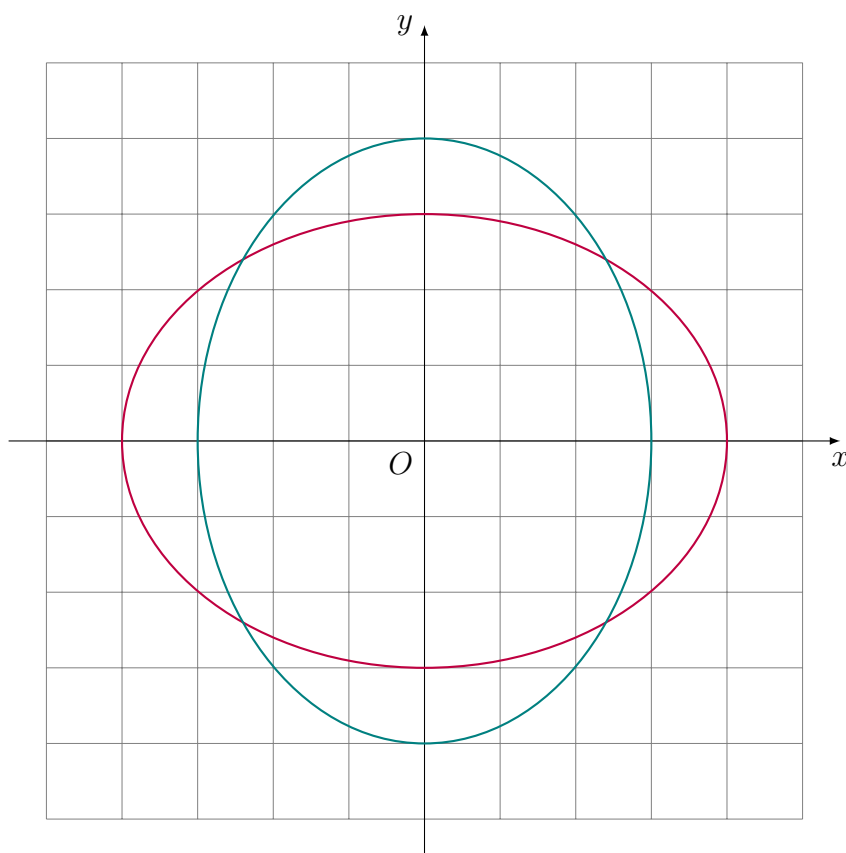

使用 `\ellipse` 命令:

```


\begin{tikzpicture}
  \axes (-5:5,-5:5);
  \ellipse[draw,thick,purple] (4,3);

```



```
\ellipse[draw,thick,teal] (3,3);
\ellipse[draw,thick,magenta] (4,4);

\coordinate (O) at (0,0);
\coordinate (A) at ({4*cos(30)},{4*sin(30)});
\coordinate (B) at ({3*cos(30)},{3*sin(30)});
\coordinate (C) at ({4*cos(30)},{3*sin(30)});
\draw[red] (O) -- (A) -- (C) -- (B);
\end{tikzpicture}
```

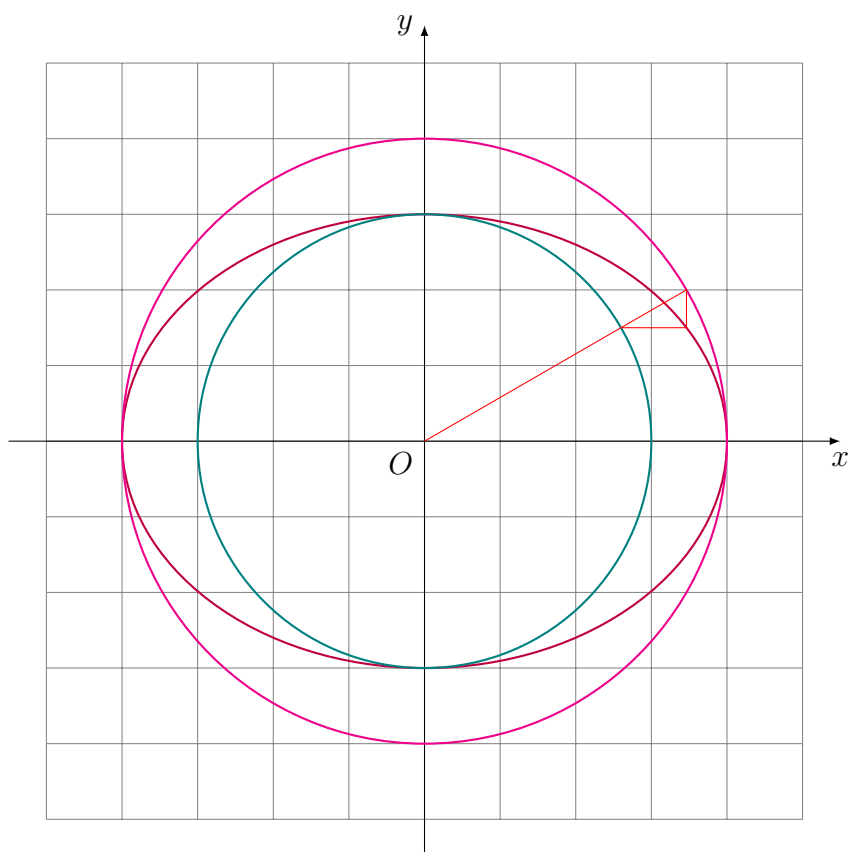

### 3.1.2 由两焦点和一点确定椭圆

调用方式

```

\ellipse/define = {F1,F2,P}`: define an ellipse with
↪ two foci and a point.
\ellipse`: creates the ellipse path.
\ellipse/directrix/scale=k`: set the scale of
↪ directrices.
\ellipse/directrix`: create the directrices.
\ellipse/axis/scale=k`: set the scale of axes
\ellipse/axis`: create the axes.

```

### 示例

```

\begin{tikzpicture}
  \axes(-5:5, -5:5);

  \coordinate (F1) at (-3,0);
  \coordinate (F2) at (2,1);
  \coordinate (P) at (2,2);

  \tikzset{
    ellipse/define = {F1,F2,P},
  }

  \draw [purple, thick, ellipse] node at (P) [below
↪ left] {ellipse};
  \draw [teal, thick, ellipse/directrix/scale=1.5]
↪ 5,ellipse/directrix] node [above] {directrix};
  \draw [cyan, thick, dashdotted,
↪ ellipse/axis/scale=1.5,ellipse/axis] node [above]
↪ {axis};


```

```

\foreach \p/\placement in {F1/left,F2/right,P/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}

\end{tikzpicture}

```

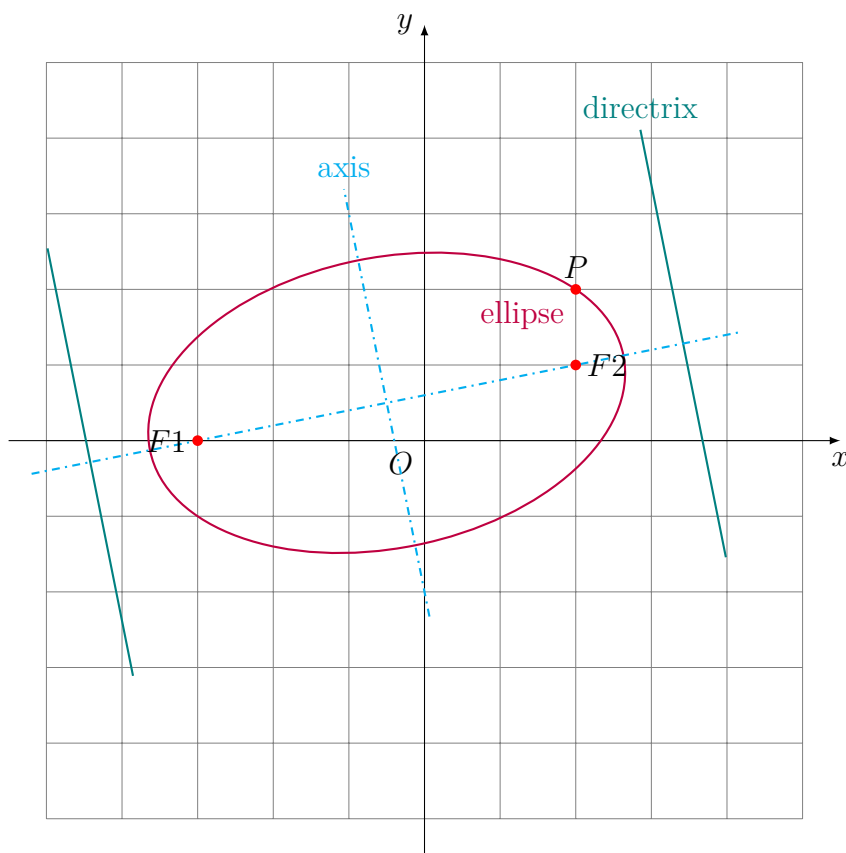

## 3.2 椭圆弧 Arc


### 基本用法

在 TikZ 中绘制圆弧可以通过 arc 操作来实现, 将椭圆的一部分添加到当前路径中.

```

\begin{tikzpicture}
  % Arc operation
  \draw (2,0) arc
  [
    start angle=0,
    end angle=300,
    x radius=2cm,
    y radius =1cm
  ];
\end{tikzpicture}

```



圆弧从点 (2,0) 开始, 以 0 度 (由起始角度指定) 结束, 以 300 度 (由结束角度指定) 结束.

为了绘制圆的一部分, 我们使用与前一个相同的语法, 并且不提供参数 `x radius` 和 `y radius`, 而是仅提供参数 `radius`.

```

\begin{tikzpicture}


\draw[fill=yellow!30] (0,0) -- (2,0) arc[start
↪ angle=0, end angle=60,radius=2cm] -- (0,0);

\draw[fill=cyan!30] (0,0) -- (0,1.5) arc [start
↪ angle=90, delta angle=30, radius=1.5cm] -- (0,0);

\draw[-latex] (120:0.5) arc (120:360:0.5) ;

```

```
\end{tikzpicture}
```



- 黄色扇区是通过 arc 操作绘制的, 为了得到圆的一部分, 我们只定义 radius 而不是 x radius 和 y radius 参数.
- 蓝色扇区的绘制方式与黄色扇区相同, 但在本例中我们指定了 delta angle 而不是 end angle, 后者等于 start angle + delta angle.

### 简短语法

上图中的弯曲箭头是使用 arc 操作的较短语法绘制的, 对应于圆的一部分:

```
arc(start angle:end angle: radius)
```

对于椭圆, 我们使用以下语法:

```
arc(start angle:end angle: x radius and y radius)
```

然而, 这种语法不直观且难以阅读, 因此一般情况下应首选普通语法 (见 PGF 手册).

## 3.3 抛物线 Parabola

### 3.3.1 已知方程系数 a, b 和 c 绘图

#### 调用方式

```
\parabola [options] (a,b,c)
```

#### 参数说明

**a,b,c** 二次函数的系数

返回抛物线:  $y = ax^2 + bx + c$ .

#### 示例

使用 tikz 内置曲线:

```

\begin{tikzpicture}
  \draw[help lines] (0,0) grid (3,2);
  \draw[thick,teal] (-1,0) parabola[bend pos=0.5] bend
    ↪ +(0,2) +(3,0);
  \draw[thick,purple] (-1,0) parabola[parabola
    ↪ height=1cm] +(3,0);
\end{tikzpicture}

```




使用 `\parabola` 命令:

```

\begin{tikzpicture}
  \axes (-5:5,0:10);
  \parabola[draw,thick,teal,domain=-1:3] (1,0,0);
  \parabola[draw,thick,purple] (1,0,1);
\end{tikzpicture}

```

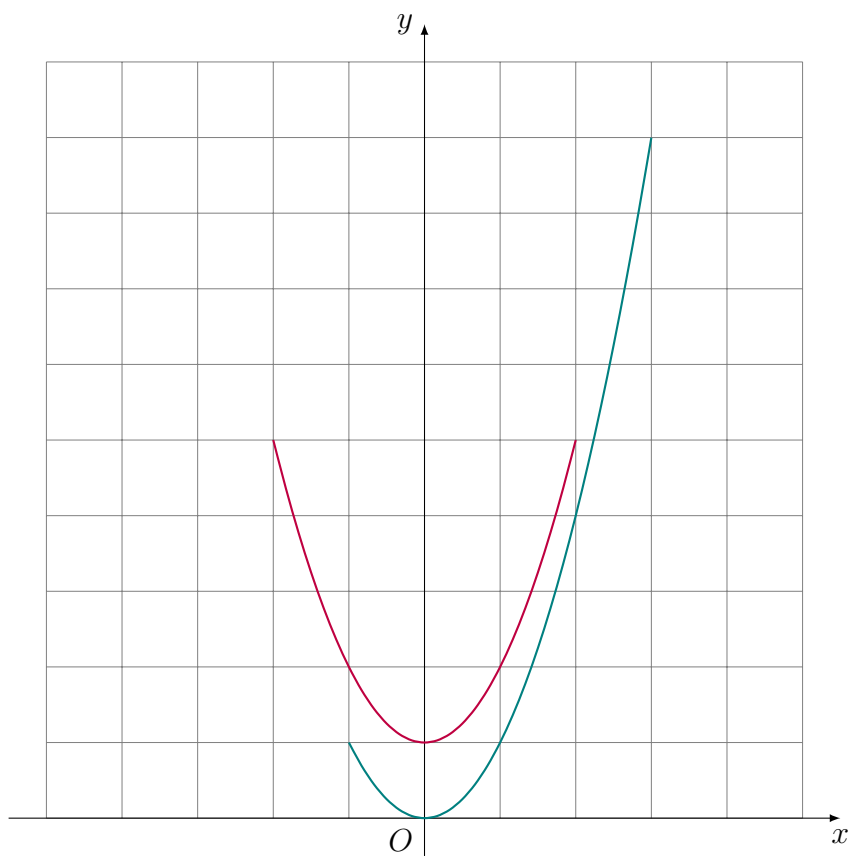

### 3.3.2 由焦点和顶点确定抛物线

#### 调用方式

```
`parabola/define = {F,P}`: define a parabola with the
↪ focus and vertex.
`parabola/domain=t1:t2`: set the domain for parametric
↪ equation:  $x = a*t^2$ ,  $y = 2a*t$ , where `a` is the
↪ distance from the focus to the vertex.
`parabola`: creates the parabola path.
`parabola/directrix/scale=k`: set the scale of
↪ directrices.
`parabola/directrix`: create the directrix.
```

```
\parabola/axis/scale=k`: set the scale of axis.
\parabola/axis`: create the axis.
```

### 示例

```
\begin{tikzpicture}
  \axes(-5:5, -5:5);

  \coordinate (F) at (0,1);
  \coordinate (P) at (0.5,0);


  \tikzset{
    % parabola/doamin=-1.25:1.25,
    parabola/define={F,P},
  }

  \draw [purple, thick, parabola] node [above]
  ↪ {parabola};
  \draw [teal, thick,
    % parabola/directrix/scale=1.5,
    parabola/directrix] node [below] {directrix};
  \draw [magenta, thick, dashdotted,
    % parabola/axis/scale=2.5,
    parabola/axis] node [right] {axis};

  \foreach \pp/\placement in {F/right,P/above}{
    \fill[red] (\pp) circle (2pt);
    \draw (\pp) node[\placement] {$\pp$};
  }
}
```



```
\end{tikzpicture}
```

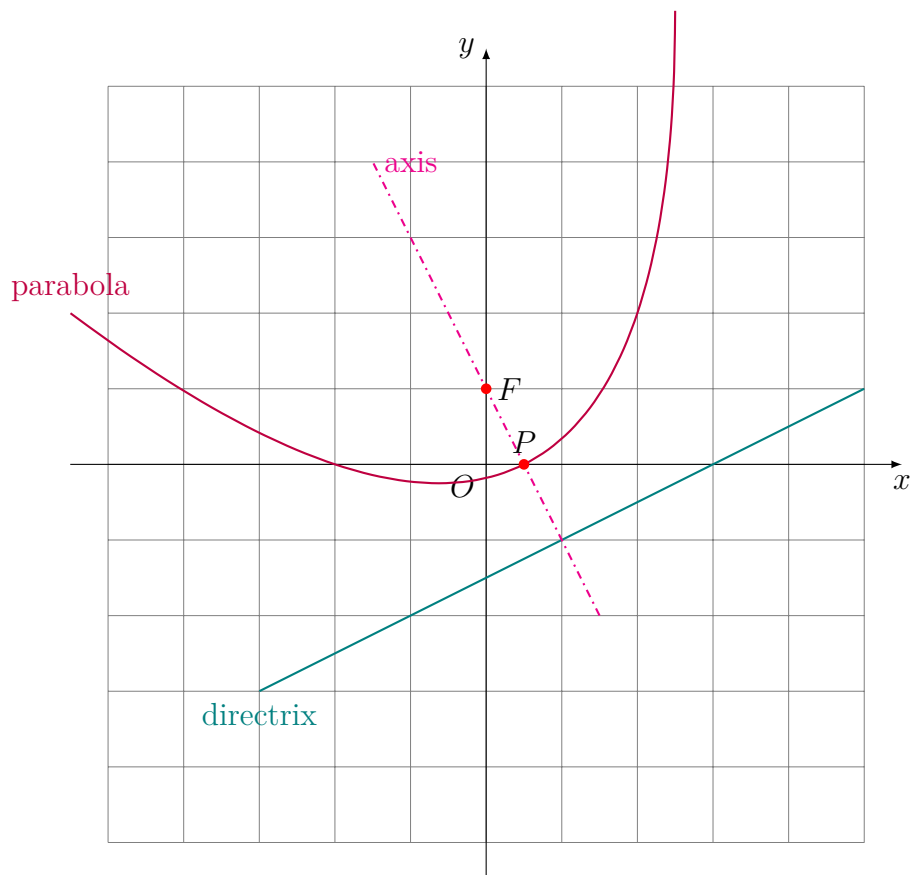

### 3.4 双曲线 Hyperbola 与渐近线 Asymptote

#### 3.4.1 已知半实轴长 $a$ 和半虚轴长 $b$ 绘图

调用方式

```
\hyperbola [options] (a,b);
```

或

```
\asymptote [options] (a,b);
```

### 参数说明

**a, b** 半实轴长 (semi-major axis) 和半虚轴长 (semi-minor axis), 默认单位为 cm, 可指定单位, 如 (4cm, 3cm)

分别返回中心在 origin 的双曲线:  $\frac{x^2}{a^2} - \frac{y^2}{b^2} = 1$  和渐近线:  $y = \pm \frac{b}{a}x$ .

### 示例

```
\begin{tikzpicture}
  \tikzmath{
    \a = 1;
    \b = 1;
  }
  \draw[help lines] (-5,-5) grid (5,5);

  \hyperbola [draw,thick,purple,name path=c1] (\a,\b);
  \asymptote [draw,dashed,purple] (\a,\b);

  \hyperbola [transform={45:(1,2)},draw,thick,teal,name
    ↪ path=c2] (1,1);
  \asymptote [transform={45:(1,2)},draw,dashed,teal]
    ↪ (1,1);


  \hyperbola [draw,thick,red,domain=-1.2:1.2,name
    ↪ path=c3] (2,1);
  \asymptote [draw,dashed,red,domain=-3:3] (2,1);

  \draw[name path=l] (-5,-1) -- (5,3);
  \path[name intersections={of=c2 and l, by={A,B}, sort
    ↪ by=1}];
```

```

\foreach \p/\placement in {A/above, B/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}
\end{tikzpicture}

```

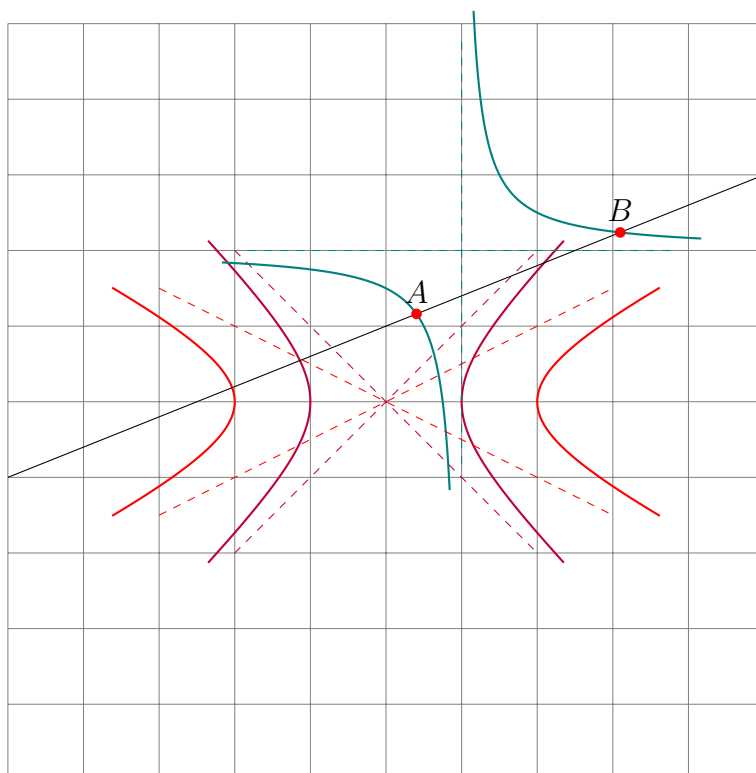

注 当指定绘制双曲线 (hyperbola) 的 domain (default: domain=-1.5:1.5) 时, domain 是下列双曲线参数方程中  $t$  的取值范围:

$$\begin{cases} x = \cosh t, \\ y = \sinh t \end{cases}$$

$t$  的几何意义: 射线出原点交单位双曲线  $x^2 - y^2 = 1$  于  $(\cosh t, y = \sinh t)$ ,  $t$  是射线, 双曲线和  $x$  轴围成的面积的二倍. 对于双曲线上位于  $x$  轴下方的点, 这个面积被认为是负值.

当指定绘制渐进线 (asymptote) 的 domain (default: domain=-2:2) 时, domain 是下列直线方程中  $x$  的取值范围:

$$y = \pm \frac{b}{a}x$$

### 示例

```
\begin{tikzpicture}
  \draw[help lines] (-5,-5) grid (5,5);

  \coordinate (O) at (0,0);
  \coordinate (A') at (3,2);
  \coordinate (B) at (1,0);


  \path[name path=ray] (O) -- (A');

  \hyperbola[draw,thick,domain=-2:2,name
    ↪ path=hyperbola] (1,1);
  \asymptote[draw,dashed,domain=-3:3] (1,1);

  \path[name intersections={of=ray and hyperbola,
    ↪ by=A}];

  \draw[thick,red] (A) -- (O) -- (B);

  \foreach \p/\placement in {O/below, A/above left,
    ↪ B/right}{
    \fill[red] (\p) circle (2pt);
    \draw (\p) node[\placement] {$\p$};
  }
\end{tikzpicture}
```

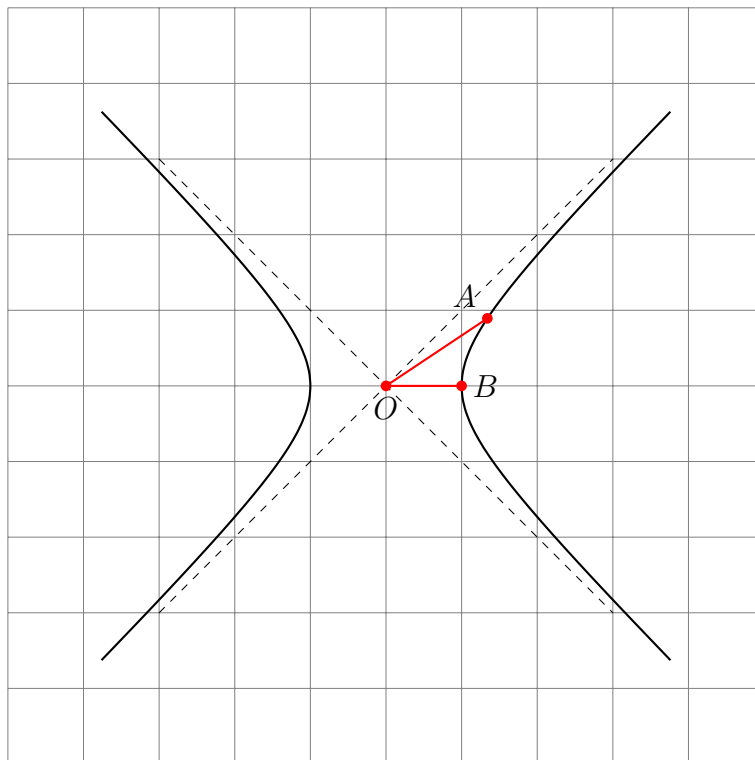

也可使用 pgfplots 底层函数来绘制双曲线:

示例

```
\begin{tikzpicture}
  \axes (-5:5,-5:5);

  % 定义焦点 F1 和 F2, 以及点 P
  \coordinate (F1) at (-1, -2); % Left focus
  \coordinate (F2) at (2, 1); % Right focus
  \coordinate (P) at (0, 2);

  % 提取各点的坐标分量 x-coordinate and y-coordinate
  % 注意: 根据 LaTeX 的规则, 宏不能含有数字, 提取坐标的 x
  %   ↪ 和 y 分量的宏不要含有数字
  \newdimen\xFL
```

```

\newdimen\yFL
\newdimen\xFR
\newdimen\yFR
\newdimen\xP
\newdimen\yP
\pgfextractx{\xFL}{\pgfpointanchor{F1}{center}}
\pgfextracty{\yFL}{\pgfpointanchor{F1}{center}}
\pgfextractx{\xFR}{\pgfpointanchor{F2}{center}}
\pgfextracty{\yFR}{\pgfpointanchor{F2}{center}}
\pgfextractx{\xP}{\pgfpointanchor{P}{center}}
\pgfextracty{\yP}{\pgfpointanchor{P}{center}}

% 计算  $2a = |PF_1 - PF_2|$ 
% 注意: \x{} \y{} 只能在 let 中
\pgfmathsetmacro{\PFLeft}{veclen(\x{P}-\x{F1},
  ↪ \y{P}-\y{F1}))} % 计算 PF1
\pgfmathsetmacro{\PFRight}{veclen(\x{P}-\x{F2},
  ↪ \y{P}-\y{F2}))} % 计算 PF2
\pgfmathsetmacro{\PFLeft}{veclen(\xP-\xFL, \yP-\yFL)}
  ↪ % 计算 PF1
\pgfmathsetmacro{\PFRight}{veclen(\xP-\xFR,
  ↪ \yP-\yFR)} % 计算 PF2
\pgfmathsetmacro{\a}{abs(\PFLeft - \PFRight)/2cm} % 计
  ↪ 算 a 并转换单位

% 计算焦距 c
\pgfmathsetmacro{\c}{veclen(\x{F1}-\x{F2},
  ↪ \y{F1}-\y{F2}) / 2} %  $c = |F_1F_2| / 2$ 
\pgfmathsetmacro{\c}{veclen(\xFL-\xFR, \yFL-\yFR) /
  ↪ 2cm} %  $c = |F_1F_2| / 2$ 

```

```

% 计算 b
\pgfmathsetmacro{\b}{sqrt(\c^2 - \a^2)} % b = sqrt(c^2
↪ - a^2)

% 计算双曲线的中心 (h, k)
\pgfmathsetmacro{\h}{(\xFL + \xFR) / 2cm} % h
\pgfmathsetmacro{\k}{(\yFL + \yFR) / 2cm} % k

% 计算旋转角度 theta
%\pgfmathsetmacro{\theta}{atan2(\y{F2}-\y{F1},
↪ \x{F2}-\x{F1})} % theta
\pgfmathsetmacro{\theta}{atan2(\yFR-\yFL, \xFR-\xFL)}
↪ % theta

% 绘制焦点
\filldraw[red] (F1) circle (2pt) node[below
↪ left]{$F_1$};
\filldraw[red] (F2) circle (2pt) node[above
↪ right]{$F_2$};

% 绘制点 P
\filldraw[black] (P) circle (2pt) node[above
↪ right]{$P$};


% 绘制双曲线
\draw[domain=-1.5:1.5, smooth, variable=\t, purple,
↪ thick, rotate around={\theta:({\h},{k})}]
plot ({\a*cosh(\t) + \h}, {\b*sinh(\t) + \k});

```

```

\draw[domain=-1.5:1.5, smooth, variable=\t, purple,
↪  thick, rotate around={\theta:({\h},{\k})}]
  plot ({-\a*cosh(\t) + \h}, {\b*sinh(\t) + \k});
\end{tikzpicture}

```

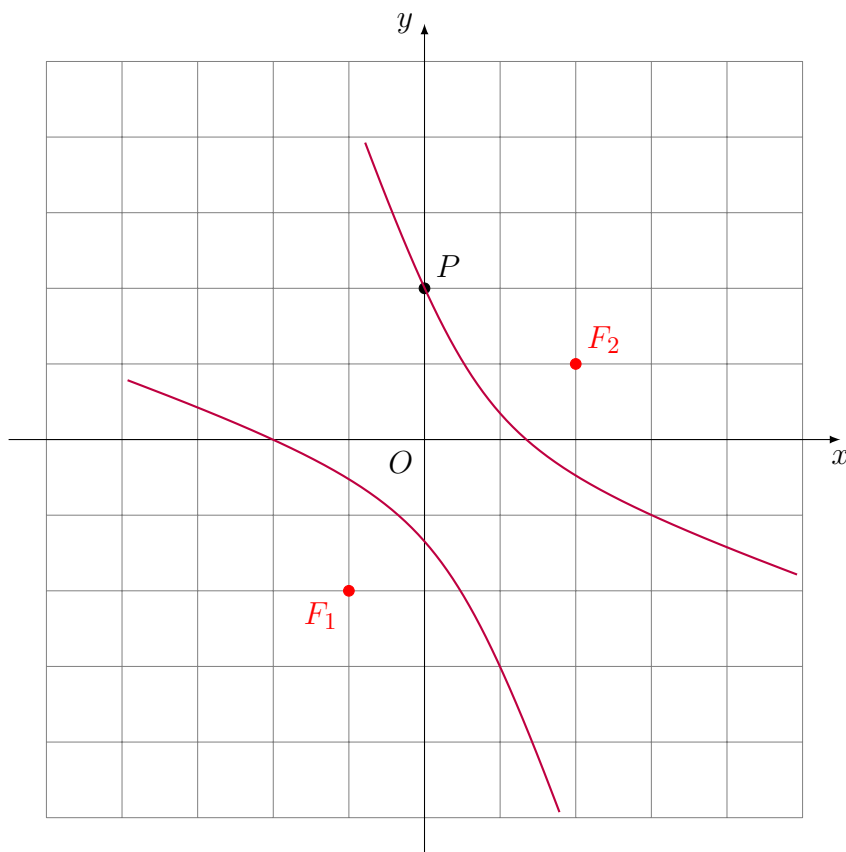

### 3.4.2 由两焦点和一点确定双曲线

调用方式



```

`hyperbola/define = {F1,F2,P}`: define a hyperbola
↪ with two foci and a point.
`hyperbola/domain=t1:t2`: set the domain for
↪ parametric equation:  $x = a \cosh(t)$ ,  $y =$ 
↪  $b \sinh(t)$ .
`hyperbola`: creates the hyperbola path.
`hyperbola/directrix/scale=k`: set the scale of
↪ directrices.
`hyperbola/directrix`: create the directrices.
`hyperbola/axis/scale=k`: set the scale of axes.
`hyperbola/axis`: create the axes.

```

### 示例

```

\begin{tikzpicture}
  \axes(-5:5, -5:5);

  \coordinate (F1) at (-3,-1);
  \coordinate (F2) at (3,1);
  \coordinate (P) at (2,2);

  \tikzset{
    hyperbola/define={F1,F2,P},
    hyperbola/doamin=-1.25:1.25,
  }

  \draw [purple, thick,hyperbola] node [above right]
    ↪ {hyperbola};
  \draw [red, dashed, asymptote] node [below left]
    ↪ {asymptote};

```


```

\draw [teal, thick,hyperbola/directrix/scale=1.]
  ↪ 5,hyperbola/directrix] node [above] {directrix};
\draw [cyan, thick, dashdotted,
  ↪ hyperbola/axis/scale=1.5,hyperbola/axis] node
  ↪ [above] {axis};

\foreach \p/\placement in {F1/left,F2/right,P/above}{
  \fill[red] (\p) circle (2pt);
  \draw (\p) node[\placement] {$\p$};
}

\end{tikzpicture}

```

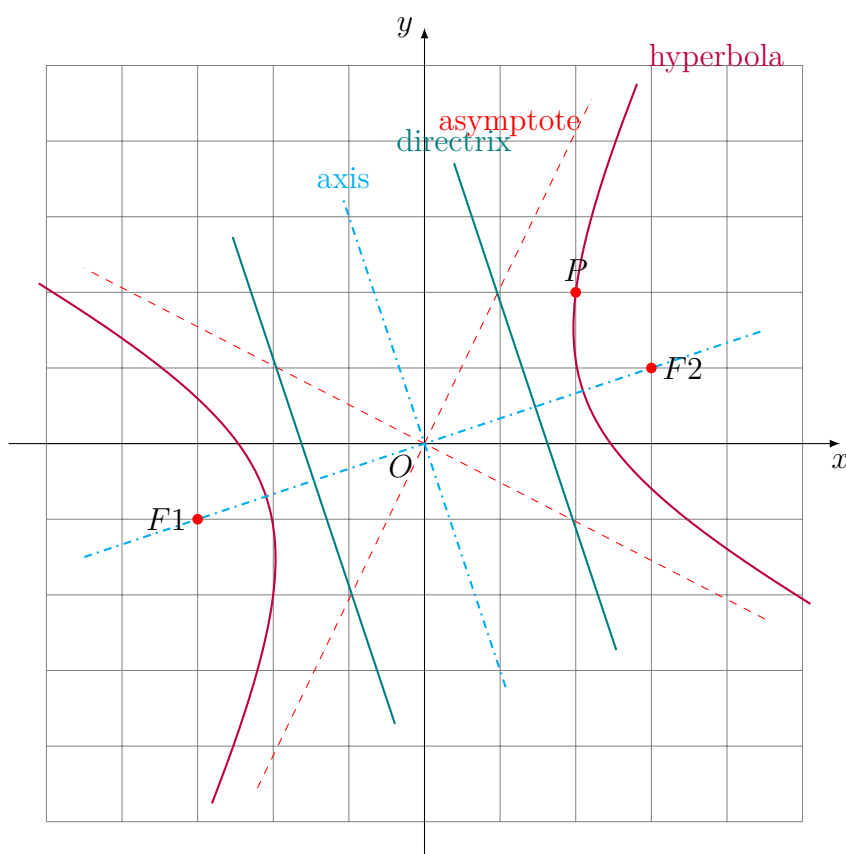

## 附录 A 两直线的交点

求解两直线交点的方程 [4]:

$$\begin{vmatrix} x & y & 1 \\ x_1 & y_1 & 1 \\ x_2 & y_2 & 1 \end{vmatrix} = 0$$

$$\begin{vmatrix} x & y & 1 \\ x_3 & y_3 & 1 \\ x_4 & y_4 & 1 \end{vmatrix} = 0$$

注意, 两个方程的系数都是行列式, 解得:

$$x = \frac{\begin{vmatrix} x_1 & y_1 \\ x_2 & y_2 \\ x_3 & y_3 \\ x_4 & y_4 \end{vmatrix} \begin{vmatrix} x_1 & 1 \\ x_2 & 1 \\ x_3 & 1 \\ x_4 & 1 \end{vmatrix}}{\begin{vmatrix} x_1 & 1 \\ x_2 & 1 \\ x_3 & 1 \\ x_4 & 1 \end{vmatrix} \begin{vmatrix} y_1 & 1 \\ y_2 & 1 \\ y_3 & 1 \\ y_4 & 1 \end{vmatrix}} = \frac{\begin{vmatrix} x_1 & y_1 & x_1 - x_2 \\ x_2 & y_2 & x_3 - x_4 \\ x_3 & y_3 & x_3 - x_4 \\ x_4 & y_4 & x_3 - x_4 \end{vmatrix}}{\begin{vmatrix} x_1 - x_2 & y_1 - y_2 \\ x_3 - x_4 & y_3 - y_4 \end{vmatrix}}$$

$$y = \frac{\begin{vmatrix} x_1 & y_1 \\ x_2 & y_2 \\ x_3 & y_3 \\ x_4 & y_4 \end{vmatrix} \begin{vmatrix} y_1 & 1 \\ y_2 & 1 \\ y_3 & 1 \\ y_4 & 1 \end{vmatrix}}{\begin{vmatrix} x_1 & 1 \\ x_2 & 1 \\ x_3 & 1 \\ x_4 & 1 \end{vmatrix} \begin{vmatrix} y_1 & 1 \\ y_2 & 1 \\ y_3 & 1 \\ y_4 & 1 \end{vmatrix}} = \frac{\begin{vmatrix} x_1 & y_1 & y_1 - y_2 \\ x_2 & y_2 & y_1 - y_2 \\ x_3 & y_3 & y_3 - y_4 \\ x_4 & y_4 & y_3 - y_4 \end{vmatrix}}{\begin{vmatrix} x_1 - x_2 & y_1 - y_2 \\ x_3 - x_4 & y_3 - y_4 \end{vmatrix}}$$

进一步化简得到<sup>1</sup>:

$$x = \frac{(x_1 y_2 - y_1 x_2)(x_3 - x_4) - (x_1 - x_2)(x_3 y_4 - y_3 x_4)}{(x_1 - x_2)(y_3 - y_4) - (y_1 - y_2)(x_3 - x_4)}$$

$$y = \frac{(x_1 y_2 - y_1 x_2)(y_3 - y_4) - (y_1 - y_2)(x_3 y_4 - y_3 x_4)}{(x_1 - x_2)(y_3 - y_4) - (y_1 - y_2)(x_3 - x_4)}$$

上述方法给出的交点坐标公式在 TikZ 环境中的计算稳定性不够好, 经常出现 `Dimension too large` 错误, 究其原因是分母可能有时会比较小. 下面给出一个计算更稳定的公式.

我们可以给出两条直线的参数方程:

直线  $L_1$  的方程:

$$\begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x_1 \\ y_1 \end{bmatrix} + s \begin{bmatrix} x_2 - x_1 \\ y_2 - y_1 \end{bmatrix}$$

直线  $L_2$  的方程:

$$\begin{bmatrix} x \\ y \end{bmatrix} = \begin{bmatrix} x_3 \\ y_3 \end{bmatrix} + t \begin{bmatrix} x_4 - x_3 \\ y_4 - y_3 \end{bmatrix}$$

---


<sup>1</sup>[https://en.wikipedia.org/wiki/Line-line\\_intersection](https://en.wikipedia.org/wiki/Line-line_intersection)

可以解出  $s, t$ :

$$s = \frac{\begin{vmatrix} x_1 - x_3 & x_3 - x_4 \\ y_1 - y_3 & y_3 - y_4 \end{vmatrix}}{\begin{vmatrix} x_1 - x_2 & x_3 - x_4 \\ y_1 - y_2 & y_3 - y_4 \end{vmatrix}}$$

$$t = \frac{\begin{vmatrix} x_1 - x_3 & x_1 - x_2 \\ y_1 - y_3 & y_1 - y_2 \end{vmatrix}}{\begin{vmatrix} x_1 - x_2 & x_3 - x_4 \\ y_1 - y_2 & y_3 - y_4 \end{vmatrix}}$$

我们也可从几何的角度来分析:

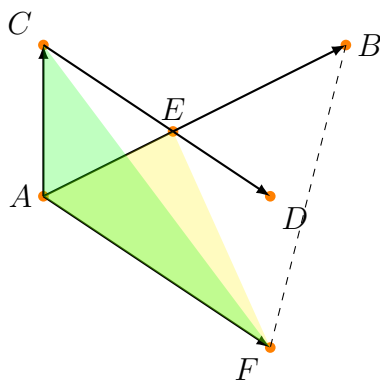

$$\overrightarrow{AE} = s\overrightarrow{AB}$$

$$s = \frac{S_{\triangle AEF}}{S_{\triangle ABF}}$$

$$= \frac{S_{\triangle ACF}}{S_{\triangle ABF}}$$

$$= \frac{\overrightarrow{AF} \times \overrightarrow{AC}}{\overrightarrow{AF} \times \overrightarrow{AB}}$$

$$= \frac{\overrightarrow{CD} \times \overrightarrow{AC}}{\overrightarrow{CD} \times \overrightarrow{AB}}$$

为了保证数值计算的稳定性, 可以对下面的方程进行列主元消元法求解:

$$x_1 + s(x_2 - x_1) = x_3 + t(x_4 - x_3)$$

$$y_1 + s(y_2 - y_1) = y_3 + t(y_4 - y_3)$$

## 附录 B 通径 Latus Rectum

通径 (latus rectum) 亦称“正通径”,“首通径”,“直焦弦”,“主焦弦”,“正焦弦”. 过圆锥曲线的焦点且与过焦点的轴垂直的弦称为通径, 清代明安图《割环密率捷法》中, 称圆的直径为通径.

### B.1 椭圆的通径与焦准距

连接椭圆上任意两点的线段叫作这个椭圆的弦, 通过焦点的弦叫作这个椭圆的焦点弦 (所以椭圆的长轴也是焦点弦), 和长轴垂直的焦点弦叫作这个椭圆的通径 (正焦弦). 连接椭圆上任意一点与一个焦点的线段 (或这线段的长) 叫作椭圆在这点的焦半径, 椭圆上任意一点有两条焦半径.

设椭圆的方程为

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1, (a > b > 0)$$

其通径的长为  $\frac{2b^2}{a}$ , 或  $2ep$ , 其中:  $a$  为半长轴长,  $b$  为半短轴长,  $e$  为椭圆的离心率,  $p$  为椭圆的焦准距.

焦点与相应准线的距离称为椭圆的焦准距, 也叫焦参数.

$$p = \frac{a^2}{c} - c = \frac{a^2 - c^2}{c} = \frac{b^2}{c}$$

### B.2 抛物线的通径与焦准距

经过抛物线的焦点, 作一条垂直于它的对称轴的直线, 这直线与抛物线有两个交点, 这两个交点之间的线段叫做抛物线的通径.

抛物线的方程:

$$y^2 = 2px$$

抛物线的通径长为  $2p$ , 其中: 抛物线的焦准距长为  $p$ .

### B.3 双曲线的通径与焦准距

过双曲线的焦点与双曲线的实轴垂直的直线被双曲线截得的线段的长, 称为双曲线的通径.

$$\frac{x^2}{a^2} - \frac{y^2}{b^2} = 1, (a > 0, b > 0)$$

其通径长  $\frac{2b^2}{a}$ , 或  $2ep$ , 其中:  $a$  为半实轴长,  $b$  为半虚轴长,  $e$  为双曲线的离心率,  $p$  为双曲线的焦准距.



## 附录 C 源代码

```
\ProvidesFile{tikzlibraryeuclidea.code.tex}[2025/02/22
↪ v1.4.0 A tikz library for plane geometry]

\usetikzlibrary{math,calc,quotes}

% https://tex.stackexchange.com/questions/455991/
↪ pgfmath-function-for-strings-and-numbers
% Solving the error:
% Package PGF Math: Could not parse input 'A' as a
↪ floating
% point number, sorry. The unreadable part was near
↪ 'A'..
\pgfkeys{
  /pgf/fpu/handlers/invalid number/.code = {%
    \pgfmathfloatparsenumber{3Y0.0e0}]}%
  }
}

\makeatletter

% 注意：计算过程是保留坐标单位（pt）的，所以存在乘除法单
↪ 位的问题，首先数值始终携带单位，
```

```

% 在 calc 运算时有的需要转换为标量; 将坐标转换为 pt 值,
↪ 数值可能超出限值, 出现
% Dimension too large 错误, 在计算长度时及时进行缩小
% https://tex.stackexchange.com/questions/475556/tikz-
↪ why-is-dimension-too-large
% 具体方法是修改默认的 1cm, 如:
↪ [scale=1.0,x=0.5cm,y=0.5cm]
% 注意此处的变量不要和 tikzpicture 环境重名, 否则被替换掉
% triangle centers:
% https://mathworld.wolfram.com/BarycentricCoordinates.
↪ html
\tikzmath{
  % 采用列主元消元法求直线 P1P2 与直线 P3P4 的交点 P 位置
  ↪ 参数 s:  $s = P1P/P1P2$ 
  function intersectll(\x1,\y1,\x2,\y2,\x3,\y3,\x4,\y4)
  ↪ {
    \a1 = \x2-\x1; \b1 = \x3-\x4; \c1 = \x3-\x1;
    \a2 = \y2-\y1; \b2 = \y3-\y4; \c2 = \y3-\y1;
    \dmax = max(max(abs(\a1),abs(\a2)),
    ↪ max(abs(\b1),abs(\b2)));
    \a1 = \a1/\dmax; \b1 = \b1/\dmax; \c1=\c1/\dmax;
    \a2 = \a2/\dmax; \b2 = \b2/\dmax; \c2=\c2/\dmax;
    if abs(\a1) < abs(\a2) then {
      \temp = \a1; \a1 = \a2; \a2 = \temp;
      \temp = \b1; \b1 = \b2; \b2 = \temp;
      \temp = \c1; \c1 = \c2; \c2 = \temp;
    };
    \b1 = \b1/\a1; \c1 = \c1/\a1; \a1 = 1.0;
    \b2 = \b2-\a2*\b1; \c2 = \c2-\a2*\c1; \a2 = 0.0;
    \n2 = \c2/\b2; \n1 = \c1-\b1*\n2;
  }
}

```

```

    return \n1;
};
}

\tikzset{
  % specifying start and end with modifiers(see tikz
  ↪ manual 13.5)
  % commands supporting partway modifiers:
  % radical axis, perpendicular bisector, perpendicular,
  ↪ parallel
  start modifier/.initial = 0,
  start modifier/.default = 0,
  end modifier/.initial = 1,
  end modifier/.default = 1,
  % ===== Coordinates Transformations =====
  % affine={A,B,k}: returns affine combination of two
  ↪ points
  % with affine ratio, i.e.  $A + k * (B - A)$ 
  affine/.style args = {#1,#2,#3}{
    insert path = {
      ($(#1)!{#3}!(#2)$)
    }
  },
  % midpoint={A,B}: returns midpoint of AB.
  midpoint/.style args = {#1,#2}{
    insert path = {
      ($(#1)!.5!(#2)$)
    }
  },
  % translate={A,B,C}: returns translation of C by

```

```

% the vector AB, i.e. C + ( B - A )
translate/.style args = {#1,#2,#3}{
  insert path = {
    ($(#3)+(#2)-(#1)$)
  }
},
% reflect={A,B,C}: reflects point C across line AB.
reflect/.style args = {#1,#2,#3}{
  insert path = {
    let
      \p{ft} = ($(#1)!(#3)!(#2)$),% perpendicular foot
      in ($(#3)!2!(\p{ft})$)
    }
  },
% project={A,B,C}: projects point C onto line AB.
project/.style args = {#1,#2,#3}{
  insert path = {
    ($(#1)!(#3)!(#2)$)
  }
},
% inverse={O,A,P}: returns inverse point P with
↔ respect to
% a reference circle(O,A).
inverse/.style args = {#1,#2,#3}{
  insert path = {
    let
      \p{OA} = ($(#2)-(#1)$),
      \p{OP} = ($(#3)-(#1)$),
      \n{r} = {veclen(\p{OA})},
      \n{d} = {veclen(\p{OP})},

```

```

        \n1 = {scalar((\n{r}/\n{d}))},
        in ($(#1)!\n1*\n1!(#3)$)
    }
},
revolve/scale/.initial = 1,% angle scale
revolve/@angle/.initial = 90,
revolve/@argn/.initial = 0,% arguments count
% set revolve/@angle with certain degrees or angle of
↪ a vector
revolve/@set angle 1/.code args = {#1}{
    \pgfmathanglebetweenpoints
        {\pgfpoint{0cm}{0cm}}
        {\pgfpointanchor{#1}{center}}
    \pgfkeysalso{/tikz/revolve/@angle = \pgfmathresult}
    \typeout{=====}
    \typeout{/tikz/revolve/@angle:\pgfkeysvalueof{/}
    ↪ tikz/revolve/@angle}}
    \typeout{=====}
},
% set revolve/@angle with angle between two position
↪ vectors
revolve/@set angle 2/.code args = {#1,#2}{
    \pgfmathanglebetweenpoints
        {\pgfpointanchor{#1}{center}}
        {\pgfpointanchor{#2}{center}}
    \pgfkeysalso{/tikz/revolve/@angle = \pgfmathresult}
    \typeout{=====}
    \typeout{/tikz/revolve/@angle:\pgfkeysvalueof{/}
    ↪ tikz/revolve/@angle}}
    \typeout{=====}

```

```

},
% set revolve/@angle with angle {A,B,C}, angle between
↪ two sides
% (A is apex, B is the start point, C is the end
↪ point)
revolve/@set angle 3/.code args = {#1,#2,#3}{
  \pgfmathanglebetweenlines
    {\pgfpointanchor{#1}{center}}
    {\pgfpointanchor{#2}{center}}
    {\pgfpointanchor{#1}{center}}
    {\pgfpointanchor{#3}{center}}
  \pgfkeysalso{/tikz/revolve/@angle = \pgfmathresult}
  \typeout{=====}
  \typeout{/tikz/revolve/@angle:\pgfkeysvalueof{/}
    ↪ tikz/revolve/@angle}}
  \typeout{=====}
},
% set revolve/@angle with angle between two
↪ vectors(ccw, AB and CD)
revolve/@set angle 4/.code args = {#1,#2,#3,#4}{
  \pgfmathanglebetweenlines
    {\pgfpointanchor{#1}{center}}
    {\pgfpointanchor{#2}{center}}
    {\pgfpointanchor{#3}{center}}
    {\pgfpointanchor{#4}{center}}
  \pgfkeysalso{/tikz/revolve/@angle = \pgfmathresult}
  \typeout{=====}
  \typeout{/tikz/revolve/@angle:\pgfkeysvalueof{/}
    ↪ tikz/revolve/@angle}}
  \typeout{=====}

```

```

},
revolve/angle/.code = {%
  \pgfmathfloatparsenumber{#1}
  \pgfmathfloattomacro{\pgfmathresult}{\F}{\M}{\E}
  \ifnum \F < 3%number
    \pgfmathparse{#1}
  \else
    % Compute the Number of Arguments
    \pgfutil@for\arg:=#1\do{
      \pgfmathparse{int(add(\pgfkeysvalueof{/tikz/}
        ↪ revolve/@argn},1))}
      \pgfkeysalso{/tikz/revolve/@argn =
        ↪ \pgfmathresult}
    }
    \ifnum \pgfkeysvalueof{/tikz/revolve/@argn} = 1
      \tikzset{revolve/@set angle 1 = {#1}}
    \else\ifnum \pgfkeysvalueof{/tikz/revolve/@argn} =
      ↪ 2
      \tikzset{revolve/@set angle 2 = {#1}}
    \else\ifnum \pgfkeysvalueof{/tikz/revolve/@argn} =
      ↪ 3
      \tikzset{revolve/@set angle 3 = {#1}}
    \else\ifnum \pgfkeysvalueof{/tikz/revolve/@argn} =
      ↪ 4
      \tikzset{revolve/@set angle 4 = {#1}}
    \else
      \pgferror{"Incorrect number of arguments!"}
    \fi\fi\fi
  \fi
\fi

```

```

\pgfkeysalso{/tikz/revolve/@angle = \pgfmathresult}
},
% revolve={A,B}: rotates point B by the angle around
↪ point A.
revolve/.style args = {#1,#2}{
  insert path = {
    let
      \n1 = {\pgfkeysvalueof{/tikz/revolve/@angle}},
      \n2 = {\pgfkeysvalueof{/tikz/revolve/scale}}
    in ($(#1)!1!\n1*\n2:(#2)$)
  }
},
% angle bisector={A,B,C}: alias for [revolve/angle={
↪ A,B,C},revolve/scale=.5,revolve={A,B}]
angle bisector/.style args = {#1,#2,#3}{
  revolve/angle={#1,#2,#3},revolve/scale=.5,revolve={
↪ #1,#2}
},
% erect={A,B}: alias for
↪ [revolve/angle=90,revolve={A,B}]
erect/.style args = {#1,#2}{
  revolve/angle=90,revolve={#1,#2}
},
% equilateral={A,B}: alias for
↪ [revolve/angle=60,revolve={A,B}]
equilateral/.style args = {#1,#2}{
  revolve/angle=60,revolve={#1,#2}
},
% cut a line segment of a certain length on a straight
↪ line

```



```

intercept/@length/.initial = 1cm,
intercept/scale/.initial = 1,% length scale
intercept/length/.code = {% set length by distance of
↪ segment
    \pgfutil@in@{,}{#1}
    \ifpgfutil@in@%compute segment length
        \euclidea@ComputeLength#1\euclidea@stop
        \pgfkeysalso{/tikz/intercept/@length =
            ↪ \pgfmathresult}
    \else
        \pgfkeysalso{/tikz/intercept/@length = #1}
    \fi
    \typeout{=====}
    \typeout{/tikz/intercept/@length:\pgfkeysvalueof{/
        ↪ tikz/intercept/@length}}
    \typeout{=====}
},
% intercept={A,B}: intercepts a line segment(starting
% from point A) of a certain length on line AB.
intercept/.style args = {#1,#2}{
    insert path = {
        let
            \n1 =
            ↪ {\pgfkeysvalueof{/tikz/intercept/@length}},
            \n2 = {\pgfkeysvalueof{/tikz/intercept/scale}},
            \p{AB} = ({#2})-({#1}),
            \n{d} = {veclen(\p{AB})},
            \n3 = {scalar(\n1*\n2/\n{d})}
        in ({#1})!\n3!({#2})
    }
}

```

```

},
% intersect={A,B,C,D}: returns the intersection
↪ coordinate
% of line AB and line CD.
% https://en.wikipedia.org/wiki/Line%E2%80%93line\_intersection
↪ 93line_intersection
intersect/.style args = {#1,#2,#3,#4}{
  insert path = {
    let
      \p1 = (#1), \p2 = (#2), \p3 = (#3), \p4 = (#4),
      \n1 = {intersectll(\x1,\y1,\x2,\y2,\x3,\y3,\x4,\y4)},
    in ($(\p1)!\n1!(\p2)$)
  }
},
% ===== Triangle Centers =====
% calculated from barycentric coordinates
% incenter = {A,B,C}
incenter/.style args = {#1,#2,#3}{
  insert path = {
    let
      \p1 = (#1), \p2 = (#2), \p3 = (#3),
      \p{AB} = ($(\p2)-(\p1)$),
      \p{BC} = ($(\p3)-(\p2)$),
      \p{CA} = ($(\p1)-(\p3)$),
      \n{a} = {vecLen(\x{BC}, \y{BC})},
      \n{b} = {vecLen(\x{CA}, \y{CA})},
      \n{c} = {vecLen(\x{AB}, \y{AB})},
      \n{s} = {\n{a}+\n{b}+\n{c}},
      \n1 = {\n{a}/\n{s}},

```

```

        \n2 = {\n{b}/\n{s}},
        \n3 = {\n{c}/\n{s}},
in ({\n1*\x1+\n2*\x2+\n3*\x3,\n1*\y1+\n2*\y2+\n3*\y3})
    ↪
    }
},
% excenter = {A,B,C}, returns excenter opposite to the
    ↪ vertex A
excenter/.style args = {#1,#2,#3}{
    insert path = {
        let
            \p1 = (#1), \p2 = (#2), \p3 = (#3),
            \p{AB} = ($(#2)-(#1)$),
            \p{BC} = ($(#3)-(#2)$),
            \p{CA} = ($(#1)-(#3)$),
            \n{a} = {vecLen(\x{BC}, \y{BC})},
            \n{b} = {vecLen(\x{CA}, \y{CA})},
            \n{c} = {vecLen(\x{AB}, \y{AB})},
            \n{s} = {-\n{a}+\n{b}+\n{c}},
            \n1 = {\n{a}/\n{s}},
            \n2 = {\n{b}/\n{s}},
            \n3 = {\n{c}/\n{s}},
in ({-\n1*\x1+\n2*\x2+\n3*\x3,-\n1*\y1+\n2*\y2+\n3*\y3})
    ↪
    }
},
% circumcenter = {A,B,C}
circumcenter/.style args = {#1,#2,#3}{
    insert path = {
        let

```

```

\p1 = (#1), \p2 = (#2), \p3 = (#3),
\p{AB} = ($(#2)-(#1)$),
\p{BC} = ($(#3)-(#2)$),
\p{CA} = ($(#1)-(#3)$),
\n{a} = {vecLen(\x{BC}, \y{BC})},
\n{b} = {vecLen(\x{CA}, \y{CA})},
\n{c} = {vecLen(\x{AB}, \y{AB})},
\n{m} = {max(max(\n{a}, \n{b}), \n{c})},
\n{a} = {\n{a}/\n{m}},
\n{a} = {\n{a}*\n{a}},
\n{b} = {\n{b}/\n{m}},
\n{b} = {\n{b}*\n{b}},
\n{c} = {\n{c}/\n{m}},
\n{c} = {\n{c}*\n{c}},
\n1 = {\n{a}*(\n{b}+\n{c}-\n{a})},
\n2 = {\n{b}*(\n{c}+\n{a}-\n{b})},
\n3 = {\n{c}*(\n{a}+\n{b}-\n{c})},
\n{s} = {\n1+\n2+\n3},
\n1 = {\n1/\n{s}},
\n2 = {\n2/\n{s}},
\n3 = {\n3/\n{s}},
in ({\n1*\x1+\n2*\x2+\n3*\x3, \n1*\y1+\n2*\y2+\n
    ↪ \n3*\y3})
}
},
% orthocenter = {A,B,C}
orthocenter/.style args = {#1,#2,#3}{
    insert path = {
        let
            \p1 = (#1), \p2 = (#2), \p3 = (#3),

```

```

\p{AB} = ($(#2)-(#1)$),
\p{BC} = ($(#3)-(#2)$),
\p{CA} = ($(#1)-(#3)$),
\n{a} = {vecLen(\x{BC}, \y{BC})},
\n{b} = {vecLen(\x{CA}, \y{CA})},
\n{c} = {vecLen(\x{AB}, \y{AB})},
\n{m} = {max(max(\n{a}, \n{b}), \n{c})},
\n{a} = {\n{a}/\n{m}},
\n{a} = {\n{a}*\n{a}},
\n{b} = {\n{b}/\n{m}},
\n{b} = {\n{b}*\n{b}},
\n{c} = {\n{c}/\n{m}},
\n{c} = {\n{c}*\n{c}},
\n{a2} = {\n{b}+\n{c}-\n{a}},
\n{b2} = {\n{c}+\n{a}-\n{b}},
\n{c2} = {\n{a}+\n{b}-\n{c}},
\n1 = {\n{c2}*\n{b2}},
\n2 = {\n{a2}*\n{c2}},
\n3 = {\n{b2}*\n{a2}},
\n{s} = {\n1+\n2+\n3},
\n1 = {\n1/\n{s}},
\n2 = {\n2/\n{s}},
\n3 = {\n3/\n{s}},
in ({\n1*\x1+\n2*\x2+\n3*\x3, \n1*\y1+\n2*\y2+\n
    ↪ \n3*\y3})
}
},
% centroid = {A,B,C}
centroid/.style args = {#1,#2,#3}{
    insert path = {

```

```

let
  \p1 = (#1), \p2 = (#2), \p3 = (#3),
  in ({(\x1+\x2+\x3)/3},{(\y1+\y2+\y3)/3})
}
},
% nine-pint center = {A,B,C}
nine-point center/.style args = {#1,#2,#3}{
  insert path = {
    let
      \p1 = (#1), \p2 = (#2), \p3 = (#3),
      \p{AB} = ($(#2)-(#1)$),
      \p{BC} = ($(#3)-(#2)$),
      \p{CA} = ($(#1)-(#3)$),
      \n{a} = {vecLen(\x{BC}, \y{BC})},
      \n{b} = {vecLen(\x{CA}, \y{CA})},
      \n{c} = {vecLen(\x{AB}, \y{AB})},
      \n{m} = {max(max(\n{a}, \n{b}), \n{c})},
      \n{a} = {\n{a}/\n{m}},
      \n{a} = {\n{a}*\n{a}},
      \n{b} = {\n{b}/\n{m}},
      \n{b} = {\n{b}*\n{b}},
      \n{c} = {\n{c}/\n{m}},
      \n{c} = {\n{c}*\n{c}},
      \n1 = {\n{a}*(\n{b}+\n{c})-(\n{b}-\n{c})*(\n{b}
        ↪ -\n{c})},
      \n2 = {\n{b}*(\n{c}+\n{a})-(\n{c}-\n{a})*(\n{c}
        ↪ -\n{a})},
      \n3 = {\n{c}*(\n{a}+\n{b})-(\n{a}-\n{b})*(\n{a}
        ↪ -\n{b})},
      \n{s} = {\n1+\n2+\n3},

```

```

        \n1 = {\n1/\n{s}},
        \n2 = {\n2/\n{s}},
        \n3 = {\n3/\n{s}},
    in ({\n1*\x1+\n2*\x2+\n3*\x3,\n1*\y1+\n2*\y2+\n3*\y3})
    }
},
% ===== Circle Operations =====
% circle = {0,A}, creates circle with the center (0)
%   through A
circle/.style args = {#1,#2}{
    insert path = {
        let
            \p{OA} = ($(#2)-(#1)$),
            in (#1) circle ({veclen(\p{OA})})
        }
    },
% tagent point = {0,A,P}
% 0,A: center of circle and an abitary point on the
%   circle
% P: a point outside the circle
tangent point/.style args = {#1,#2,#3}{
    insert path = {
        let
            \p{OA} = ($(#2)-(#1)$), % 半径
            \p{OP} = ($(#3)-(#1)$),
            \n1 = {veclen(\p{OA})},
            \n2 = {veclen(\p{OP})},
            \n3 = {scalar(\n1/\n2)}
            in ($(#1)!\n3!\acos(\n1/\n2)}:(#3)$)
        }
    },

```

```

    }
  },
  % external homothetic center
  % O1,A1: center of circle 1 and an abitary point on
  ↪ the circle
  % O2,A2: center of circle 2 and an abitary point on
  ↪ the circle
  external center/.style args = {#1,#2,#3,#4}{
    insert path = {
      let
        \p{O1A1} = ($(#2)-(#1)$),% 半径 O1A1
        \p{O2A2} = ($(#4)-(#3)$),% 半径 O2A2
        \n{r1} = {veclen(\p{O1A1})},
        \n{r2} = {veclen(\p{O2A2})},
        \n1 = {scalar(\n{r1}/(\n{r1}-\n{r2}))}
      in ($(#1)!\n1!(#3)$)
    }
  },
  % internal homothetic center
  % O1,A1: center of circle 1 and an abitary point on
  ↪ the circle
  % O2,A2: center of circle 2 and an abitary point on
  ↪ the circle
  internal center/.style args = {#1,#2,#3,#4}{
    insert path = {
      let
        \p{O1A1} = ($(#2)-(#1)$),% 半径 O1A1
        \p{O2A2} = ($(#4)-(#3)$),% 半径 O2A2
        \n{r1} = {veclen(\p{O1A1})},
        \n{r2} = {veclen(\p{O2A2})},

```



```

        \n1 = {scalar(\n{r1}/(\n{r1}+\n{r2}))}
    in ($(#1)!\n1!(#3)$)
}
},
% creates the radical axis of two non-concentric
↪ circles
% O1,A1: center of circle 1 and an abitary point on
↪ the circle
% O2,A2: center of circle 2 and an abitary point on
↪ the circle
radical axis/.style args = {#1,#2,#3,#4}{
    insert path = {
        let
            \n{s} = {\pgfkeysvalueof{/tikz/start modifier}},
            \n{e} = {\pgfkeysvalueof{/tikz/end modifier}},
            \p{O1A1} = ($(#2)-(#1)$),% 半径 O1A1
            \p{O2A2} = ($(#4)-(#3)$),% 半径 O2A2
            \p{O1O2} = ($(#3)-(#1)$),
            \n{r1} = {vecLen(\p{O1A1})},
            \n{r2} = {vecLen(\p{O2A2})},
            \n{d} = {vecLen(\p{O1O2})},
            \n1 = {scalar(\n{r1}/\n{d})},
            \n2 = {scalar(\n{r2}/\n{d})},
            \n3 = {.5*(1+\n1*\n1-\n2*\n2)},
            \p{ft} = ($(#1)!\n3!(#3)$),% perpendicular foot
            \p{s0} = ($(\p{ft})+(-\y{O1O2},\x{O1O2})$),
            \p{e0} = ($(\p{ft})+(\y{O1O2},-\x{O1O2})$),
            \p{s} = ($(\p{s0})!\n{s}!(\p{e0})$),% start
            \p{e} = ($(\p{s0})!\n{e}!(\p{e0})$)% end
        in (\p{s}) -- (\p{e})
    }
}

```

```

    }
  },
  % ===== Path Definitions =====
  % perpendicular bisector of the line segment (#1 --
  ↪ #2)
  perpendicular bisector/.style args = {#1,#2}{
    insert path = {
      let
        \n{s} = {\pgfkeysvalueof{/tikz/start modifier}},
        \n{e} = {\pgfkeysvalueof{/tikz/end modifier}},
        \p{AB} = ($(#2)-(#1)$),
        \p{m} = ($(#1)!0.5!(#2)$),% midpoint
        \p{s0} = ($(\p{m})+(-\y{AB},\x{AB})$),% rotate
        ↪ ccw, default start
        \p{e0} = ($(\p{m})+(\y{AB},-\x{AB})$),% rotate
        ↪ cw, default end
        \p{s} = ($(\p{s0})!\n{s}!(\p{e0})$),% start
        \p{e} = ($(\p{s0})!\n{e}!(\p{e0})$)% end
      in (\p{s}) -- (\p{e})
    }
  },
  % perpendicular line of the line (#1 -- #2) through #3
  % specifying start and end with modifiers(see tikz
  ↪ manual 13.5)
  perpendicular/.style args = {#1,#2,#3}{
    insert path = {
      let
        \n{s} = {\pgfkeysvalueof{/tikz/start modifier}},
        \n{e} = {\pgfkeysvalueof{/tikz/end modifier}},
        \p{AB} = ($(#2)-(#1)$),

```

```

\p{ft} = ($(#1)!(#3)!(#2)$),% perpedicular foot
↪
\p{s0} = ($(\p{ft})+(-\y{AB},\x{AB})$),
\p{e0} = ($(\p{ft})+(\y{AB},-\x{AB})$),
\p{s} = ($(\p{s0})!\n{s}!(\p{e0})$),% start
\p{e} = ($(\p{s0})!\n{e}!(\p{e0})$)% end
in (\p{s}) -- (\p{e})
}
},
% parallel line of the line (#1 -- #2) through #3
% specifying start and end with modifiers(see tikz
↪ manual 13.5)
parallel/.style args = {#1,#2,#3}{
  insert path = {
    let
      \n{s} = {\pgfkeysvalueof{/tikz/start modifier}},
      \n{e} = {\pgfkeysvalueof{/tikz/end modifier}},
      \p{s0} = (#3),
      \p{e0} = ($(#3)+(#2)-(#1)$),
      \p{s} = ($(\p{s0})!\n{s}!(\p{e0})$),% start
      \p{e} = ($(\p{s0})!\n{e}!(\p{e0})$)% end
    in (\p{s}) -- (\p{e})
  }
},
% alias for parallel={A,B,A}
extend/.style args = {#1,#2} {
  parallel={#1,#2,#1}
},
% rotate around the origin by `angle` and then shift
↪ by (`xshift`,`yshift`)

```

```

% transform = {angle:(xshift,yshift)}
transform/.style args = {#1:(#2,#3)} {
    cm={cos(#1), sin(#1), -sin(#1), cos(#1), (#2,#3)}
},
% ===== Conics Definitions =====
% ellipse with foci and a point
ellipse/@a/.initial = 0,
ellipse/@b/.initial = 0,
ellipse/@c/.initial = 0,
ellipse/@angle/.initial = 0,
ellipse/@xcenter/.initial = 0,
ellipse/@ycenter/.initial = 0,
ellipse/define/.code args = {#1,#2,#3}{
    % 提取各点的坐标分量 x-coordinate and y-coordinate
    % 注意: 根据 LaTeX 的规则, 宏不能含有数字, 提取坐标的
    %   x 和 y 分量的宏不要含有数字
    \newdimen\xFL
    \newdimen\yFL
    \newdimen\xFR
    \newdimen\yFR
    \newdimen\xP
    \newdimen\yP
    \pgfextractx{\xFL}{\pgfpointanchor{#1}{center}}
    \pgfextracty{\yFL}{\pgfpointanchor{#1}{center}}
    \pgfextractx{\xFR}{\pgfpointanchor{#2}{center}}
    \pgfextracty{\yFR}{\pgfpointanchor{#2}{center}}
    \pgfextractx{\xP}{\pgfpointanchor{#3}{center}}
    \pgfextracty{\yP}{\pgfpointanchor{#3}{center}}

    % semimajor axis:  $a = |PF1 - PF2| / 2$ 

```

```

\pgfmathsetmacro{\PFLeft}{veclen(\xP-\xFL,
↪ \yP-\yFL)} % 计算 PF1
\pgfmathsetmacro{\PFRight}{veclen(\xP-\xFR,
↪ \yP-\yFR)} % 计算 PF2
\pgfmathsetmacro{\a}{abs(\PFLeft + \PFRight)/2cm} %
↪ 计算 a 并转换单位

% the distance from the center to a focus: c =
↪ |F1F2| / 2
\pgfmathsetmacro{\c}{veclen(\xFL-\xFR, \yFL-\yFR) /
↪ 2cm}

% semiminor axis: b = sqrt(a^2 - c^2)
\pgfmathsetmacro{\b}{sqrt(\a^2 - \c^2)} %

% ellipse center
\pgfmathsetmacro{\xcenter}{(\xFL + \xFR) / 2cm}
\pgfmathsetmacro{\ycenter}{(\yFL + \yFR) / 2cm}

% angle of rotation
\pgfmathsetmacro{\angle}{atan2(\yFR-\yFL,
↪ \xFR-\xFL)}

\pgfkeysalso{/tikz/ellipse/@a = \a}
\pgfkeysalso{/tikz/ellipse/@b = \b}
\pgfkeysalso{/tikz/ellipse/@c = \c}
\pgfkeysalso{/tikz/ellipse/@xcenter = \xcenter}
\pgfkeysalso{/tikz/ellipse/@ycenter = \ycenter}
\pgfkeysalso{/tikz/ellipse/@angle = \angle}
\typeout{=====}

```

```

\typeout{
  ellipse:{
    a:\pgfkeysvalueof{/tikz/ellipse/@a},
    b:\pgfkeysvalueof{/tikz/ellipse/@b},
    c:\pgfkeysvalueof{/tikz/ellipse/@c},
    angle:\pgfkeysvalueof{/tikz/ellipse/@angle},
    center:(\pgfkeysvalueof{/tikz/ellipse/@xcenter}
    ↪ ,\pgfkeysvalueof{/tikz/ellipse/@ycenter})
  }
}
\typeout{=====}
},
ellipse/.style = {
  insert path = {
    let
      \n{a} = {\pgfkeysvalueof{/tikz/ellipse/@a}},
      \n{b} = {\pgfkeysvalueof{/tikz/ellipse/@b}},
      \n{angle} =
        ↪ {\pgfkeysvalueof{/tikz/ellipse/@angle}},
      \n{xcenter} =
        ↪ {\pgfkeysvalueof{/tikz/ellipse/@xcenter}},
      \n{ycenter} =
        ↪ {\pgfkeysvalueof{/tikz/ellipse/@ycenter}},
    in [transform={\n{angle}: (\n{xcenter}, \n{ycenter}
    ↪ )}]
      (0,0) ellipse [x radius=\n{a},y radius=\n{b}]
    }
  },
% ellipse directrices: k = 1.25
% (-a^2/c, -k*b) -- (-a^2/c, k*b)

```

```

%   ( a^2/c, -k*b) -- ( a^2/c, k*b)
ellipse/directrix/@scale/.initial = 1.25,
ellipse/directrix/scale/.code args= {#1}{
    \pgfkeysalso{/tikz/ellipse/directrix/@scale = #1}
},
ellipse/directrix/.style = {
    insert path = {
        let
            \n{a} = {\pgfkeysvalueof{/tikz/ellipse/@a}},
            \n{b} = {\pgfkeysvalueof{/tikz/ellipse/@b}},
            \n{c} = {\pgfkeysvalueof{/tikz/ellipse/@c}},
            \n{d} = {\n{a}^2/\n{c}},
            \n{scale} = {\pgfkeysvalueof{/tikz/ellipse/
↪ directrix/@scale}},
            \n{angle} =
↪ {\pgfkeysvalueof{/tikz/ellipse/@angle}},
            \n{xcenter} =
↪ {\pgfkeysvalueof{/tikz/ellipse/@xcenter}},
            \n{ycenter} =
↪ {\pgfkeysvalueof{/tikz/ellipse/@ycenter}},
        in [transform={\n{angle}: (\n{xcenter}, \n{ycenter}
↪ )}]
        (-\n{d}, -\n{b}*\n{scale}) -- (-\n{d},
↪ \n{b}*\n{scale})
        ( \n{d}, -\n{b}*\n{scale}) -- ( \n{d},
↪ \n{b}*\n{scale})
    }
},
% ellipse axes: k = 1.5
%   (-k*a, 0) -- (k*a, 0)

```

```

% (0, -k*b) -- (0, k*b)
ellipse/axis/@scale/.initial = 1.5,
ellipse/axis/scale/.code args= {#1}{
    \pgfkeysalso{/tikz/ellipse/axis/@scale = #1}
},
ellipse/axis/.style = {
    insert path = {
        let
            \n{a} = {\pgfkeysvalueof{/tikz/ellipse/@a}},
            \n{b} = {\pgfkeysvalueof{/tikz/ellipse/@b}},
            \n{scale} = {\pgfkeysvalueof{/tikz/ellipse/}
                ↪ axis/@scale}},
            \n{angle} =
                ↪ {\pgfkeysvalueof{/tikz/ellipse/@angle}},
            \n{xcenter} =
                ↪ {\pgfkeysvalueof{/tikz/ellipse/@xcenter}},
            \n{ycenter} =
                ↪ {\pgfkeysvalueof{/tikz/ellipse/@ycenter}},
        in [transform={\n{angle}:({\n{xcenter}}, {\n{ycenter}}
            ↪ )}]
            (-\n{scale}*{\n{a}}, 0) -- ({\n{scale}*{\n{a}}, 0)
            (0, -\n{scale}*{\n{b}}) -- (0, {\n{scale}*{\n{b}})
        }
    },
% hyperbola with foci and a point
% hyperbola parametric equation:  $x = a \cosh(t)$ ,  $y =$ 
    ↪  $b \sinh(t)$ 
hyperbola/@domain/.initial=-1.5:1.5,
hyperbola/doamin/.code args = {#1}{
    \pgfkeysalso{/tikz/hyperbola/@domain = #1}
}

```



```

},
hyperbola/@a/.initial = 0,
hyperbola/@b/.initial = 0,
hyperbola/@c/.initial = 0,
hyperbola/@angle/.initial = 0,
hyperbola/@xcenter/.initial = 0,
hyperbola/@ycenter/.initial = 0,
hyperbola/define/.code args = {#1,#2,#3}{
  % 提取各点的坐标分量 x-coordinate and y-coordinate
  % 注意: 根据 LaTeX 的规则, 宏不能含有数字, 提取坐标的
  ↪ x 和 y 分量的宏不要含有数字
  \newdimen\xFL
  \newdimen\yFL
  \newdimen\xFR
  \newdimen\yFR
  \newdimen\xP
  \newdimen\yP
  \pgfextractx{\xFL}{\pgfpointanchor{#1}{center}}
  \pgfextracty{\yFL}{\pgfpointanchor{#1}{center}}
  \pgfextractx{\xFR}{\pgfpointanchor{#2}{center}}
  \pgfextracty{\yFR}{\pgfpointanchor{#2}{center}}
  \pgfextractx{\xP}{\pgfpointanchor{#3}{center}}
  \pgfextracty{\yP}{\pgfpointanchor{#3}{center}}

  % semimajor axis:  $a = |PF1 - PF2| / 2$ 
  \pgfmathsetmacro{\PFLeft}{veclen(\xP-\xFL,
  ↪ \yP-\yFL)} % 计算 PF1
  \pgfmathsetmacro{\PFRight}{veclen(\xP-\xFR,
  ↪ \yP-\yFR)} % 计算 PF2

```

```

\pgfmathsetmacro{\a}{abs(\PLeft - \PRight)/2cm} %
↪ 计算 a 并转换单位

% the distance from the center to a focus: c =
↪ |F1F2| / 2
\pgfmathsetmacro{\c}{veclen(\xFL-\xFR, \yFL-\yFR) /
↪ 2cm} % c = |F1F2| / 2

% semiminor axis: b = sqrt(c^2 - a^2)
\pgfmathsetmacro{\b}{sqrt(\c^2 - \a^2)}

% hyperbola center
\pgfmathsetmacro{\xcenter}{(\xFL + \xFR) / 2cm}
\pgfmathsetmacro{\ycenter}{(\yFL + \yFR) / 2cm}

% angle of rotation
\pgfmathsetmacro{\angle}{atan2(\yFR-\yFL,
↪ \xFR-\xFL)}

\pgfkeysalso{/tikz/hyperbola/@a = \a}
\pgfkeysalso{/tikz/hyperbola/@b = \b}
\pgfkeysalso{/tikz/hyperbola/@c = \c}
\pgfkeysalso{/tikz/hyperbola/@xcenter = \xcenter}
\pgfkeysalso{/tikz/hyperbola/@ycenter = \ycenter}
\pgfkeysalso{/tikz/hyperbola/@angle = \angle}
\typeout{=====}
\typeout{
hyperbola:{
a:\pgfkeysvalueof{/tikz/hyperbola/@a},
b:\pgfkeysvalueof{/tikz/hyperbola/@b},

```

```

c:\pgfkeysvalueof{/tikz/hyperbola/@c},
angle:\pgfkeysvalueof{/tikz/hyperbola/@angle},
center:(\pgfkeysvalueof{/tikz/hyperbola/_
↪ @xcenter},\pgfkeysvalueof{/tikz/hyperbola/_
↪ @ycenter})
}
}
\typeout{=====}
},
hyperbola/.style = {
insert path = {
let
\n{a} = {\pgfkeysvalueof{/tikz/hyperbola/@a}},
\n{b} = {\pgfkeysvalueof{/tikz/hyperbola/@b}},
\n{angle} =
↪ {\pgfkeysvalueof{/tikz/hyperbola/@angle}},
\n{xcenter} =
↪ {\pgfkeysvalueof{/tikz/hyperbola/@xcenter}},
\n{ycenter} =
↪ {\pgfkeysvalueof{/tikz/hyperbola/@ycenter}},
in [smooth, domain=\pgfkeysvalueof{/tikz/_
↪ hyperbola/@domain}, variable=\_
↪ euclidea@var, transform={\n{angle}: (\n{_
↪ xcenter}, \n{ycenter})}]
plot({-\n{a}*cosh(\euclidea@var)}, {\n{b}*sinh(\_
↪ euclidea@var)}) % right branch
plot({ \n{a}*cosh(\euclidea@var)}, {\n{b}*sinh(\_
↪ euclidea@var)}) % left branch
}
},

```

```

% asymptote parametric equation:  $x = a \sinh(t)$ ,  $y =$ 
 $\hookrightarrow b \sinh(t)$ 
asymptote/.style = {
  insert path = {
    let
      \n{a} = {\pgfkeysvalueof{/tikz/hyperbola/@a}},
      \n{b} = {\pgfkeysvalueof{/tikz/hyperbola/@b}},
      \n{angle} =
 $\hookrightarrow$  {\pgfkeysvalueof{/tikz/hyperbola/@angle}},
      \n{xcenter} =
 $\hookrightarrow$  {\pgfkeysvalueof{/tikz/hyperbola/@xcenter}},
      \n{ycenter} =
 $\hookrightarrow$  {\pgfkeysvalueof{/tikz/hyperbola/@ycenter}},
    in [smooth,domain=\pgfkeysvalueof{/tikz/}
 $\hookrightarrow$  hyperbola/@domain},variable=\j
 $\hookrightarrow$  euclidea@var,transform={\n{angle}: (\n{
 $\hookrightarrow$  xcenter},\n{ycenter})}]
    plot({-\n{a}*\sinh(\euclidea@var)},{\n{b}*\sinh(\j
 $\hookrightarrow$  euclidea@var)})
    plot({ \n{a}*\sinh(\euclidea@var)},{\n{b}*\sinh(\j
 $\hookrightarrow$  euclidea@var)})
  }
},
% hyperbola directrices:  $k = 1.5$ 
%  $(-a^2/c, -k*b) \text{ -- } (-a^2/c, k*b)$ 
%  $(a^2/c, -k*b) \text{ -- } (a^2/c, k*b)$ 
hyperbola/directrix/@scale/.initial = 1.5,
hyperbola/directrix/scale/.code args= {#1}{
  \pgfkeysalso{/tikz/hyperbola/directrix/@scale = #1}
},

```

```

hyperbola/directrix/.style = {
  insert path = {
    let
      \n{a} = {\pgfkeysvalueof{/tikz/hyperbola/@a}},
      \n{b} = {\pgfkeysvalueof{/tikz/hyperbola/@b}},
      \n{c} = {\pgfkeysvalueof{/tikz/hyperbola/@c}},
      \n{d} = {\n{a}^2/\n{c}},
      \n{scale} = {\pgfkeysvalueof{/tikz/hyperbola/
        ↪ directrix/@scale}},
      \n{angle} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@angle}},
      \n{xcenter} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@xcenter}},
      \n{ycenter} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@ycenter}},
    in [transform={\n{angle}:({\n{xcenter}},\n{ycenter})
        ↪ )}]
      (-\n{d}, -\n{scale}*\n{b}) -- (-\n{d},
        ↪ \n{scale}*\n{b})
      ( \n{d}, -\n{scale}*\n{b}) -- ( \n{d},
        ↪ \n{scale}*\n{b})
    }
  },
% hyperbola axes: k = 1.5
%   (-k*c, 0) -- (k*c, 0)
%   (0, -k*b) -- (0, k*b)
hyperbola/axis/@scale/.initial = 1.5,
hyperbola/axis/scale/.code args= {#1}{
  \pgfkeysalso{/tikz/hyperbola/axis/@scale = #1}
},

```

```

hyperbola/axis/.style = {
  insert path = {
    let
      \n{b} = {\pgfkeysvalueof{/tikz/hyperbola/@b}},
      \n{c} = {\pgfkeysvalueof{/tikz/hyperbola/@c}},
      \n{scale} = {\pgfkeysvalueof{/tikz/hyperbola/|
        ↪ axis/@scale}},
      \n{angle} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@angle}},
      \n{xcenter} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@xcenter}},
      \n{ycenter} =
        ↪ {\pgfkeysvalueof{/tikz/hyperbola/@ycenter}},
    in [transform={\n{angle}:({\n{xcenter}}, {\n{ycenter}}
        ↪ )}]
      (-\n{scale}*\n{c}, 0) -- (\n{scale}*\n{c}, 0)
      (0, -\n{scale}*\n{b}) -- (0, \n{scale}*\n{b})
    }
  },
  % parabola with the focus and vertex
  % parabola parametric equation:
  %  $y^2 = 4a \cdot x$ ,  $x = a \cdot t^2$ ,  $y = 2a \cdot t$ 
  % The quantity  $4a$  is known as the latus rectum.
  parabola/@domain/.initial=-2:2,
  parabola/@domain/.code args = {#1}{
    \pgfkeysalso{/tikz/parabola/@domain = #1}
  },
  parabola/@a/.initial = 0,
  parabola/@angle/.initial = 0,
  parabola/@xvertex/.initial = 0,

```

```

parabola/@yvertex/.initial = 0,
parabola/define/.code args = {#1,#2}{
  % 提取各点的坐标分量 x-coordinate and y-coordinate
  % 注意: 根据 LaTeX 的规则, 宏不能含有数字, 提取坐标的
  %   x 和 y 分量的宏不要含有数字
  \newdimen\xF
  \newdimen\yF
  \newdimen\xP
  \newdimen\yP
  \pgfextractx{\xF}{\pgfpointanchor{#1}{center}}
  \pgfextracty{\yF}{\pgfpointanchor{#1}{center}}
  \pgfextractx{\xP}{\pgfpointanchor{#2}{center}}
  \pgfextracty{\yP}{\pgfpointanchor{#2}{center}}

  % latus rectum 4a
  % 注意: semi-latus rectum 通常表示为 p (=2a),
  % macro 不要定义为 \p, \p 有表示向量的含义
  \pgfmathsetmacro{\a}{veclen(\xP-\xF, \yP-\yF)/1cm}
  % 计算 PF

  % parabola vertex
  \pgfmathsetmacro{\xvertex}{(\xP) / 1cm}
  \pgfmathsetmacro{\yvertex}{(\yP) / 1cm}

  % angle of rotation
  \pgfmathsetmacro{\angle}{atan2(\yF-\yP, \xF-\xP)}

  \pgfkeysalso{/tikz/parabola/@a = \a}
  \pgfkeysalso{/tikz/parabola/@xvertex = \xvertex}
  \pgfkeysalso{/tikz/parabola/@yvertex = \yvertex}
}

```

```

\pgfkeysalso{/tikz/parabola/@angle = \angle}
\typeout{=====}
\typeout{
  parabola:{
    a:\pgfkeysvalueof{/tikz/parabola/@a},
    angle:\pgfkeysvalueof{/tikz/parabola/@angle},
    center:(\pgfkeysvalueof{/tikz/parabola/
      ↪ @xvertex},\pgfkeysvalueof{/tikz/parabola/
      ↪ @yvertex})
  }
}
\typeout{=====}
},
parabola/.style = {
  insert path = {
    let
      \n{a} = {\pgfkeysvalueof{/tikz/parabola/@a}},
      \n{angle} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@angle}},
      \n{xvertex} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@xvertex}},
      \n{yvertex} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@yvertex}},
    in [smooth,domain=\pgfkeysvalueof{/tikz/parabola/
      ↪ @domain},variable=\euclidea@var,transform={\
      ↪ n{angle}:(\n{xvertex},\n{yvertex})}]
      plot({\n{a}*(\euclidea@var)^2},{2*\n{a}*(\
      ↪ euclidea@var)})
  }
},

```



```

% parabola directrix:  $k = 2$ 
%    $(-a, -k*a) \text{ -- } (-a, 2k*a)$ 
parabola/directrix/@scale/.initial = 2,
parabola/directrix/scale/.code args= {#1}{
    \pgfkeysalso{/tikz/parabola/directrix/@scale = #1}
},
parabola/directrix/.style = {
    insert path = {
        let
            \n{a} = {\pgfkeysvalueof{/tikz/parabola/@a}},
            \n{scale} = {\pgfkeysvalueof{/tikz/parabola/|
                \rightarrow directrix/@scale}},
            \n{angle} =
                \rightarrow {\pgfkeysvalueof{/tikz/parabola/@angle}},
            \n{xcenter} =
                \rightarrow {\pgfkeysvalueof{/tikz/parabola/@xvertex}},
            \n{ycenter} =
                \rightarrow {\pgfkeysvalueof{/tikz/parabola/@yvertex}},
        in [transform={\n{angle}:({\n{xcenter}}, {\n{ycenter}}
            \rightarrow )}]
            (-\n{a}, -2*\n{scale}*\n{a}) -- (-\n{a},
                \rightarrow 2*\n{scale}*\n{a})
        }
    },
% parabola directrix:  $k = 2$ 
%    $(-2a, 0) \text{ -- } (k^2*a, 0)$ 
parabola/axis/@scale/.initial = 2,
parabola/axis/scale/.code args= {#1}{
    \pgfkeysalso{/tikz/parabola/axis/@scale = #1}
},

```

```

parabola/axis/.style = {
  insert path = {
    let
      \n{a} = {\pgfkeysvalueof{/tikz/parabola/@a}},
      \n{scale} = {\pgfkeysvalueof{/tikz/parabola/|
        ↪ axis/@scale}},
      \n{angle} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@angle}},
      \n{xcenter} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@xvertex}},
      \n{ycenter} =
        ↪ {\pgfkeysvalueof{/tikz/parabola/@yvertex}},
    in [transform={\n{angle}:({\n{xcenter}}, {\n{ycenter}}
        ↪ )}]
      (-2*\n{a}, 0) -- ({\n{scale}}^2*\n{a}, 0)
    }
  },
}

% Utilities for implementation of 'intercept'
\def\euclidea@ComputeLength#1,#2\euclidea@stop{
  \newdimen\euclidea@ax
  \newdimen\euclidea@ay
  \newdimen\euclidea@bx
  \newdimen\euclidea@by
  \pgfextractx{\euclidea@ax}{\pgfpointanchor{#1}{|
    ↪ center}}
  \pgfextracty{\euclidea@ay}{\pgfpointanchor{#1}{|
    ↪ center}}

```

```

\pgfextractx{\euclidea@bx}{\pgfpointanchor{#2}{_
↪ center}}
\pgfextracty{\euclidea@by}{\pgfpointanchor{#2}{_
↪ center}}
% 以下 showthe 指令 overleaf.com 编译通过, 而在
↪ macOS+texlive 2021 报错
% \showthe\euclidea@ax
% \showthe\euclidea@ay
% \showthe\euclidea@bx
% \showthe\euclidea@by
\pgfmathvecLen{\euclidea@ax-\euclidea@bx}{\_
↪ euclidea@ax-\euclidea@by}
}

% Syntax of parabola:  $y = a * x * x + b * x + c$ 
% \parabola [options] (a,b,c);
\newcommand\parabola{} % just for safety
\def\parabola[#1]#2(#3,#4,#5){
  \path[smooth,domain=-2:2,#1,variable=\euclidea@var]
    plot({\euclidea@var},{(#3)*\euclidea@var*_
    ↪ euclidea@var+(#4)*\euclidea@var+(#5)})
}

% Syntax of ellipse:
% \ellipse [options] (a,b);
% wherein, a,b are major/minor semi axis.
\newcommand\ellipse{} % just for safety
\def\ellipse[#1]#2(#3,#4){
  \path[#1] (0,0) ellipse ({#3} and {#4})

```

```

}

% Syntax of hyperbola:
%   \hyperbola [options] (a,b);
% wherein, a,b are major/minor semi axis.
\newcommand\hyperbola{} % just for safety
\def\hyperbola[#1]#2(#3,#4){
  \path[smooth, domain=-1.5:1.5, #1, variable=\_
    ↪ euclidea@var]
    plot({-(#3)*cosh(\euclidea@var)}, {(#4)*sinh(\_
    ↪ euclidea@var)}) % right arm
    plot({ (#3)*cosh(\euclidea@var)}, {(#4)*sinh(\_
    ↪ euclidea@var)}) % left arm
}

% Syntax of asymptote:
%   \asymptote [options] (a,b);
% wherein, a,b are major/minor semi axis.
\newcommand\asymptote{} % just for safety
\def\asymptote[#1]#2(#3,#4){
  \path[domain=-2:2, #1, variable=\euclidea@var,]
    plot({\euclidea@var}, {(#4)/(#3)*(\euclidea@var)})
    plot({\euclidea@var}, {-(#4)/(#3)*(\euclidea@var)})
}

% Syntax of axes:
%   \axes (xmin:xmax, ymin:ymax);
\newcommand\axes{}
\def\axes(#1:#2,#3:#4){
  \draw[help lines] (#1,#3) grid[step=1] (#2,#4);
}

```

```
\draw[-latex] ({(#1)-0.5},0) -- ({(#2)+0.5},0)
  \node[below] {$x$};
\draw[-latex] (0,{(#3)-0.5}) -- (0,{(#4)+0.5})
  \node[left] {$y$};
\draw (0,0) node[below left] {$0$}
}

\makeatother
```



## 参考文献

- [1] Syntax for path specifications. <https://tikz.dev/tikz-paths>.
- [2] Homothetic center. [https://en.wikipedia.org/wiki/Homothetic\\_center](https://en.wikipedia.org/wiki/Homothetic_center).
- [3] Coordinate calculations. <https://tikz.dev/tikz-coordinates#sec-13.5>.
- [4] Line-line intersection. <https://mathworld.wolfram.com/Line-LineIntersection.html>.