CLOUD4C



UCP Manual for Linux + Weblogic

CLOUD4C SERVICES PVT LTD



Document control

Prepared By

Version	Author	Date
V 1.0	Sai Krishna	29-04-2022

Reviewed By

Version	Reviewer	Date
V 1.0	Priyadarshi Mishra	30-04-2022

Approved By

Version	Approver	Date
V 1.0	Harmandeep Singh	30-04-2022

Change Control

Version	Change Reason	Effective Date
V 1.0	Initial Release	

STATEMENT OF CONFIDENTIALITY

This document contains proprietary trade secret and confidential information to be used solely for evaluating CtrIS & Cloud4C Datacentres' Ltd. The information contained herein is to be considered confidential. Customer, by receiving this document, agrees that neither this document nor the information disclosed herein, nor any part thereof, shall be reproduced or transferred to other documents, or used or disclosed to others for any purpose except as specifically authorized in writing by Ctrl S Datacentres' Ltd.

CLOUD₄C

Contents Document control______2 Prepared By _____ ___2 Reviewed By _____ 2 Approved By ______ Change Control ______2 STATEMENT OF CONFIDENTIALITY _____ 2 Contents _____ 3 1. Introduction to UCP____ 4 4 3. Glossary_____ 19 3.1



1. Introduction to UCP

Welcome to UCP User guide.

This document helps users to provision different types of Linux Machines, namely the following

a. Weblogic Images

In addition this document also emphasizes on various features such as

- a. Provisioning in desired zones
- b. Provisioning with desired availability sets

Cloning of Machines

2. Procedure


Step 1 - Login to UCP

Step 2 - Navigate to the Service Order by Clicking on Order -> New VM Instance -> Azure

Step 3 – Service Order Page appears as below


In Basic Info Page please select the Following details

- a. For Production servers please select ITS-SPCS-Azure-Managed-VM-PROD-122
- b. For Test servers please select ITS-SPCS-Azure-Managed-VM-PROD-123

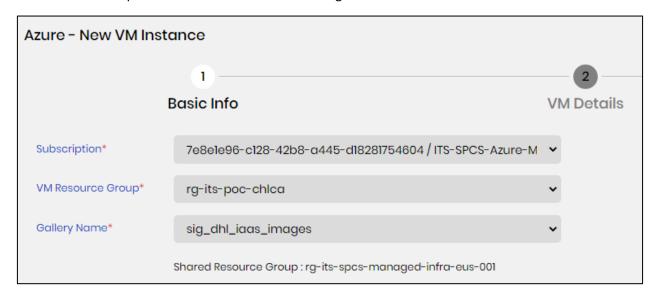


- c. VM Resource group automatically populates to the one that you're assigned to, otherwise you may click on the drop-down option to select relevant Resource Group.
- d. Gallery Name is automatically set to sig_dhl_iaas_images. This cannot be modified.
- e. Servers can be provisioned based on two types of Operating Systems
 - a. Linux
 - b. Windows




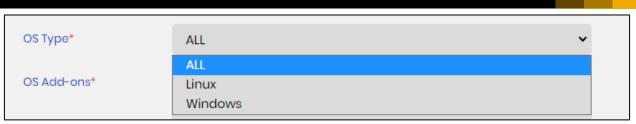


f. Selecting Linux Will show the Add-Ons as below.

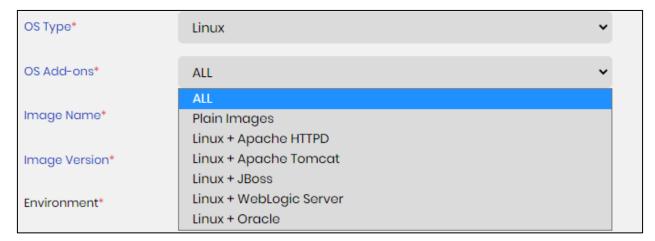

g. By selecting Linux + Weblogic server the following Weblogic Images will appear.

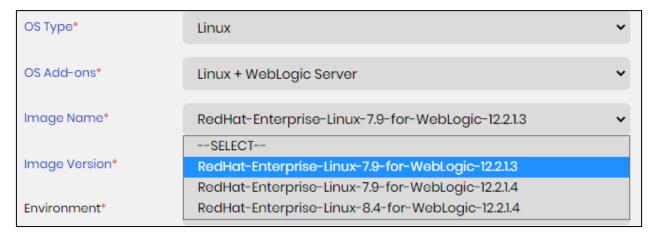

h. After selecting the desired image the latest version of the image will automatically appear.

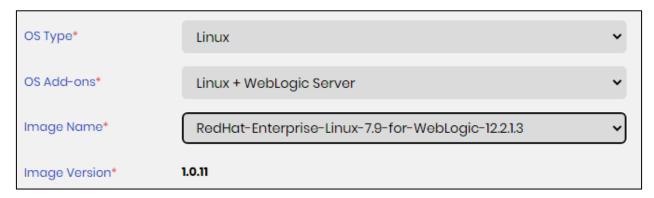


i. The Environment is by default selected to Production for ITS-SPCS-Azure-Managed-VM-PROD-122 and as TEST for ITS-SPCS-Azure-Managed-VM-TEST-123






- j. Selection either one of the options for Classified or Unclassified Networks.
 - a. Servers provisioned in Classified Network have access to the internet
 - b. Whereas Server provisioned in Unclassified Network do not have access to the internet.

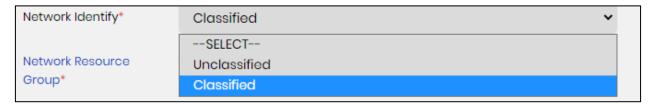


- k. Network Resource Group is set to Default.
- I. Please select desired Region. The selected region is the datacenter where the requested server will be provisioned.




m. Automatically the relevant Virtual Network is selected along with the subnet.

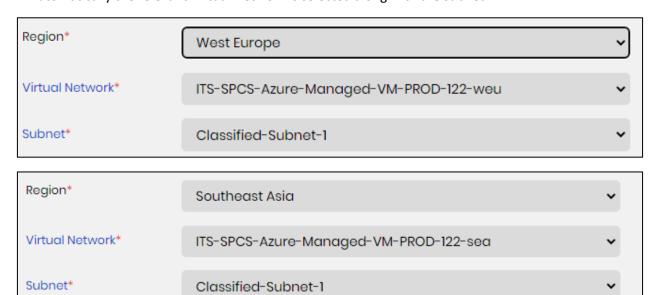



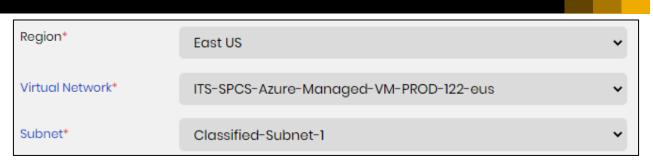


- n. Select the number of servers that need to be provisioned in a single order.
 - a. At a time, a maximum of 10 similar servers can be ordered & provisioned.
 - b. Note: These servers will have exactly the same base machine or SKU. This will be explained in the following steps

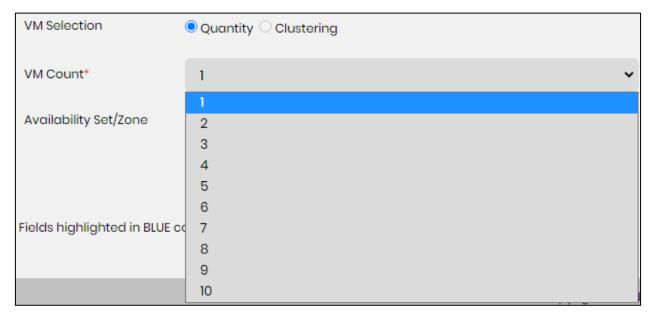

- o. Cluster option will be explained in the user guide for Cluster Servers.
- p. For every order either a Availability Zone / Availability Set / None option can be selected.




q. After selected all the relevant options please click on Next on the bottom Right of the screen.

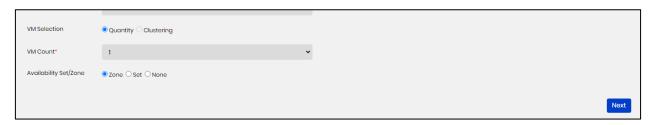


Step 4 – The next page allows the user to select the Base Machine details.



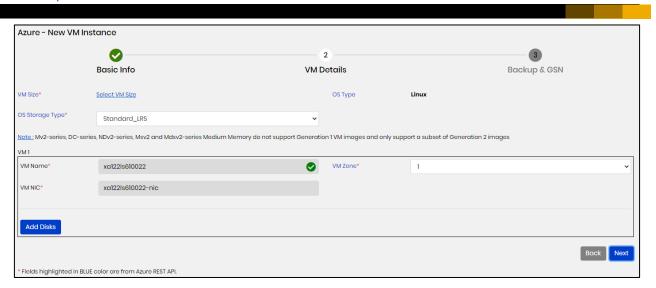


- a. Select the desired server size by clicking on "Select VM Size" which will then show the list of VM sizes available for the relevant image.
 - a. Note: For each image of Linux & Windows only the supported list of VM SKUs will appear.

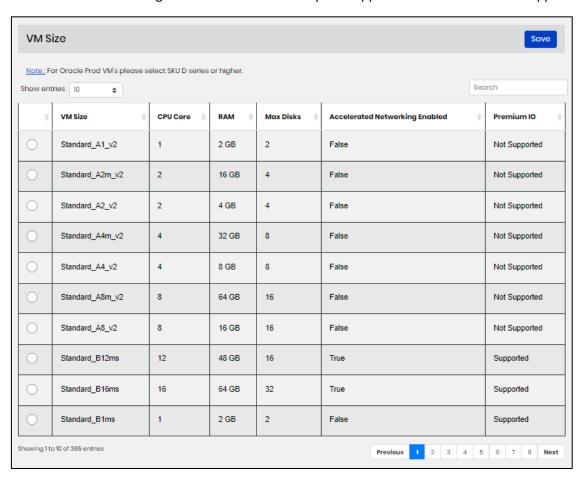

- b. Select the desired VM size and click on the SAVE button.
- c. The user may also be able to change the server size by clicking on "Change VM Size" button.
- d. Selected the desired Operating System Storage Type from the list shown below.



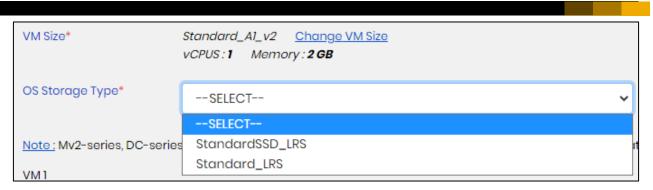


- e. The Network details & NIC information is automatically populated and cannot be modified.
- f. However, a relevant zone can be selected based on previous selection in Step-3.p



- g. User should provide the Managed disk details hereunder.
 - a. The additional disks can also be selected based on its disk types & sizes available.



b. Disk Storage SKU1 dropdown option will provide the list of supported disk types along with the size of the disk




- c. After selecting relevant disk type & size, Disk Host caching can be selected based on the options available
- d. Weblogic service name has to be provided by the user.






- e. NOTE: The effective disk size available to configure will be wary between 60% to 80% depending on the size of the disk. Please read the note next to the disk details.
- f. After configuring the desired option, click next on the bottom right to select Backup related information and Global Service Now Details for Business purposes

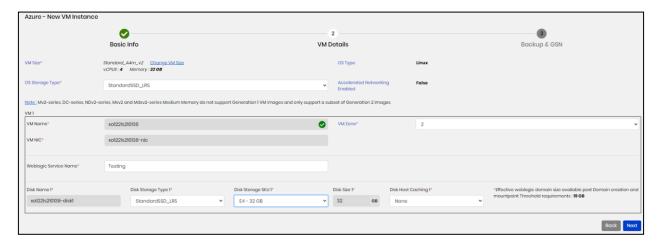

- g. Or Click on Back to go to the previous page for changes in Basic Information.
- h. The final page for adding the service to cart is the Backup & GSN information screen

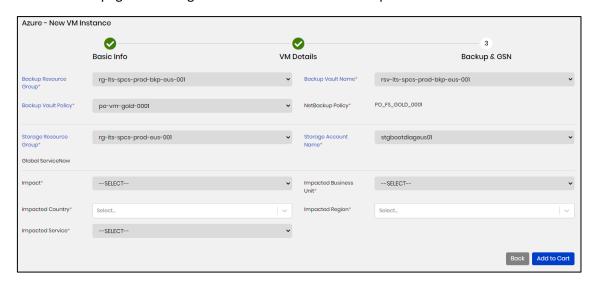


- i. All the options to enable backup for the desired server are auto-populated and pre-selected.
 - i. Note: For every production server the Backup policy is selected as GOLD
 - ii. For every test server the Backup Policy is selected as BRONZE.
 - iii. The details of these policies will be shared in the FAQ section






j. For Global Service Now Business details the Following options can be selected


i. IMPACT

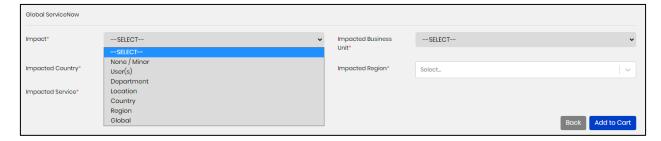

ii. Impacted BUSINESS UNIT

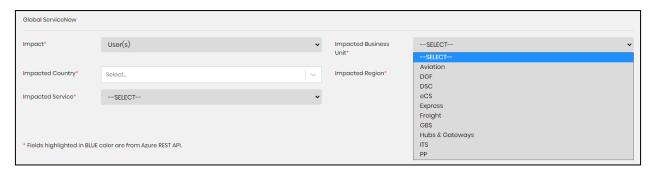

iii. Impacted COUNTRY.

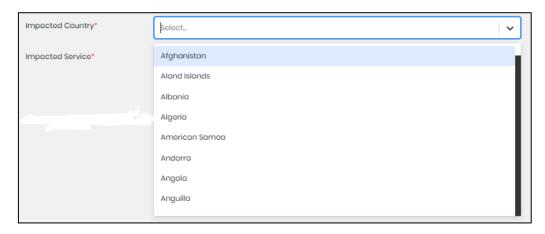


- iv. Impacted region is automatically selected based on the Impacted Country.
 - 1. Note: Multiple Countries & Regions can be selected based on the business requirements.
 - 2. Note: Selecting multiple Countries will auto select regions and vice-versa.






v. Impacted service can be selected based on the list of 4000+ services available.

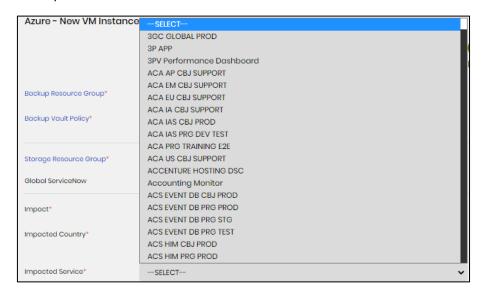

k. After having selected all the relevant information click on the "Add to Cart" button to place the order for the service.

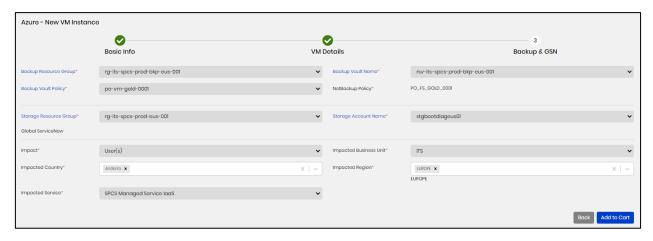

Step 5 – user will be navigated to Order List screen for approving the provisioning.

Note: If the user requesting for the server is a Team Member then the Resource Group Owner alone can approve or reject the Order request.

Note: if the user requesting for the server is a Team Manager then he/she can approve or reject the order request.


After approving the request the Resource Group Owner/ Team Manager should click on Submit to Order the server for Provisioning.

Note: Until the Submit button is clicked, the Order will not be sent for Provisioning.







After clicking on Submit Button the preview of the Order is shown in the next screen.

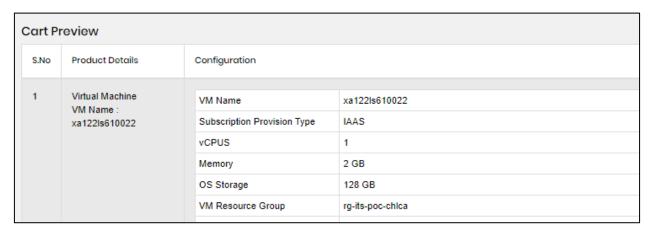


The Team Manager or Resource Group Owner only can click on Proceed to Provisioning button to order the server.

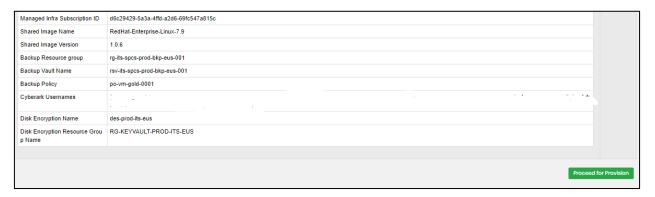


Once the desired server is sent to provisioning the following acknowledgement screen will appear, along with an acknowledgement email.

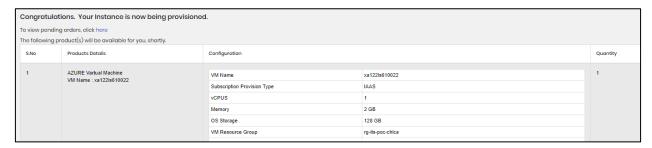



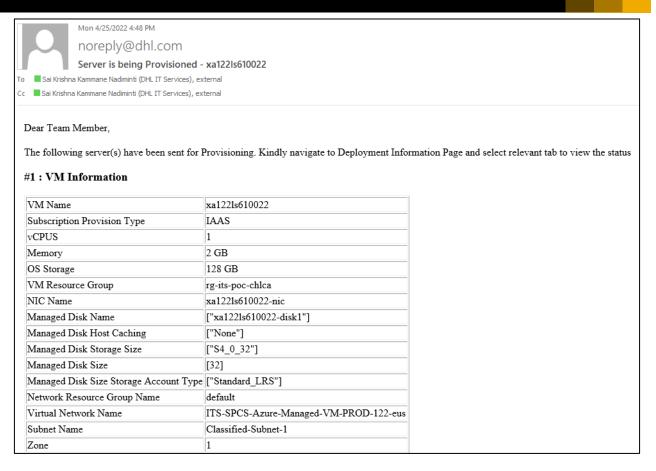

Step 6 – To Check for Provisioning Status Navigate to Order -> Deployment Information.

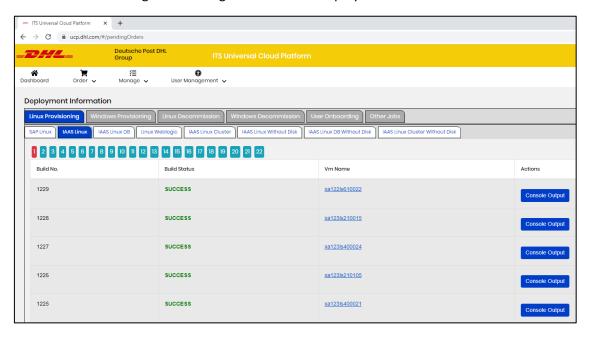

a. There are several tabs to check for the status of activities performed in UCP. The table mentioned hereunder outlines all the activities.



Sl.No	Main Tab	Sub-Tab	Acitivit	
1.		IAAS Linux	i.	Plain Linux Machines with Additional Disk
2		IAAS Linux DB	i.	Oracle Machines with Additional Disk
			ii.	TOMCAT Machines with Additional Disk
			iii.	APACHE Machines with Additional Disk
			iv.	JBOSS Machines with Additional Disk
3.		Linux WebLogic	i.	WebLogic Machines with Additional Disk
4.		IAAS Linux Cluster	i.	SAP Veritas Clusters with Additional Disk
			ii.	Veritas Clusters with Additional Disk
. 5	Linux Provisioning	IAAS Linux Without Disk	i.	Plain Linux Machines without Additional Disk
6		IAAS Linux DB	i.	Oracle Machines without Additional Disk
		Without Disk	ii.	TOMCAT Machines without Additional Disk
			iii.	APACHE Machines without Additional Disk
			iv.	JBOSS Machines without Additional Disk
7		IAAS Linux Cluster	i.	SAP Veritas Clusters without Additional Disk
		Without Disk	ii.	Veritas Clusters without Additional Disk
8		IAAS Windows	i.	Plain Windows with Additional Disk
			ii.	Windows IIS with Additional Disk
9	14 /:	IAAS Windows DB	i.	Windows MSSQL with Additional Disk
10	Windows	IAAS Windows	i.	Plain Windows without Additional Disk
	Provisioning	without Disk	ii.	Windows IIS without Additional Disk
11		IAAS Windows DB	i.	Windows MSSQL without Additional Disk
		without Disk		
12		IAAS Linux	i.	Plain Linux Machines with Additional Disk
		Decommissioning		
13		IAAS Linux DB	i.	Oracle Machines with Additional Disk
		Decommissioning	ii.	TOMCAT Machines with Additional Disk
			iii.	APACHE Machines with Additional Disk
			iv.	JBOSS Machines with Additional Disk
14		Linux WebLogic	i.	WebLogic Machines with Additional Disk
		Decommissioning		
15	Liming	IAAS Linux Cluster	i.	SAP Veritas Clusters with Additional Disk
4.5	Linux	Decommissioning	ii.	Veritas Clusters with Additional Disk
16	Decommissioning	IAAS Linux Without Disk Decommissioning	i.	Plain Linux Machines without Additional Disk
17		IAAS Linux DB	i.	Oracle Machines without Additional Disk
		Without Disk	ii.	TOMCAT Machines without Additional Disk
		Decommissioning	iii.	APACHE Machines without Additional Disk
			iv.	JBOSS Machines without Additional Disk
18		IAAS Linux Cluster	i.	SAP Veritas Clusters without Additional Disk
_		Without Disk	ii.	Veritas Clusters without Additional Disk
		Decommissioning		The state of the s
19		IAAS Windows	i.	Plain Windows with Additional Disk
	Windows	Decommissioning	ii.	Windows IIS with Additional Disk
20	Decommissioning	IAAS Windows DB	i.	Windows MSSQL with Additional Disk
_		Decommissioning		\



21		IAAS Windows	i. Plain Windows without Additional Disk
		without Disk	ii. Windows IIS without Additional Disk
		Decommissioning	
22		IAAS Windows DB	i. Windows MSSQL without Additional Disk
		without Disk	
		Decommissioning	
23		Windows User On-	Onboard a user to a Windows Plain or IIS machine as
23		boarding	either
		Doarding	i. Administrator or
			ii. Remote Desktop User
24		Windows User Off-	Offboard a user from a Windows Plain or IIS Machine
24			
		boarding	either as
			i. Administrator or
			ii. Remote Desktop User
25		Windows SQL user	Onboard a Database user onto MSSQL DB as
		On-boarding	a. User Account
	User On-boarding		i. MSSQL Reader
			ii. MSSQL DataReader
			iii. MSSQL DataWriter
			iv. MSSQL AgentReader
			v. MSSQL DBSSISAdmin
26		AD User Onboarding	Onboard a <u>abc@dhl.com</u> email id user to
		(Active Directory)	i. UDLDHL-UCP (UCP Access)
			ii. UDLDHL-PVWA (Cyberark Platform Acces)
27		AD User Off-boarding	Offboard a abc@dhl.com email id user from
		(Active Directory)	i. UDLDHL-UCP (UCP Access)
		,,	ii. UDLDHL-PVWA (Cyberark Platform Acces)
28		Windows SQL Service	Onboard a Database user onto MSSQL DB as
		Account Onboarding	a. Service Account
			i. MSSQL DBOwner
			ii. MSSQL SysAdmin
			iii. MSSQL AgentReader
			iv. MSSQL DBSSISAdmin
29		IAAS Windows OAT	Status of OAT Checklist Re-Run for Windows Plain & IIS
		Rerun	Machines
30		IAAS Linux OAT Rerun	Status of OAT Checklist Re-Run for any Plain Linux
			Machine
31		IAAS-Linux DB OAT	Status of OAT Checklist Re-Run for all
	Other Jobs	Rerun	i. Oracle Machines
			ii. Tomcat Machines
			iii. Apache Machines
			iv. JBOSS Machines
32		IAAS-Linux Weblogic	Status of OAT Checklist Re-Run for all
52		OAT Rerun	i. Weblogic Machines
33		IAAS-Linux Cluster	Status of OAT Checklist Re-Run for all
. 33		OAT Re-Run	i. SAP Veritas Cluster Machines
		OAT NE-KUII	
24		IAAC Mindaus COL	10.000 0.0001
34		IAAS-Windows SQL	Status of OAT Checklist Re-Run for all
		OAT Re-Run	i. MSSQL Machines



35	IAAS L	inux DB Add Provis	ioning of Additional Disk for already provisioned
	Disk	i.	Oracle Machines
		ii.	Tomcat Machines
		iii.	Apache Machines
		iv.	JBOSS Machines
36	IAAS L	inux Weblogic Provis	ioning of Additional Disk for already provisioned
	Add D	isk i.	Weblogic Machines
37	IAAS V	Vindows DB Add Provis	ioning of Additional Disk for already provisioned
	Disk	i.	MSSQL Machines

b. Status of Provisioning – There are 3 Statuses

Provisioning	IN-PROGRESS	Provisioning of a server is In-Progress
	SUCCESS	Provisioning of a server is Successful
	FAILURE	Provisioning of a server has Failed


c. Status of Resizing – There are 3 Statuses

Resizing	IN-PROGRESS	Resizing of a server is In-Progress	
	SUCCESS	Resizing of a server is Successful	
FAILURE Resizing of a server has Faile		Resizing of a server has Failed	

d. Status of Decommissioning – There are 3 Statuses


0.	Decommissioning	1. IN-	2.	Decommissioning of a server is In-Progress
		PROGRESS		
В.		4. SUCCESS	5.	Decommissioning of a server is Successful
5.		7. FAILURE	З.	Decommissioning of a server has Failed

Step 7 – To view the successfully provisioned server Navigate to Manage -> Azure -> VM List

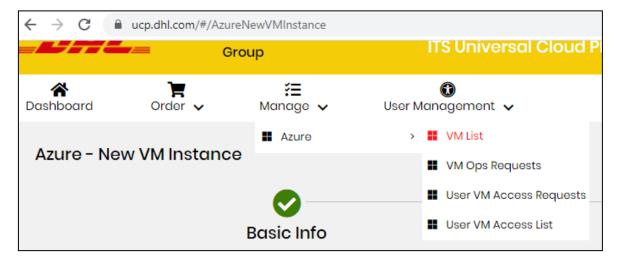


a. Either select by the filtering options available or Enter the hostname of the server.



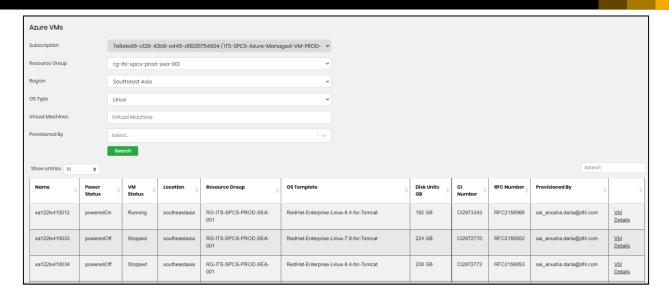

b. Click on VM Details Button to view the details of the server that has been provisioned.

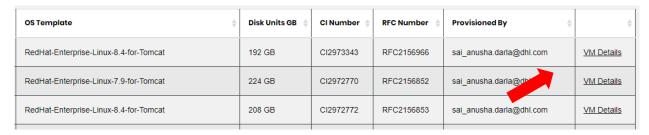





3. Glossary

3.1 **Definition**

Terms	Abbreviation
VM	Virtual Macine
UCP	Universal Cloud Platform