

Optional user actions and MT

Mihaly Novak (CERN, EP-SFT)

Getting Started with **Geant4** at CERN, Geneva (Switzerland)

- Key concepts of **Geant4** tracking and related optional User-Actions
- Muti-threaded (MT) related notes on the User-Actions and Run

Optional user actions and MT


KEY CONCEPTS OF GEANT4 TRACKING

- **G4Track:**

- a **G4Track** object represents/describes **the state of a particle** that is under simulation in a given instant of the time (i.e. **a given time point**)
- a snapshot of a particle **without** keeping any **information regarding the past**
- its **G4ParticleDefinition** stores **static** particle **properties** (charge, mass, etc.) as it describes a particle type (e.g. **G4Electron**)
- its **G4DynamicParticle** stores **dynamic** particle **properties** (energy, momentum, etc.)
- while all **G4Track**-s, describing the same particle type, share the same, unique **G4ParticleDefinition** object of the given type (e.g. **G4Electron**) while each individual track has its own **G4DynamicParticle** object
- the **G4Track** object is propagated in a step-by-step way during the simulation and the dynamic properties are continuously updated to reflect the current state
- manager: **G4TrackingManager**; optional user hook: **G4UserTrackingAction**
- step-by-step? what about the difference between two such states within a step?

• G4Step:

- a **G4Step** object can provide the information regarding the **change in the state of the particle** (that is under tracking) **within a simulation step** (i.e. **delta**)
- has two **G4StepPoint**-s, pre- and post-step points, that stores information (position, direction, energy, material, volume, etc...) that belong to the corresponding point (space/time/step)
- these are updated in a step-by-step way: the post-step point of the previous step becomes the pre-step point of the next step (when the next step starts)
- **(important)** if a step is limited by the geometry (i.e. by a volume boundary), the post-step point:
 - **physically stands on the boundary** (the step status of the post step point i.e. `G4Step::GetPostStepPoint() -> GetStepStatus() is fGeomBoundary`)
 - **logically belongs to the next volume**
 - since these “*boundary*” **G4Step**-s have information both regarding the previous and the next volumes/materials, boundary processes (e.g. reflection, refractions and transition radiation) can be simulated

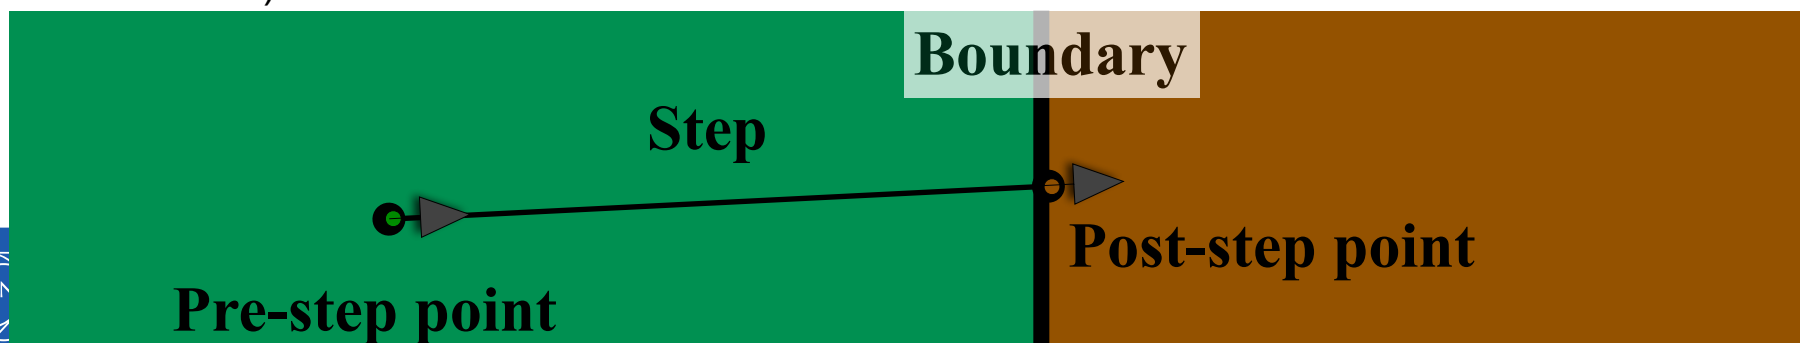

- **G4Step:**

- a **G4Step** object can provide the information regarding the **change in the state of the particle** (that is under tracking) **within a simulation step** (i.e. **delta**)
- has two **G4StepPoint**-s, pre- and post-step points, that stores information (position, direction, energy, material, volume, etc...) that belong to the corresponding point (space/time/step)
- these are updated in a step-by-step way: the post-step point of the previous step becomes the pre-step point of the next step (when the next step starts)
- **(important)** if a step is limited by the geometry (i.e. by a volume boundary), the post-step point:
 - **physically stands on the boundary** (the step status of the post step point i.e. `G4Step::GetPostStepPoint() -> GetStepStatus()` is `fGeomBoundary`)
 - **logically belongs to the next volume**
 - since these “*boundary*” **G4Step**-s have information both regarding the previous and the next volumes/materials, boundary processes (e.g. reflection, refractions and transition radiation) can be simulated
- the **G4Track** object, that is under tracking i.e. generates information for the **G4Step** object, can be obtained from the step by the `G4Step::GetTrack()` method and the other way around `G4Track::GetStep()`
- manager: **G4SteppingManager**; optional user hook: **G4UserSteppingAction**

- **G4Step** – **G4UserSteppingAction**:

- optional user action class with the possibility to obtain information after each simulation steps
- **virtual UserSteppingAction(const G4Step* theStep)** method:
 - is called at the end of each step by **G4SteppingManager**
 - providing access to the **G4Step** object representing the simulation step that has just done (see this class in Geant4 /source/tracking/include/G4UserSteppingAction.hh)
- users can implement their own **YourSteppingAction** class by:
 - extending the **G4UserSteppingAction** class
 - providing their own implementation of the method mentioned above
 - creating and registering the corresponding object in the **ActionInitialisation::Build()** interface method (see later)

How to get information regarding the simulation when the **G4Step* theStep** is given?

How to get information regarding the simulation when the `G4Step* theStep` is given?

```
// get the pre-step point
G4StepPoint*      preStp = theStep->GetPreStepPoint();
// get the volume which the step was done
G4VPhysicalVolume* physVol = preStp->GetPhysicalVolume();
// get the energy deposit and length of the step
G4double          stpEdep = theStep->GetTotalEnergyDeposit();
G4double          stpLength = theStep->GetStepLength();
// get the track
G4Track*          theTrack = theStep->GetTrack();
// get the static and dynamic particle properties
const G4ParticleDefinition* partDef = theTrack->GetParticleDefinition();
const G4DynamicParticle*    partDyn = theTrack->GetDynamicParticle();
// get the charge of the particle that is under tracking in this step
G4double          partCharge = partDef->GetPDGCharge();
// get the post step point kinetic energy
G4double          postStpEkin = theStep->GetPostStepPoint()->GetKineticEnergy();
// or since the track is already updated to reflect the post-step point
// G4double          postStpEkin = partDyn->GetKineticEnergy();
// which is different in case of the pre-step point kinetic energy that can be
// obtained only from the pre-step point as
G4double          preStpEkin = preStp->GetKineticEnergy();
```


- **G4Event:**

- a **G4Event** is the basic simulation unit that represents a **set of G4Track objects**
- **at the beginning** of an event:
 - **primary G4Track object(s)** is(are) **generated** (with their static and initial dynamic properties) and pushed **to a track-stack**
 - **one G4Track object** is **popped from** this track-stack and transported/tracked/simulated:
 - *the track object **is propagated in a step-by-step way** and its dynamic properties as well as the corresponding **G4Step** object are updated at each step
 - *the step is limited either by physics interaction or geometry boundary
 - ***transportation** (to the next volume through the boundary) will take place in the later while **physics** interaction in the former case
 - ***secondary G4Track-s, generated by these physics interactions, are also pushed to the track-stack**
 - *a **G4Track object** is kept tracking till:
 - + leaves the outermost (World) volume i.e. goes out of the simulation universe
 - + participates in a destructive interaction (e.g. decay or photoelectric absorption)
 - + its kinetic energy becomes zero and doesn't have interaction that can happen "at-rest"
 - + the user decided to (artificially) stop the tracking and kill
 - *when one track object reaches its termination point, **a new G4Track object** (either secondary or primary) is popped from the stack for tracking
 - processing an event will be terminated when there is **no any G4Track objects in the track-stack**
- **at the end** of an event, the corresponding **G4Event** object will store its input i.e. the list of primaries (and possibly some of its outputs like hits or trajectory collection)

- **G4Event - G4UserEventAction:**

- optional user action class, with the possibility to get the control before/after an event processing
- virtual `BeginOfEventAction(const G4Event* anEvent):`
 - **called before a new event processing starts by the G4EventManager**
- virtual `EndOfEventAction(const G4Event* anEvent):`
 - **called after an event processing competed by the G4EventManager**
- in both cases, the **G4EventManager** provides access to the corresponding **G4Event** object (see this class in Geant4 /source/event/include/G4UserEventAction.hh)
- users can implement their own **YourEventAction** class by:
 - extending the **G4UserEventAction** class
 - providing their own implementation of the two methods mentioned above
 - creating and registering the corresponding object in the **ActionInitialisation::Build()** interface method (see later)
- at the beginning of the event (`BeginOfEventAction`) we usually clear some data structures that we want to use to accumulate information during the processing of the current event (populated after each step in the **UserSteppingAction**) while at the end of the event (`EndOfEventAction`) we usually write the accumulated information to an upper (Run global) level

- **G4Run** (as already discussed in the DetectorConstruction):
 - **G4Run** is a collection of **G4Event-s** (a **G4Event** is a collection of **G4Track-s**)
 - during a run, events are taken and processed one by one in an event-loop
 - **before the start of a run** i.e. at run initialisation (`G4RunManager::Initialize()`): the **geometry** is **constructed** and **physics** is **initialised**
 - **at the start of a run** (`G4RunManager::BeamOn()`): the **geometry** is **optimised** for tracking (voxelization), **physics tables are built**, then event processing starts i.e. entering into the event-loop
 - as long as the event processing is running, i.e. during the run, the user cannot modify **neither the geometry** (i.e. the detector setup) **nor the physics** settings
 - they **can be changed** though **between run-s** but the **G4RunManager** needs to be informed (re-optimize or re-construct geometry, re-build physics tables):
 - if the **geometry** has been changed, depending on the modifications:
 - `GeometryHasBeenModified()` re-voxelization but no re-Construct
 - `ReinitializeGeometry()` complete re-Construct
 - or with the UI commands `/run/geometryModified` or `/run/reinitializeGeometry`
 - same for the **physics**: `PhysicsHasBeenModified()` or `/run/physicsModified`
 - manager: **G4RunManager**; optional user hook: **G4UserRunAction**

- **G4Run - G4UserRunAction:**

- optional user action class, with the possibility to get the control before/after a run and to provide custom run-object (see later)
- virtual `BeginOfRunAction(const G4Run* aRun):`
 - **called before the run starts i.e. before the first event processing starts by the G4RunManager**
- virtual `EndOfRunAction(const G4Run* aRun):`
 - **called after a run completed i.e. after the last event processing completed by the G4RunManager**
- in both cases, the **G4RunManager** provides access to the corresponding **G4Run** object (see this class in Geant4 /source/run/include/G4UserRunAction.hh)
- users can implement their own **YourRunAction** class by:
 - extending the **G4UserRunAction** class
 - providing their own implementation of the two methods mentioned above
 - creating and registering the corresponding object in the **ActionInitialisation::Build()** interface method (see later)
- note, at the beginning of the run (`BeginOfRunAction`) we usually allocate/initialise some data structures/histograms that we want to use during the whole run to collect the final simulation results that we usually print out at the end of the run (`EndOfRunAction`)

- **G4Run – G4UserRunAction:**

- an additional method, `virtual G4Run* GenerateRun()` is also available:
 - users can implement their own **YourRun** class by:
 - *extending the **G4Run** class and defining their own run-global data structure (i.e. quantities, objects to be collected during the complete run as the result of the simulation/run)
 - *instantiation of the custom **YourRun** object needs to be done in this `GenerateRun()` method of **YourRunAction**
- this will be invoked by the **G4RunManager** at initialisation to generate your (extended) **YourRun** instead of the (base) **G4Run** object
- the generated **YourRun** object can be accessed during the simulation as the Run (in UserAction-s) and can be populated by information (after each simulation Step, Event, etc.)
- we will add our method (`RunSummary()`) that prints the final information at the end of the run, i.e. will be invoked from **YourRunAction::EndOfRunAction** method to report the final results collated during the entire run
- see next section on its MT related parts !!!

- **G4Run – G4UserRunAction:**

- an additional method, `virtual G4Run* GenerateRun()` is also available:
 - users can implement their own **YourRun** class by:
 - *extending the **G4Run** class and defining their own run-global data structure (i.e. quantities, objects to be collected during the complete run as the result of the simulation/run)
 - *instantiation of the custom **YourRun** object needs to be done in this `GenerateRun()` method of **YourRunAction**
- this will be invoked by the **G4RunManager** at initialisation to generate your (extended) **YourRun** instead of the (base) **G4Run** object
- the generated **YourRun** object can be accessed during the simulation as the Run (in UserAction-s) and can be populated by information (after each simulation Step, Event, etc.)

**Time to add our own user
actions to the application!
BUT THE NEXT SECTION FIRST!**

Optional user actions and MT

MULTI-THREADED RELATED NOTES ON THE USERACTIONS AND RUN

- the **Detector-Construction** and the **Physics-List** need to be **created directly in the main program** and **registered directly in the G4RunManager** object
- all **User-Actions** need to be **created** and **registered** in the **User-Action-Initialisation** (including the only mandatory **Primary-Generator-Action** as well as all other, **optional User-Actions**)
- we have already created **YourActionInitialization** for this, derived from the **G4VUserActionInitialization** interface, and the mandatory **YourPrimaryGeneratorAction** is already construct and registered in its **YourActionInitialization::Build()** method
- the base **G4VUserActionInitialization** has two build methods:
 - **BuildForMaster()** : invoked **only by the Master**
 - **Build()** : invoked **by all Worker-s**
- we will understand why these two and what they are for

- **BuildForMaster()** : invoked **only by the Master**
 - the **only user action**, that is supposed to be created and registered in this build method, is the G4UserRunAction
- **Build()** : invoked **by all the Worker-s**
 - **all user actions**, including the mandatory **G4VUserPrimaryGeneratorAction** and all other optional G4UserRunAction, G4UserEventAction, etc., must be constructed and registered in this build method

- **Consequence: (the why?)**

- both **the Master** and **all the Worker-s** have their own **G4UserRunAction** object
- before the run starts, all invokes the `G4Run* G4UserRunAction::GenerateRun()` (interface) method of its own run action object
- therefore, both **the Master** and **all the Worker-s** will have **their own G4Run object**
- **during the run** (i.e. between Begin and End of run):
 - ➔ the **Master's G4Run object** is **not used**
 - ➔ all **Worker-s** **populate its own** **G4Run object** with the information processed by it
- **at the end of the run**:
 - ➔ the **Master** invokes the `G4Run::Merge(const G4Run* run_i)` method of its **own G4Run object** $runMaster = \sum runWorker_i$
 - ➔ passing by **all the Worker-s G4Runⁱ object** (pointer) as arguments (i.e. `run_i`)
 - ➔ equivalent to:
- **the end**: the **Master's G4Run** object contains all information collected during the run

- **Consequence: (the why?)**

- **to collect our own data** while the simulation is running:

- e.g. mean or distribution of energy deposit in the target per event
- i.e. beyond what is already in the **base G4Run**
- we **derive our own** run from **the base G4Run**: this will be **YourRun**
- this will contain our data that we are interested to collect during the run (beyond what is already in the base **G4Run**)
- we will create our own **YourRun** object in our **YourRunAction::GenerateRun** (**YourRun** is a **G4Run** as well since it extends **G4Run** with our data objects)
- therefore, we need to implement the **YourRun::Merge**(const **G4Run*** run_i) method :
 - ➔ to tell how to add our data objects when this method is invoked (by the **Master** on its own **YourRun** object and passing **Worker-S YourRun** objects)
 - ➔ calling **G4Run::Merge**(run) at the end to merge all data that are in the base **G4Run**
- (e.g. we will implement how to add our energy deposit data or our histogram that we will store in **YourRun**)

- Other consequences (just to note some):
 - the **Master** does not have any user actions but **RunAction**
 - **Worker-s have all user actions:**
 - their **RunAction** can be the **same as for Master or different**
 - ➔ you might have a dedicated RunAction **for the Master** that **implements** writing the final data in its `G4UserRunAction::EndOfRunAction()`
 - ➔ other **for Worker-s** as they have **nothing to do** at the **end of the run**
 - ➔ we will have the same RunAction (**YourRunAction**) and use the `G4UserRunAction::IsMaster()` method to **differentiate Master/Worker**
 - each has **their own** set of **objects** from the actions, **but** all have **the same type**
 - ➔ e.g. all **Worker-s have their own object** for primary event generation and they are all **YourPrimaryGeneratorAction** type
 - ➔ need to **ensure that** the individual **Worker-s** generate **distinct set of events**
 - ➔ otherwise, all **Worker-s** simulate the same events!
 - ➔ important only when events are different: not in our simple particle gun example!

G4Run

Optional user actions and MT

**SO WHAT'S NEXT? SLIDE 14: WE IMPLEMENT THE
OPTIONAL (RUN, EVENT, STEPPING) USER
ACTIONS WITH OUR OWN RUN TO COLLECT DATA**