
DETECTING INFLUENTIAL BELIEFS IN LARGE-SCALE SURVEYS

A PREPRINT

 **Aleksandar Tomaevi**

Department of Sociology
University of Novi Sad
Novi Sad, Republic of Serbia
atomashevic@ff.uns.ac.rs

June 21, 2021

1 Introduction

2 Results

2.1 Unique variable analysis

After two rounds of UVA redundancy detection and the removal of 5 variables, we are left with the network with 10 nodes. Exploratory graph analysis confirmed the existence of a single community using Louvain algorithm and an extra unidimensionality check (which method?).

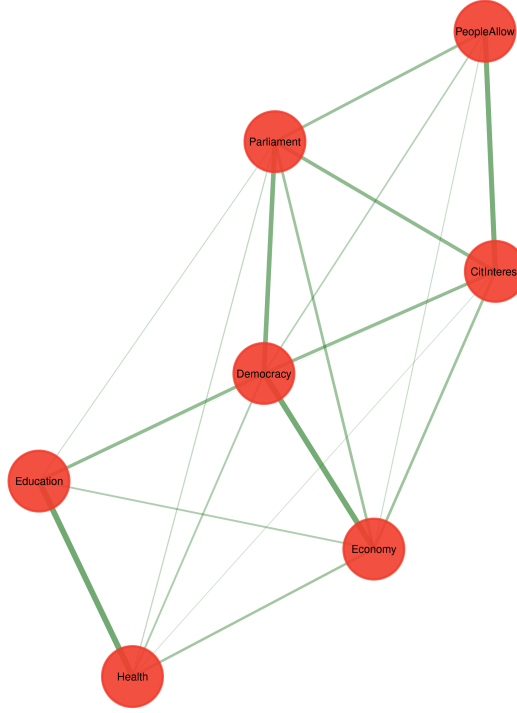


Figure 1: Attitude network based on a complete dataset after redundancy analysis

2.2 Intergrated Value of Influence

Standardized values of IVI measure for the nodes of the network based on the complete dataset are shown on figure 2.2.

Belief Network IVI - Complete ESS R9 dataset

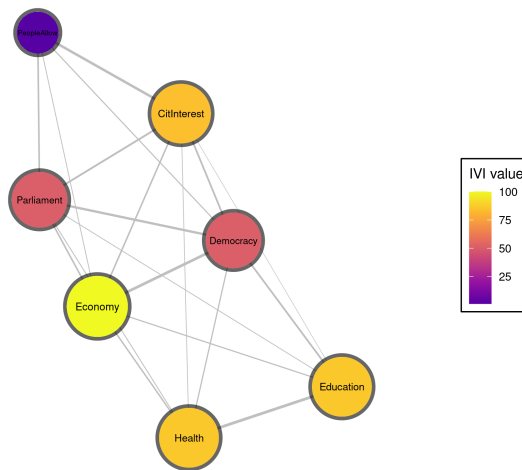


Figure 2: Standardized IVI values for networks based on complete dataset