



Control 1: Withdraw the gold pages, keep 16

Gold pages are swapped for pages ranked below 16: **recall** moves, the page budget does not.
The same samples are scored at every level.

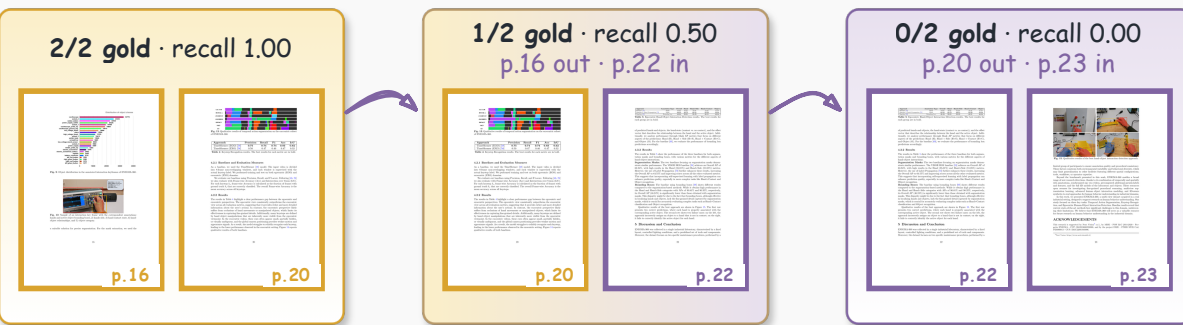

+ 14 unchanged pages at every level, so each arm always reads 16 pages: recall is the only quantity that moves.

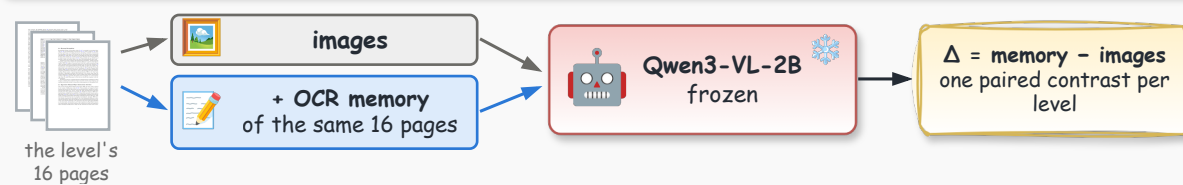


the advantage at each recall level → Fig. 5a, b

Control 2: Filter answer-string leakage

At zero recall the answer string can still reach the memory from a non-gold page; those samples are **dropped**, so what survives is not a leaked answer.

Q: Who served as the Chair of the General Council during the preparations for the 11th Ministerial Conference (MC11) held in Buenos Aires?

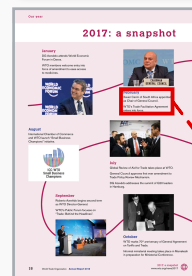

retrieved p.3

February
Xavier Carim of South Africa appointed as Chair of General Council.
WTO's Trade Facilitation Agreement enters into force.

gold p.9 is withdrawn, yet this OCR block on p.3 is packed into the memory

gold answer in the memory?

yes → dropped
no → kept
"Xavier Carim" found → dropped



Detector: normalised string containment of the gold answer in the packed memory, at minimum answer lengths of 4 · 6 · 8 · 12 characters (headline 6).
What is left on the kept samples: no gold page and no answer string in the memory, so any remaining advantage is same-document context or text as a form. Control 3 separates the two.


residual on the leak-free samples → Fig. 5c

Control 3: Swap the document's text

Each document's memory is replaced by another document's text under the same packing rule; images, page ids and budget stay, only **whose text** changes.




A · arXiv paper p.6

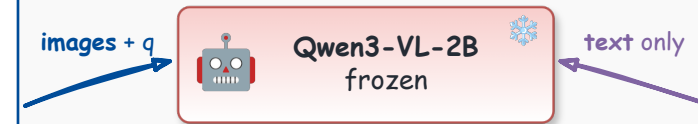

The pull requests previously required to ship an SDK change.
Following the completion of [our transition to OpenAPI from JSON Hyper Schema](#), we caught up internally and started discussing what else OpenAPI could help us unlock. It was at that point that we set the lofty goal of using OpenAPI for more than just our documentation. It was time to use OpenAPI to generate our SDKs.
Before we dove headfirst into generating SDKs, we established some guiding principles. These would be non-negotiable and determine where we spent our effort.
You should not be able to tell what underlying language generated the SDK
This was important for us because too often companies build SDKs using automation. Not only do you end up with SDKs that are flavored based on generator language, but the SDKs then lack the language nuances or patterns that are noticeable to users familiar with the language.
For example, a Rubyist may use the following `if` expression:

B · Cloudflare blog p.3

What is compared · same samples, same 16 page images, same packing rule and block budget:



at full recall and at zero recall, on the leak-free subsets of Control 2 · colours as in Fig. 5
if text helped as a form, green would beat grey; if only the document's own context helps, they coincide

foreign memory at full and zero recall → Fig. 5a-c