

MONARC technical guide

"security made in Lëtzebuerg" (SMILE) g.i.e.

Table of Contents

1. Introduction	1
2. Architecture	1
3. Modules of the project	1
4. Requirements and deployment	2
4.1. Requirements	2
4.2. Deployment	2
5. Updates	3
5.1. System	3
5.2. MONARC	3



This document is currently under active development and discussion!

This document is intended to administrators of a MONARC instance. If you find errors or omissions in this document, please don't hesitate to submit an [issue](#) or open a [pull request](#) with a fix.


1. Introduction

2. Architecture

Basically MONARC is composed of two main parts:

- a back office: for the management of the database, clients and instances of MONARC installation;
- a front office: for the management of the risks analysis. A front office instance can be used without the back office.

The whole architecture includes an additional reverse proxy and a configuration server. It is possible to connect many front offices to one back office.

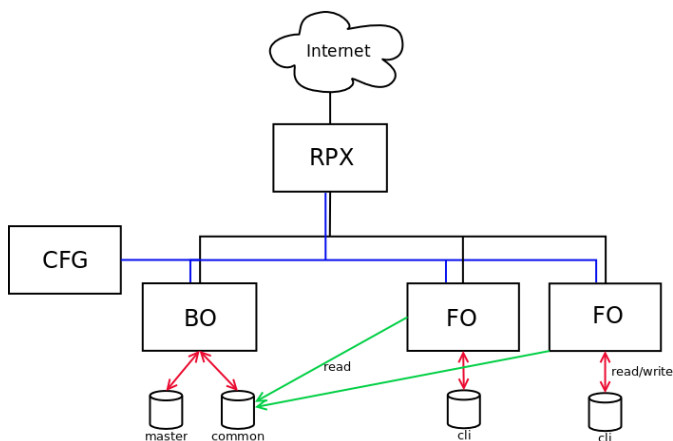

It can be deployed with [ansible](#). More information [here](#).

- The configuration server manages the configurations of the back office, reverse proxy and different front office(s) through SSH.
- The database *common* of the BO should also be available to the FO servers.



If you want run your own risk analysis you only need the front office. More information about the installation in [this section](#).

3. Modules of the project

The source code of MONARC is divided in several modules with dedicated Git repositories.

Summary of the different modules of the project

	Back office	Front office
	MONARC BO: Management of the database, clients and FO servers.	MONARC: The MONARC front office
Modules	<ul style="list-style-type: none"> • MonarcCore (zm-core in vendor/monarc/core) • MonarcBO (zm-backoffice in vendor/monarc/backoffice) 	<ul style="list-style-type: none"> • MonarcCore (zm-core in vendor/monarc/core) • MonarcFO (zm-client in vendor/monarc/frontoffice)
Interfaces (in node_modules/)	<ul style="list-style-type: none"> • ng_anr • ng_backoffice 	<ul style="list-style-type: none"> • ng_anr • ng_client

- MonarcCore ([zm-core](#)) is the API in charge of providing an access to the data. Common to the front office and the back office.
- MonarcFO ([zm-client](#)) is the interface for the front office.
- MonarcBO ([zm-backoffice](#)) is the interface for the back office.

4. Requirements and deployment

4.1. Requirements

The deployment of MONARC has been tested on Debian 9.0, Ubuntu 16.04 LTS and Ubuntu 17.04.

- PHP (version 7.0 recommended);
 - PHP extensions: xml, mbstring, mysql, zip, unzip, mcrypt, intl, gettext, imagick
- Apache 2;
- MariaDB;
- Postfix (SMTP is used for the password recovery).

4.2. Deployment

4.2.1. Only the front office

Different methods are provided.

Prepared virtual machine

A [virtual machine](#) for use with VirtualBox is available if you want to quickly test MONARC.

Vagrant

If you want to deploy the application with Vagrant:

```
$ sudo apt-get install virtualbox vagrant
$ git clone https://github.com/monarc-project/MonarcAppF0-vagrant.git
$ cd MonarcAppF0-vagrant/
$ vagrant up
```

Once the virtual machine will be ready go to the address: <http://127.0.0.1:5001>

The username is *admin@admin.test* and the password is *admin*.

This method is not recommended for production. But this is the best way if you want to try an up-to-date version of MONARC.

Manual deployment

Follow the instructions [here](#).

4.2.2. The back office and the front office

The whole architecture can be deployed with [ansible](#). More information [here](#).

5. Updates

5.1. System

Keep the software of your distribution up-to-date (Apache, PHP, MariaDB, etc.). At least the security updates from the GNU/Linux distribution.

5.2. MONARC

The master branch should always be working and it is recommended to install the project using this one.

If you have already installed MONARC and want to upgrade to a later version, you can use the provided script:

```
$ scripts/update-all.sh
$ sudo systemctl restart apache2
```

This script will retrieve the updates from the last stable release of MONARC.

For more details the script will:

- backup your databases in case the upgrade fails;

- check the presence of composer;
- retrieve the new code from the Git repositories from the last stable release:
 - pull updates for module/[MonarcCore, MonarcBO/MonarcFO];
 - pull updates for node_modules/[ng_anr, ng_backoffice/ng_client].
- run the appropriate database upgrade scripts (pathCore, pathBO, pathFO);
- install/update JavaScript libraries with npm;
- update the translations.