KIROVAULT

UI/UX Design System & Screen Specifications

Define KiroVault's visual language and concrete screen layouts. Align with the master blueprint's three-zone Explorer, glass-inspired navigation, pastel file categories, readable contrast, and light/dark themes.

DOCUMENT PURPOSE

This standalone companion document complements the KiroVault Desktop App Blueprint. It follows the Windows-first, local-first product direction. Recommendations are proposed guidance, not claims that these features already exist.

Layout reference image

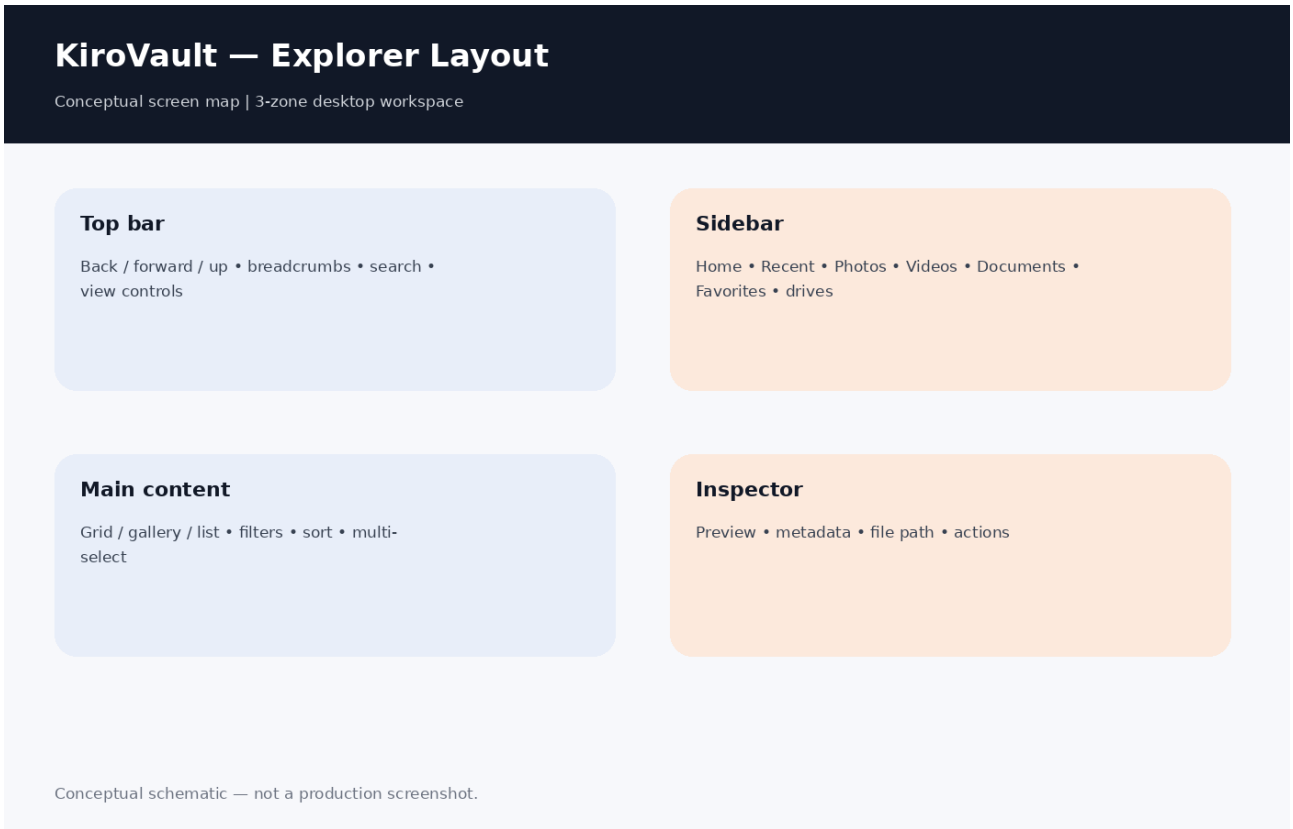

Contents and implementation guidance

Design principles

• Use controlled glass effects only on navigation and transient controls; keep content surfaces calm. Filename is primary, type/date secondary, path/technical metadata tertiary.

• Use consistent spacing, restrained motion, reduced-motion support, clear selection outlines, and sufficient contrast in both themes.

• Category colors: Photos ice blue #E1EBFF; Video peach #F9E2D2; Documents mint #E0F0DE; Code lavender #EDE2FF; Audio rose #F9E3EC; Archives champagne #F4EED5.

Explorer layout

• Three zones: persistent sidebar, main file content, optional resizable inspector.

• Top chrome: back/forward/up, breadcrumbs, path copy, global/current-folder search, sorting, view selector, settings.

• Sidebar: Home, Recent, Photos, Videos, Documents, Downloads, Favorites, pinned folders and drives.

• Main area: grid/gallery/list/timeline, filters, multi-select and loading/empty/error states.

• Inspector: preview, properties, metadata, tags, favorite, path and primary actions.

Core screen wireframes

• Home: recent files, quick locations, drive cards and smart collections.

• Explorer: breadcrumb bar + filters; file cards or details table; inspector toggled on right.

• Visual Library: date-grouped media timeline, type/date/size filters, fullscreen viewer.

• Storage: drive capacity, largest files/folders, type breakdown, duplicate candidates.

• Settings: appearance, Explorer behavior, indexing scope, cache, privacy and About.

Interaction states

• Loading: skeletons without layout shifts. Empty: explain why and offer next action.

• Permission denied/offline drive: name the location and preserve navigation back.

• Conflict: explicit Skip/Replace/Keep both/Cancel choices.

• Destructive action: confirm scope, use Recycle Bin where possible, report partial failures.

Accessibility and responsive behavior

• Support keyboard navigation and Ctrl/Shift multi-select; do not rely on color alone.

• Inspector may collapse at narrow widths; preserve access to primary actions.

• Provide high-contrast/reduced-transparency options and reduced motion.

• Test text over light/dark imagery and long filenames, Unicode, scaling and large folders.

References

• Apple Human Interface Guidelines — Materials: https://developer.apple.com/design/human-interface-guidelines/materials

• Microsoft Fluent 2 — Materials: https://fluent2.microsoft.design/materials

• Microsoft Fluent 2 — Design system: https://fluent2.microsoft.design/

• KiroVault Desktop App Blueprint, pp. 7–9 and 26 (user-provided source).

Reference note: external documentation may change. Verify current versions, licensing, APIs and platform prerequisites during implementation.